
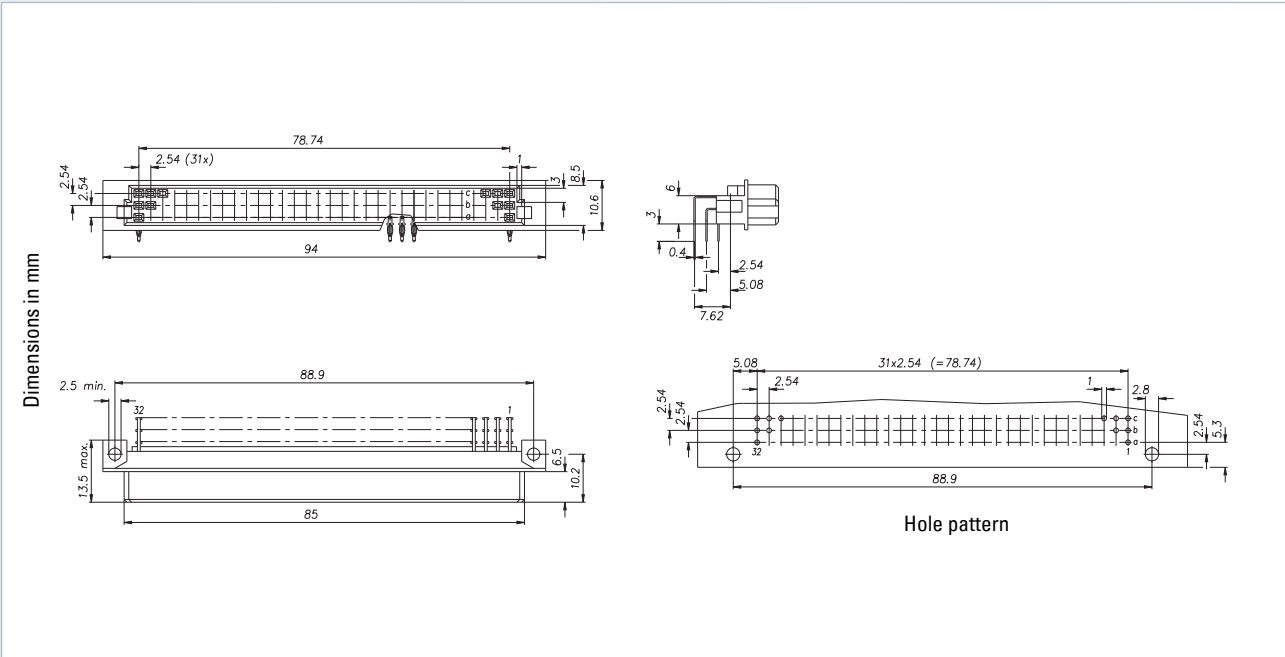




Connectors according to DIN 41612 / IEC 60603-2


Type R






Female connector



No. of contacts	Contact arrangement	Press-fit technology – Performance level II
		Termination length
		 Part number
64		116-60054
96		116-60074

Accessories – Press-fit tool (see page 210) – Support tool (see page 211)	On request – Performance levels I + III or customer-specific – Special contact length	Options – Without flange – Contact arrangement (see page 162)
--	--	--

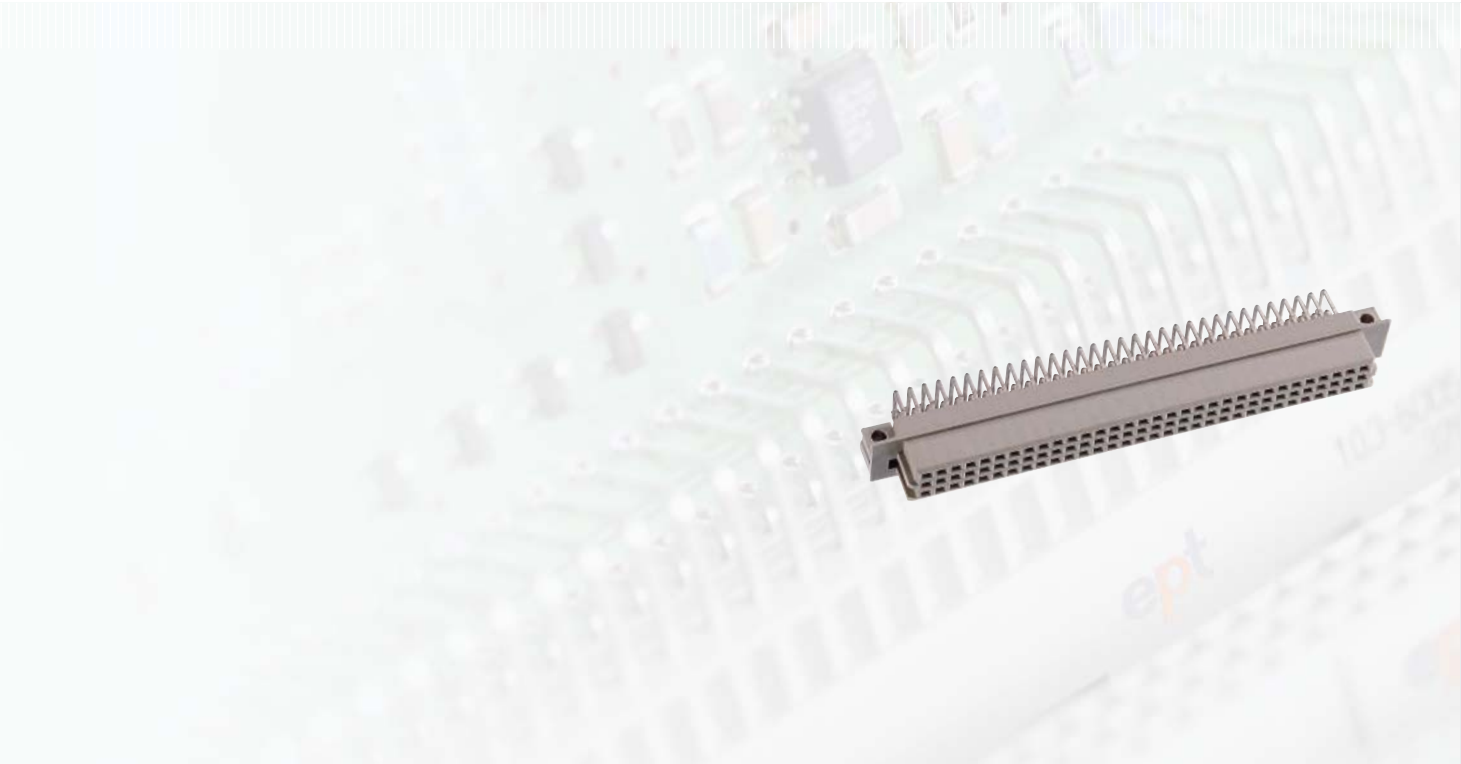

No. of contacts	Contact arrangement	Solder technology – Performance level II
		Termination length
		
		Part number
32		116-40034
48		116-40044
64		116-40054
96		116-40074

On request

- Performance levels I + III or customer-specific
- Special contact length
- Also in THTR

Options

- Board lock (see page 159)
- Contact arrangement (see page 162)