

NEW



- ## Typical Applications

- www.ckswitches.com

NEW


SL Series Sealed Interlock Door Switches

MODEL

11SL WITH SMALL BRACKET



11SL404
SPDT

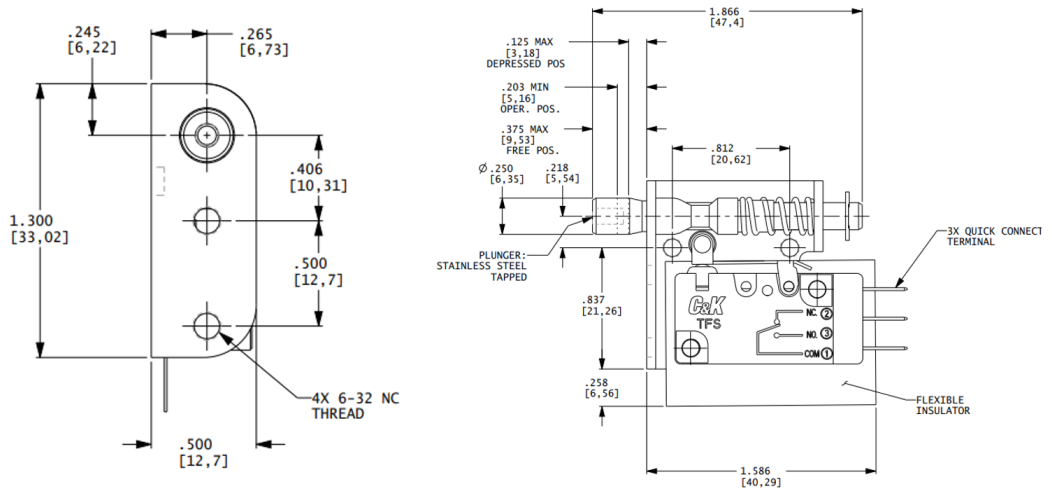


SWITCH CHARACTERISTICS	
OPERATING FORCE LBS MAX	8

12SL WITH LARGE BRACKET



12SL404
SPDT

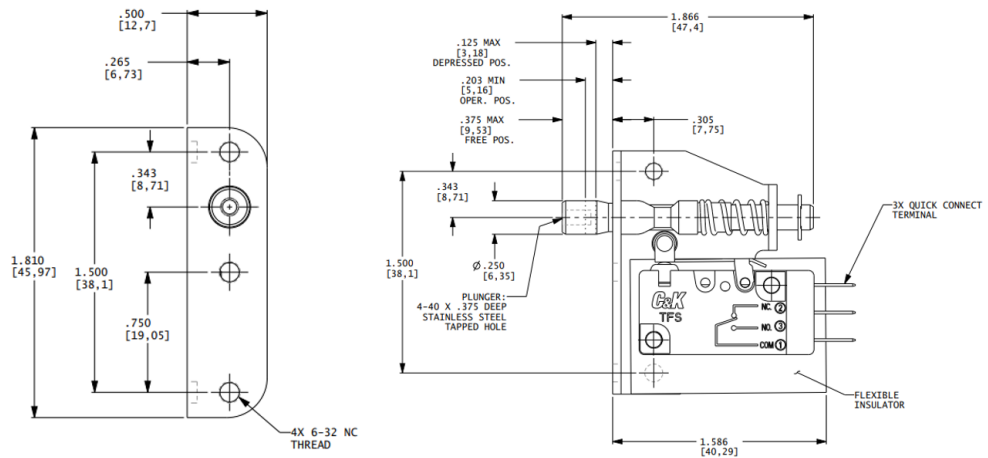

SWITCH CHARACTERISTICS	
OPERATING FORCE LBS MAX	8



Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change




8 Dec 21

SL Series Sealed Interlock Door Switches


NEW

MODEL

23SL WITH TWO SWITCHES

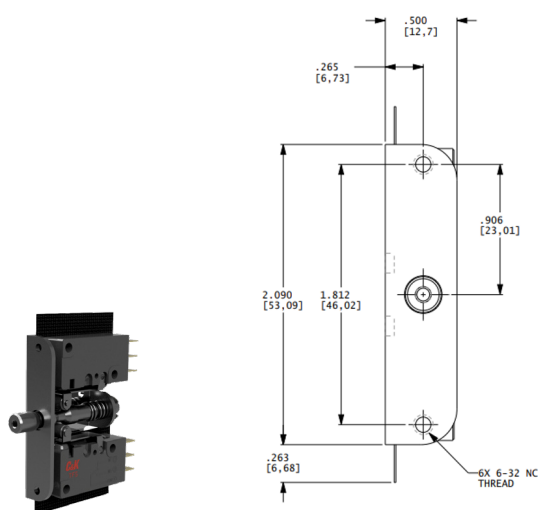


23SL404
SPDT

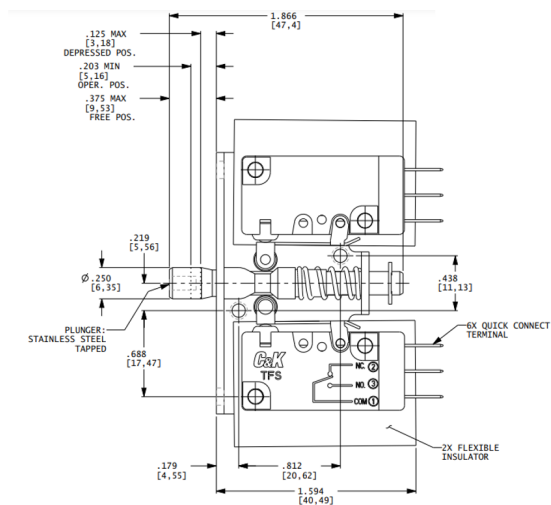



SWITCH CHARACTERISTICS	
OPERATING FORCE LBS MAX	8

TERMINATIONS

40 0.187" QUICK CONNECT

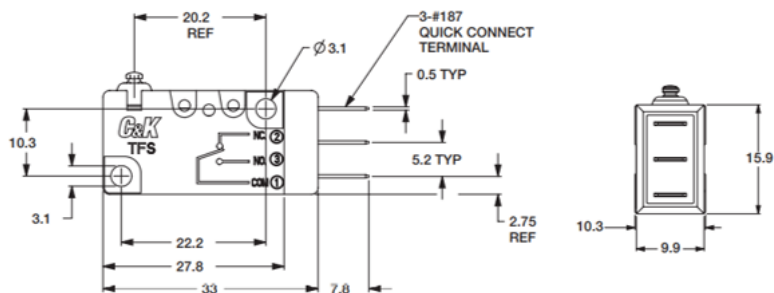

W WIRE UL1015

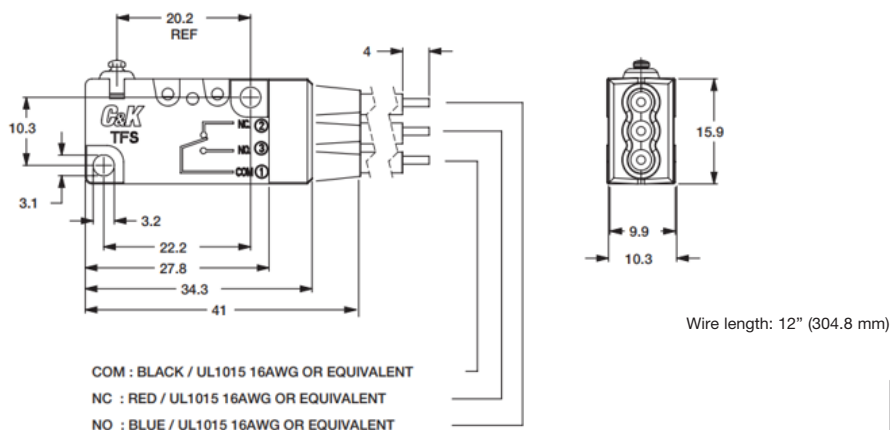

Third Angle
Projection

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change




NEW


SL Series Sealed Interlock Door Switches

PLUNGERS

2 STAINLESS STEEL, NOT TAPPED



4 STAINLESS STEEL, TAPPED 4-40 X 0.375 (9.52) MIN. DEPTH

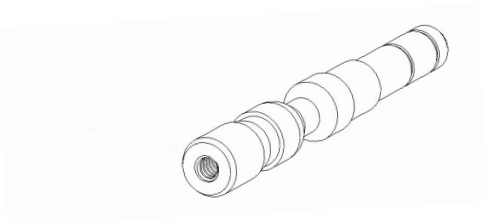

ELECTRICAL RATING

- 01** 0.1A @ 125/250 VAC OR 30VDC
- 03** 3A @ 125/250 VAC OR 30VDC
- 06** 6A @ 125/250 VAC OR 30VDC
- 10** 10A @ 125/250 VAC OR 5A@ 30VDC

Electrival Rating Code	AMPS	Wire Type 16AWG
01	0.1	.
03	3	.
06	6	.
10	10	.




Snap-acting



8 Dec 21

J-117


 Third Angle Projection
 Dimensions are shown: Inches (mm)
 Specifications and dimensions subject to change

www.ckswitches.com