

120-001
Type A Series 72 Annular Convuluted Tubing
Thermally Stabilized Kynar®



120-001-16

Product Series ————
 Basic No. ————
 Dash No. (Table I)

**TYPE
A**

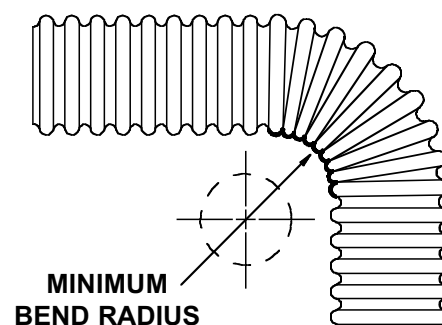
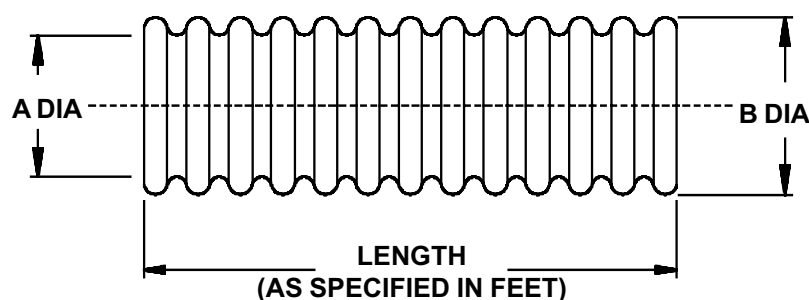


TABLE I						
DASH NO.	A DIA		B DIA		MINIMUM BEND RADIUS	
	MIN	MAX	MIN	MAX		
09	.24 (6.1)	.28 (7.1)	.38 (9.7)	.42 (10.7)	.75 (19.1)	
12	.33 (8.4)	.37 (9.4)	.48 (12.2)	.52 (13.2)	1.00 (25.4)	
16	.45 (11.4)	.50 (12.7)	.60 (15.2)	.66 (16.8)	1.38 (35.1)	
20	.57 (14.5)	.62 (15.7)	.71 (18.0)	.77 (19.6)	1.69 (42.9)	
24	.69 (17.5)	.75 (19.1)	.88 (22.4)	.94 (23.9)	1.88 (47.8)	
28	.81 (20.6)	.87 (22.1)	1.00 (25.4)	1.08 (27.4)	2.00 (50.8)	
32	.93 (23.6)	1.00 (25.4)	1.12 (28.4)	1.20 (30.5)	2.38 (60.5)	
40	1.18 (30.0)	1.25 (31.8)	1.36 (34.5)	1.44 (36.6)	2.88 (73.2)	

Metric dimensions (mm) are in parentheses.

Note: Tubing supplied in random lengths.
 For specific size lengths, consult factory.