

SHORTSTOP® Series 120


Auto, Manual & Modified Reset Circuit Protectors

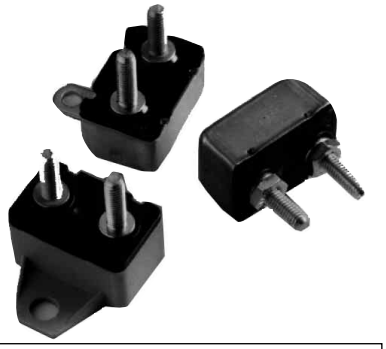


SPECIFICATIONS

Single Pole Thermal Type Breakers
Ratings: 8A to 50A; 12 VDC; 24 VDC.
Operating Temperature: –10°F (–23°C) to 150°F (65°C).
Storage Temperature: –20°F (–29°C) to 200°F (93°C).
Applications: Battery chargers, trucks, buses, RV's, trolling motors, etc.
Approvals: Complies with SAE Standard J553.

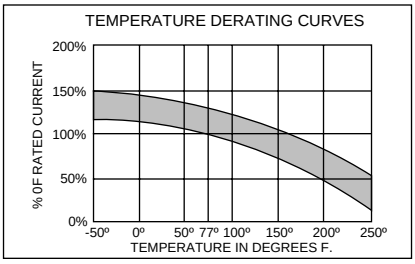


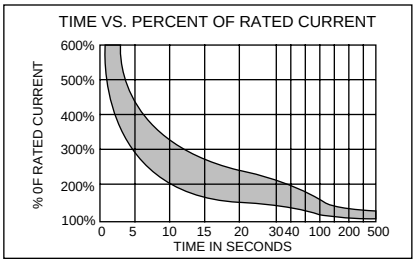

Terminal Options

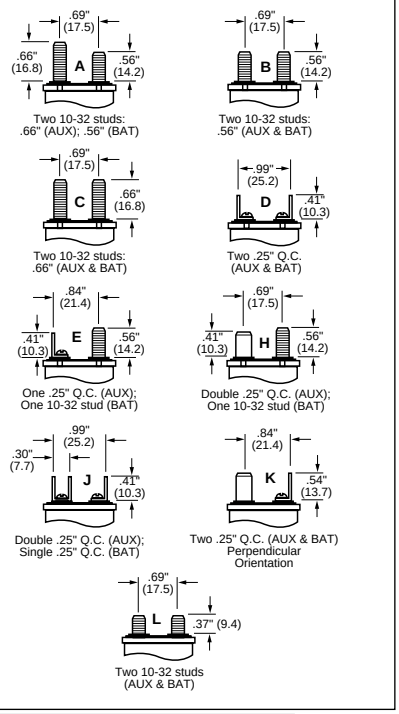

Cover & Bracket Options

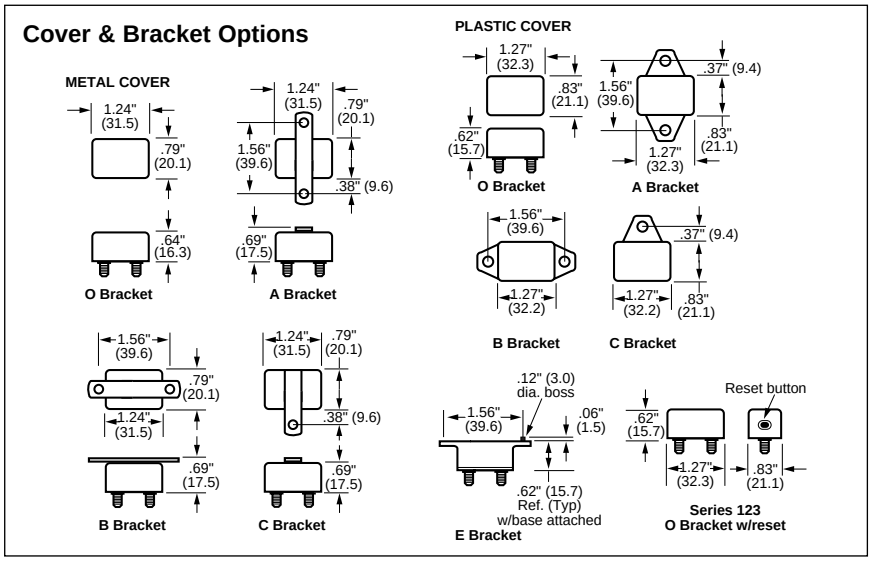

PART NUMBERING SYSTEM

Series	Terminal	Rating	Bracket	Mtg. Holes	Cover*	Options	Hardware
1 2 ❑	❑	❑❑ —	❑	❑	❑ —	❑❑ —	❑❑
121 – Auto Reset 12 VDC	A – Two 10-32 studs; .66 (Aux), .56 (Bat)	08 – 8 amps	O – No bracket	0 – No bracket	M – Metal	01 – Waterproof (metal covers only)	WA – Whiz-lock nut assembled
122 – Modified 12 VDC	B – Two 10-32 studs; .56 (Aux & Bat)	10 – 10 amps	A – Bracket	1 – .140 dia.	P – Plastic	02 – Splashproof (optional on metal covers - add 02 suffix; std. on plastic covers - omit 02 suffix.)	WB – Whiz-lock nut bulk un-assembled
123 – Manual 24 VDC 115 VAC	C – Two 10-32 studs; .66 (Aux & Bat)	12 – 12 amps	B – Bracket	2 – .196 dia.			HA – Nut & lock washer assembled
124 – Auto 24 VDC	***D – Two .250 QC; (Aux & Bat)	15 – 15 amps	C – Bracket	3 – .237 dia. (metal only)			HB – Nut & lock washer bulk unassembled
125 – Modified 24 VDC	***E – One .250 QC (Aux); One 10-32 stud (Bat)	20 – 20 amps	E – Bracket (plastic only)	4 – .265 dia. (plastic only)			KA – Keps lock nut assembled
	** H – One 10-32 stud .56 (Bat), Double .250 QC (Aux)	25 – 25 amps		5 – .228 dia. (plastic only)			KB – Keps lock nut bulk unassembled
	***J – Single .250 QC (Bat) Double .250 QC (Aux)	30 – 30 amps		6 – .221 dia. (metal only)			
	***K – Two .250 QC (Aux & Bat)	35 – 35 amps					
	L – Two 10-32 studs; .37 (Aux & Bat)	40 – 40 amps					
		50 – 50 amps					

*Series 123 available in plastic cover only. Series 122 & 125 available in metal cover only.
**40A maximum
***30A maximum

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.