


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

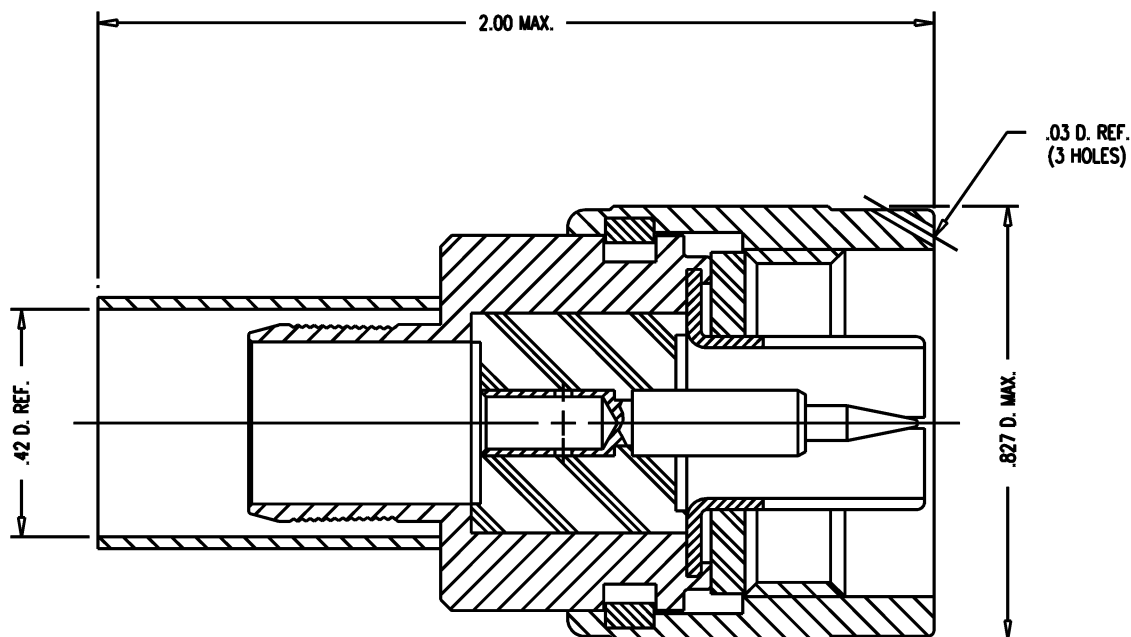

STAMP: 91836 M39012/01-0017
1205-68-5 YRWK (DATE CODE)

NOTES:

1. FOR USE WITH M17/74-213 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-610.
3. FOR CABLE TRIMMING USE KTJ-137 & KTD-138.
4. FOR CRIMPING USE DIE KTH-2004.
5. INTERFACE PER MIL-STD-348, FIG. 304-1.
6. CENTER CONTACT SUPPLIED UNASSEMBLED.
7. MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKETS: SILICONE RUBBER, ZZ-R-765
K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM-B-140
C-RING } PHOSPHOR BRONZE, ASTM-B-103
OUTER CONTACT }
ALL OTHER METAL PARTS: BRASS, ASTM-B16
8. FINISHES:
CENTER CONTACT: HARD GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz.

GSD

GSD

M39012/01-0017

REVISIONS	
ISSUE	CHANGES
0	ER 36057 MJB 01/18/95
1	CN 36099 E ME 02/09/95
2	CN 38571 E TML 05/21/02
MJB2547	
SCALE 4:1	
APPROX SURFACE AREA	
1205-68-5	
USED ON	
REF:	
PL, N	
DRAWN MJB	12/02/94
DESIGN LJ	12/02/94
APPR. LJ	06/24/95
KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730	
M39012/01-0017	