


GSD

1206-26-9

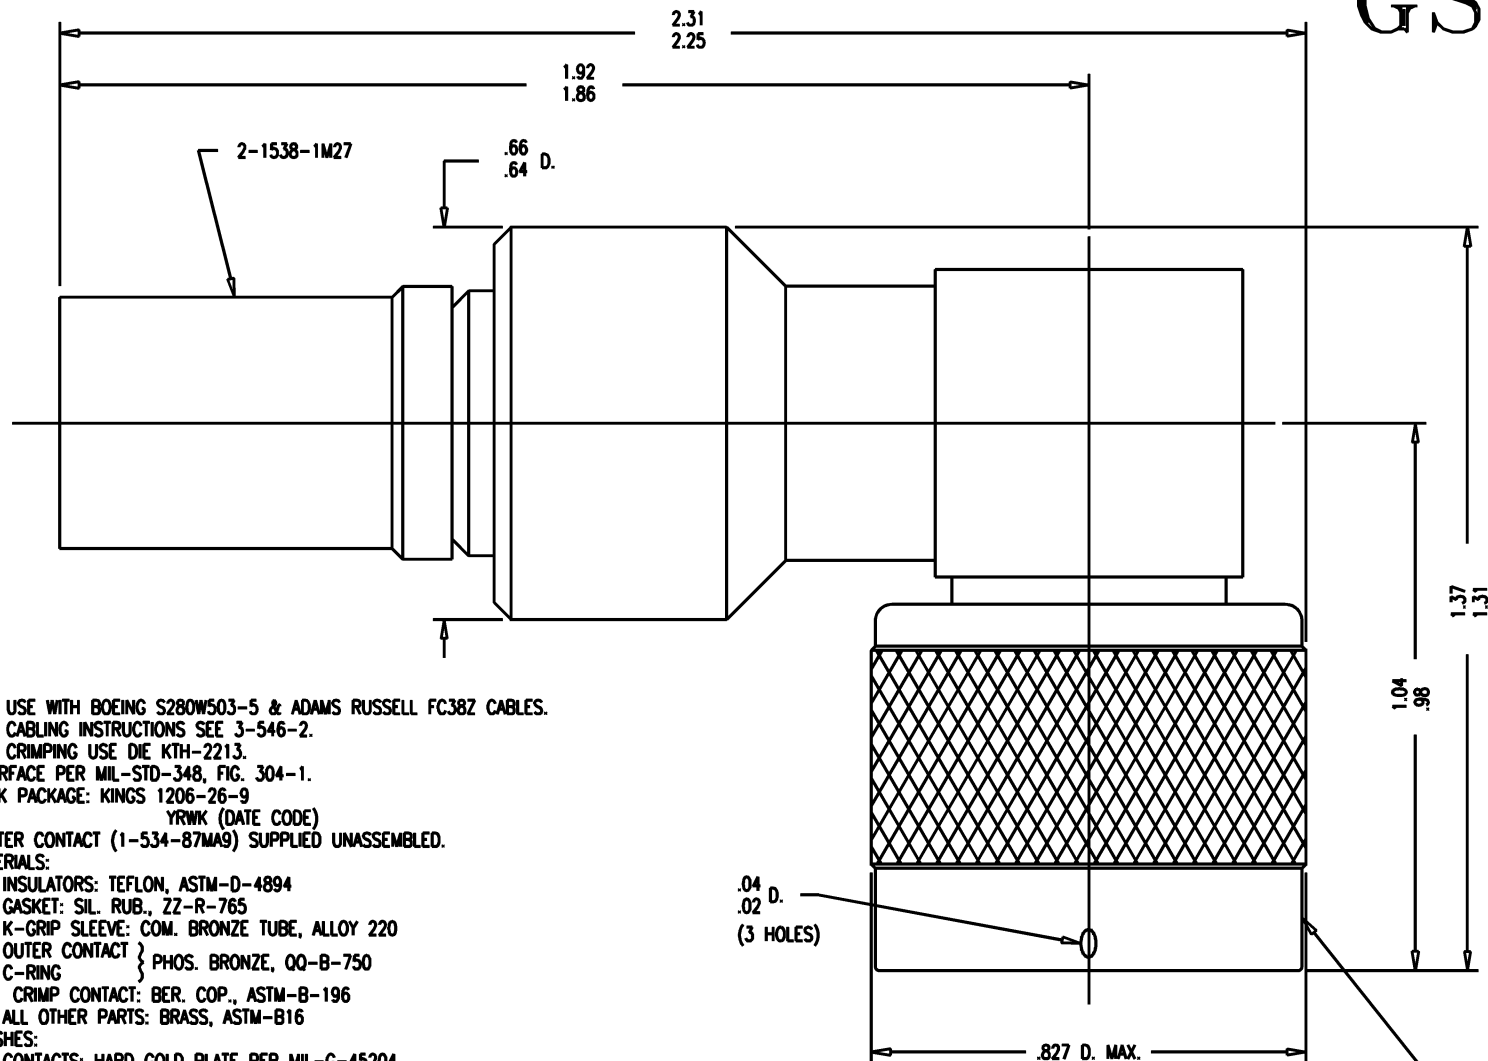

NOTES:

1. FOR USE WITH BOEING S280W503-5 & ADAMS RUSSELL FC38Z CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
3. FOR CRIMPING USE DIE KTH-2213.
4. INTERFACE PER MIL-STD-348, FIG. 304-1.
5. MARK PACKAGE: KINGS 1206-26-9

YRWK (DATE CODE)

6. CENTER CONTACT (1-534-87MA9) SUPPLIED UNASSEMBLED.

7. MATERIALS:

INSULATORS: TEFLON, ASTM-D-4894
 GASKET: SIL. RUB., ZZ-R-765
 K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
 OUTER CONTACT } PHOS. BRONZE, QQ-B-750
 C-RING }
 CRIMP CONTACT: BER. COP., ASTM-B-196
 ALL OTHER PARTS: BRASS, ASTM-B16

8. FINISHES:

CONTACTS: HARD GOLD PLATE PER MIL-G-45204
 OUTER CONTACT: SILVER PLATE PER QQ-S-365
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)

9. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 1000 VRMS
 FREQUENCY RANGE: DC TO 11 GHz

STAMP: KINGS 1206-26-9
 YRWK (DATE CODE)

GSD

REVISIONS

ISSUE	CHANGES	
	DESCRIPTION	DATE
0	ER JCA 35256	12/16/93
1	CN 35739 A	08/10/94
2	CN 38322 E	06/15/01

WAS:
 JCA3770

1206269S

SCALE 4:1

APPROX SURFACE AREA

WAS: E-18166

USED ON

REF: BOEING

PLUG, ANGLE, N

DRAWN	JCA	DATE	04/26/93
DESIGN	JT	DATE	04/27/93
APPR.		DATE	

KINGS
 ELECTRONICS CO., INC.
 ROCK HILL, SOUTH CAROLINA 29730

1206-26-9