


EFC

Polypropylene and Foil Capacitors

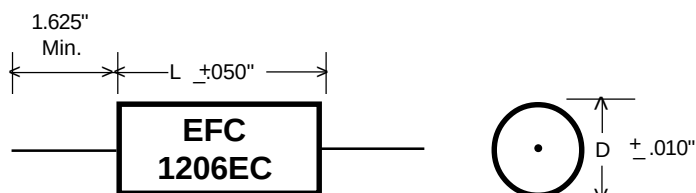

(All dimensions in inches)

1206EC

**Epoxy case
(Axial Leads)**

Lead Specs.

Tinned Copperweld
Under .250D = 24 AWG
.250 - .440D = 22 AWG
Above .440D = 20 AWG

DIMENSIONS and RATINGS

Cap.	1206EC 50 VDC		1206EC 100 VDC		1206EC 150 VDC		1206EC 200 VDC		1206EC 400 VDC		1206EC 600 VDC	
μF	D	L	D	L	D	L	D	L	D	L	D	L
.001	1	A	1	A	1	A	1	A	2	A	2	B
.0012	1	A	1	A	1	A	1	A	2	A	2	B
.0015	1	A	1	A	1	A	1	A	2	A	2	B
.0022	1	A	1	A	1	A	1	A	1	B	3	B
.0027	1	A	1	A	1	A	2	A	2	B	3	B
.0039	1	A	1	A	1	A	2	A	2	B	3	C
.0047	1	A	2	A	2	A	2	B	3	B	3	C
.0056	2	A	2	A	2	A	2	B	3	B	4	C
.0068	2	A	1	B	1	B	2	B	2	C	4	C
.0082	2	A	1	B	1	B	2	B	3	C	4	C
.01	2	B	2	B	2	B	3	B	3	C	4	D
.012	2	B	2	B	2	B	3	B	4	C	4	D
.015	2	B	2	B	2	B	2	C	4	C	5	D
.018	2	B	3	B	3	B	3	C	4	C	5	D
.022	3	B	3	B	3	B	4	C	4	D	5	E
.027	3	B	3	C	3	C	4	C	5	D	6	E
.033	3	C	3	C	3	C	4	C	5	D	6	E
.039	3	C	4	C	4	C	4	C	5	E	7	E
.047	4	C	4	C	4	C	4	D	6	E	7	E
.056	4	C	4	C	4	C	5	D	6	E	7	F
.068	4	C	4	D	4	D	5	D	7	E	7	F
.082	4	D	5	D	5	D	5	E	7	E		
.1	4	D	5	D	5	D	6	E	7	F		
.12	5	D	5	D	5	D	6	E	7	F		
.15	5	D	5	E	5	E	7	E				
.18	5	E	6	E	6	E	7	E				
.22	6	E	6	E	6	E	7	F				
.27	6	E	7	E	7	E						
.33	7	E	7	F	7	F						
.39	7	F	7	F	7	F						
.47	7	F										

DIAMETER

1 = .187 5 = .375
2 = .225 6 = .437
3 = .250 7 = .500
4 = .312

SIZE CODE

LENGTH

A = .375 D = .750
B = .500 E = .875
C = .625 F = 1.190

ELECTRONIC FILM CAPACITORS, INC.

Reidville Industrial Park * 41 Interstate Lane * WATERBURY, CONNECTICUT 06705
Phone (203) 755-5629 FAX (203) 755-0659

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.