



**121-003**  
**Type C Series 72 Annular Convuluted Tubing**  
**Thermally Stabilized Kynar®**



**121-003-16**

Product Series ————  
 Dash No. (Table I) ————  
 Basic No. ————

**TYPE  
 C  
 EXTERNAL  
 TIN/COPPER  
 BRAID**

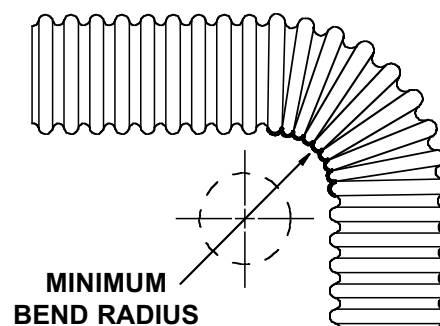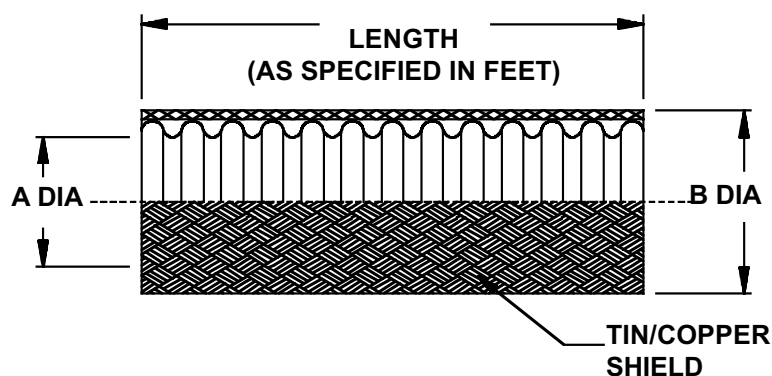

| DASH<br>NO. | A DIA       |             | B DIA       |             | MINIMUM<br>BEND RADIUS |
|-------------|-------------|-------------|-------------|-------------|------------------------|
|             | MIN         | MAX         | MIN         | MAX         |                        |
| 09          | .24 (6.1)   | .28 (7.1)   | .42 (10.7)  | .46 (11.7)  | .75 (19.1)             |
| 12          | .33 (8.4)   | .37 (9.4)   | .52 (13.2)  | .56 (14.2)  | 1.00 (25.4)            |
| 16          | .45 (11.4)  | .50 (12.7)  | .64 (16.3)  | .70 (17.8)  | 1.38 (35.1)            |
| 20          | .57 (14.5)  | .62 (15.7)  | .75 (19.1)  | .81 (20.6)  | 1.69 (42.9)            |
| 24          | .69 (17.5)  | .75 (19.1)  | .92 (23.4)  | .98 (24.9)  | 1.88 (47.8)            |
| 28          | .81 (20.6)  | .87 (22.1)  | 1.04 (26.4) | 1.12 (28.4) | 2.00 (50.8)            |
| 32          | .93 (23.6)  | 1.00 (25.4) | 1.16 (29.5) | 1.24 (31.5) | 2.38 (60.5)            |
| 40          | 1.18 (30.0) | 1.25 (31.8) | 1.40 (35.6) | 1.48 (37.6) | 2.88 (73.2)            |

Metric dimensions (mm) are in parentheses.

Note: Tubing supplied in random lengths.  
 For specific size lengths, consult factory.