

For non-environmental EMI/RFI applications



How To Order

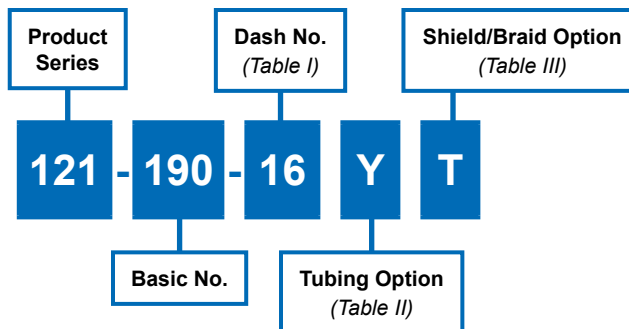


Table I - Dash Number/Diameter


Dash No	A Inside Dia		B Outside Dia	
	Min	Max	Min	Max
09	.24 (6.1)	.28 (7.1)	.42 (10.7)	.46 (11.7)
12	.33 (8.4)	.37 (9.4)	.52 (13.2)	.56 (14.2)
16	.45 (11.4)	.50 (12.7)	.64 (16.3)	.70 (17.8)
20	.57 (14.5)	.62 (15.7)	.75 (19.1)	.81 (20.6)
24	.69 (17.5)	.75 (19.1)	.92 (23.4)	.98 (24.9)
28	.81 (20.6)	.87 (22.1)	1.04 (26.4)	1.12 (28.4)
32	.93 (23.6)	1.00 (25.4)	1.16 (29.5)	1.24 (31.5)
40	1.18 (30.0)	1.25 (31.8)	1.40 (35.6)	1.48 (37.6)
52	1.56 (39.6)	1.63 (41.4)	1.81 (46.0)	1.89 (48.0)

Table II - Tubing Option

Y	Kynar/Thermally stabilized
V	PVDF/Not thermally stabilized
S	Siltem/Medium duty

Table III - Shield/Braid Option

T	Tin/Copper
C	Stainless Steel
N	Nickel Copper
L	AarmorLite™
D	Dacron
M	Nomex
E	AmberStrand® 100%
F	AmberStrand® 75%/25%

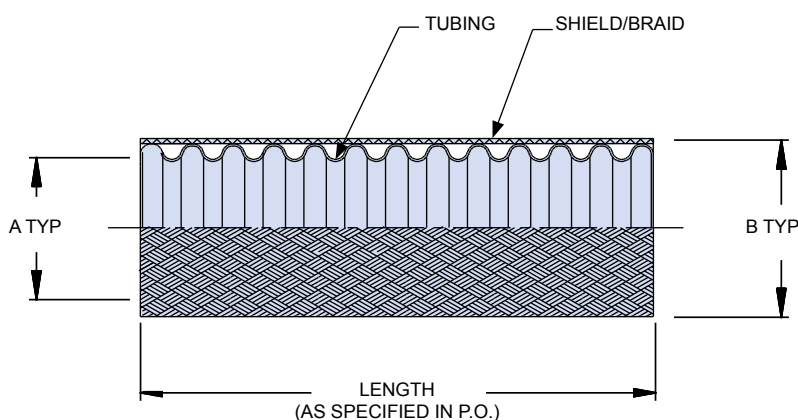

Packaging

Long-length orders of 121-190 braided conduit are subject to carrier weight and box size restrictions. For example, UPS air shipments are currently limited to 50 lbs. per box. Unless otherwise specified, Glenair standard practice is to ship optimal lengths of product based on weight, size, and individual carrier specifications. Consult factory for additional information or to specify packaging requirements.