

## Triple-Balanced Mixer

**M83/M83C**

V3

### Features

- LO 2 TO 18 GHz
- RF 1 TO 18 GHz
- IF 0.03 TO 5 GHz
- LO DRIVE: +13 dBm (NOMINAL)
- WIDE BANDWIDTH

### Description

M83 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

### Product Image



### Ordering Information

Part Number	Package
M83	Minpac
M83C	SMA Connectorized

### Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +13$ dBm (Downconverter Application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C
SSB Conversion Loss (max) & SSB Noise Figure (max)	f <sub>R</sub> = 5 to 13 GHz, f <sub>L</sub> = 5 to 13 GHz, f <sub>I</sub> = 0.03 to 2 GHz f <sub>R</sub> = 2 to 16 GHz, f <sub>L</sub> = 2 to 18 GHz, f <sub>I</sub> = 0.03 to 4 GHz f <sub>R</sub> = 1 to 18 GHz, f <sub>L</sub> = 2 to 18 GHz, f <sub>I</sub> = 0.03 to 5 GHz	dB	6.5	8.0	8.5
			7.5	9.0	9.5
			8.5	10.0	10.5
Isolation, L to R (min)	f <sub>L</sub> = 2 to 3 GHz f <sub>L</sub> = 3 to 18 GHz	dB	20	16	14
			30	18	16
Isolation, L to I (min)	f <sub>L</sub> = 2 to 18 GHz	dB	30	20	18
1 dB Conversion Comp.	f <sub>L</sub> = +13 dBm	dBm	+6		
Input IP3	f <sub>R1</sub> = 6 GHz at -3 dBm, f <sub>R2</sub> = 3.01 GHz at -3 dBm, f <sub>L</sub> = 8 GHz at +13 dBm f <sub>R1</sub> = 15 GHz at -3 dBm, f <sub>R2</sub> = 15.01 GHz at -3 dBm, f <sub>L</sub> = 18 GHz at +13 dBm	dBm	+18		
			+19		


**Triple-Balanced Mixer**

**M83/M83C**


V3

**Typical Performance Curves**




**Conversion Loss vs. LO Drive Power**

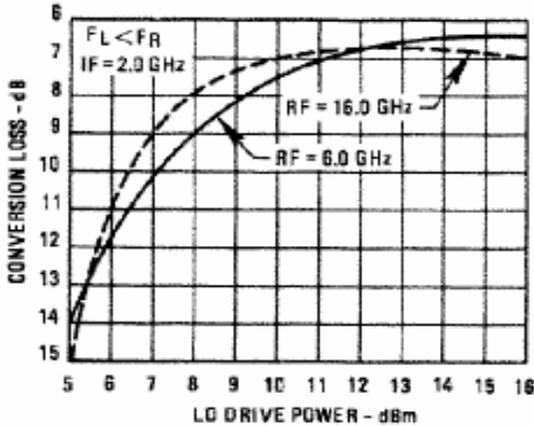

**Conversion Loss**

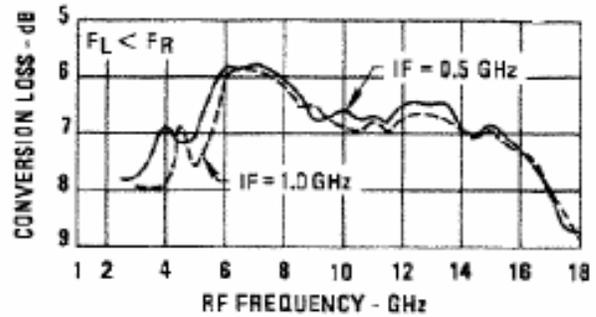

**Conversion Loss**

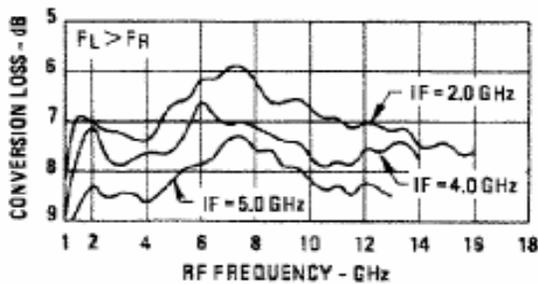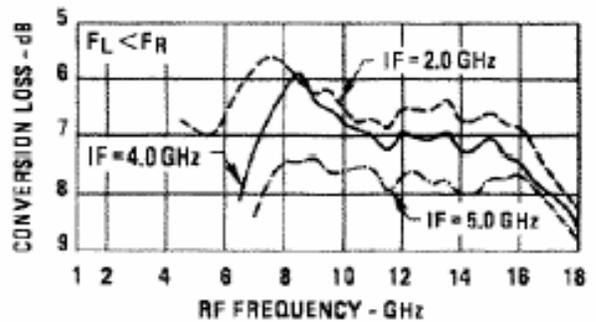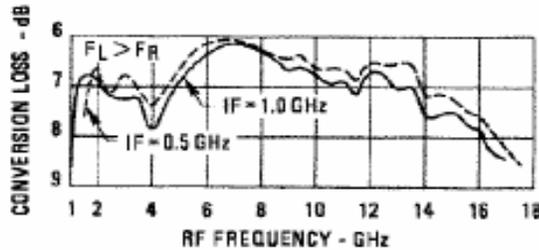

**Isolation**

