EPSON

SCI7661C$_{OA}$/M$_{OA}$

DC-DC Converter

Low Voltage Operation Products

- 95% Typical Power Efficiency
- Doubled or Tripled Output Voltage
- Internal Voltage Regulator


■ DESCRIPTION

The SCI7661C$_{OA}$/M$_{OA}$CMOS DC-DC Converter features high operational performance with low power dissipation. It consists of two major parts: the booster circuitry and the regulator circuitry. The booster generates a doubled output voltage(–2.4 to –12V) or tripled output voltage(–3.6 to –18V) from the input (–1.2 to –6V). The regulator is capable of setting the output to any desired voltage. The regulated voltage can be given one of the three threshold temperature gradients.


■ FEATURES

- High performance with low power dissipation
- Simple conversion of V_{IN} (–5V) to $|V_{IN}|$ (+5V), 2 $|V_{IN}|$ (+10V), 2V_{IN} (–10V) or 3V_{IN}(–15V)
- On-chip output voltage regulator
- Power conversion efficiency–Typ. 95%
- Temperature gradient for LCD power supply – 0.1% / °C, 0.4%/°C or 0.6%/ °C
- Power off by external signals – Stationary current at power off – Max. 2 µA
- Cascade connection–two device connected: V_{IN}=–5V, V_{OUT}=–20V
- On-chip C'–R oscillator
- Package ..... SCI7661C$_{0A}$: DIP-14pin(plastic)
  SCI7661M$_{0A}$: SOP5-14pin(plastic)
  SCI7661M$_{AA}$: SSOP2-16pin(plastic)

■ BLOCK DIAGRAM

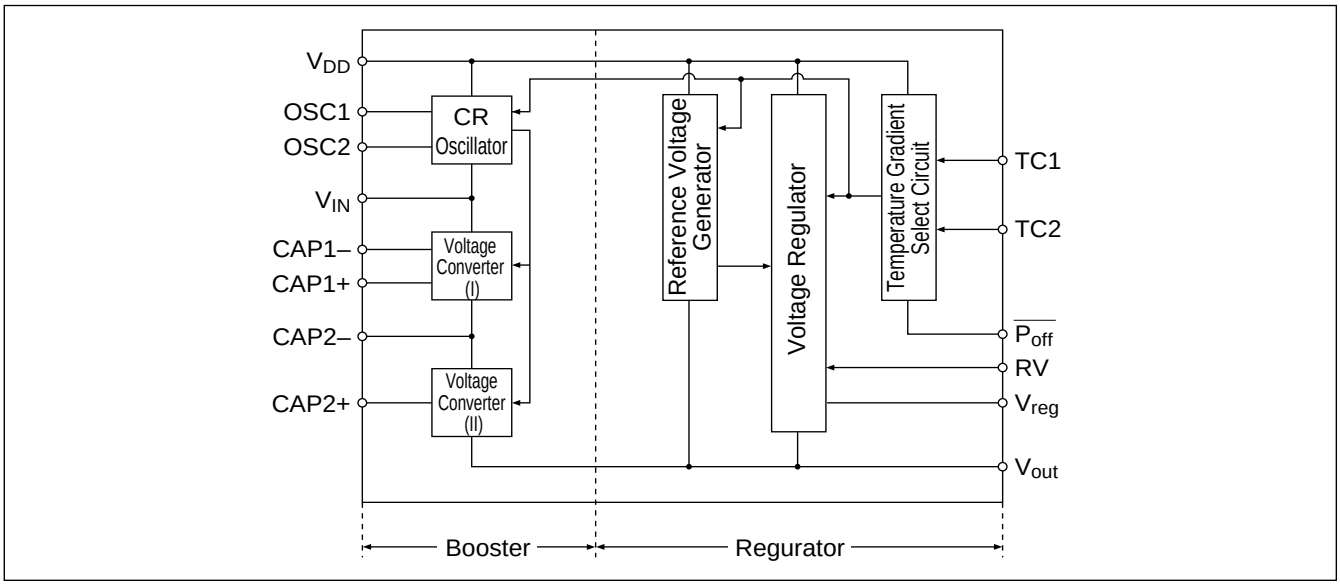

■ PIN CONFIGURATION

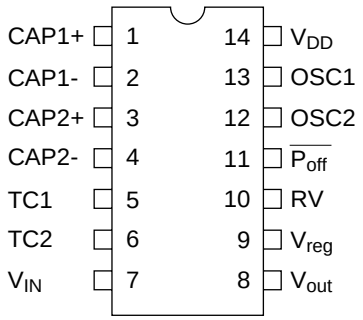

The same pin configuration in DIP and SOP

■ PIN DESCRIPTION

Pin name	No.	Function
CAP1+, CAP1-	1, 2	Terminal for connection of capacitor for doubler
CAP2+, CAP2-	3, 4	Terminal for connection of capacitor for tripler
TC1, TC2	5, 6	Temperature gradient selection terminal
V_{IN}	7	Power supply terminal(negative, system supply GND)
V_{OUT}	8	Output terminal at tripling
Vreg	9	Regulated voltage output terminal
R_V	10	Regulated voltage control terminal
P_{off}	11	Vreg output ON/OFF control terminal
OSC2, OSC1	12, 13	Oscillation resistor connection terminal
V_{DD}	14	Power supply terminal(positive system supply VCC)

■ ABSOLUTE MAXIMUM RATINGS

(V_{DD}=0V)

Rating	Symbol	Min.	Max.	Unit	Remark
Input supply voltage	V_I	-20/N	0.5	V	N=2 : Doubler N=3 : Tripler
Input terminal voltage	V_I	V_{IN}-0.5	0.5	V	OSC1, $\overline{P_{off}}$
		V_{OUT}-0.5	0.5	V	TC1, TC2, RV
Output voltage	V_O	-20.0		V	
Allowable loss	P_d		300	mW	
Operating temperature	T_{opr}	-30	85	°C	Plastic package
Storage temperature	T_{stg}	-55	150	°C	
Soldering temperature and time	T_{sol}	260°C, 10s(at lead)		-	

Note: When this IC is soldered in the solder-reflow process, be sure to maintain the reflow furnace at the curve shown in "Fig. 1-5 Reflow Furnace Temperature Curve" of this DATA BOOK. And this IC can not be exposed to high temperature of the solder dipping.

■ ELECTRICAL CHARACTERISTICS

(V_{DD} = 0V, V_{IN}=-5V, Ta=-30 to 85°C)

Characteristic	Symbol	Min.	Typ.	Max.	Unit	Condition
Input supply voltage	V_I	-6.0		-1.2	V	
Output voltage	V_O	-18.0			V	
	Vreg	-18		-2.6	V	R_L=∞, R_{RV}=1MΩ, V_O=-18V
Regulator operating voltage	V_{OUT}	-18.0		-3.2	V	
Booster current consumption	$Iopr_1$		60	100	μA	R_L=∞, R_{OSC}=1MΩ
Regulator current consumption	$Iopr_2$		50	12.0	μA	R_L=∞, R_{RV}=1MΩ V_{OUT}=-15V
Stationary current	I_Q			2.0	μA	TC2=TC1=V_{OUT}, R_L=∞
Oscillation frequency	f_{osc}	16	20	24	kHz	R_{OSC}=1MΩ
Output impedance	R_{OUT}		150	200	Ω	I_{OUT}=10mA
Booster power conversion efficiency	Peff	90	95		%	I_{OUT}=5mA
Regulated output voltage fluctuation	$\frac{\Delta V_{reg}}{\Delta V_{OUT} \cdot V_{reg}}$		0.2		%/V	-18V<V_{OUT}<-8V, V_{reg}=-8V, R_L=∞, Ta=25°C

Characteristic	Symbol	Min.	Typ.	Max.	Unit	Condition
Regulated output load fluctuation	$\frac{\Delta V_{reg}}{\Delta I_{OUT}}$		5		Ω	V_{OUT}=-15V, V_{reg}=-8V, Ta=25°C 0<I_{OUT}<10mA, TC1=V_{DD} TC2=V_{OUT}
Regulated output saturation resistance	R_{SAT}		5		Ω	R_{SAT}=D(Vreg—V_{OUT})/DI_{OUT} 0<I_{OUT}<10mA, RV=V_{DD}, Ta=25°C
Reference voltage	V_{RV0} V_{RV1} V_{RV2}	-2.3 -1.7 -1.1	-1.5 -1.3 -0.9	-1.0 -1.1 -0.8	V V V	TC2=V_{OUT}, TC1=V_{DD}, Ta=25°C TC2=TC1=V_{OUT}, Ta=25∞C TC2=V_{DD}, TC1=V_{OUT}, Ta=25°C
Temperature Gradient	CT^0 CT^4 CT^2	-0.25 -0.5 -0.7	-0.1 -0.4 -0.6	-0.06 -0.3 -0.5	%/°C %/°C %/°C	$CT = \frac{\lvert V_{reg}(50°C)\rvert - \lvert V_{reg}(0°C)\rvert}{50°C-0°C} \times \frac{1}{\lvert V_{reg}(25°C)\rvert} \times 100$
Input leakage current	I_L			2.0	μA	P_{off}, TC1, TC2, OSC1, RV pins


■ RECOMMENDED OPERATING CONDITIONS


(Ta=-30 to 85°C)

Condition	Symbol	Min.	Max.	Unit	Remark
Booster start voltage	V_{STA1}		-1.2	V	R_{OSC}=1MΩ, C_3≥10μF*1 C_L/C_3≤1/20, Ta=-20 to 85°C
	V_{STA2}		-2.2	V	R_{OSC}=1MΩ
Booster stop voltage	V_{STP}	-1.2		V	R_{OSC}=1MΩ
Output load resistance	R_L	R_L Min.*2		Ω	
Output load current	I_{OUT}		20	mA	
Oscillation frequency	f_{OSC}	10	30	kHz	
Extarnal resistance for oscillation	R_{OSC}	680	2000	kΩ	
Capasitor for booster	C_1, C_2, C_3	3.3		μF	
Regulated output adjustable resistance	R_{RV}	100	1000	kΩ	

*1: Recommended circuity in low voltage operation is shown below.

*2: R_L Min. depends on input voltage as shown below.

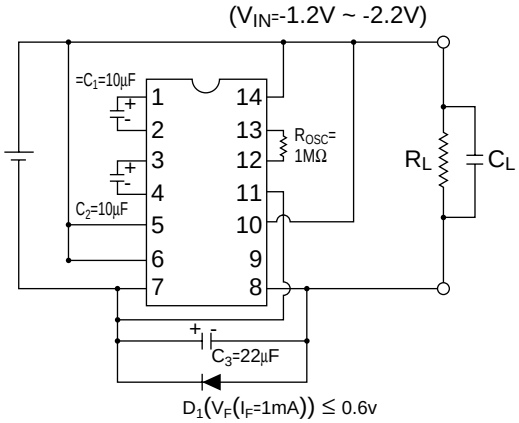

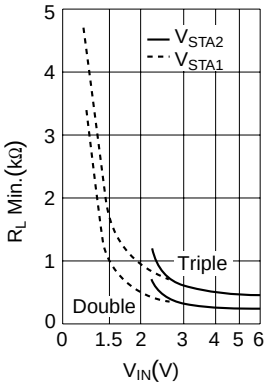

■ PERFORMANCE CURVES

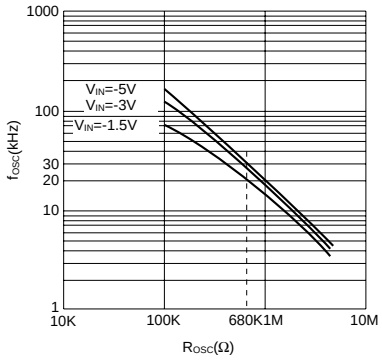


Fig.1 Oscillation Frequency(f_{OSC})vs. External-Resistance(R_{OSC})

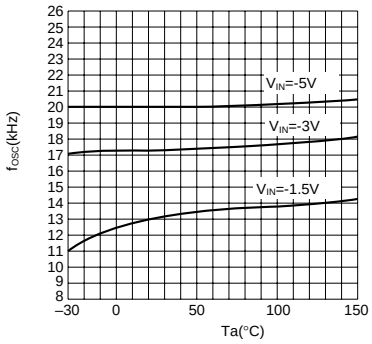


Fig.2 Oscillation Frequency(f_{OSC})vs. Temperature(Ta)

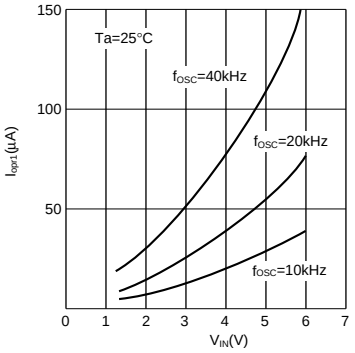


Fig.3 Input Voltage(V_{IN})vs. Booster Current Consumption(I_{opr1})

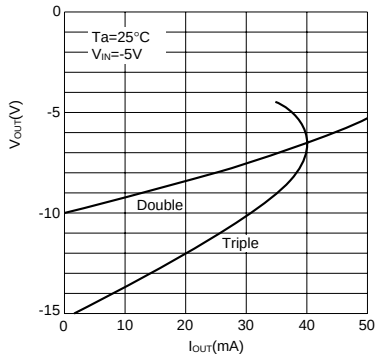


Fig.4 Output Voltage(V_{OUT})vs. Output Current(I_{OUT})

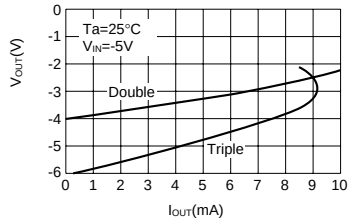


Fig.5 Output Voltage(V_{OUT})vs. Output Current(I_{OUT})

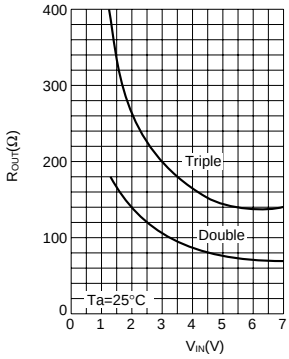


Fig.6 Output Inpedance(R_{OUT})vs. Input Voltage(V_{IN})

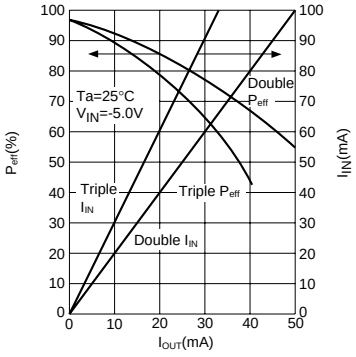


Fig.7 Power Conversion Efficiency (P_{eff})/Input Current(I_{IN})vs. Output Current(I_{OUT})

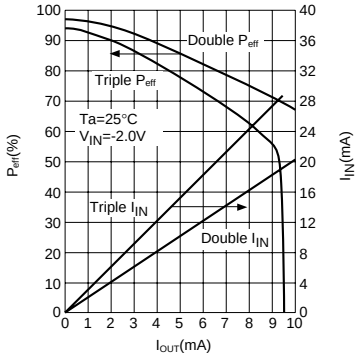


Fig.8 Power Conversion Efficiency (P_{eff})/Input Current(I_{IN})vs. Output Current(I_{OUT})

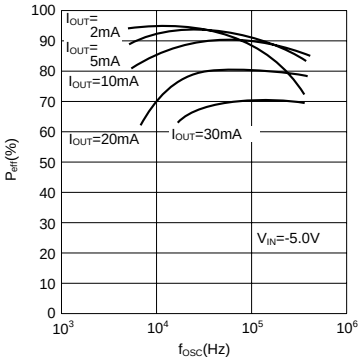


Fig.9 Power Conversion Efficiency (P_{eff})vs. Oscillation Frequency (f_{OSC})

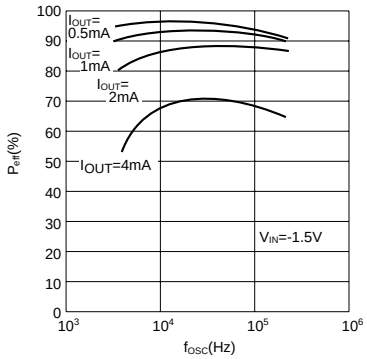


Fig.10 Power Conversion Efficiency(P_{eff}) vs.Oscillation Frequency(f_{OSC})

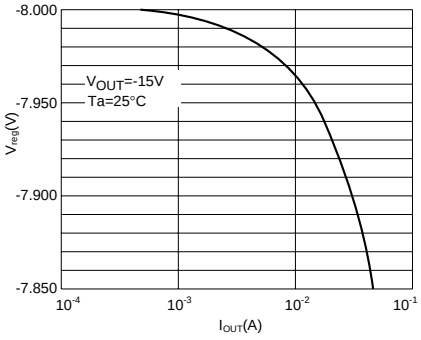


Fig.11 Output Voltage(V_{reg})vs. Output Current(I_{OUT})

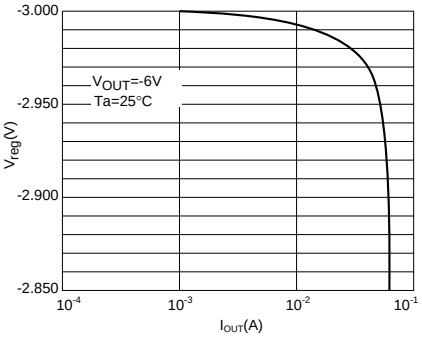


Fig.12 Output Voltage(V_{reg})vs. Output Current(I_{OUT})

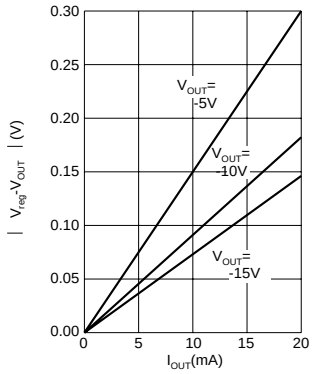


Fig:13 Regulated Output Saturation Resistance(R_{SAT})V_{reg}—V_{OUT} —I_{OUT}


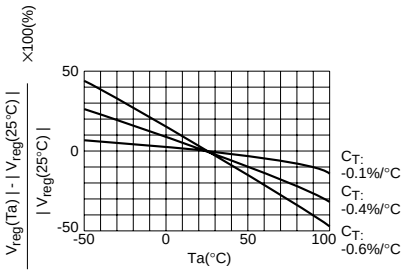


Fig:14 Output Voltage(v_{reg})vs. Temperature(Ta)

■ CIRCUIT DESCRIPTION


● C-R Oscillator

The SCI7661C/M contains a C-R oscillator for internal oscillation. It consists of an external resistor R_{OSC} connected between the OSC1 pin and OSC2 pin.

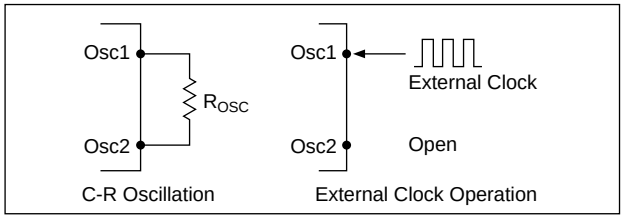


● Voltage Converters

The voltage converters doubleÅ^triple the input supply voltage (V_{IN}) using clocks generated by the C-R oscillator

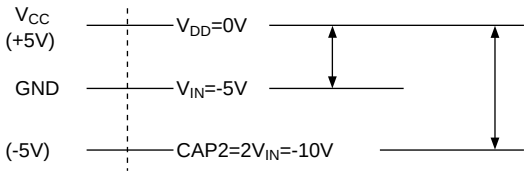


Typical Doubled Voltage Relations

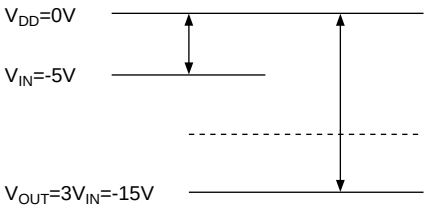

Typical Tripled Voltage Relations

●Reference Voltage Generator and Voltage Regulator

The reference voltage generator produces reference voltage needed for operation of regulator circuit. The voltage regulator is used to regulate a boosted output voltage and its circuit contains a power-off function which uses signals from the system for on-off control of the V_{reg} output.

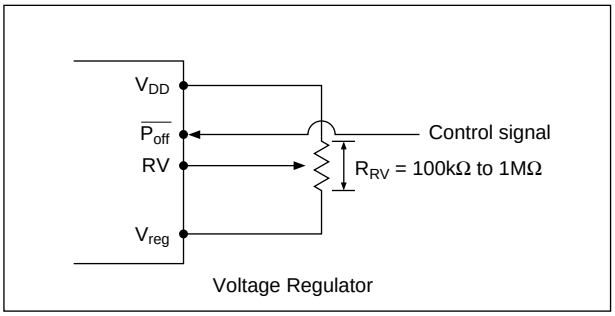

● Temperature Gradient Selector Circut

The SCI7661C/M provides the V_{reg} output with a temperature gradient suitable for LCD driving.

● Temperature Gradient Assignment


$\overline{P_{off}}$	TC2	TC1	Temp. Gradient	V_{reg} Output	CR oscillation	Remarks
1(V_{DD})	L(V_{OUT})	L(V_{OUT})	-0.4%/°C	ON	ON	
1	L	H(V_{DD})	-0.1%/°C	ON	ON	
1	H(V_{DD})	L	-0.6%/°C	ON	ON	
1	H	H	-0.6%/°C	ON	OFF	Cascade connection
0(V_{IN})	L	L	-	OFF(Hi-Z)	OFF	
0	L	H	-	OFF(Hi-Z)	OFF	
0	H	L	-	OFF(Hi-Z)	OFF	
0	H	H	-	OFF(Hi-Z)	ON	Without regulation

NOTE: The potential at Low level is different between the $\overline{P_{off}}$ pin and the TC1/TC2 pin.

■ BASIC EXTERNAL CONNECTION

● Voltage Doubler and Tripler


A doubled voltage can be obtained at V_{OUT}(CAP2-) by disconnecting capacitor C_2 from the tripler configuration and shorting CAP2- (pin4) and V_{OUT} (pin 8).

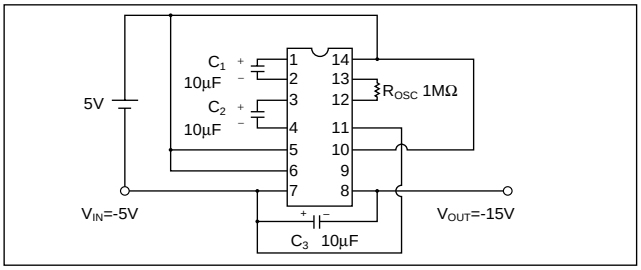

Voltage Tripler

● Voltage Tripler+Regulator

V_{reg} output is given a temperature gradient, after boosted output V_{OUT} regulated. In this connection, both V_{OUT} and V_{reg} can be taken out at the same time.

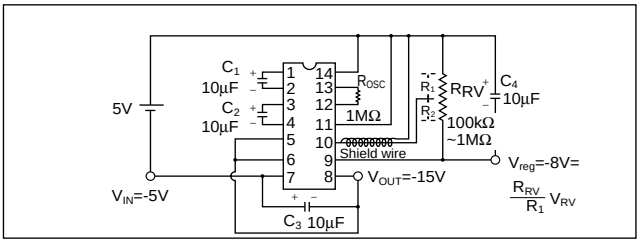


Tripler+Regulator
(-0.4%/°C selected as temperature gradient)

● Parallel Connection

Parallel connection of n circuits can reduce R_{OUT} to about 1/n, that output impedance R_{OUT} can be reduced by connecting serial configuraiton. A single smoothing capacitor C_3 can be used commonly for all parallely connected circuit.


In parallely connection, a regulated output can be obtained by applying the regulation circuit to only one of the n parallely connected circuit.

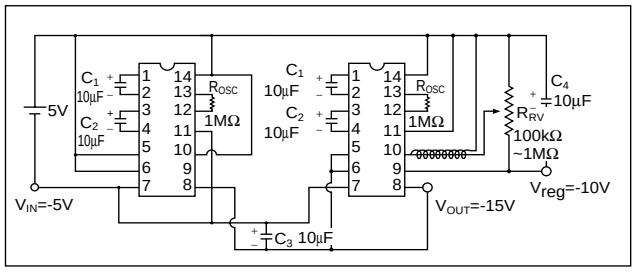

Parallel Connection

● Cascade Connection

Cascade connection of SCI7661C/M (by connecting V_{IN} and V_{OUT} of one stage to V_{DD} and V_{IN} respectively of the next stage) further increase the output voltage. Note, however, that the serial connection increases the output impedance.

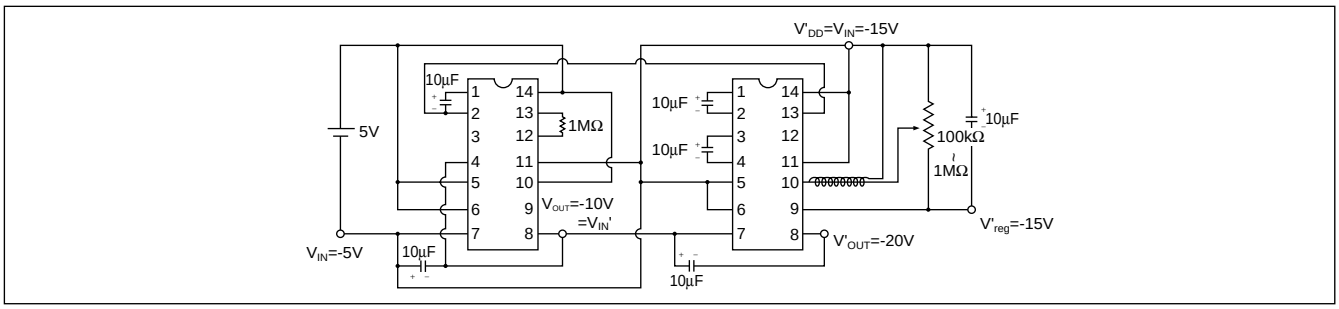


Serial Connection

● Positive Voltage Conversion

The input voltage can be doubled or tripled toward the positive side. (In the doubler configuration, capacitor C_2 and diode D_3 are disconnected and the diode D_3 shorted at the both ends.) In this case, however, the output voltage decrease by V_F(forward voltage)


For example V_{DD}=0V, V_{IN}=–5V and V_F=0.6V, then V_{OUT}=10V–3×0.6V=8.2 V (if doubled, 5V–2×0.6V=3.8V)

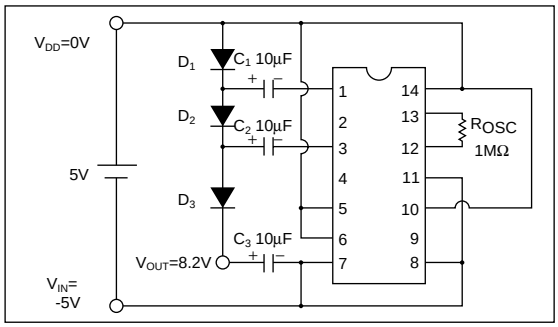

Positive Voltage Conversion D_1, D_2, D_3,: Shottky diodes with small V_F are recommended.

● Negative Voltage Conversion + Positive Voltage Conversion


This circuit produces outputs of –15V and +8.2V from the –5V input. Note that this configuration causes higher output impedance than in a single function (negative or positive voltage converter).

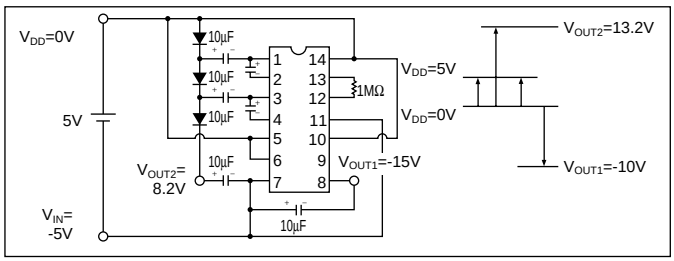

Negative Voltage Convertion +Positive Voltage Conversion

● Changing the Temperature Gradient through Use of External Temperature Sensor (Thermistor)


The SCI7661C/M has a temperature gradient selector circuit in its regulator. It selects any one of the three gradients: –0.1% / °C, –0.4% / °C and –0.6% / °C. It is necessary that the temperature gradient can be changed to any other value by connecting a thermistor in series to the output voltage control resistor R_{RV}.

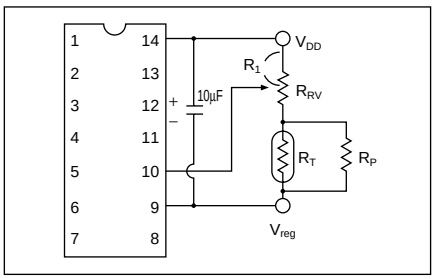

Example of Change of Temperature Gradient


■ PACKAGE DIMENSIONS

Plastic DIP-14pin

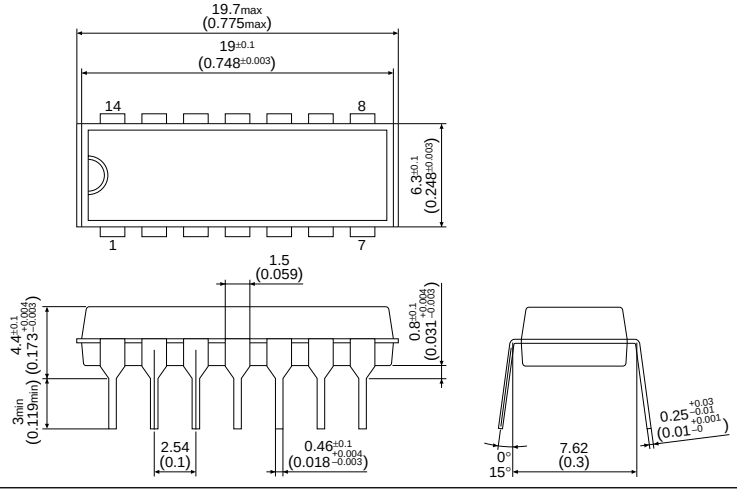

Unit: mm
(inch)

Plastic SOP5-14pin

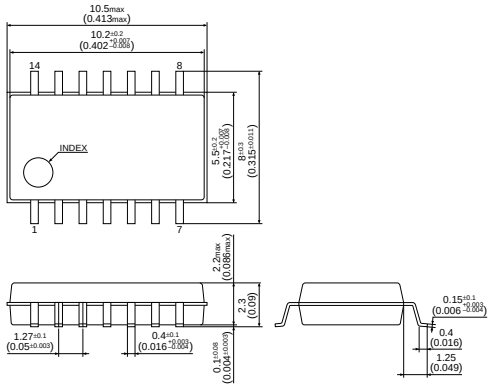

Unit: mm
(inch)

NOTICE

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Control Law of Japan and may require an export license from the Ministry of International Trade and Industry or other approval from another government agency.

All product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

©Seiko Epson Corporation 1998 All rights reserved.

SEIKO EPSON CORPORATION

ELECTRONIC DEVICES MARKETING DIVISION

Electronic Device Marketing Department
IC Marketing & Engineering Group
421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-(0)42-587-5816 Fax: +81-(0)42-587-5624

ED International Marketing Department I (Europe & U.S.A.)
421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-(0)42-587-5812 Fax: +81-(0)42-587-5564

ED International Marketing Department II (Asia)
421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN
Phone: +81-(0)42-587-5814 Fax: +81-(0)42-587-5110

Electric Device Information of EPSON WWW server

http://www.epson.co.jp

ENERGY SAVING EPSON