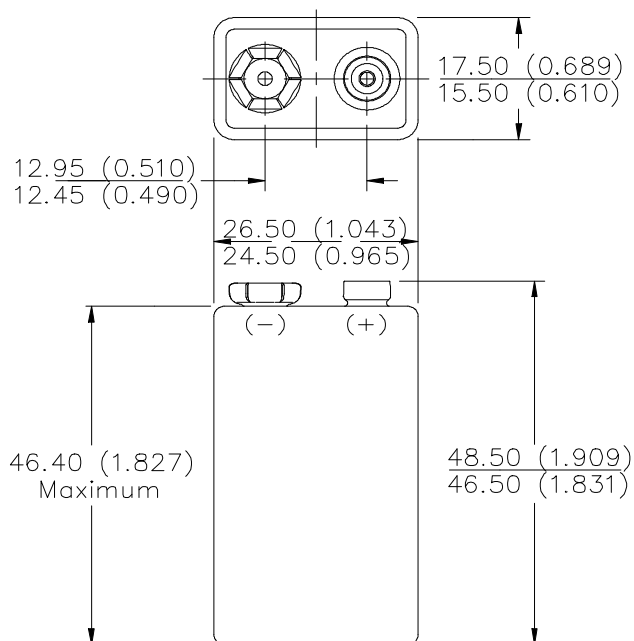


ENERGIZER NO. 1222

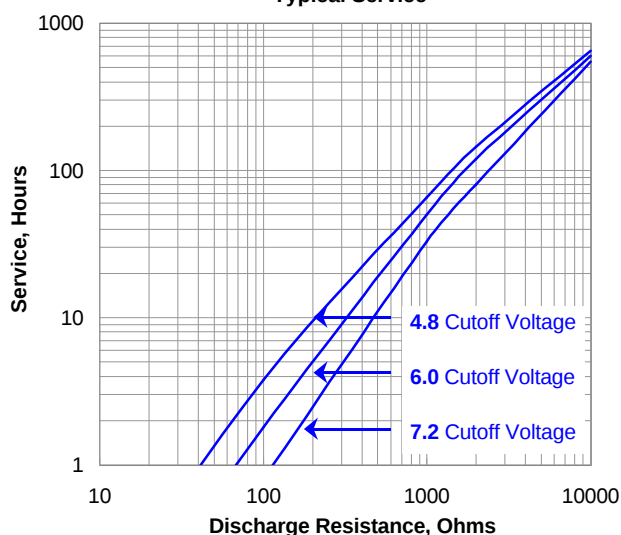
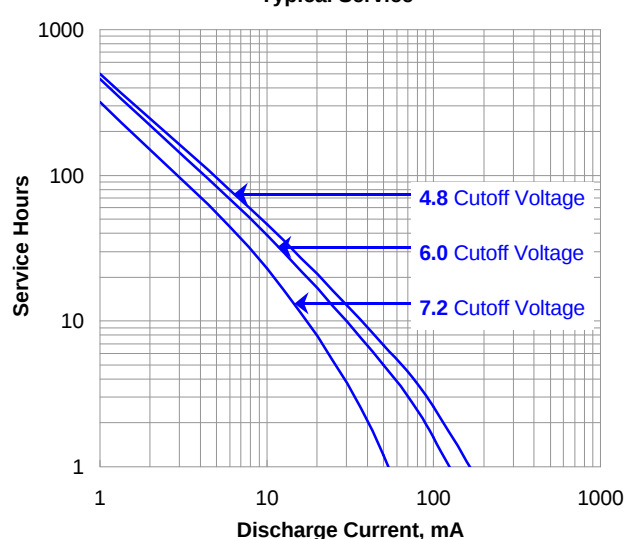
9V
SUPER HEAVY DUTY


Industry Standard Dimensions in mm (inches)



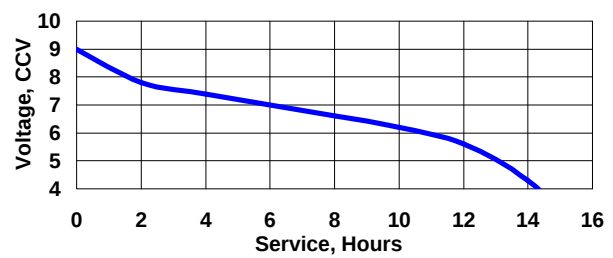
Chemical System:	Leclanche Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-1604D, IEC-6F22
Battery Voltage:	9.0 Volts
Operating Temp:	-5°C to 55°C (20°F to 130°F)
Average Weight:	37.0 grams (1.3 oz.)
Volume:	20.3 cubic centimeters (1.2 cubic inch)
Average Capacity:	400 mAh to 0.8 volts per cell (Rated capacity at 5 mA continuous at 21°C)
Cell:	Six No. 118P in series
Jacket:	Metal

TEMPERATURE EFFECTS
 Typical Service to 4.8 Volts

CONSTANT RESISTANCE PERFORMANCE
 Typical Service

CONSTANT CURRENT DISCHARGE
 Typical Service


Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.
 Contents herein do not constitute a warranty.

ENERGIZER NO. 1222Typical Applications**RADIO**
620 ohm - 2 hours/day**TOY**
270 ohm - 1 hr/day**CALCULATOR**
180 ohm - 0.5 hr/day**RECORDER**
180 ohms - 1 hr/day**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.
Contents herein do not constitute a warranty.