

### GENERAL DESCRIPTION

The EV2105 evaluation board is designed for low dropout step down converter applications. It implements the MP2105 1MHz Fixed Frequency, Current Mode, PWM step-down converter. The device integrates a main switch and a synchronous rectifier for high efficiency without an external Schottky diode. It is ideal for powering portable equipments that runs from a single cell Lithium-Ion (Li+) Battery. It can supply 800mA of load current from a 2.5V to 6V input voltage. The output voltage can be regulated as low as 0.6V. In 100% Duty Cycle Dropout operation, it works with minimum input voltage as low as output voltage.

### ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Input Voltage Range	$V_{IN}$	2.5 to 6.0	V
Output Voltage	$V_{OUT}$	1.8	V
Load Max	$I_{OUT}$	800	mA

### FEATURES

- High Efficiency: Up to 95%
- 800mA Available Load Current
- 2.5V to 6V Input Voltage Range
- Output Voltage as Low as 0.6V
- 100% Duty Cycle in Dropout
- Short Circuit Protection
- Thermal Fault Protection
- <math><0.1\mu A</math> Shutdown Current
- Programmable Enable Control

### APPLICATIONS

- Cellular and Smart Phones
- Microprocessors/DSP Core Supplies
- PDAs
- MP3 Players
- Digital Still and Video Cameras
- Portable Instruments


MPS, "MPS", "Monolithic Power Systems", and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

### EV2105DJ-00A EVALUATION BOARD




Dimensions (2.0"X x 2.0"Y x 0.5"Z)

Board Number	MPS IC Number
EV2105DJ-00A	MP2105DJ

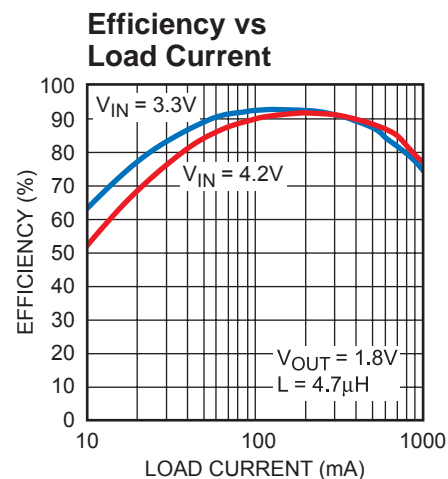

MP2105-EC01

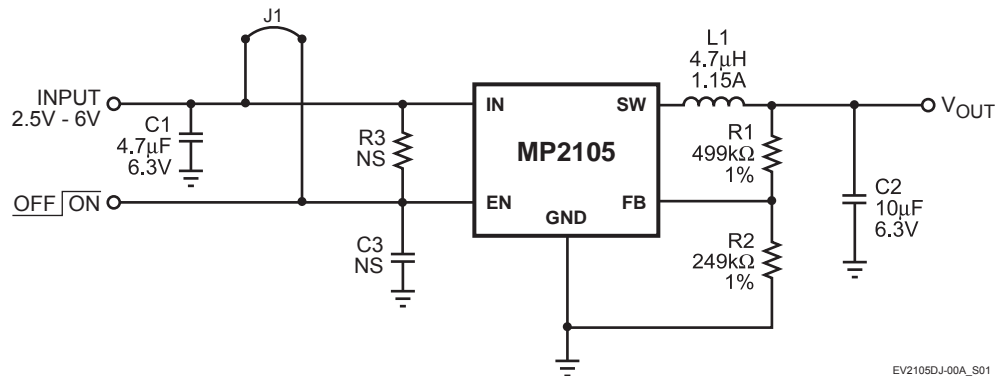
**EVALUATION BOARD SCHEMATIC**


EV2105DJ-00A\_S01


**EV2105DJ-00A BILL OF MATERIALS**

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer P/N
1	C1	4.7µF	Ceramic Cap, 6.3V, X5R	SM0805	AVX	08056D475KAT2A
1	C2	10µF	Ceramic Cap, 6.3V, X5R	SM0805	AVX	08056D106KAT2A
1	C3		Do Not Stuff			
1	J1		Jumper			
1	L1	4.7µH	1.15A	SMD	Sumida	CR43-4R7
1	R1	499kΩ	Film Res, 1%	SM0805	Yageo	9C08052A3003FK HFT
1	R2	249kΩ	Film Res, 1%	SM0805	Panasonic	ERJ-6ENF1503V
1	R3		Do Not Stuff			
1	U1		DC-DC Converter	SOT23-5	MPS	MP2105DJ


**PRINTED CIRCUIT BOARD LAYOUT**

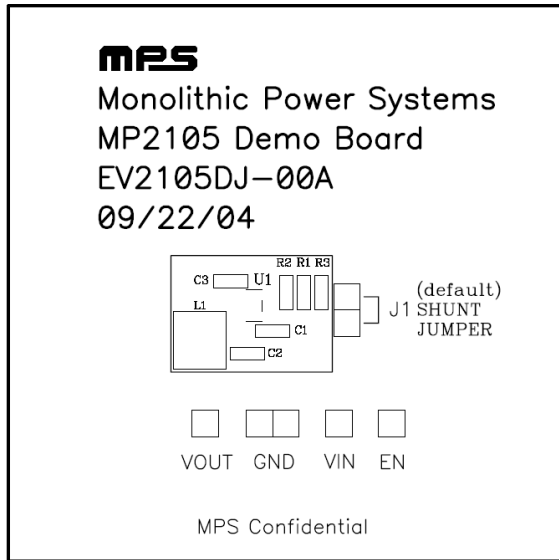


**Figure 1—Top Silk Layer**

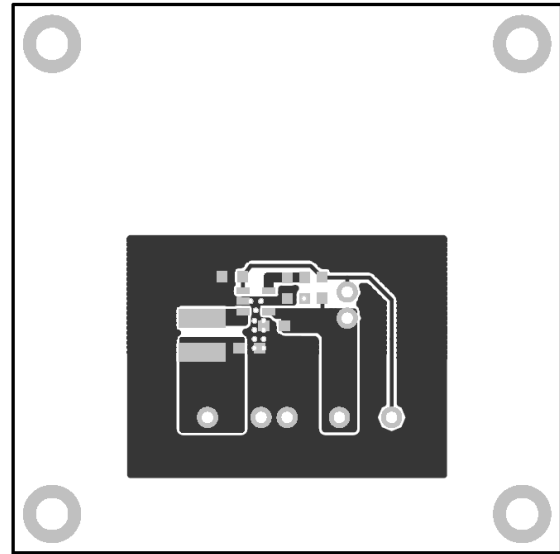

**Figure 2—Top Layer**

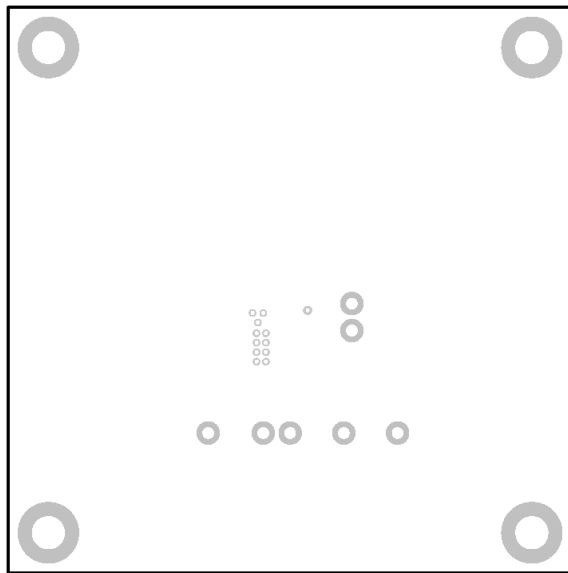

**Figure 3—Bottom Silk Layer**

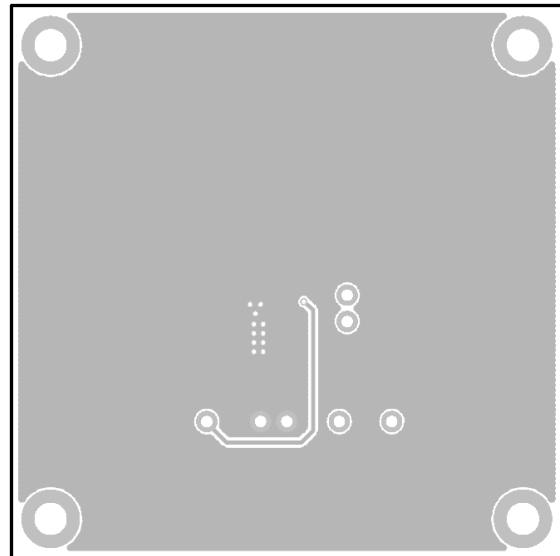

**Figure 4—Bottom Layer**

## QUICK START GUIDE

The output voltage of this board is set to 1.8V. The board layout accommodates most commonly used inductors and output capacitors.

1. Attach Positive end and Negative end of Load to V<sub>OUT</sub> and GND pins respectively.
2. Attach Input Voltage  $2.5V \leq V_{IN} \leq 6V$  and Input Ground to VIN and GND pins respectively.
3. To enable the MP2105 apply a voltage,  $1.5V \leq V_{EN} \leq 6V$ , to the EN pin. To disable the MP2105 apply a voltage,  $V_{EN} < 0.3V$ , to the EN pin. The default setting for the jumper J1 on the board connects V<sub>IN</sub> to the EN pin. With this configuration, the part will operate without applying any external voltage to the EN pin.
4. The Output Voltage V<sub>OUT</sub> can be changed by varying R2. Calculate the new value by formula:

$$R2 = \frac{R1}{\left(\frac{V_{OUT}}{V_{FB}}\right) - 1}$$

Where V<sub>FB</sub> = 0.6V and R1 = 499kΩ.

Example:

For V<sub>OUT</sub> = 2.5V:

$$R2 = \frac{499k\Omega}{\left(\frac{2.5V}{0.6V}\right) - 1} = 174k\Omega$$

Therefore, use a 174kΩ standard 1% value.

**NOTICE:** MPS believes the information in this document to be accurate and reliable. However, it is subject to change without notice. Contact MPS for current specifications. MPS encourages users of its products to ensure that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS cannot assume any legal responsibility for any said applications.