


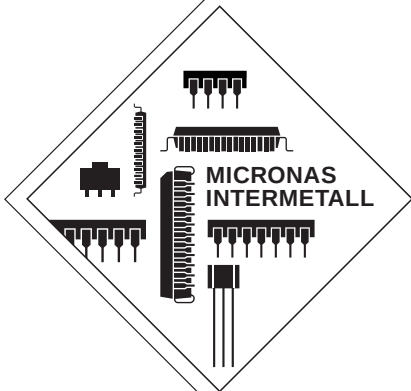

ADVANCE INFORMATION

# VDP 3108 Single-Chip Video Processor

Edition Oct. 12, 1994  
6251-352-3AI

 **MICRONAS**  
**INTERMETALL**

---

**Contents**

| <b>Page</b> | <b>Section</b> | <b>Title</b>                          |
|-------------|----------------|---------------------------------------|
| <b>4</b>    | <b>1.</b>      | <b>Introduction</b>                   |
| 4           | 1.1.           | System Architecture                   |
| <b>5</b>    | <b>2.</b>      | <b>Functional Description</b>         |
| 5           | 2.1.           | Analog Front End                      |
| 5           | 2.1.1.         | Input Selector                        |
| 5           | 2.1.2.         | Clamping                              |
| 5           | 2.1.3.         | Automatic Gain Control                |
| 5           | 2.1.4.         | Analog-to-Digital Converters          |
| 5           | 2.1.5.         | ADC Range                             |
| 5           | 2.1.6.         | Digitally Controlled Clock Oscillator |
| 8           | 2.2.           | Color Decoder                         |
| 8           | 2.2.1.         | IF-Compensation                       |
| 8           | 2.2.2.         | Demodulator                           |
| 8           | 2.2.3.         | Chrominance Filter                    |
| 8           | 2.2.4.         | Frequency Demodulator                 |
| 9           | 2.2.5.         | Burst Detection                       |
| 9           | 2.2.6.         | Color Killer Operation                |
| 9           | 2.2.7.         | Delay Line/Comb Filter                |
| 10          | 2.2.8.         | Luminance Notch filter                |
| 11          | 2.2.9.         | Skew Filter                           |
| 11          | 2.2.10.        | Picture Bus Color Space               |
| 12          | 2.3.           | Digital Video Interfaces              |
| 12          | 2.3.1.         | Picture Bus Interface                 |
| 12          | 2.3.2.         | Digital RGB Interface                 |
| 12          | 2.3.3.         | Priority Codec                        |
| 13          | 2.4.           | Display Processor                     |
| 13          | 2.4.1.         | Contrast Adjustment                   |
| 13          | 2.4.2.         | Black Level Expander                  |
| 13          | 2.4.3.         | Dynamic Peaking                       |
| 16          | 2.4.4.         | Brightness Adjustment                 |
| 16          | 2.4.5.         | Soft Limiter                          |
| 16          | 2.4.6.         | Chroma Interpolation                  |
| 16          | 2.4.7.         | Chroma Transient Improvement          |
| 17          | 2.4.8.         | Dematrix                              |
| 17          | 2.4.9.         | RGB Processing                        |
| 17          | 2.4.10.        | FIFO Display Buffer                   |
| 17          | 2.5.           | Analog Back End                       |
| 18          | 2.5.1.         | CRT Measurement and Control           |
| 19          | 2.6.           | Synchronization and Deflection        |
| 20          | 2.6.1.         | Video Sync Processing                 |
| 21          | 2.6.2.         | Deflection Processing                 |
| 22          | 2.6.3.         | Vertical, East–West Deflection        |
| 22          | 2.6.4.         | Protection Circuitry                  |
| 22          | 2.7            | Reset and Standby Functions           |
| <b>24</b>   | <b>3.</b>      | <b>Serial Interface</b>               |
| 24          | 3.1.           | I <sup>2</sup> C Bus Interface        |
| 24          | 3.2.           | Control and Status Registers          |

---

|           |           |                                            |
|-----------|-----------|--------------------------------------------|
| <b>35</b> | <b>4.</b> | <b>Specifications</b>                      |
| 35        | 4.1.      | Outline Dimensions                         |
| 35        | 4.2.      | Pin Connections and Short Descriptions     |
| 38        | 4.3.      | Pin Descriptions (pin numbers for 68–PLCC) |
| 40        | 4.4.      | Pin Configuration                          |
| 42        | 4.5.      | Pin Circuits                               |
| 44        | 4.6.      | Electrical Characteristics                 |
| 44        | 4.6.1.    | Absolute Maximum Ratings                   |
| 44        | 4.6.2.    | Recommended Operating Conditions           |
| 44        | 4.6.3.    | Characteristics                            |
| 44        | 4.6.4.    | Recommended Crystal Characteristics        |
| 54        | 4.7.      | Application Circuit                        |
| <b>60</b> | <b>5.</b> | <b>Data Sheet History</b>                  |

## Single-Chip Video Processor

### 1. Introduction

The entire video processing and controlling for a color TV has been developed on a single chip in 0.8 $\mu$  CMOS technology. Modular design and submicron technology allow the economic integration of features in all classes of TV sets.

Open architecture is the key word to the new DSP generation. Flexible standard building blocks have been defined that offer continuity and transparency of the entire system.

One IC contains the entire video and deflection processing and builds the heart of a modern color TV. Its performance and complexity allow the user to standardize his product development. Hardware and software applications can profit from the modularity as well as manufacturing, system support or maintenance. The main features are:

- low cost, high performance
- all digital video processing
- multi-standard color decoder PAL/NTSC/SECAM
- 3 composite, 1 S-VHS input
- integrated high-quality AD/DA converters

- sync and deflection processing
- luminance and chrominance features, e.g. peaking, color transient improvement
- programmable RGB matrix
- various digital interfaces
- embedded RISC controller (80 MIPS)
- one crystal, few external components
- single power supply 5 V
- 0.8 $\mu$  CMOS Technology
- 68-pin PLCC or 64-pin Shrink DIL Package

### 1.1. System Architecture

Two main modules have been defined:

Video Processor and  
Display Processor.

They are designed as silicon building blocks. Their partitioning permits a variety of IC configurations with the aim to satisfy the particular requirements of different applications. Both, analog and digital interfaces, support state of the art TV receivers as well as other environments. Fig. 1–1 shows the block diagram of the single-chip Video Processor which consists of both modules.

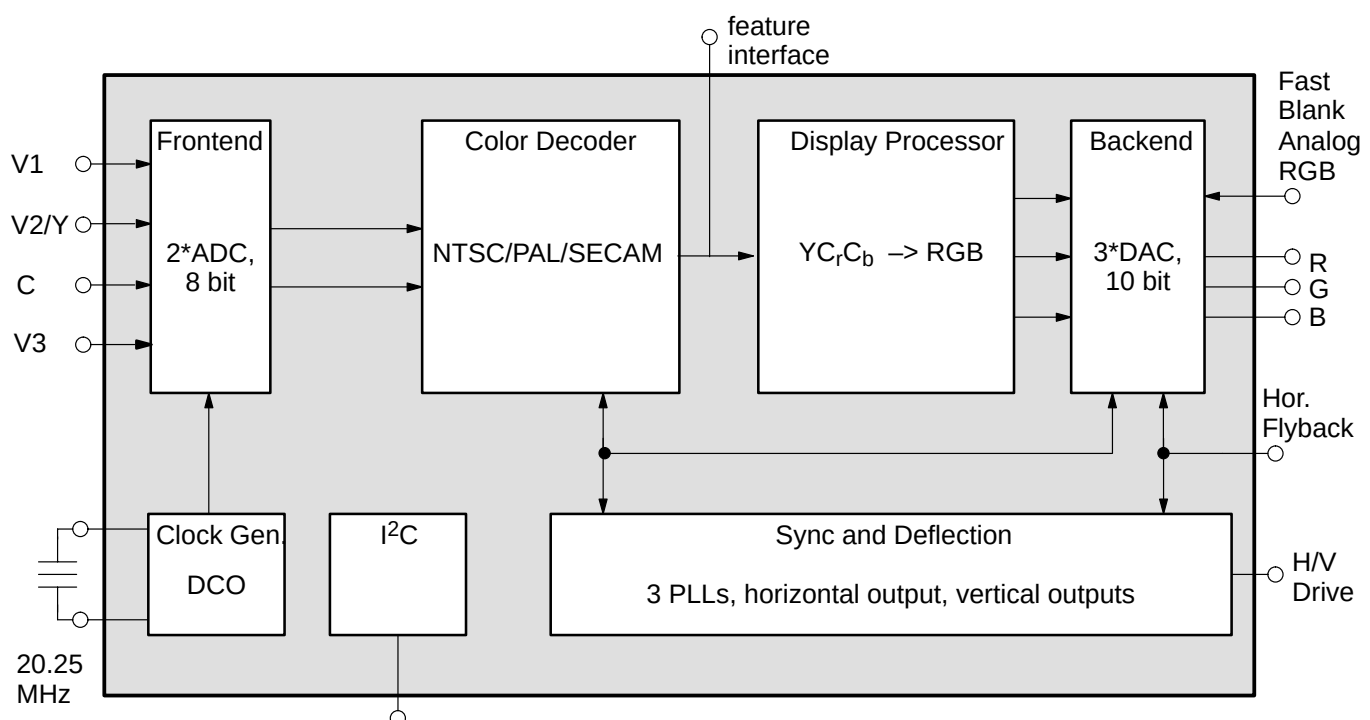


**Fig. 1–1:** VDP block diagram

## 2. Functional Description

### 2.1. Analog Front End

This block provides the analog interfaces to all video inputs and mainly carries out analog-to-digital conversion for the following digital video processing. A block diagram is given in figure 2–1.

Most of the functional blocks in the front end are digitally controlled (clamping, AGC and clock-DCO). The control loops are closed by the Fast Processor ('FP') embedded in the decoder.

#### 2.1.1. Input Selector

Up to four analog inputs can be connected. Three inputs are for input of composite video or S-VHS luma signal. These inputs are clamped to the sync back porch and are amplified by a variable gain amplifier. One input is for connection of S-VHS carrier-chrominance signal. This input is internally biased and has a fixed gain amplifier.

#### 2.1.2. Clamping

The composite video input signals are AC coupled to the IC. The clamping voltage is stored on the coupling capacitors and is generated by digitally controlled current sources. The clamping level is the back porch of the video signal. S-VHS chroma is also AC coupled. The input pin is internally biased to the center of the ADC input range.

#### 2.1.3. Automatic Gain Control

A digitally working automatic gain control adjusts the magnitude of the selected baseband by  $+6/-4.5$  dB in 64 logarithmic steps to the optimal range of the ADC.

The gain of the video input stage including the ADC is 213 steps/V for all three standards (PAL/NTSC/SECAM/Y/C), with the AGC set to 0 dB.

#### 2.1.4. Analog-to-Digital Converters

Two ADCs are provided to digitize the input signals. Each converter runs with 20.25 MHz and has 8 bit resolution. An integrated bandgap circuit generates the required reference voltages for the converters.

The two ADCs are of a 2-stage subranging type.

#### 2.1.5. ADC Range

The ADC input range for the various input signals and the digital representation is given in table 2–1 and figure 2–2.

#### 2.1.6. Digitally Controlled Clock Oscillator

The clock generation is also a part of the analog front end. The crystal oscillator is controlled digitally by the control processor; the clock frequency can be adjusted within  $\pm 150$  ppm.

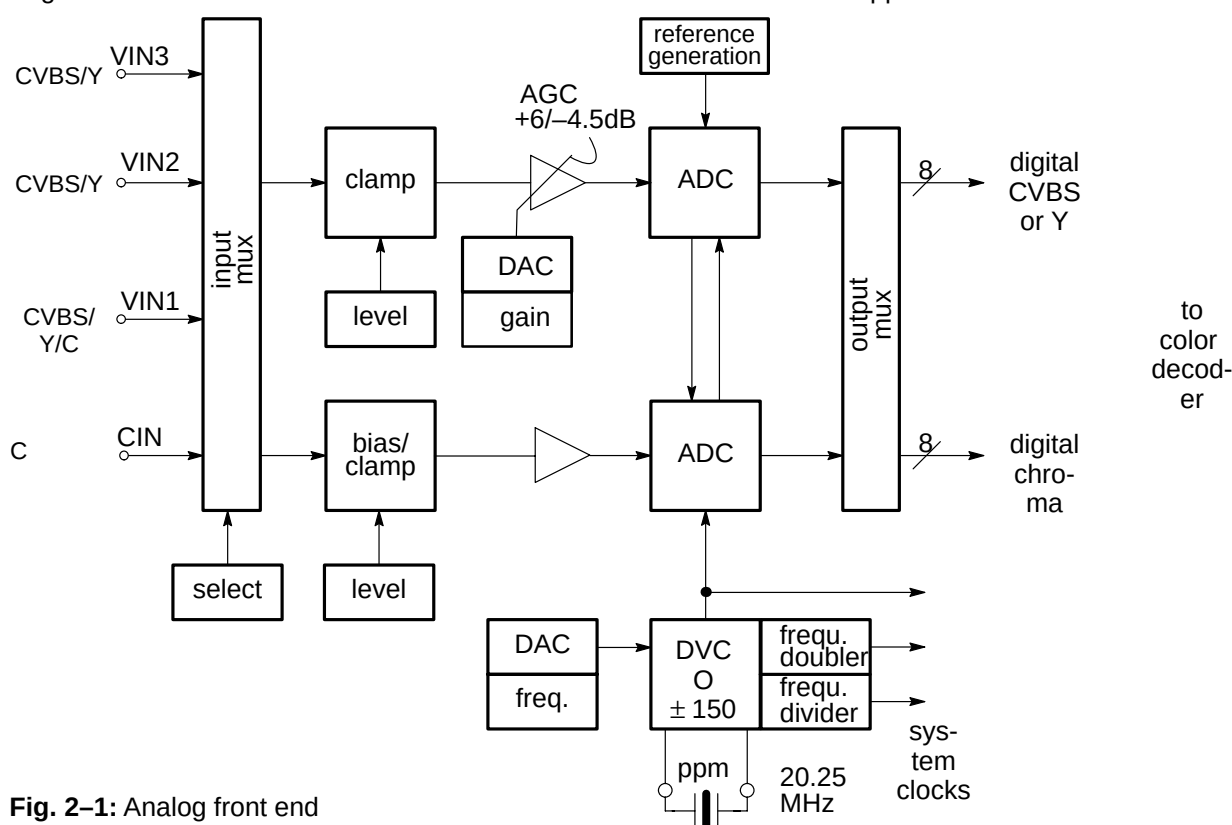


Fig. 2–1: Analog front end

Table 2–1: ADC input range for PAL input Signal

| Signal |              | ADC Range [steps]        | Input Level [mV <sub>pp</sub> ] |      |         |
|--------|--------------|--------------------------|---------------------------------|------|---------|
|        |              |                          | –6 dB                           | 0 dB | +4.5 dB |
| CVBS   | 100% CVBS    | 252 (clipped at 125 IRE) | 667                             | 1333 | 2238    |
|        | 75% CVBS     | 213                      | 500                             | 1000 | 1679    |
|        | video (luma) | 149                      | 350                             | 700  | 1175    |
|        | sync         | 64 (AGC reference)       | 150                             | 300  | 504     |
|        | clamp level  | 68                       |                                 |      |         |
| Chroma | burst        | 64                       |                                 | 300  |         |
|        | 100% Chroma  | 190                      |                                 | 890  |         |
|        | 75% Chroma   | 143                      |                                 | 670  |         |
|        | bias level   | 128                      |                                 |      |         |

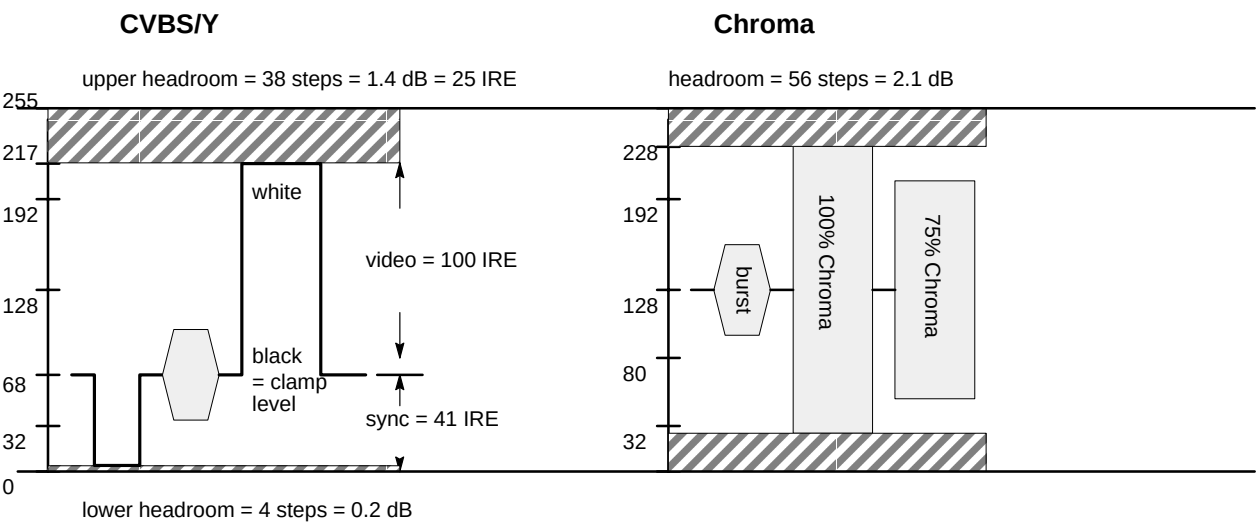


Fig. 2–2: ADC ranges for CVBS/Luma and Chroma, PAL input signal

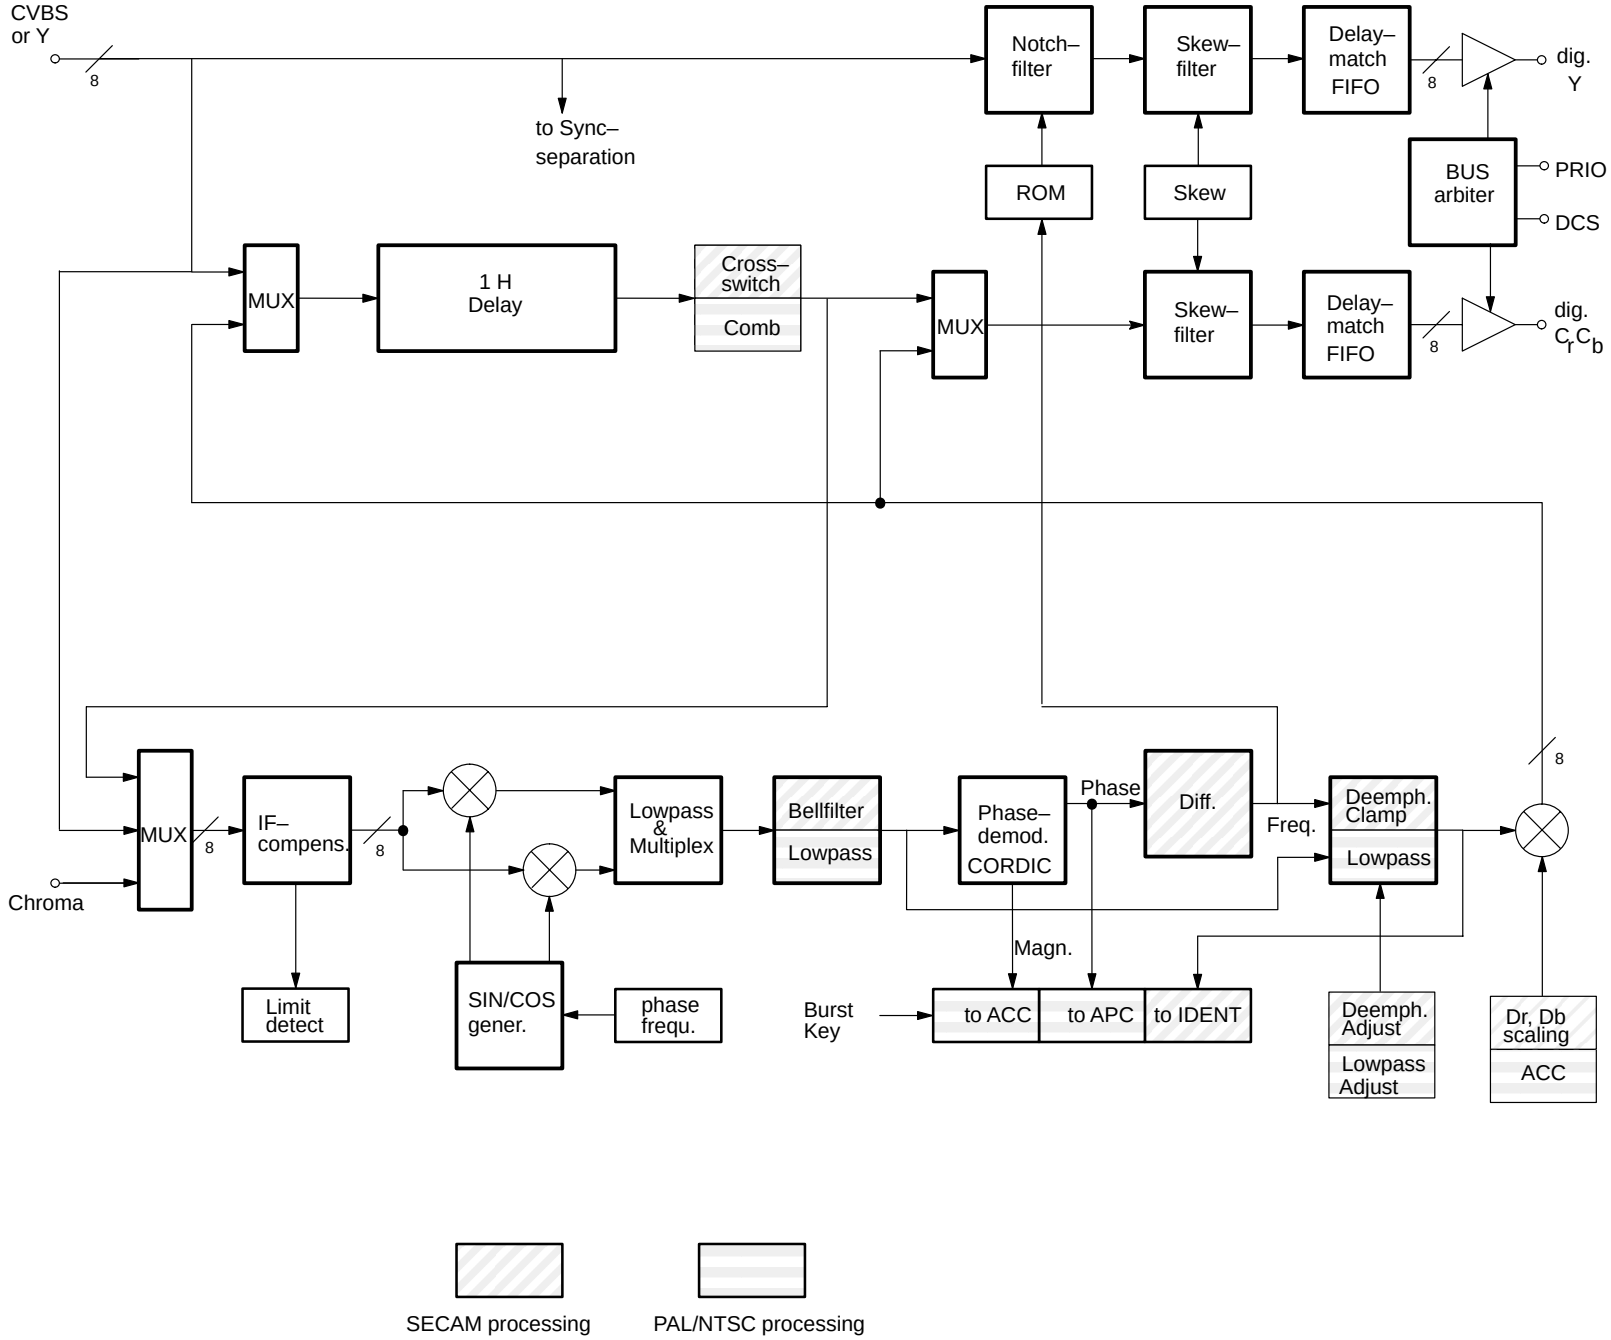


Fig. 2-3: Color decoder

## 2.2. Color Decoder

In this block the entire luma/chroma separation and multi standard color demodulation is carried out. The color demodulation uses an asynchronous clock, thus allowing a unified architecture for all color standards.

Both luma and chroma are processed to an orthogonal sampling raster. Luma and Chroma delays are matched. The total delay of the decoder is adjustable by a FIFO memory. Thus, including the delay of the display processing, exactly 64  $\mu$ sec processing delay can be obtained.

The output of color decoder is  $YC_rC_b$  in a 4:2:2 format.

### 2.2.1. IF-Compensation

With off-air or mistuned reception any attenuation at higher frequencies or asymmetry around the color sub-carrier is compensated. Three different settings of the IF-compensation are possible:

- flat (no compensation)
- 6 dB /octave
- 12 dB /octave

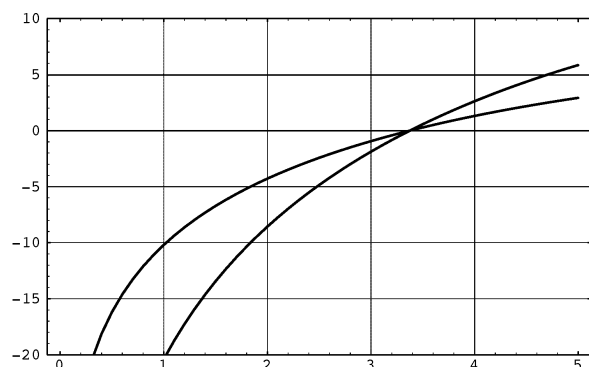


**Fig. 2-4:** Frequency response of chroma IF-compensation

### 2.2.2. Demodulator

The entire signal (which might still contain luma) is now quadrature-mixed to the baseband. The mixing frequency is equal to the subcarrier for PAL and NTSC, thus achieving the chroma demodulation. For SECAM, the mixing frequency is 4.286 MHz giving the quadrature baseband components of the FM modulated chroma. After the mixer, a lowpass filter selects the chroma components; a downsampling stage converts the color difference signals to a multiplexed half rate data stream.

The subcarrier frequency in the demodulator is generated by direct digital synthesis; therefore substandards

such as PAL 3.58 or NTSC 4.43 can also be demodulated.

### 2.2.3. Chrominance Filter

The demodulation is followed by a lowpass filter for the color difference signals for PAL/NTSC. SECAM requires a modified lowpass function with bell-filter characteristic. At the output of the lowpass filter all luma information is eliminated.

The lowpass filters are calculated in time multiplex for the two color signals. Three bandwidth settings (narrow, normal, broad) are available for each standard. The filter passband can be shaped with an extra peaking term at 1.25 MHz.

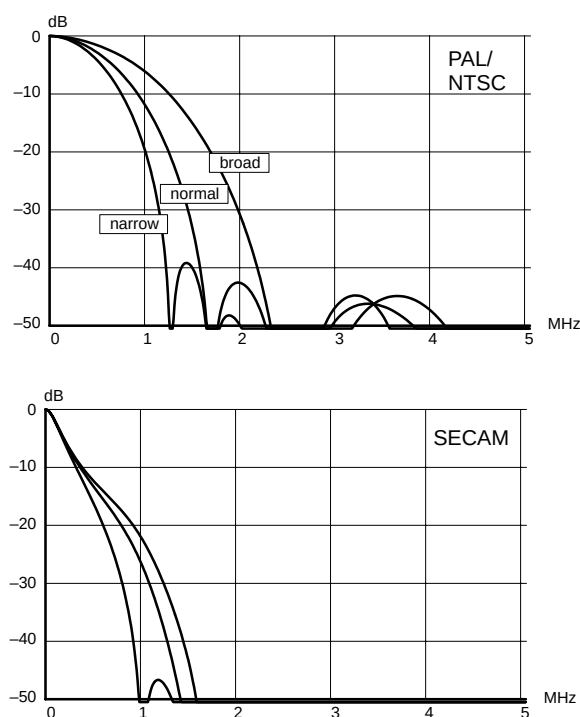


**Fig. 2-5:** Frequency response of chroma filters

### 2.2.4. Frequency Demodulator

The frequency demodulator for demodulating the SECAM signal is implemented as a CORDIC-structure. It calculates the phase and magnitude of the quadrature components by coordinate rotation.

The phase output of the CORDIC processor is differentiated to obtain the demodulated frequency. After a programmable deemphasis filter the  $D_r$  and  $D_b$  signals are scaled to standard  $C_rC_b$  amplitudes and fed to the cross-over-switch.

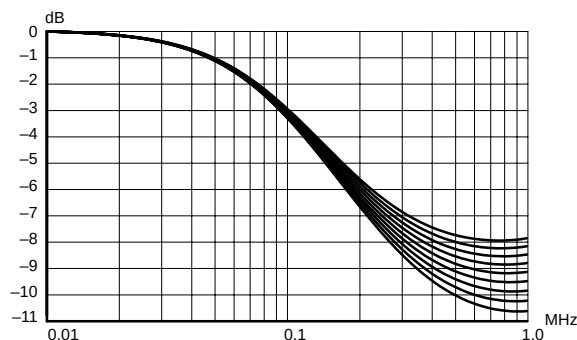


**Fig. 2-6:** Frequency response of SECAM deemphasis

### 2.2.5. Burst Detection

In the PAL/NTSC-system the burst is the reference for the color signal. The phase and magnitude outputs of the CORDIC are gated with the color key and used for controlling the phase-lock-loop (APC) of the demodulator and the automatic color control (ACC) in PAL/NTSC.

The ACC has a control range of +30 ... -6 dB.

For SECAM decoding, the frequency of the burst is measured. Thus, the current chroma carrier frequency can be identified and is used to control the SECAM processing. The burst measurements also control the color killer operation; they can be used for automatic standard detection as well.

### 2.2.6. Color Killer Operation

The color killer uses the burst-phase, -frequency measurement to identify a PAL/NTSC or SECAM color signal. For PAL/NTSC the color is switched off (killed) as long as the color subcarrier PLL is not locked. For SECAM the killer is controlled by the toggle of the burst frequency. The burst amplitude measurement is used to switch-off the color if the burst amplitude is below a programmable threshold. Thus color will be killed for very noisy signals. The color amplitude killer has a programmable hysteresis.

### 2.2.7. Delay Line / Comb Filter

The color decoder uses one fully integrated delay line. Only active video is stored.

The delay line application depends on the color standard:

|        |                                         |
|--------|-----------------------------------------|
| NTSC:  | combfilter <b>or</b> color compensation |
| PAL:   | color compensation                      |
| SECAM: | crossover-switch                        |

In the NTSC compensated mode, Fig. 2-7 c), the color signal is averaged for two adjacent lines. Thus cross-

color distortion and chroma noise is reduced. In the NTSC combfilter mode, Fig. 2-7 d), the delay line is in the composite signal path, thus allowing reduction of cross-color components as well as cross-luminance. The loss of vertical resolution in the luminance channel is compensated by adding the vertical detail signal with removed color information.

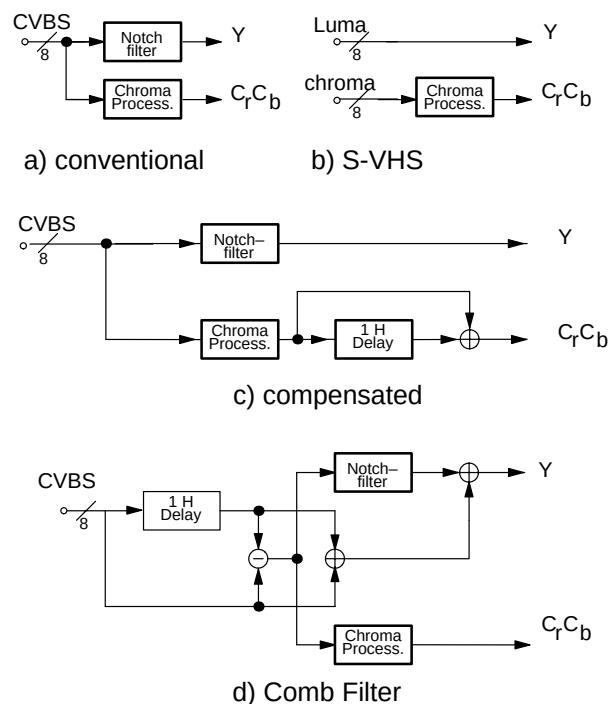


**Fig. 2-7:** NTSC color decoding options

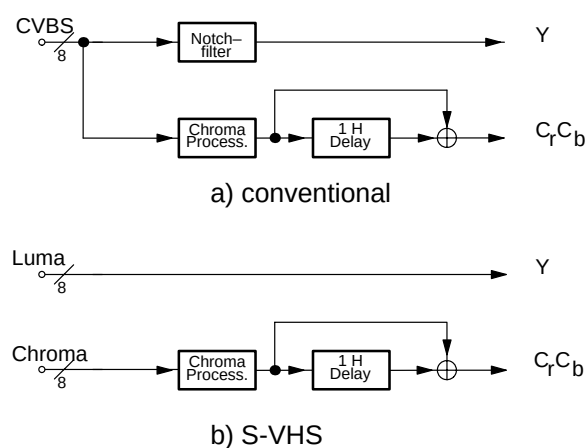


**Fig. 2-8:** PAL color decoding options


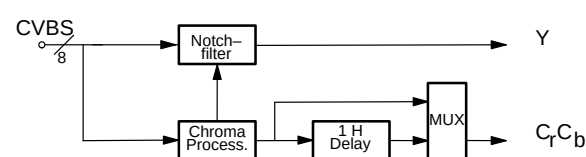


**Fig. 2-9:** SECAM color decoding



### 2.2.8. Luminance Notch Filter

If a composite video signal is applied, the color information is suppressed by a programmable notch filter. The position of the filter center frequency depends on the



subcarrier frequency for PAL/NTSC. For SECAM, the notch is directly controlled by the chroma carrier frequency. This considerably reduces the cross-luminance. The frequency responses and the delay characteristics of all three systems are shown below.

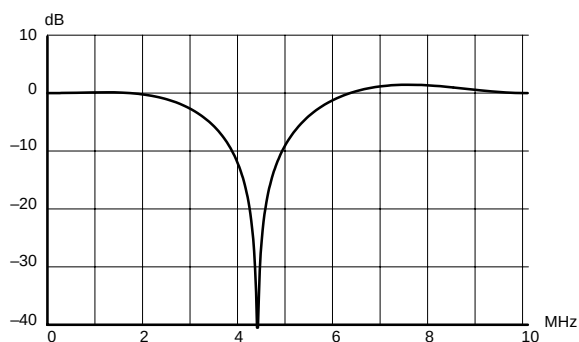

PAL notch filter

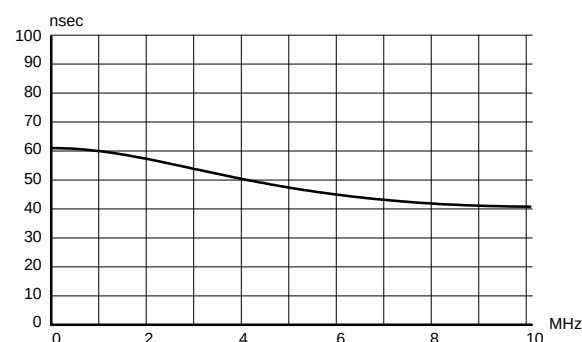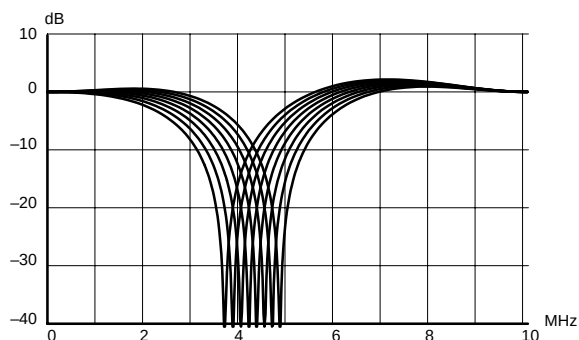

SECAM notch filter

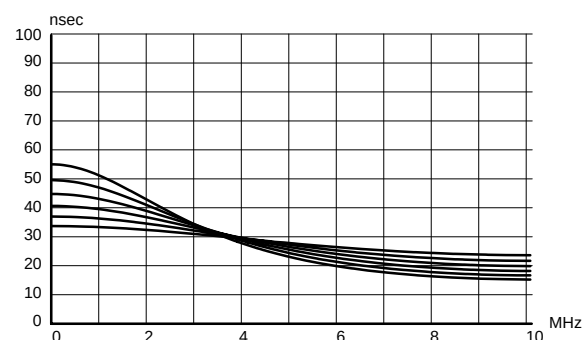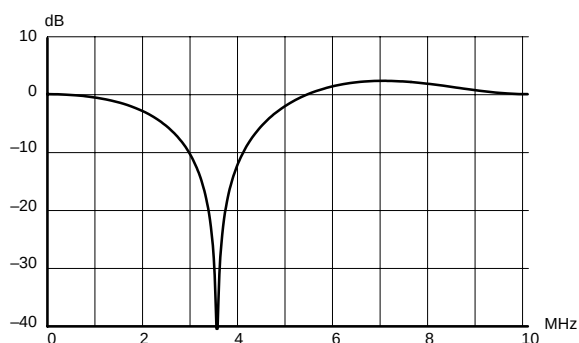

NTSC notch filter

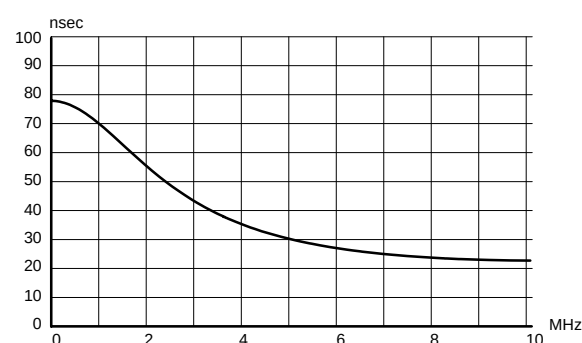


**Fig. 2-10:** Frequency Responses and Time Delay Characteristics for PAL, SECAM, NTSC

### 2.2.9. Skew Filter

The system clock is free running and not locked to the TV line frequency. Therefore, the ADC sampling pattern is not orthogonal. The decoded  $YCrCb$  signals are converted to an orthogonal sampling raster by skew filter block at the output of the color decoder.

The skew filters are controlled by a skew parameter and

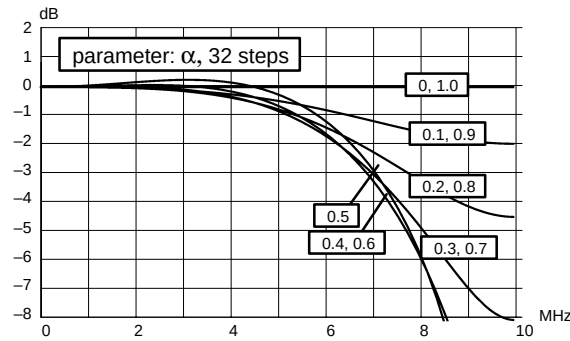


**Fig. 2-11:** Luminance, Chrominance skew filter magnitude frequency response

### 2.2.10. Picture Bus Color Space

Output of the color decoder block is  $YCrCb$  with 20.25 Msamples/s. Only active video is transferred. The number of active samples is 1068 per line for all standards (525 lines and 625 lines).

The following equations explain the data formats. The R,G,B source signals are already gamma-weighted. The transform matrix from R,G,B to color difference signals is given by:

$$\begin{pmatrix} Y \\ R - Y \\ B - Y \end{pmatrix} = \begin{pmatrix} 0.299 & 0.587 & 0.114 \\ 0.701 & -0.587 & -0.114 \\ -0.299 & -0.587 & 0.886 \end{pmatrix} \begin{pmatrix} R \\ G \\ B \end{pmatrix}$$

In each TV broadcast standard different weighting factors for  $(R-Y)$  and  $(B-Y)$  are used:

PAL:  $V = 0.877*(R-Y)$   
 $U = 0.493*(B-Y)$

NTSC:  $I = V*\cos 33^\circ - U*\sin 33^\circ$   
 $Q = V*\sin 33^\circ + U*\cos 33^\circ$

SECAM:  $Dr = -1.9*(R-Y)$   
 $Db = 1.5*(B-Y)$

MAC:  $Vm = 0.927*(R-Y)$   
 $Um = 0.733*(B-Y)$

allow to apply a group delay to the input signals without introducing waveform of frequency response distortion.

The amount of phase shift of this filter is controlled by the horizontal PLL1. The accuracy of the filters is 1/32 clocks for luminance and 1/4 clocks for chroma. Thus the output of the color decoder is in an orthogonal pixel format even in the case of nonstandard input signals such as VCR.

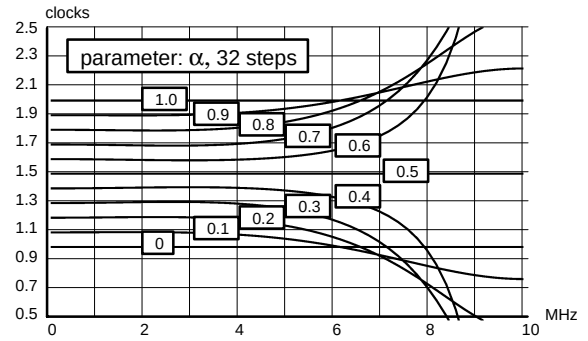


**Fig. 2-12:** Luminance, chrominance skew filter group delay characteristics

Studio  $C_r = 0.713*(R-Y)$   
(CCIR 601)  $C_b = 0.564*(B-Y)$

In the color decoder the weighting for both color difference signals is adjusted individually. The default format will have the following specification:

$Y = 224*Y + 16$  (pure binary),  
 $C_r = 224*(0.713*(R-Y)) + 128$  (offset binary),  
 $C_b = 224*(0.564*(B-Y)) + 128$  (offset binary).

Optionally the picture bus format of the chrominance components  $C_r$ ,  $C_b$  can be switched to two's complement format.

The  $YCrCb$  FIFO memories allow an adjustable delay for the video processing e.g. one TV line. The memories are controlled by the horizontal sync information available in the front end and the display processor. Using the front end sync, a window for the active video is generated. Only active video data are written to the FIFO memories. The display processor generates the main sync signal from the display timing and data is read from the FIFOs using the main sync signal. This allows an adjustable delay as well as a variable delay, e.g. for VCR timebase correction.

## 2.3. Digital Video Interfaces

The digital video interface allows insertion of digital data in YCrCb format on the internal YCrCb data bus. The orthogonal data structure of this bus is the ideal interface point to external data sources and sinks. On top of this, a host of formats are supported, e.g. support of level-2 teletext or the priority pixel bus concept.

Figure 2–13 shows all available digital interfaces:

YCrCb 16 bit 4:2:2  
 RBG 5 bit 4:4:4  
 PRIO 3 bit, source selection

The YCrCb bus is used for video insertion. The RGB interface is used for insertion of a Teletext or OSD picture. The priority bus allows to mix up to 8 sources on the YCrCb / RGB bus.

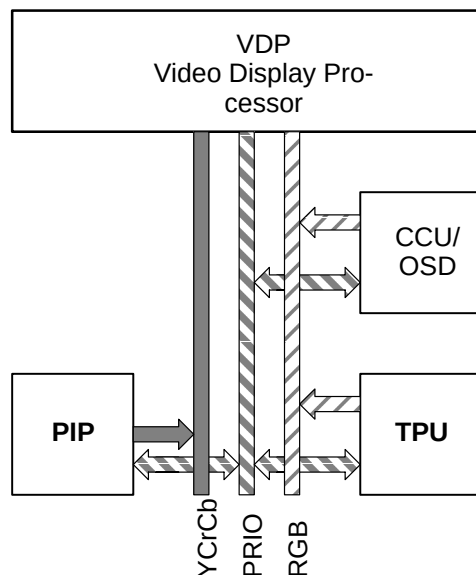


**Fig. 2–13:** VDP video interfaces

### 2.3.1. Picture Bus Interface

The picture bus format between all DIGIT3000 ICs is YCrCb with 20.25 Msamples/s. Only active video is transferred, synchronized by the system main sync signal (MSY) which indicates the start of valid data for each scan line. The number of active samples per line is 1068 for all standards (525 and 625).

Via the MSY line, serial data is transferred which contains information about the main picture such as current line number, odd/even field etc.). It is generated by the deflection circuitry and represents the orthogonal time-base for the entire system.

Feature ICs (e.g. PIP) will be synchronized to the main YCrCb bus. Digital insertion (boxing) is controlled by a priority system.

### 2.3.2. Digital RGB Interface

Digital RGB from text or on-screen-display is connected via the Picture bus. The RGB signal is 5 bits wide. The RGB signals are not subject to any post-filtering. The RGB signal provides 3-bit RGB (one bit per color), the 4th bit allows to display half contrast colors. Bit 5 enables a programmable color–look–up table with 16 entries and 4 bit resolution per color. This allows the support of a World System Teletext level-2 color display. Display contrast for RGB data can be adjusted separately by three contrast multipliers.

### 2.3.3. Priority Codec

Up to eight digital YCrCb or RGB sources (main decoder, PIP, OSD, Text, etc.) may be selected in real-time by means of a 3-bit priority bus. Thus a pixelwise bus arbitration and source switching is possible. It is essential that all YCrCb-sources are synchronous and orthogonal.

In general each source (= master) has its own YCrCb bus request. This bus request may either be software or hardware-controlled, i.e. a fast blank signal. Data collision is avoided by a bus arbiter that provides the individual bus acknowledge in accordance to a user defined priority.

Each master sends a bus request with his individual priority ID onto the PRIO-bus and immediately reads back the bus status. Only in case of positive arbitration (send-PRIO-ID = read-PRIO-ID) the bus acknowledge becomes active and the data is sent.

This treatment has many features that have impact on the appearance of a TV picture:

- real-time bus arbitration (PIP, OSD, ...)
- priorities are software configurable
- different coefficients for different sources

## 2.4. Display Processor

In the display processor the conversion from digital  $YC_bC_b$  to analog RGB is carried out. A block diagram is shown in figure 2–18. In the luminance processing path contrast and brightness adjustments and variety of features such as black level expansion, dynamic peaking and soft limiting are provided. In the chrominance path, the  $C_rC_b$  signals are converted to 20.25 MHz sampling rate and filtered by a color transient improvement circuit. The  $YC_bC_b$  signals are converted by a programmable matrix to RGB color space.

The signals inserted via the  $YC_bC_b$  bus are identified by their respective priority. The display processor provides separate control settings for two pictures, i.e. different coefficients for a 'main' and a 'side' picture.

The digital RGB insertion circuit allows the insertion of a 5 bit RGB signal. The color space for this signal is controlled by a programmable color look up table (CLUT) and contrast adjustment.

The RGB signals and the display clock are synchronized to the horizontal flyback. For the display clock a gate delay phase shifter is used. The RGB signals are synchronized by a FIFO. In the analog back-end, three 10-bit digital-to-analog converters provide the analog output signals.

### 2.4.1. Contrast Adjustment

The 8 bit luminance input is multiplied by a factor of 0 ... 2 in 64 steps. A 2-bit noise shaping on the result is used to increase the resolution of the luma signal. Contrast adjustment is separate for main and side picture.

### 2.4.2. Black Level Expander

The black level expander enhances the contrast of the picture. Therefore the luminance signal is modified with an adjustable, nonlinear function. Dark areas of the picture are changed to black, while bright areas remain unchanged. The advantage of this black level expander is that the black expansion is performed only if there is a large dynamic range in the video signal and when it will be most noticeable to the viewer.

The black level expander works adaptively. Depending on the measured amplitudes ' $L_{min}$ ' and ' $L_{max}$ ' of the low-pass-filtered luminance and an adjustable coefficient BTLT, a tilt point ' $L_t$ ' is being established by

$$L_t = L_{min} + BTLT (L_{max} - L_{min}).$$

Above this value there is no expansion, while all luminance values below this point are expanded according to:

$$L_{out} = L_{in} + BAM (L_{in} - L_t)$$

A second threshold,  $L_{tr}$ , can be programmed, above which there is no expansion. The characteristics of the

black level expander are shown in Fig. 2–14 and Fig. 2–15.

The tilt point  $L_t$  is a function of the dynamic range of the video signal. Thus, the black level expansion is only performed when the video signal has a large dynamic range. Otherwise, the expansion to black is zero. This allows the correction of the characteristics of the picture tube.

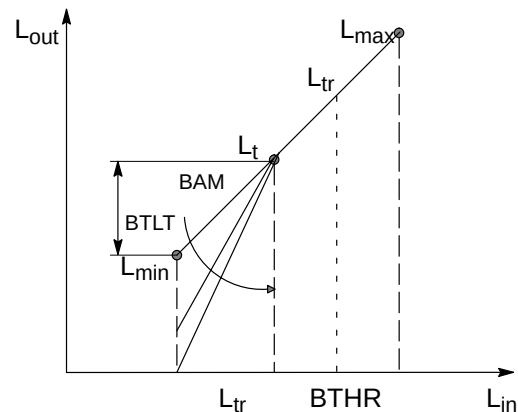


**Fig. 2–14:** Characteristics of the black level expander

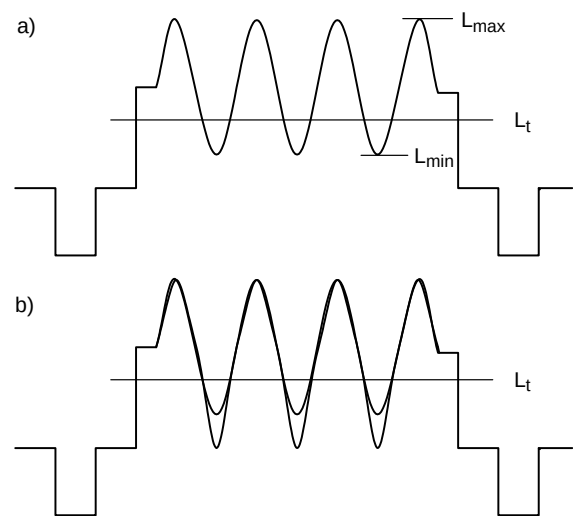


**Fig. 2–15:** Black-level-expansion

- a) luminance input
- b) luminance output

### 2.4.3. Dynamic Peaking

Especially with composite input signals and notch filter luminance separation, it is necessary to improve the luminance frequency characteristics.

In DIGIT3000 the luma response is improved by 'dynamic' peaking. The algorithm has been optimized regarding step and frequency response. It adapts to the amplitude of the high frequency part. Small amplitudes are enhanced while large amplitudes stay nearly unmodified.

The dynamic range can be adjusted to 0 ... +14 dB for small high frequency signals. Adjustment is separate for signal overshoot and for signal undershoot. For large signals the dynamic range is limited by a nonlinear function that does not create any visible alias components.

The center frequency of the peaking filter is switchable from 2.5 MHz to 3.2 MHz. For S-VHS and for notch filter color decoding, the total system frequency responses for PAL and NTSC are shown in figure 2–17.

Transients, produced by the dynamic peaking when switching video source signals, can be suppressed via the priority bus.




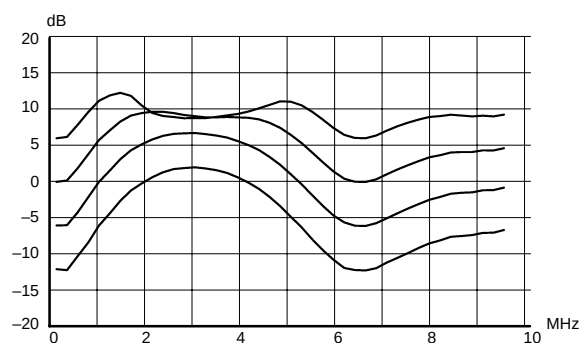




**Fig. 2–16:** Dynamic peaking frequency response

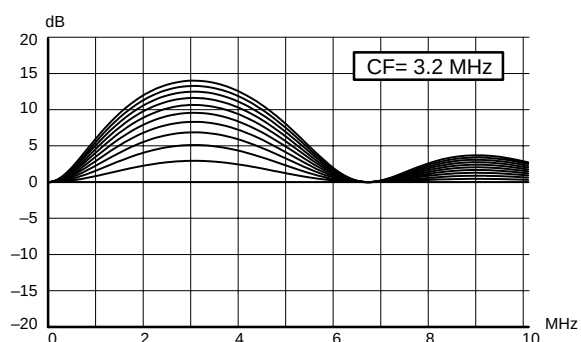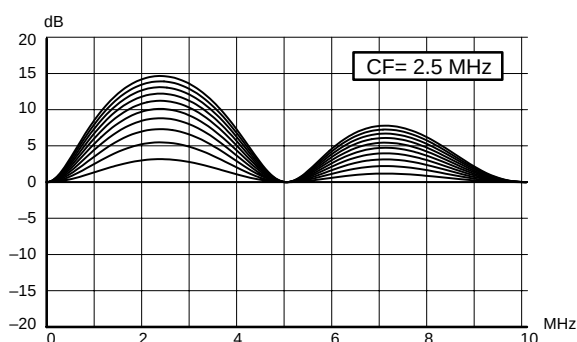

S-VHS

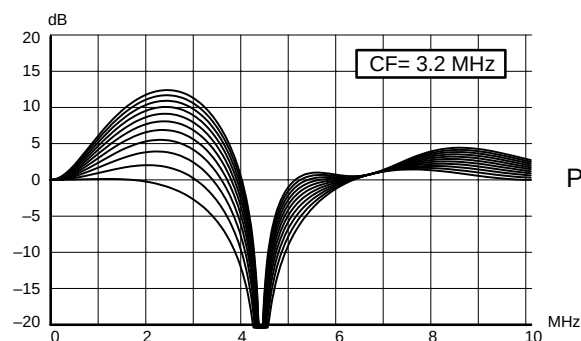

PAL/SECAM

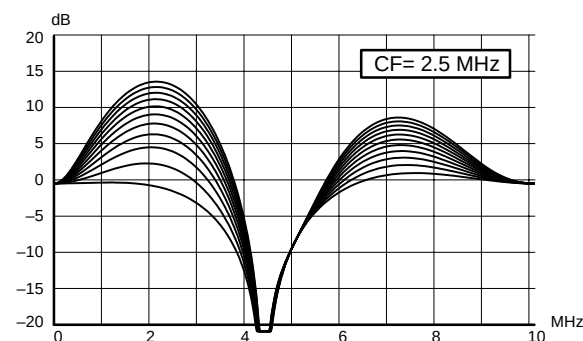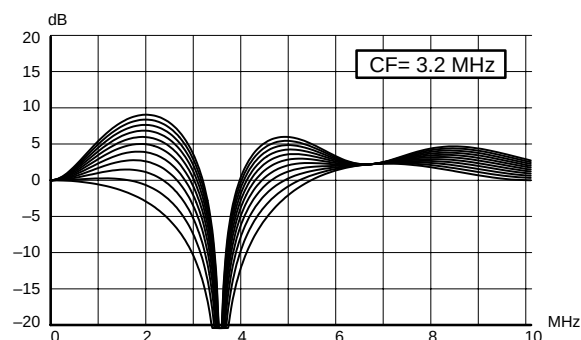

NTSC

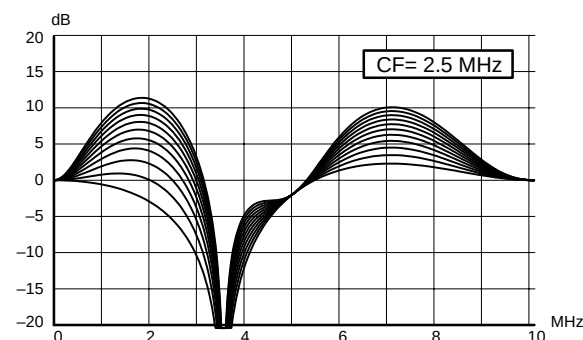


**Fig. 2–17:** Total frequency response for peaking filter and S-VHS, PAL, NTSC

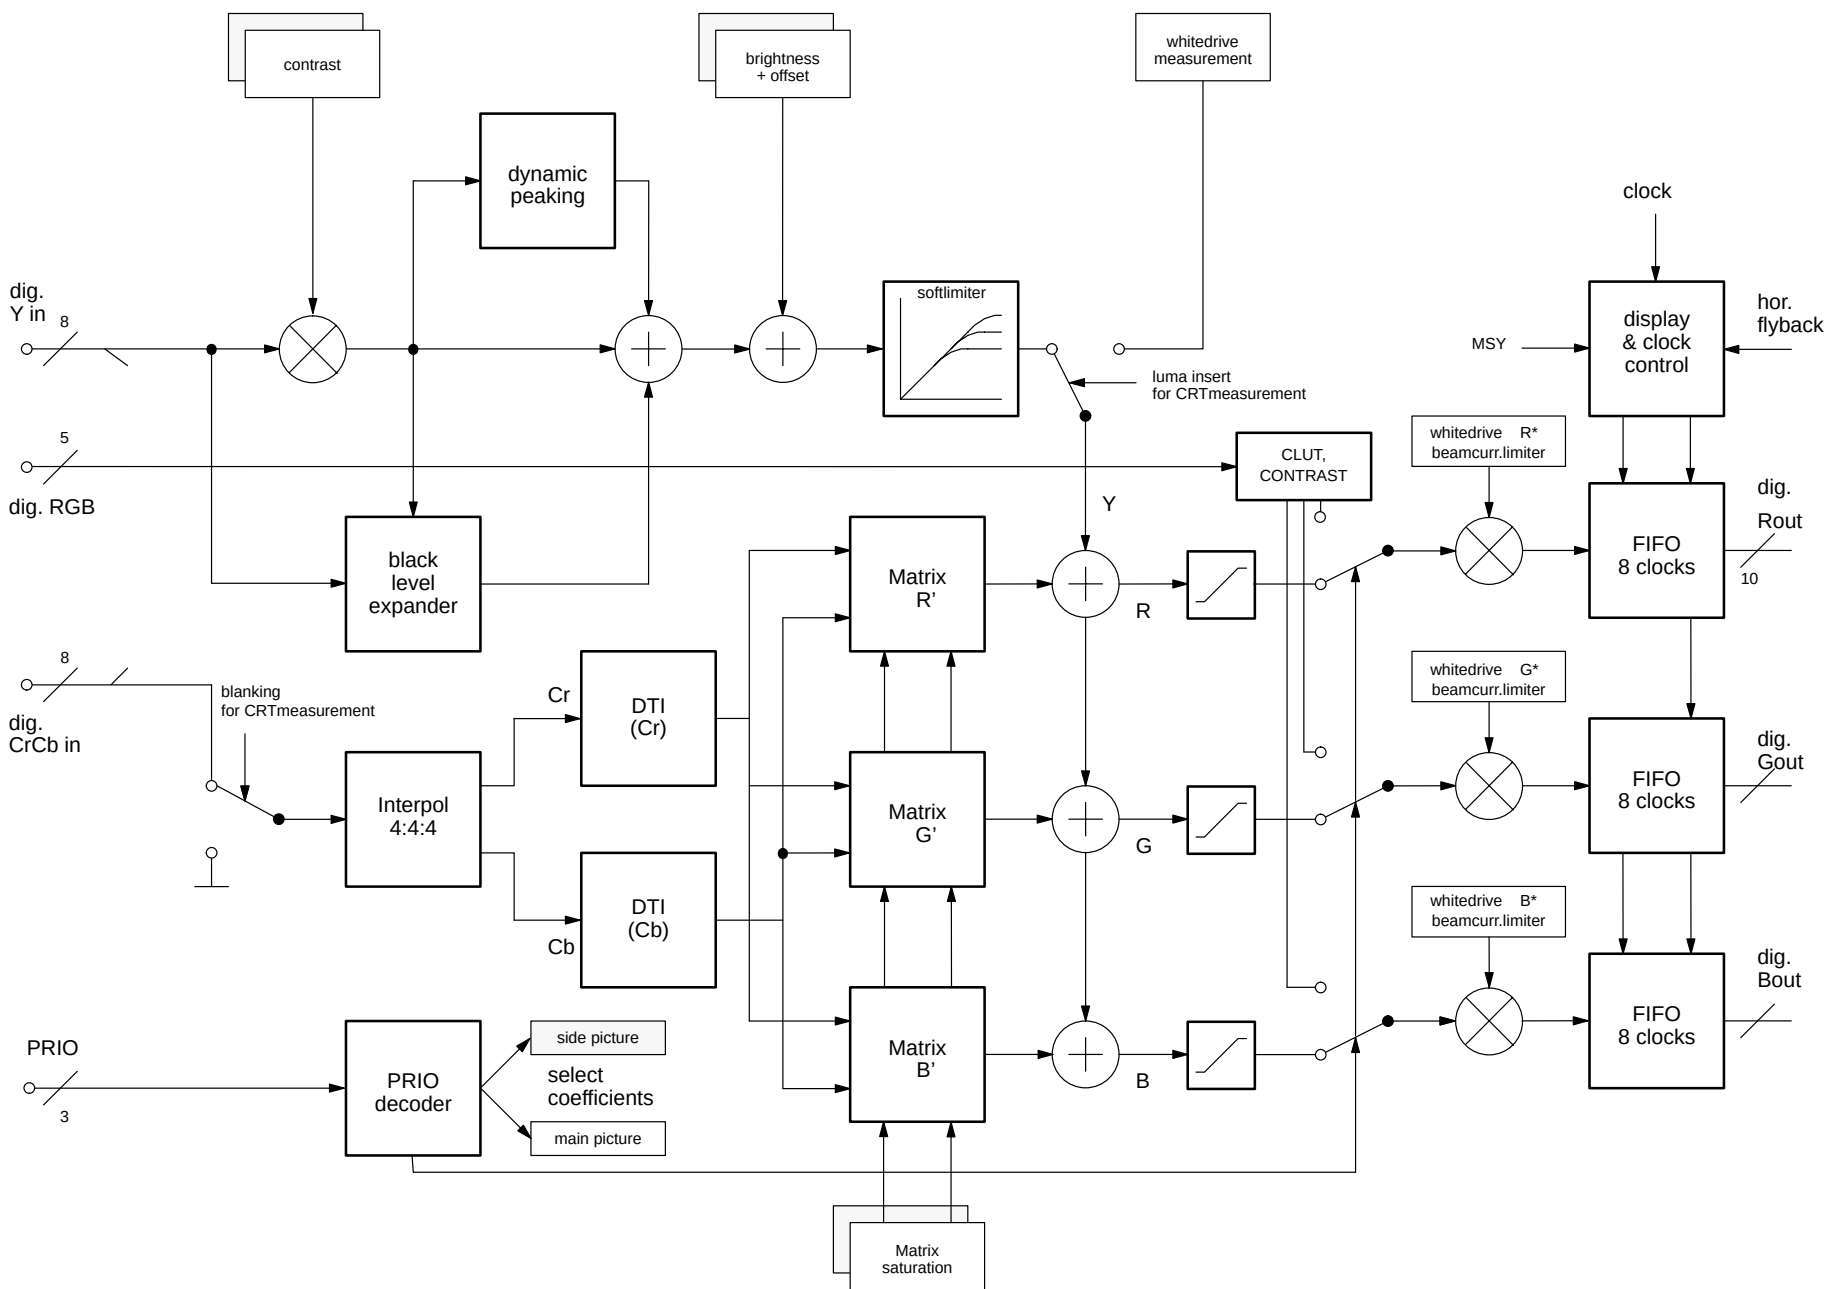


Fig. 2-18: Display processor

### 2.4.4. Brightness Adjustment

The DC-level of the luminance signal can be adjusted by  $-30 \dots +100\%$  with 8 bit resolution. It is desirable to keep a small offset with the signal to prevent undershoots from the peaking from being cut. The brightness adjustment is separate for main and side picture.

### 2.4.5. Soft Limiter

The dynamic range of the processed luma signal must be limited to prevent the CRT from overload. An appropriate headroom for contrast, peaking and brightness can be adjusted by the manufacturer according to the CRT-characteristic. All signals higher than above this limit will be 'soft'-clipped. The soft limiter can support or even replace an analog beam current limiter. Aliasing due to signal limitation is avoided by using a filterbank with individual limiter circuits.

A block diagram of the soft limiter is shown in figure 2-19. The signal is split into high and low frequency bands. The low frequency part represents the average picture level; if the average level is too high the picture tube will overheat and produce coloration. The high frequency part represents the peak picture level which can be considerably higher than the average picture level. Due to this characteristic of the picture tube, both components are treated individually and are later recombined. For the low frequency band a limiter with adjustable threshold is used. The high frequency components produced in the limiter are below the nyquist frequency, therefore no disturbing alias frequencies are generated. For the high frequency band, the limiting is done by a variable gain notch filter, effectively bounding the peak to peak amplitude of the signal. In this way the signal is limited without generating unwanted aliasing.

When the high and low frequency bands are added together again a second limiter sets the exact signal amplitude range. The state of this limiter is used to control the attenuation of the variable notch filter.

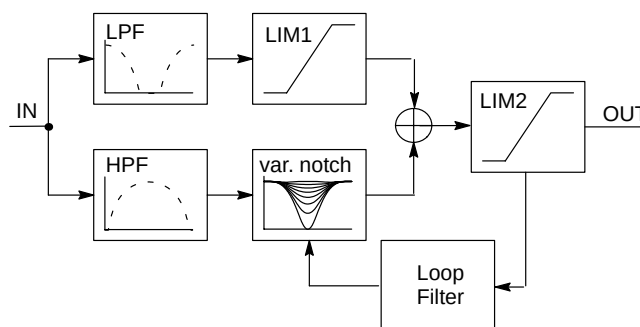


Fig. 2-19: Block diagram of the soft limiter

### 2.4.6. Chroma Interpolation

A linear phase interpolator is used to convert the chroma sampling rate from 10.125 MHz (4:2:2) to 20.25 MHz (4:4:4). The frequency response of the interpolator is shown in fig. 2-20. All further processing is carried out at the full sampling rate.

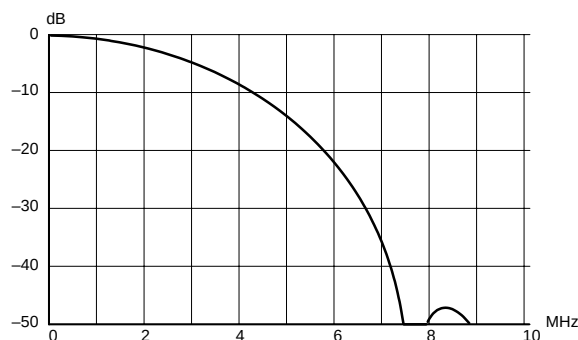


Fig. 2-20: Frequency response of the chroma interpolation filter

### 2.4.7. Chroma Transient Improvement

The intention of this block is to enhance the chroma resolution. A correction signal is calculated by differentiation of the color difference signals. The differentiation can be adjusted according to the signal bandwidth, e.g. for PAL/NTSC/SECAM or digital component signals respectively. The amplitude of the correction signal is adjustable independently for the Cr/Cb signals. Small

noise amplitudes in the correction signal are suppressed by an adjustable coring circuit. To eliminate 'wrong colors', which are caused by over and undershoots at the chroma transition, the sharpened chroma signals are limited to a proper value automatically.

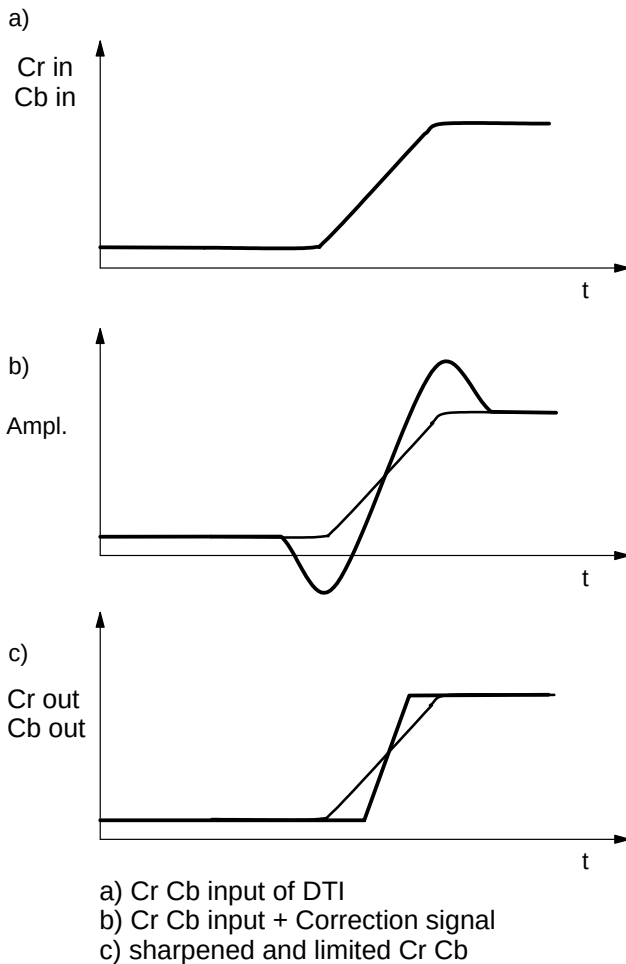


**Fig. 2-21:** Digital Color Transient Improvement

#### 2.4.8. Dematrix

A 6-multiplier matrix transcodes the Cr and Cb signals to R-Y, B-Y and G-Y. The multipliers are also used to adjust color saturation in the range of 0 ... 2. The coefficients are signed and have a resolution of 9 bits. The matrix coefficients are separate for main and side picture. The matrix computes:

$$\begin{aligned} R-Y &= MR1*Cb + MR2*Cr \\ G-Y &= MG1*Cb + MG2*Cr \\ B-Y &= MB1*Cb + MB2*Cr \end{aligned}$$

The initialization values for the matrix are computed from the standard ITUR matrix:

$$\begin{pmatrix} R \\ G \\ B \end{pmatrix} = \begin{pmatrix} 1 & 0 & 1.402 \\ 1 & -0.345 & -0.713 \\ 1 & 1.773 & 0 \end{pmatrix} \begin{pmatrix} Y \\ Cb \\ Cr \end{pmatrix}$$

For a contrast setting of CTM=32 the matrix values are scaled by a factor of 64, see also table 3-1.

#### 2.4.9. RGB Processing

After adding the post processed luma, the digital RGBs are limited to 10 bits. Three multipliers are used to digitally adjust the whitedrive. Using the same multipliers an average beam current limiter is implemented. See also paragraph 'CRT control'.

#### 2.4.10. FIFO Display Buffer

A FIFO is used to buffer the phase differences between the video source and the flyback signal. By using the described clock system, this 'phase-buffer' is working with sub-pixel accuracy. It has a range of 8 clocks which is equivalent to +/- 200 ns @ 20.25 MHz.

#### 2.5. Analog Back End

The digital RGB signals are converted to analog RGBs using three video digital to analog converters (DAC) with 10 bit resolution. An analog brightness value is provided by three additional DACs. The adjustment range is 40% of the full RGB range.

The back end allows insertion of an external analog RGB signal. The RGB signal is key-clamped and inserted into the main RGB by the fast blank switch. The external RGB signals are virtually handled as priority bus signals. Thus they can be overlaid or underlaid to the digital picture. The external RGB signals can be independently adjusted in DC-level (brightness) and magnitude (contrast).

The controls for the whitedrive / analog brightness and also for the external contrast and brightness adjustments are via the Fast Processor. The controls for the cutoff DACs are via I<sup>2</sup>C bus registers.

Finally cutoff and blanking values are added to the RGB signals. Cutoff (dark current) is provided by three 9-bit DACs. The adjustment range is 60% of full scale RGB range.

The analog RGB-outputs are current outputs with current-sink characteristics. The maximum current drawn by the output stage is obtained with peak white RGB.

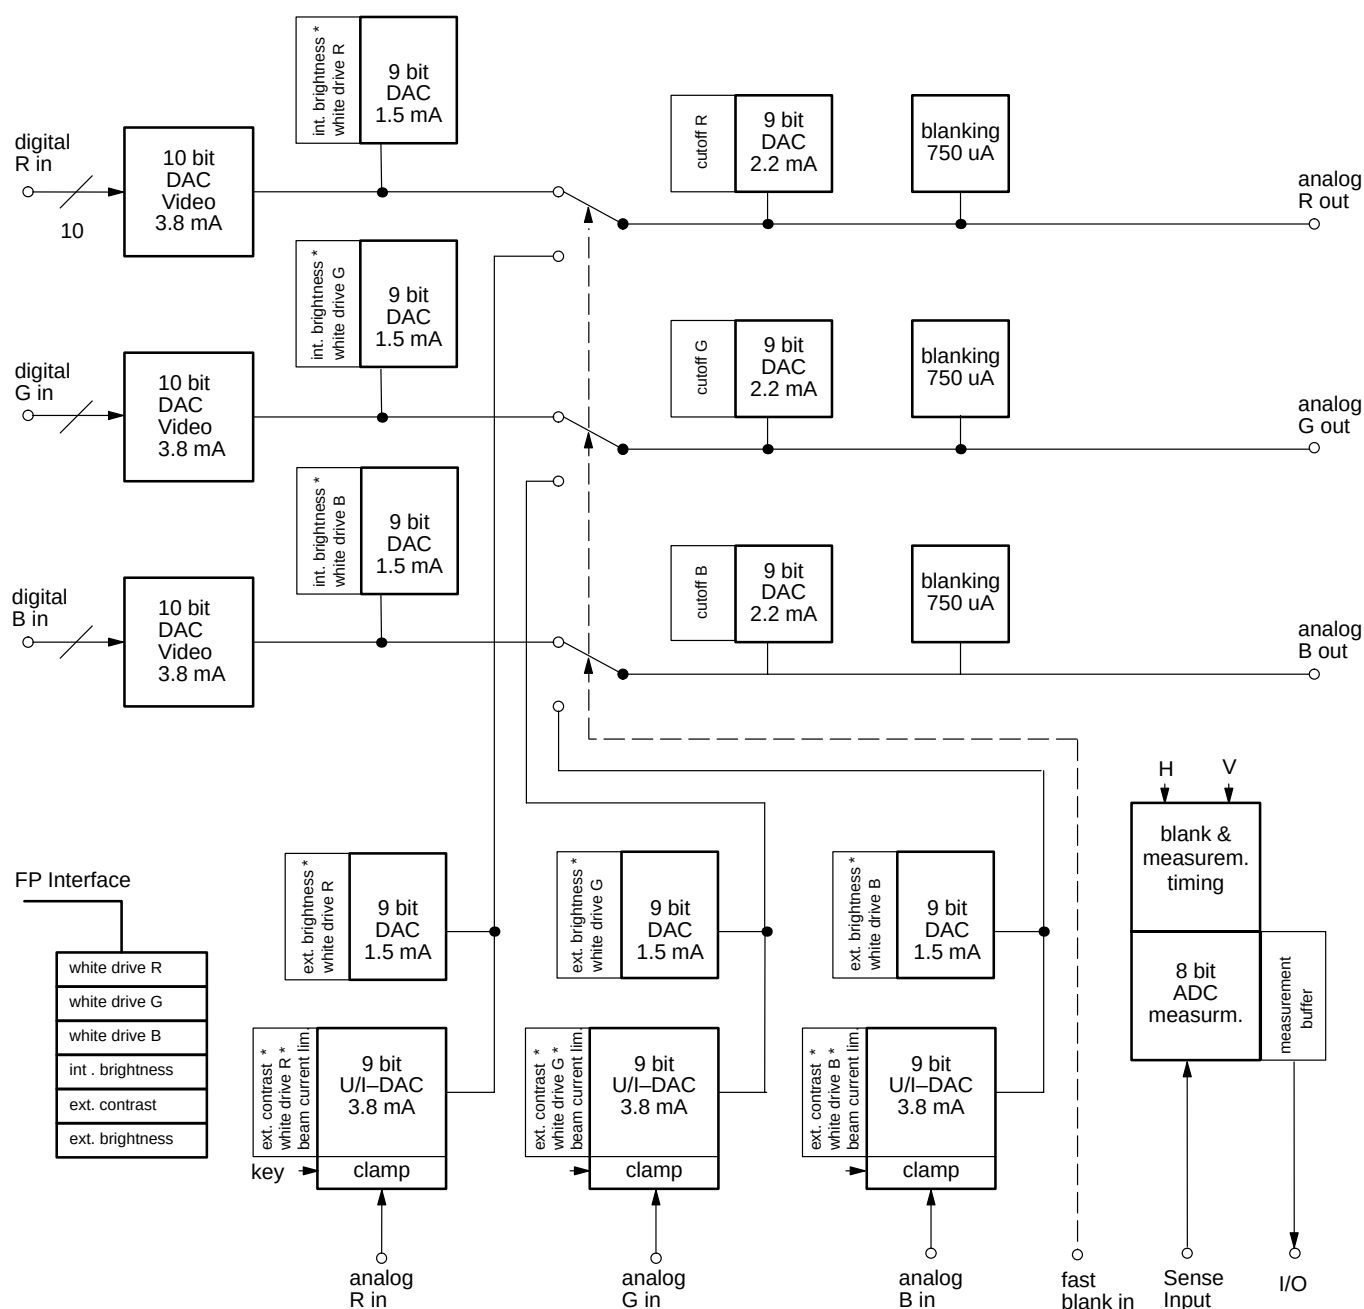


Fig. 2-22: Analog back end

### 2.5.1. CRT Measurement and Control

The display processor is equipped with an 8 bit PDM-ADC for all measuring purposes. The ADC is connected to the Sense input pin, the input range is 0...1.5V. The bandwidth of the PDM filter can be selected; the measurement window is 19/9.5  $\mu$ s for small/large bandwidth setting. The input impedance is more than 1 M $\Omega$ .

Cutoff and white drive current measurement is carried out during the vertical blanking interval. It is always using the small bandwidth setting. The current range for the cutoff measurement is set by connecting a sense resistor to then MADC input. For the whitedrive measure-

ment, the range is set by using a sense resistor and the range select switch 2 output pin. During the active picture the minimum and maximum beam current is measured. The measurement range can be set by using the range select switch pin. The timing window of this measurement is programmable. The intention is to automatically detect letterbox transmission or to measure the actual beam current. All control loops are closed via the external control microprocessor.

In each field two sets of measurements can be taken:  
a) The picture tube measurement returns results for

- cutoff R
  - cutoff G
  - cutoff B
  - white drive R or G or B (sequentially).
- b) The picture measurement returns
- active picture maximum current
  - active picture minimum current.

The tube measurement is automatically started when the cutoff blue result register is read. Cutoff control for RGB requires one field only while a complete white-drive control requires three fields. If the measurement mode is set to 'offset check' a measurement cycle is run with the cutoff / whitedrive signals set to zero. This allows to compensate the MADC offset as well as input the leakage currents. During cutoff and whitedrive measurements, the average beam current limiter function (ref. 2.5.2.) is switched off and a programmable value is used for the brightness setting. The start line of the tube measurement can be programmed via I<sup>2</sup>C bus, the first line used for the measurement, i.e. measurement of cutoff red, is 2 lines after the programmed start line.

The picture measurement must be enabled by the control microprocessor after reading the min./max. result registers. The measurement is always started at the beginning of active video.

The vertical timing for the picture measurement is programmable, and may even be a single line. Also the signal bandwidth is switchable for the picture measurement.

Two horizontal windows are available for the picture measurement. The large window is active for the entire active line. Tube measurement is always carried out with the small window. Measurement windows for picture and tube measurement are shown in figure 2-23.

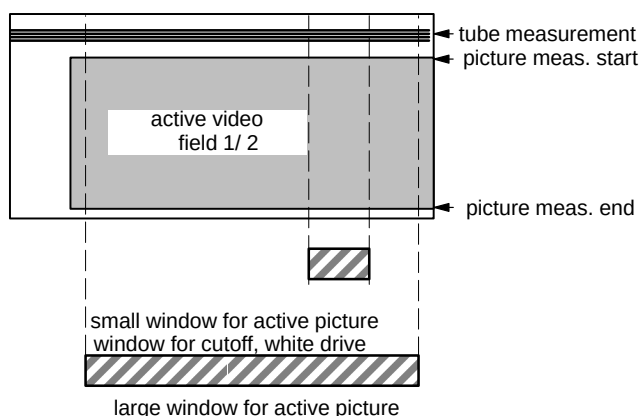


**Fig. 2-23:** Windows for tube and picture measurement

### 2.5.2. Average Beam Current Limiter

The average beam current limiter (BCL) uses the sense input for the beam current measurement. The BCL uses a different filter to average the beam current during the active picture. The filter bandwidth is approximately 2 kHz. The beam current limiter has an automatic offset adjust that is active two lines before the first cutoff measurement line.

The beam current limiter allows to set a threshold current. If the beam current is above the threshold, the excess current is low pass filtered and used to attenuate the RGB outputs by adjusting the white drive multipliers for the internal (digital) RGB signals and the analog contrast multipliers for the analog RGB inputs respectively. The lower limit of the attenuator is programmable, thus a minimum contrast can always be set. During the tube measurement the ABL attenuation is switched off. After the whitedrive measurement line it takes 3 lines to switch back to BCL limited drives and brightness.

Typical characteristics of the ABL for different loop gains are shown in Fig. 2-24; for this example the tube has been assumed to have a square law characteristic.

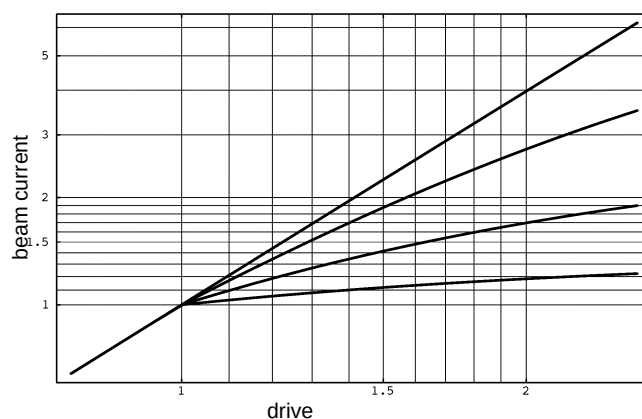


**Fig. 2-24:** Beam current limiter characteristics: beam current output vs. drive  
BCL threshold: 1

### 2.6. Synchronization and Deflection

The synchronization and deflection processing is distributed over front end and back end. The video clamping, horizontal and vertical sync separation and all video related timing information are processed in the front end. Most of the processing that runs at the horizontal frequency is programmed on the internal Fast Processor (FP). Also the values for vertical & East-West deflection are calculated by the FP software.

The display related synchronization, i.e. generation of horizontal and vertical drive and synchronization of horizontal and vertical drive to the video timing extracted in the front end, are implemented in hardware.

2.6.1. Video Sync Processing

Fig. 2–25 shows a block diagram of the front end sync processing. To extract the sync information from the video signal, a linear phase lowpass filter eliminates all noise and video contents above one MHz. The sync is separated by a slicer, the sync phase is measured. A variable window can be selected to improve the noise immunity of the slicer. The phase comparator measures the falling edge of sync as well as the integrated sync pulse.

The sync phase error is filtered by a phase locked loop that is computed by the FP. All timing in the front end is derived from a counter that is part of this PLL and it thus counts synchronously to the video signal.

A separate hardware block measures the signal back porch and also allows to gather maximum/minimum of

the video signal. This information is processed by the FP and used for of gain control and clamping.

For vertical sync separation the sliced video signal is integrated. The FP uses the integrator value to derive vertical sync and field information.

The information extracted by the video sync processing is multiplexed onto the hardware front sync signal (FSY) and is distributed to the rest of the video processing system. The format of the front sync signal is given in fig. 2–26.

The data for the vertical deflection, the sawtooth and the East-West correction signal is calculated by the FP. The data is buffered in a FIFO and transferred to the back end by a single wire interface.

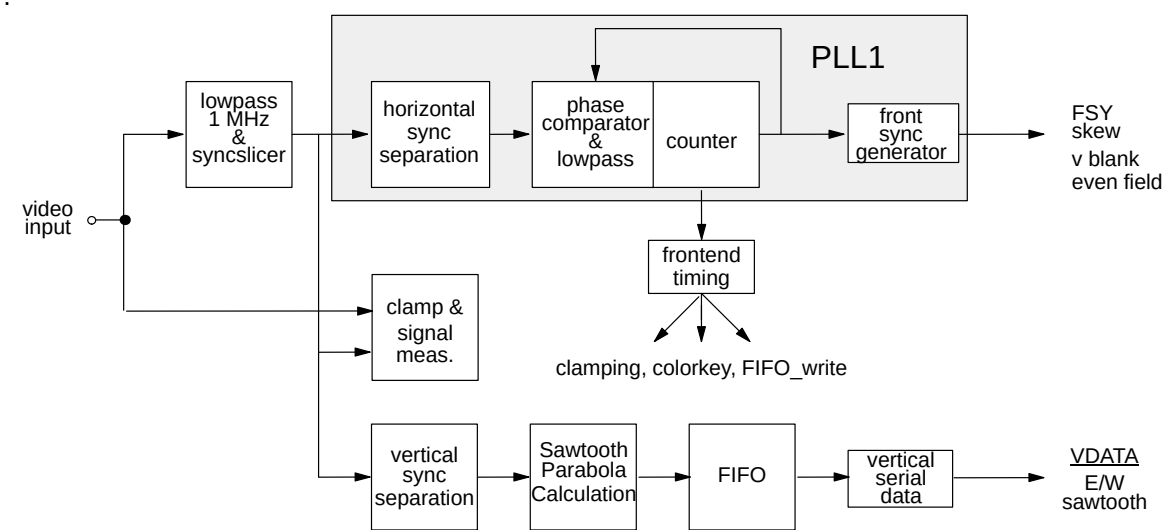


Fig. 2–25: Sync separation block diagram

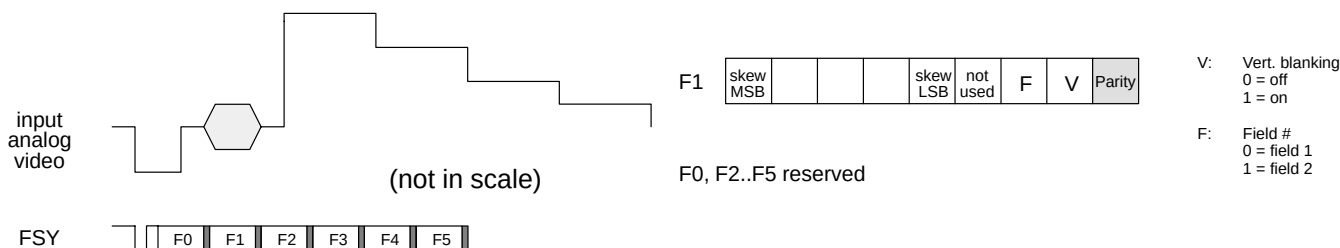


Fig. 2–26: Front sync format

2.6.2. Deflection Processing

The deflection processing generates the signals for the horizontal and vertical drive (fig. 2–27). This block contains two phase-locked loops:

- PLL2 generates the horizontal and vertical timing. Phase and frequency are synchronized by the front sync signal. The Main Sync (MSY) signal that is generated from PLL2 is a multiplex of all display related data (fig. 2–28). This signal is intended for use by other processors, e.g. a PIP processor can use this signal to adjust to a certain display position.

- PLL3 adjusts the phase of the horizontal drive pulse and compensates for the delay of the horizontal output stage.

The horizontal drive circuitry uses a digital sine wave generator to produce the exact (subclock) timing for the drive pulse. The generator runs at 1 MHz; in the output stage the frequency is divided down to give drive-pulse period and width. In standby mode, the output stage is driven from an internal 1 MHz clock that is derived from the 20 MHz main clock oscillator and a fixed drive pulse width is used. When the circuit is switched out of standby operation the drive pulse width is programmable. The horizontal drive uses a high voltage (8V) open drain output transistor.

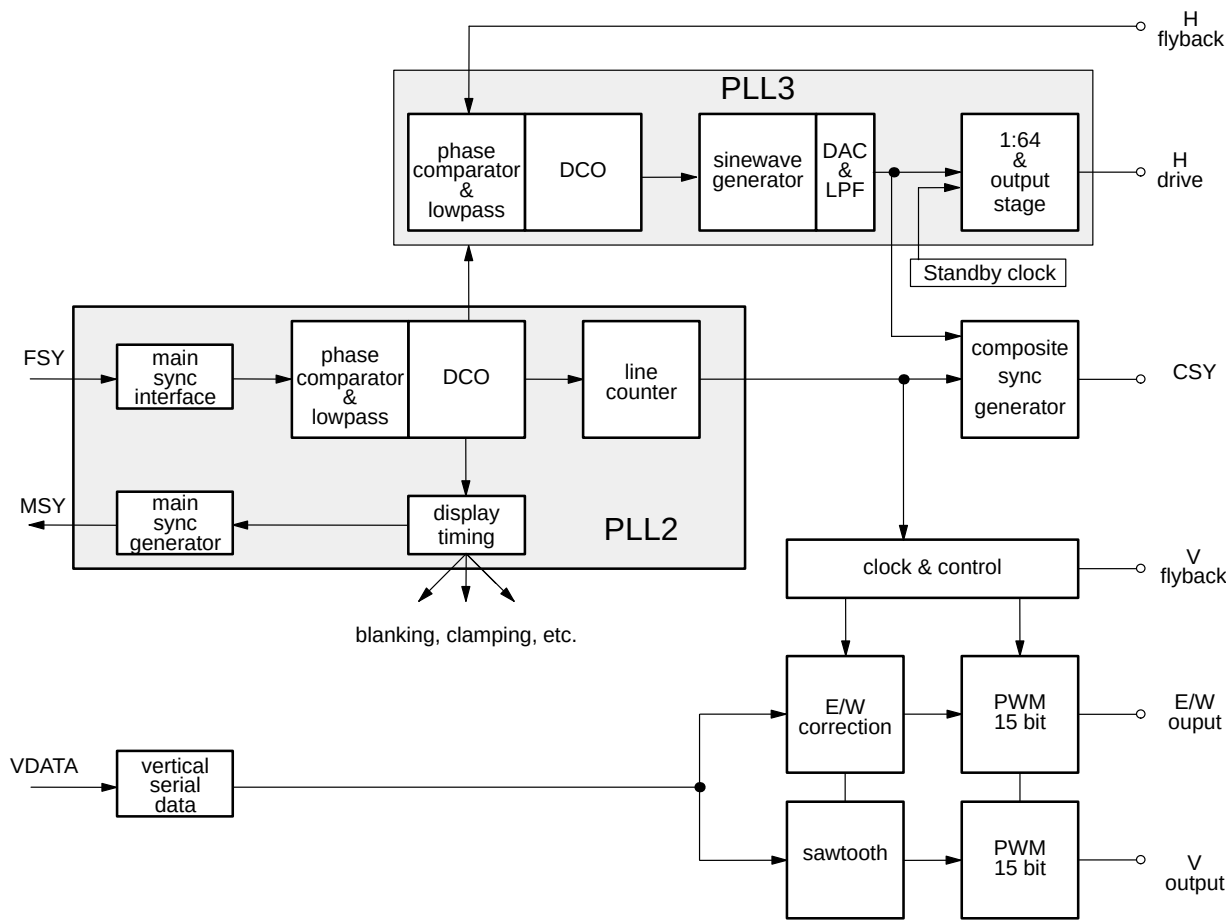


Fig. 2–27: Deflection processing block diagram

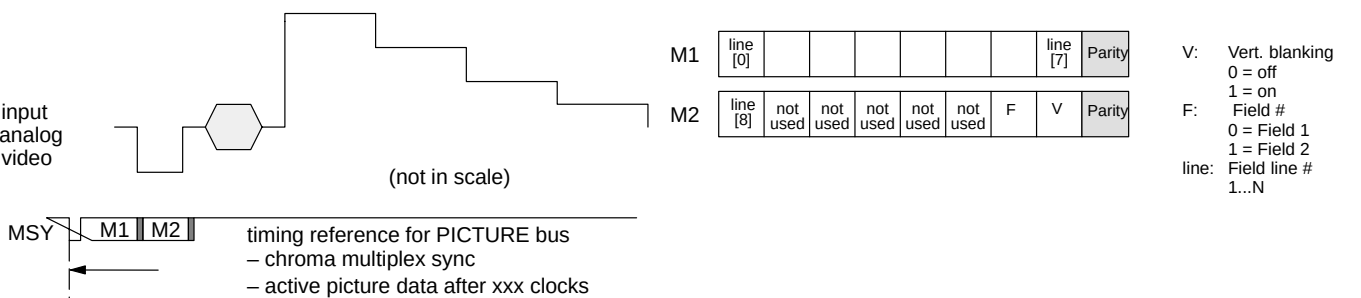


Fig. 2–28: Main sync format

### 2.6.3. Vertical, East–West Deflection

The calculations of the vertical and east–west deflection waveforms are done by the fast processor. The algorithm is using a chain of accumulators to generate the required polynomial waveforms. To produce the deflection waveforms, the accumulators are initialized at the beginning of each field. The initialization values must be computed by the control processor and are written once to the fast processor of the VDP3108. The waveforms are described as polynomials in  $x$ , where  $x$  varies from 0 to 1 for one field.

$$P: a + b(x-0.5) + c(x-0.5)^2 + d(x-0.5)^3 + e(x-0.5)^4$$

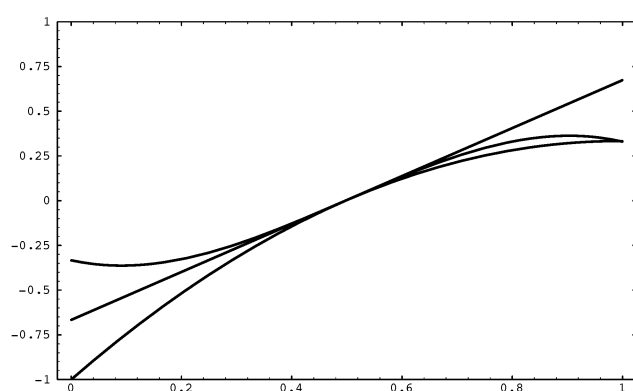
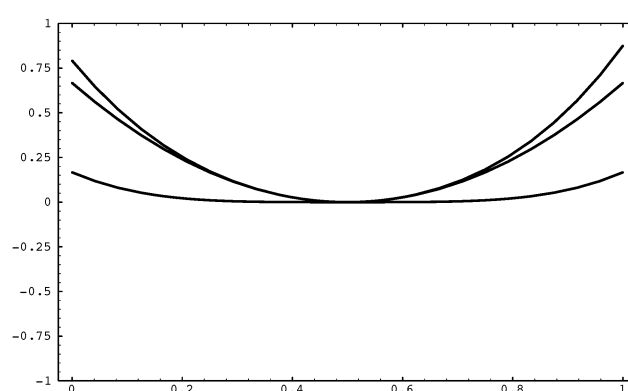


**Fig. 2–29: Vertical and East–West Deflection Waveforms**

vertical: a,b,c,d 0,1,0,0  
0,1,1,0  
0,1,0,1

east–west: a,b,c,d,e 0,0,1,0,0  
0,0,0,0,1  
0,0,1,1,1

### 2.6.4. Protection Circuitry

Picture tube and drive stage protection is provided through the following measures:

- vertical flyback safety input: this pin looks for a negative edge in every field, otherwise the RGB drive signals are blanked.
- drive shutoff during flyback: this feature can be selected by software.
- safety input pin: this pin has two thresholds; at the lower threshold the RGB signals are blanked, at the higher threshold the horizontal drive is shut off.
- The main oscillator and the horizontal drive circuitry are run from a separate (standby) power supply and are already active while the TV set is powering up.

### 2.7. Reset and Standby Functions

Reset of most functions (exceptions see below) is performed by a reset pin. When this pin becomes active then all the internal registers and counters are set to

zero. The initialization values for the accumulators a0..a3 for vertical deflection and a0..a4 for east–west deflection are 12 bit values. The coefficients that should be used to calculate the initialization values for different field frequencies are given in section 3.

The vertical waveform can be scaled according the average beam current. This is used to compensate the effects of electric high tension changing due to beam current variations. In order to get a faster vertical retrace timing, the output impedance of the vertical DA converter can be reduced by 50% during the retrace.


Fig. 2–29 shows some vertical and east–west deflection waveforms. The polynomial coefficients are given in the figure.

zero. When this pin is released, the internal reset is still active for 4 $\mu$ s. After that time all the internal registers are loaded with the values defined in the defaults ROM. All the registers which are updated with the vertical sync get these values with the next vertical sync. During this initialization procedure (approx. 60  $\mu$ s) it is not possible to access the VDP via the serial interface (I<sup>2</sup>C). Access to other ICs via the serial bus is possible during that time. The same initialization procedure is started when the internal clock supervision detects that there is no clock (in the video processing part).

Exceptions for initialization :

- CCU clock divider (5MHz), not initialized by reset
- standby clock divider (1MHz), not initialized by reset, but clock selector switched to standby clock

During standby, only the horizontal drive pulse (see also 2.6.2.) and the 5 MHz clock output for the control microprocessor are active. The standby circuitry is reset when the standby supply voltage is applied.

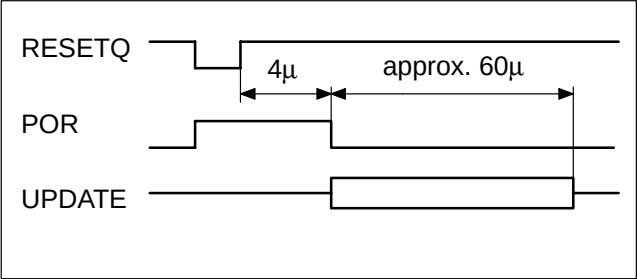

3. Serial Interface

3.1. I<sup>2</sup>C Bus Interface

Communication between the VDP and the external controller is done via I<sup>2</sup>C bus. The VDP has an I<sup>2</sup>C bus slave interface and uses I<sup>2</sup>C clock synchronization to slow down the interface if required. The I<sup>2</sup>C bus interface uses one level of subaddress: one I<sup>2</sup>C bus address is used to address the IC and a subaddress selects one of the internal registers. The I<sup>2</sup>C bus chip address is given below:

|    |    |    |    |    |    |    |     |
|----|----|----|----|----|----|----|-----|
| A6 | A5 | A4 | A3 | A2 | A1 | A0 | R/W |
| 1  | 0  | 0  | 0  | 1  | 0  | 1  | 0/1 |

The registers of the VDP have 8 or 16 bit data size; 16 bit registers are accessed by reading/writing two 8 bit data words.

Figure 3–1 shows I<sup>2</sup>C bus protocols for read and write operations of the interface; the read operation requires an extra start condition and repetition of the chip address with read command set.

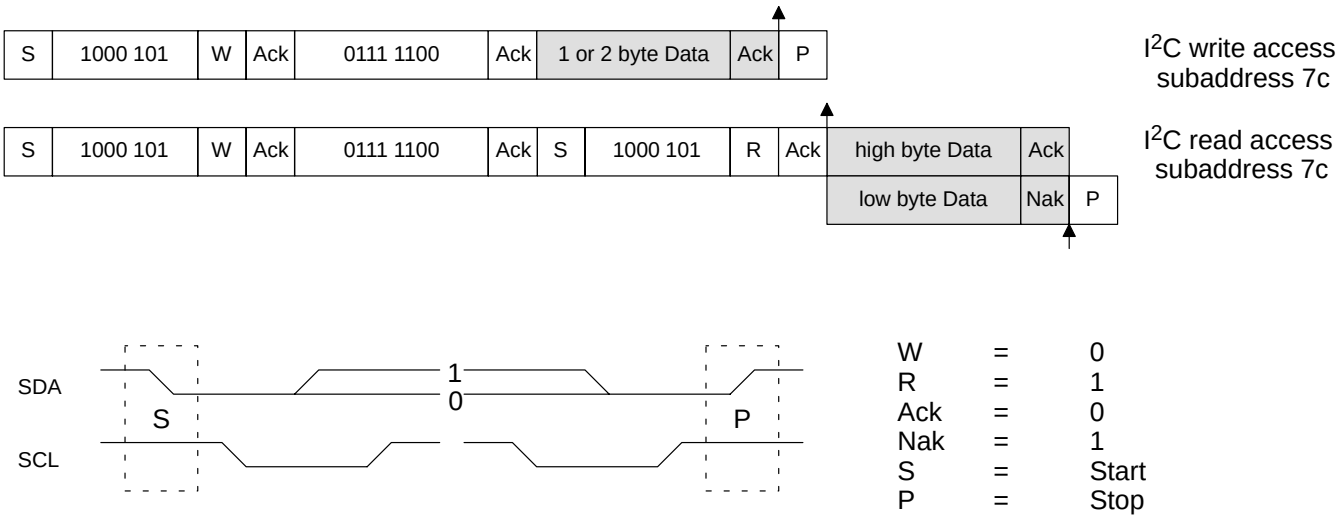


Fig. 3–1: I<sup>2</sup>C Bus Protocols

3.2. Control and Status Registers

Table 3–1 gives definitions of the VDP control and status registers. The number of bits indicated for each register in the table is the number of bits implemented in hardware, i.e. a 9-bit register must always be accessed using two data bytes but the 7 MSB will be don't care on write operations and 0 on read operations. Write registers that can be read back are indicated in the following table.

Functions implemented by software in the on-chip control microprocessor (FP) are explained elsewhere.

A hardware reset initializes all control registers to 0. The automatic chip initialization loads a selected set of registers with the default values given in Table 3–1.

The register modes given in Table 3–1 are:

- w write only register
- w/r write/read data register
- r read data from VDP
- v register is latched with vertical sync

The mnemonics used in the Intermetall VDP demo software are given in the last column.

**Table 3–1:** Control and status registers

| I <sup>2</sup> C Sub address | Number of bits | Mode | Function                                                                                                                                                                                                                                                                                               | Default        | Name                                      |
|------------------------------|----------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------|
| FP INTERFACE                 |                |      |                                                                                                                                                                                                                                                                                                        |                |                                           |
| 26                           | 16             | w    | FP read address                                                                                                                                                                                                                                                                                        |                | FPRD                                      |
| 27                           | 16             | w    | FP write address                                                                                                                                                                                                                                                                                       |                | FPWR                                      |
| 28                           | 16             | w/r  | FP data                                                                                                                                                                                                                                                                                                |                | FPDAT                                     |
| 29                           | 8              | r    | FP status<br>bit [0] write request<br>bit [1] read request<br>bit [2] busy                                                                                                                                                                                                                             |                | FPSTA                                     |
| FRONTEND                     |                |      |                                                                                                                                                                                                                                                                                                        |                |                                           |
| 33                           | 8              | w/r  | input selector luma adc:<br>bit [1:0] 00 VIN3<br>01 VIN2<br>10 VIN1<br>11 reserved<br>input selector, chroma adc:<br>bit [2] 0/1 select VIN1/CIN<br>clamping modes:<br>bit [3] 0/1 clamp on/off for chroma ad converter<br>bit [4] 0/1 internal/external clamp enable (luma adc)<br>bit [7:5] reserved |                | VIS<br><br><br><br>CS<br><br>DCLC<br>DCLY |
| CHROMA PROCESSING            |                |      |                                                                                                                                                                                                                                                                                                        |                |                                           |
| 20                           | 8              | w/r  | IF compensation:<br>bit [1:0] 0 12 dB<br>2 6 dB/oct<br>3 0 dB/oct<br>bit [7:2] reserved                                                                                                                                                                                                                | 3              | IFC                                       |
| 22                           | 8              | w/r  | SECAM deemphasis or PAL lowpass peaking filter (1.25 MHz):<br>bit [4:0] 0...31, PAL/NTSC: 8 SECAM: 24<br>bit [5] reserved<br>chroma bandwidth select: luma delay adjust (LDY)<br>PAL/NTSC SECAM<br>bit [7:6] 00 narrow 0 25<br>01 normal 3 28<br>10 broad 6 31<br>11 reserved                          | 8<br><br><br>1 | DEEM<br><br><br>CBW                       |
| LUMA PROCESSING              |                |      |                                                                                                                                                                                                                                                                                                        |                |                                           |
| 30                           | 8              | w/r  | luma notch frequency<br>bit [5:0] 0..63/64 $YNF = 128 \cdot \cos(2\pi f_f/f_s)$<br>PAL/SECAM: 25 NTSC: 57<br>bit [6] 0/1 1: disable adaptive notch filter for SECAM<br>must be set to 0 in PAL/NTSC<br>bit [7] reserved                                                                                | 25<br><br>0    | YNF<br><br>YNMD                           |
| 31                           | 8              | w/r  | luma / chroma matching delay:<br>bit [4:0] 0..31 delay in clocks (+19)<br>bit [7:5] reserved                                                                                                                                                                                                           | 3              | LDF                                       |

| I <sup>2</sup> C Sub address | Number of bits | Mode | Function                                                                                                                                                                                                                                                                                                       | Default     | Name                |
|------------------------------|----------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------------|
| 34                           | 8              | w/r  | standard select:<br>bit [2:0] 000 SECAM<br>100 SECAM–SVHS<br>001 PAL, NTSC compensated<br>101 PAL–SVHS, NTSC compensated–SVHS<br>010 NTSC, simple PAL<br>110 NTSC–SVHS, simple PAL–SVHS<br>011 NTSC comb filter mode<br>111 reserved<br>bit [3] 0/1 chroma polarity signed/offset-binary<br>bit [7:4] reserved | 9           | STS                 |
| PRIORITY BUS – FRONTEND      |                |      |                                                                                                                                                                                                                                                                                                                |             |                     |
| 23                           | 8              | w/r  | priority bus overwrite register<br>bit [7:0] 8 bit mask, bit[x] = 1 : overwrite priority x                                                                                                                                                                                                                     | 64          | PIOV                |
| 24                           | 8              | w/r  | priority bus ID register and enable<br>bit [2:0] 0..7 priority ID, 0 highest<br>bit [4:3] 0..3 pad driver strength, number of pull-down transistors 1..4<br>bit [6:5] reserved<br>bit [7] 0/1 disable/enable priority                                                                                          | 0<br>0<br>1 | PID<br>PIDD<br>PIDE |
| PRIORITY BUS – BACKEND       |                |      |                                                                                                                                                                                                                                                                                                                |             |                     |
|                              |                |      | priority mask register, if bit[x] is set to 1 then the function is active for the respective signal priority                                                                                                                                                                                                   |             |                     |
| 75                           | 9              | w v  | bit [7:0] bit [x] 0/1: select main/side picture contrast/brightness/matrix                                                                                                                                                                                                                                     |             | PBCT                |
| 71                           | 9              | w v  | bit [7:0] bit [x] 0/1: select main/external (via CLUT) RGB                                                                                                                                                                                                                                                     |             | PBERGB              |
| 7d                           | 9              | w v  | bit [7:0] bit [x] 0/1: disable/enable black level expander                                                                                                                                                                                                                                                     |             | PBBLE               |
| 79                           | 9              | w v  | bit [7:0] bit [x] 0/1: disable/enable peaking transient suppression when signal is switched                                                                                                                                                                                                                    |             | PBPK                |
| 53                           | 9              | w v  | bit [7:0] bit [x] 0/1: disable/enable analog fast blank input                                                                                                                                                                                                                                                  |             | PBFB                |
| DISPLAY PROCESSOR – LUMA     |                |      |                                                                                                                                                                                                                                                                                                                |             |                     |
| 61                           | 9              | w v  | bit [5:0] 0..63/32 main picture contrast                                                                                                                                                                                                                                                                       | 32          | CTM                 |
| 65                           | 9              | w v  | bit [5:0] 0..63/32 side picture contrast                                                                                                                                                                                                                                                                       | 32          | CTS                 |
| 51                           | 9              | w v  | bit [8:0] –256..255 main picture brightness                                                                                                                                                                                                                                                                    | 0           | BRM                 |
| 55                           | 9              | w v  | bit [8:0] –256..255 side picture brightness                                                                                                                                                                                                                                                                    |             | BRS                 |
| 2a                           | 16             | w/r  | bit [10:0] reserved<br>bit [11] 0/1 disable/enable luma input –16                                                                                                                                                                                                                                              | 1           | EY16                |
| 59                           | 9              | w v  | black level expander:<br>bit [3:0] 0..15 tilt coefficient (k2)<br>bit [8:4] 0...31 amount (k1)                                                                                                                                                                                                                 | 6<br>4      | BTLT<br>BAM         |
| 5d                           | 9              | w v  | black level expander:<br>bit [8:0] 0..511 disable expansion, threshold value                                                                                                                                                                                                                                   | 120         | BTHR                |

| I <sup>2</sup> C Sub address            | Number of bits | Mode  | Function                                                                                                                                                                                         | Default    | Name          |
|-----------------------------------------|----------------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------|
| 69                                      | 9              | w v   | luma peaking filter, the gain at high frequencies and small signal amplitudes is: $1 + (k1+k2)/8$<br>bit [3:0] 0..15 k1: peaking level undershoot<br>bit [7:4] 0..15 k2: peaking level overshoot | 4<br>4     | PKUN<br>PKOV  |
| 6d                                      | 9              | w v   | luma peaking filter, coring<br>bit [5:0] 0..31 coring level<br>bit [7:6] reserved<br>bit [8] 0/1 peaking filter CF 2.5/3.2 MHz                                                                   | 1<br>0     | COR<br>PFS    |
| 4d                                      | 9              | w v   | luma soft limiter<br>bit [7:0] 0..255 maximum limit for low frequency comp.                                                                                                                      | 255        | SLDC          |
| 49                                      | 9              | w v   | luma soft limiter<br>bit [7:0] 0..255 maximum limit for output signal                                                                                                                            | 255        | SLO           |
| 41                                      | 9              | w v   | luma soft limiter<br>bit [4:0] 0..31 loop filter gain<br>bit [5] 0/1 enable/disable noise reduction                                                                                              |            | SFG<br>DNO    |
| 45                                      | 9              | w v   | luma soft limiter<br>bit [4:0] 0..31 notch filter gain (for manual notch)<br>bit [5] 0/1 automatic/manual notch                                                                                  |            | SFGM<br>SLM   |
| DISPLAY PROCESSOR – CHROMA              |                |       |                                                                                                                                                                                                  |            |               |
| 14                                      | 8              | w/r v | luma / chroma matching delay<br>bit [2:0] -2...2 variable chroma delay<br>bit [3] 0/1 chroma polarity signed/offset binary                                                                       | 0<br>1     | LDB<br>COB    |
| 72                                      | 9              | w v   | digital transient improvement<br>bit [4:0] 0..31 transient gain Cr<br>bit [8:5] 0..15 coring level for Cr, Cb                                                                                    | 31<br>3    | CPKV<br>CCOR  |
| 7a                                      | 9              | w v   | digital transient improvement<br>bit [4:0] 0..31 transient gain Cb<br>bit [7:5] reserved<br>bit [8] 0/1 filter characteristic broad/narrow                                                       | 31<br>1    | CPKU<br>CFS   |
| DISPLAY PROCESSOR – MATRIX              |                |       |                                                                                                                                                                                                  |            |               |
| 7c/74                                   | 9              | w v   | main picture matrix coefficient $R-Y = MR1M*Cb + MR2M*Cr$<br>bit [9:0] -256 ... 255/128                                                                                                          | 0<br>86    | MR1M,<br>MR2M |
| 6c/64                                   | 9              | w v   | main picture matrix coefficient $G-Y = MG1M*Cb + MG2M*Cr$<br>bit [9:0] -256 ... 255/128                                                                                                          | -22<br>-44 | MG1M,<br>MG2M |
| 5c/54                                   | 9              | w v   | main picture matrix coefficient $B-Y = MB1M*Cb + MB2M*Cr$<br>bit [9:0] -256 ... 255 /128                                                                                                         | 113<br>0   | MB1M,<br>MB2M |
| 78/70                                   | 9              | w v   | side picture matrix coefficient $R-Y = MR1S*Cb + MR2S*Cr$<br>bit [9:0] -256 ... 255/128                                                                                                          | 0<br>73    | MR1S,<br>MR2S |
| 68/60                                   | 9              | w v   | side picture matrix coefficient $G-Y = MG1S*Cb + MG2S*Cr$<br>bit [9:0] -256 ... 255/128                                                                                                          | -19<br>-37 | MG1S,<br>MG2S |
| DISPLAY PROCESSOR – COLOR LOOK-UP TABLE |                |       |                                                                                                                                                                                                  |            |               |
| 58/50                                   | 9              | w v   | side picture matrix coefficient $B-Y = MB1S*Cb + MB2S*Cr$<br>bit [9:0] -256 ... 255/128                                                                                                          | 97<br>0    | MB1S,<br>MB2S |

| I <sup>2</sup> C Sub address                     | Number of bits | Mode | Function                                                                                                                                                                                                                                                                                                                    | Default     | Name                                                |
|--------------------------------------------------|----------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------|
| 00–0f                                            | 16             | w v  | color look-up table: 16 entries, 12 bit wide,<br>The CLUT registers are initialized at power-up<br>bit [3:0] 0..15 blue amplitude<br>bit [7:4] 0..15 green amplitude<br>bit [11:8] 0..15 red amplitude                                                                                                                      |             | CLUT0<br>...<br>CLUT15                              |
| 4c/48/<br>44                                     | 9              | w v  | digital RGB insertion contrast for R/G/B<br>bit [3:0] 0..13 RGB amplitude is CLUT*(4+x),<br>RGB amplitude range is from 0 to 255<br>14,15 invalid                                                                                                                                                                           | 8<br>8<br>8 | DRCT<br>DGCT<br>DBCT                                |
| DISPLAY PROCESSOR – DISPLAY CONTROLS             |                |      |                                                                                                                                                                                                                                                                                                                             |             |                                                     |
| 6e<br>6a<br>66                                   | 9              | w v  | cutoff R/G/B                                                                                                                                                                                                                                                                                                                |             | CR<br>CG<br>CB                                      |
| DISPLAY PROCESSOR – TUBE AND PICTURE MEASUREMENT |                |      |                                                                                                                                                                                                                                                                                                                             |             |                                                     |
| 7b                                               | 9              | w v  | picture measurement start<br>bit [8:0] 0..511 first line of picture measurement                                                                                                                                                                                                                                             | 23          | PMST                                                |
| 77                                               | 9              | w v  | picture measurement stop<br>bit [8:0] 0..511 last line of picture measurement                                                                                                                                                                                                                                               | 308         | PMSO                                                |
| 7f                                               | 9              | w v  | tube measurement line<br>bit [8:0] 0..511 line for tube measurement                                                                                                                                                                                                                                                         | 15          | TML                                                 |
| 25                                               | 8              | w/r  | tube and picture measurement control<br>bit [0] 0/1 disable/enable tube measurement<br>bit [1] 0/1 80/40 kHz bandwidth for<br>picture measurement<br>bit [2] 0/1 enable picture measurement start<br>bit [3] 0/1 large/small picture measurement window<br>bit [4] 0/1 measure / offset check for adc<br>bit [7:5] reserved |             | PMC                                                 |
| 13                                               | 16             | w/r  | white drive measurement control<br>bit [9:0] 0..1023 white drive value for measurement<br>bit [10] reserved<br>bit [11] 0/1 white drive measurement disabled/enabled                                                                                                                                                        | 512<br>0    | WDRV<br>EWDM                                        |
| 18–1d<br>18<br>19<br>1a<br>1b<br><br>1c<br>1d    | 8              | r    | measurement result registers<br>minimum<br>maximum<br>white drive<br>cutoff/leakage blue,<br>read pulse starts tube measurement<br>cutoff/leakage green<br>cutoff/leakage red                                                                                                                                               | –           | MRMIN<br>MRMAX<br>MRWDR<br>MRCB<br><br>MRCG<br>MRCR |

| I <sup>2</sup> C Sub address              | Number of bits | Mode | Function                                                                                                                                                                                                                                                                                                                                                                                                                            | Default | Name  |
|-------------------------------------------|----------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|-------|
| 1e                                        | 8              | r    | measurement adc status and fast blank input status<br><br>measurement status register<br>bit [0] 0/1 tube measurement active / complete<br>bit [2:1] white drive measurement cycle<br>00 red<br>01 green<br>10 blue<br>11 reserved<br>bit [3] 0/1 picture measurement active / complete<br>bit [4] 0/1 fast blank input low / high (static)<br>bit [5] 1 fast blank input negative transition (reset at read)<br>bit [7:6] reserved | –       | PMS   |
| 32                                        | 8              | w    | fast blank interface mode<br>bit [0] 0 fast blank from FBLIN pin<br>1 force internal fast blank signal to high<br>bit [1] 0/1 fast blank active high/low<br>bit [2] 0 clmpref<br>1<br>bit [7:3] reserved                                                                                                                                                                                                                            | –       | FBMD  |
| DISPLAY PROCESSOR – TIMING                |                |      |                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |       |
| 6f                                        | 9              | w v  | vertical blanking start<br>bit [8:0] 0..511 first line of vertical blanking                                                                                                                                                                                                                                                                                                                                                         | 305     | VBST  |
| 73                                        | 9              | w v  | vertical blanking stop<br>bit [8:0] 0..511 last line of vertical blanking                                                                                                                                                                                                                                                                                                                                                           | 25      | VBSO  |
| 6b                                        | 9              | w v  | start of active video<br>bit [8:0] 0..511 first line of active video                                                                                                                                                                                                                                                                                                                                                                | 30      | AVST  |
| DISPLAY PROCESSOR – HORIZONTAL DEFLECTION |                |      |                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |       |
| 67                                        | 9              | w v  | adjustable delay from front sync to PLL2<br>adjust analog and digital RGB<br>bit [8:0] –256..+255 +/- 8 µsec                                                                                                                                                                                                                                                                                                                        | –141    | POFS2 |
| 63                                        | 9              | w v  | adjustable delay from fly back to PLL2<br>adjust horizontal position for analog RGB picture<br>bit [8:0] –256..+255 +/- 8 µsec                                                                                                                                                                                                                                                                                                      | 0       | POFS3 |
| 7e                                        | 9              | w v  | adjustable delay from fly back to main sync<br>adjust horizontal position for digital picture<br>bit [8:0] allowed values ?                                                                                                                                                                                                                                                                                                         | 120     | HPOS  |
| 17                                        | 8              | w/r  | start of horizontal blanking<br>bit [7:0] 0..255 0..t <sub>h</sub>                                                                                                                                                                                                                                                                                                                                                                  | 1       | HBST  |
| 16                                        | 8              | w/r  | end of horizontal blanking<br>bit [7:0] 0..255 0..t <sub>h</sub>                                                                                                                                                                                                                                                                                                                                                                    | 48      | HBSO  |

| I <sup>2</sup> C Sub address | Number of bits | Mode  | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Default     | Name                                                                            |
|------------------------------|----------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------|
| 57<br>5b<br>5f               | 9              | w v   | PLL2/3 filter coefficients, refer to section 'horizontal deflection'                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 2<br>2<br>2 | PKP3<br>PKP2<br>PKI2                                                            |
| 15                           | 16             | w/r d | horizontal drive control register<br>bit [5:0] 0..63 horizontal drive pulse duration in $\mu$ sec<br>bit [6] 0/1 disable/enable horizontal pll loops<br>bit [7] 0/1 1: gate HOUT off during flyback<br>bit [8] 0<br>bit [9] 0/1 enable/disable ultra black blanking<br>bit [10] 0/1 force/enable blanking after reset<br>bit [11] 0/1 enable/disable analog RGB clamping<br>bit [12] 0/1 disable/enable composite sync(ref.bit[15])<br>bit [13] 0/1 enable/disable vertical protection<br>bit [14] 0/1 bypass/active display clock skew<br>bit [15,12] function of CSIO pin<br>00 composite sync signal output<br>01 25 Hz output (field1/field2 signal)<br>10 no interlace (field 2), output = 0<br>11 1 MHz h–drive clock | 32          | HDRV<br>EHPLL<br>EFLB<br><br>DUBL<br>EBL<br>DCRGB<br><br>DVPR<br>CSKEW<br>CSYNC |
| TEST REGISTER                |                |       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |             |                                                                                 |
| 39                           | 8              | w/r   | Main Test Register                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |                                                                                 |
| 3f                           | 8              | w/r   | Front End, Luma1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |                                                                                 |
| 3e                           | 8              | w/r   | Front End, Luma2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |                                                                                 |
| 3d                           | 8              | w/r   | Front End, Luma3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |                                                                                 |
| 2f                           | 8              | w/r   | Front End, Chroma1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |                                                                                 |
| 2e                           | 8              | w/r   | Front End, Chroma2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |                                                                                 |
| 2a                           | 16             | w/r   | Display 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |                                                                                 |
| 2b                           | 16             | w/r   | Display 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |                                                                                 |
| 2c                           | 8              | w/r   | Display 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |                                                                                 |
| 3a                           | 8              | w/r   | FP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |                                                                                 |
| 3b                           | 16             | w/r   | Display Processor Control                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |                                                                                 |
| 2d                           | 16             | w/r   | Deflection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |             |                                                                                 |
| 3c                           | 8              | w/r   | Analog Backend                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |                                                                                 |

**Table 3–2: Control Registers of the Fast Processor**

– default values are initialized at reset

– \* indicates that register is initialized according to the current standard when SDT register is changed.

| FP Sub address     | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Default                                      | Name        |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|-------------|---------|----------|---|--------|---------|----------|---|-------|---------|-------|---|--------|---------|----------|---|-------|---------|----------|---|-------|---------|----------|---|--------|---------|----------|---|-----------|---------|----------|---|-----|
| Standard Selection |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                              |             |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| h'1b               | <p>Standard select:</p> <table> <tr> <td>0</td><td>PAL B,G,H,I</td><td>(50 Hz)</td><td>4.433618</td></tr> <tr> <td>1</td><td>NTSC M</td><td>(60 Hz)</td><td>3.579545</td></tr> <tr> <td>2</td><td>SECAM</td><td>(50 Hz)</td><td>4.286</td></tr> <tr> <td>3</td><td>NTSC44</td><td>(60 Hz)</td><td>4.433618</td></tr> <tr> <td>4</td><td>PAL M</td><td>(60 Hz)</td><td>3.575611</td></tr> <tr> <td>5</td><td>PAL N</td><td>(50 Hz)</td><td>3.582056</td></tr> <tr> <td>6</td><td>PAL 60</td><td>(60 Hz)</td><td>4.433618</td></tr> <tr> <td>7</td><td>NTSC COMB</td><td>(60 Hz)</td><td>3.579545</td></tr> </table> <p>The activated routine will set up several blocks for the selected standard.<br/>Option bits:<br/>(OR for the new selected standard)<br/>h'100 no hpll setup<br/>h'200 no vertical setup<br/>h'400 no acc setup</p> <p>Note: After FP has switched to a new standard, the MSB of SDT is set to 1 to indicate operation complete.</p> | 0                                            | PAL B,G,H,I | (50 Hz) | 4.433618 | 1 | NTSC M | (60 Hz) | 3.579545 | 2 | SECAM | (50 Hz) | 4.286 | 3 | NTSC44 | (60 Hz) | 4.433618 | 4 | PAL M | (60 Hz) | 3.575611 | 5 | PAL N | (50 Hz) | 3.582056 | 6 | PAL 60 | (60 Hz) | 4.433618 | 7 | NTSC COMB | (60 Hz) | 3.579545 | 0 | SDT |
| 0                  | PAL B,G,H,I                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (50 Hz)                                      | 4.433618    |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| 1                  | NTSC M                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | (60 Hz)                                      | 3.579545    |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| 2                  | SECAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | (50 Hz)                                      | 4.286       |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| 3                  | NTSC44                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | (60 Hz)                                      | 4.433618    |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| 4                  | PAL M                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | (60 Hz)                                      | 3.575611    |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| 5                  | PAL N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | (50 Hz)                                      | 3.582056    |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| 6                  | PAL 60                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | (60 Hz)                                      | 4.433618    |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| 7                  | NTSC COMB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | (60 Hz)                                      | 3.579545    |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| Color Processing   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                              |             |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| h'1c               | NTSC tint angle, $\pm 512 = \pm \pi/4$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0                                            | TINT        |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| h'a0               | <p>ACC reference level to adjust <math>C_r</math>, <math>C_b</math> levels on picture bus.<br/>(use main matrix)<br/>ACCREF = 0: ACC function is disabled, chroma gain can be adjusted via ACCb / ACCr register</p> <p>ACC reference level for increased color saturation.<br/>(use side matrix)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <p>P/N: 2070*<br/>S: 0*</p> <p>P/N: 2263</p> | ACCREF      |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| h'a3               | <p>ACC multiplier value for SECAM Dr chroma component to adjust <math>C_r</math> level on picture bus. (use main matrix)<br/><math>b[10:0] \quad eeemmmmmmm \ m \ * \ 2^{-e}</math></p> <p>ACC multiplier value for SECAM Dr chroma component for increased color saturation (use side matrix)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <p>S: 1496*</p> <p>S:1532</p>                | ACCr        |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| h'a4               | <p>ACC multiplier value for SECAM Db chroma component to adjust <math>C_b</math> level on picture bus. (use main matrix)<br/><math>b[10:0] \quad eeemmmmmmm \ m \ * \ 2^{-e}</math></p> <p>ACC multiplier value for SECAM Dr chroma component for increased color saturation (use side matrix)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <p>S: 1155*</p> <p>S: 1177</p>               | ACCb        |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| h'a8               | amplitude color killer level (0:killer disabled)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 30                                           | KILVL       |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |
| h'a9               | amplitude color killer hysteresis                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10                                           | KILHY       |         |          |   |        |         |          |   |       |         |       |   |        |         |          |   |       |         |          |   |       |         |          |   |        |         |          |   |           |         |          |   |     |

| FP Sub address              | Function                                                                                                                                                                                                                                                                                             | Default                  | Name              |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------|
| Vertical Standard Select    |                                                                                                                                                                                                                                                                                                      |                          |                   |
| h'e7                        | vertical standard select<br>if LSB is set to one, lock to standard signal is enabled                                                                                                                                                                                                                 | 50Hz: 625*<br>60Hz: 525* | VSDT              |
| AGC – DVCO                  |                                                                                                                                                                                                                                                                                                      |                          |                   |
| h'b2                        | sync amplitude reference (0: AGC disabled).<br>Write 0 to register h'b5 after writing 0 to AGCREF to disable the AGC                                                                                                                                                                                 | 768                      | AGCREF            |
| h'be                        | start value for AGC gain while vertical lock or AGC is inactive                                                                                                                                                                                                                                      | 27                       | SGAIN             |
| h'20                        | AGC gain value ( read only if AGC is enabled )                                                                                                                                                                                                                                                       | read only                | GAIN              |
| h'58                        | crystal oscillator center frequency adjust, –2048..2047                                                                                                                                                                                                                                              | 0                        | DVCO              |
| h'59                        | crystal oscillator center frequency adjustment value for line lock mode.<br>true adjust value is DVCO – ADJUST.<br>For factory crystal alignment:<br>set DVCO=0, set lock mode, read crystal offset from ADJUST register<br>and use negative value for initial center frequency adjustment via DVCO. | read only                | ADJUST            |
| h'26                        | line locked mode lock command/status<br>write: 100 enable lock<br>0 disable lock<br>read: 4095/0 locked / unlocked                                                                                                                                                                                   | 0                        | XLG               |
| FP Status Register          |                                                                                                                                                                                                                                                                                                      |                          |                   |
| '53                         | automatic standard recognition status<br>bit0 1 vertical sync detected<br>bit1 2 horizontally locked<br>bit2 4 reserved<br>bit3 8 color killer active<br>bit5 32 ident killer active                                                                                                                 | –                        | ASR               |
| h'eb                        | number of lines per field, P/S: 312, N: 262                                                                                                                                                                                                                                                          | read only                | NLPF              |
| h'41                        | measured sync amplitude value, nominal: 768                                                                                                                                                                                                                                                          | read only                | SAMPL             |
| h'a5                        | measured burst amplitude                                                                                                                                                                                                                                                                             | read only                | BAMPL             |
| h'50                        | software version number: 2105                                                                                                                                                                                                                                                                        | read only                | –                 |
| h'5f                        | software release: 1001                                                                                                                                                                                                                                                                               | read only                | –                 |
| FP Display Control Register |                                                                                                                                                                                                                                                                                                      |                          |                   |
| h'f0                        | White Drive Red (0...1023)                                                                                                                                                                                                                                                                           | 700                      | WDR <sup>1)</sup> |
| h'f1                        | White Drive Green (0...1023)                                                                                                                                                                                                                                                                         | 700                      | WDG <sup>1)</sup> |
| h'f2                        | White Drive Blue (0...1023)                                                                                                                                                                                                                                                                          | 700                      | WDB <sup>1)</sup> |
| h'f9                        | Internal Brightness, Picture (0...511)                                                                                                                                                                                                                                                               | 256                      | IBR               |
| h'fc                        | Internal Brightness, Measurement (0...511)                                                                                                                                                                                                                                                           | 384                      | IBRM              |
| h'fa                        | Analog Brightness for external RGB (0...511)                                                                                                                                                                                                                                                         | 256                      | ABR               |
| h'fb                        | Analog Contrast for external RGB (0...511)                                                                                                                                                                                                                                                           | 350                      | ACT               |

| FP Sub address                                  | Function                                                                                                                                        | Default | Name   |
|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------|
| FP Display Control Register, BCL                |                                                                                                                                                 |         |        |
| h'd4                                            | BCL threshold current, 0..2047 (max ADC output ~1152)                                                                                           | 1000    | BCLTHR |
| h'd2                                            | BCL time constant. 0..15 → 0.5 .. 100msec                                                                                                       | 15      | BCLTM  |
| h'd3                                            | BCL loop gain. 0..1023. Bit 11 must be always set to 1.                                                                                         | 0       | BCLG   |
| h'd5                                            | BCL minimum contrast. 0..1023                                                                                                                   | 307     | BCLMIN |
| h'75                                            | Test register for BCL/EHT comp. function, register value:<br>1 stop ADC offset compensation<br>x>1 use x in place of input from Measurement ADC | 0       | BCLTST |
| FP Display Control Register, Deflection         |                                                                                                                                                 |         |        |
| h'73                                            | interlace offset, -2048..2047<br>this value is added to the SAWTOOTH output during one field                                                    | 0       | INTLC  |
| h'72                                            | discharge sample count for deflection retrace,<br>SAWTOOTH DAC output impedance is reduced for DSCC lines after vertical retrace.               | 7       | DSCC   |
| h'8f                                            | vertical discharge value,<br>SAWTOOTH output value during discharge operation, typically same as A0 init value for sawtooth                     | -1365   | DSCV   |
| h'7b                                            | EHT (electronic high tension) compensation coefficient. 0..1023                                                                                 | 0       | EHT    |
| h'7a                                            | EHT time constant. 0..15 → 0.5 .. 100msec                                                                                                       | 15      | EHTTM  |
| FP Display Control Register, Vertical Sawtooth  |                                                                                                                                                 |         |        |
| h'80                                            | DC offset of SAWTOOTH output,<br>this offset is independent of EHT compensation.                                                                | 0       | OFS    |
| h'8b                                            | accu0 init value                                                                                                                                | -1365   | A0     |
| h'8c                                            | accu1 init value                                                                                                                                | 900     | A1     |
| h'8d                                            | accu2 init value                                                                                                                                | 0       | A2     |
| h'8e                                            | accu3 init value                                                                                                                                | 0       | A3     |
| FP Display Control Register, East–West Parabola |                                                                                                                                                 |         |        |
| h'9b                                            | accu0 init value                                                                                                                                | -1121   | A0     |
| h'9c                                            | accu1 init value                                                                                                                                | 219     | A1     |
| h'9d                                            | accu2 init value                                                                                                                                | 479     | A2     |
| h'9e                                            | accu3 init value                                                                                                                                | -1416   | A3     |
| h'9f                                            | accu4 init value                                                                                                                                | 1052    | A4     |

<sup>1)</sup> The white drive values will become active only after writing the blue value WDB, latching of new values is indicated by setting the MSB of WDB.

**Table 3–3: Tables for the Calculation of Initialization values for Vertical Sawtooth and East–West Parabola**

| Vertical Deflection 50 Hz |   |         |        |         |
|---------------------------|---|---------|--------|---------|
|                           | a | b       | c      | d       |
| a0                        | 1 | –1365.3 | +682.7 | –682.7  |
| a1                        |   | 899.6   | –904.3 | +1363.4 |
| a2                        |   |         | 296.4  | 898.4   |
| a3                        |   |         |        | 585.9   |

| Vertical Deflection 60 Hz |   |         |         |         |
|---------------------------|---|---------|---------|---------|
|                           | a | b       | c       | d       |
| a0                        | 1 | –1365.3 | 682.7   | –682.7  |
| a1                        |   | 1083.5  | –1090.2 | 1645.5  |
| a2                        |   |         | 429.9   | –1305.8 |
| a3                        |   |         |         | 1023.5  |

| East–West Deflection 50 Hz |   |        |        |       |         |
|----------------------------|---|--------|--------|-------|---------|
|                            | a | b      | c      | d     | e       |
| a0                         | 1 | –341.3 | 1365.3 | –85.3 | 341.3   |
| a1                         |   | 111.9  | –899.6 | 84.8  | –454.5  |
| a2                         |   |        | 586.8  | 111.1 | 898.3   |
| a3                         |   |        |        | 72.1  | –1171.7 |
| a4                         |   |        |        |       | 756.5   |

| East–West Deflection 60 Hz |   |        |         |        |         |
|----------------------------|---|--------|---------|--------|---------|
|                            | a | b      | c       | d      | e       |
| a0                         | 1 | –341.3 | 1365.3  | –85.3  | 341.3   |
| a1                         |   | 134.6  | –1083.5 | 102.2  | –548.5  |
| a2                         |   |        | 849.3   | –161.2 | 1305.5  |
| a3                         |   |        |         | 125.6  | –2046.6 |
| a4                         |   |        |         |        | 1584.8  |

4. Specifications

4.1. Outline Dimensions

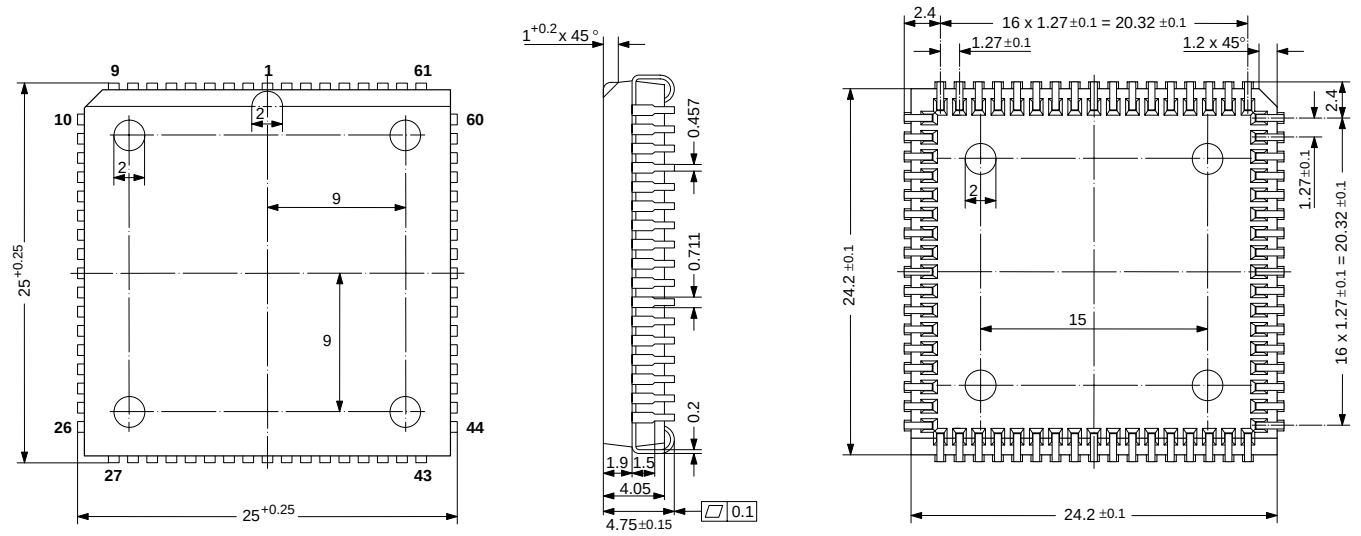


**Fig. 4-1:** VDP 3108 in 68-pin PLCC package  
Weight approx. 4.8 g                      Dimensions in mm

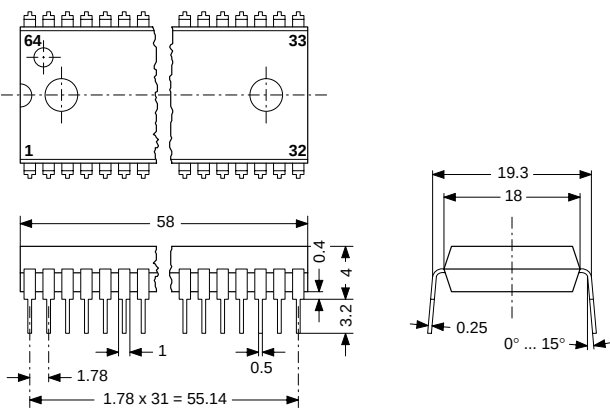


**Fig. 4-2:** VDP 3108 in 64-Pin S-DIL Plastic Package  
Weight approx. 9.0 g                      Dimensions in mm

4.2. Pin Connections and Short Descriptions

NC = not connected; leave vacant  
LV = if not used, leave vacant  
X = obligatory; connect as described in circuit diagram

| Pin No.        |                | Connection<br>(if not used) | Pin Name | Type | Short Description |
|----------------|----------------|-----------------------------|----------|------|-------------------|
| PLCC<br>68-pin | SDIL<br>64-pin |                             |          |      |                   |
| 1              | 32             | LV                          | MSY      |      | Main Sync         |
| 2              | 31             | X                           | RES      |      | Reset Input       |
| 3              | 30             | GND <sub>D</sub>            | TEST     |      | Test Pin          |

| Pin No.        |                | Connection<br>(if not used) | Pin Name          | Type | Short Description                 |
|----------------|----------------|-----------------------------|-------------------|------|-----------------------------------|
| PLCC<br>68-pin | SDIL<br>64-pin |                             |                   |      |                                   |
| 4              | 29             | ■ LV                        | CSY               |      | Composite Sync Output             |
| 5              | —              | ■ GND <sub>D</sub>          | Y7                |      | Picture Bus Luma (MSB)            |
| 6              | —              | ■ GND <sub>D</sub>          | Y6                |      | Picture Bus Luma                  |
| 7              | —              | ■ GND <sub>D</sub>          | Y5                |      | Picture Bus Luma                  |
| 8              | 28             | ■ X                         | V <sub>STBY</sub> |      | Stand-By Supply Voltage           |
| 9              | 27             | ■ X                         | HOUT              |      | Horizontal Drive Output           |
| 10             | 23             | ■ LV                        | CLK5              |      | 5 MHz Clock                       |
| 11             | —              | ■ GND <sub>D</sub>          | Y4                |      | Picture Bus Luma                  |
| 12             | —              | ■ GND <sub>D</sub>          | Y3                |      | Picture Bus Luma                  |
| 13             | 21             | ■ GND <sub>D</sub>          | Y2                |      | Picture Bus Luma                  |
| 14             | 20             | ■ GND <sub>D</sub>          | Y1                |      | Picture Bus Luma                  |
| 15             | 19             | ■ GND <sub>D</sub>          | Y0                |      | Picture Bus Luma (LSB)            |
| 16             | 18             | ■ X                         | GND <sub>D</sub>  |      | Ground, Digital Circuitry         |
| 17             | 17             | ■ X                         | XTAL2             |      | Crystal (out)                     |
| 18             | 16             | ■ X                         | XTAL1             |      | Crystal (in)                      |
| 19             | 15             | ■ X                         | V <sub>SUPD</sub> |      | Supply Voltage, Digital Circuitry |
| 20             | 14             | ■ X                         | SDA               |      | I <sup>2</sup> C Bus Data         |
| 21             | 13             | ■ GND <sub>D</sub>          | C0                |      | Picture Bus Chroma (LSB)          |
| 22             | 12             | ■ GND <sub>D</sub>          | C1                |      | Picture Bus Chroma                |
| 23             | —              | ■ GND <sub>D</sub>          | C2                |      | Picture Bus Chroma                |
| 24             | —              | ■ GND <sub>D</sub>          | C3                |      | Picture Bus Chroma                |
| 25             | —              | ■ GND <sub>D</sub>          | C4                |      | Picture Bus Chroma                |
| 26             | 10             | ■ X                         | SCL               |      | I <sup>2</sup> C Bus Clock        |
| 27             | —              | ■ GND <sub>D</sub>          | C5                |      | Picture Bus Chroma                |
| 28             | —              | ■ GND <sub>D</sub>          | C6                |      | Picture Bus Chroma                |
| 29             | —              | ■ GND <sub>D</sub>          | C7                |      | Picture Bus Chroma (MSB)          |
| 30             | 4              | ■ GND <sub>D</sub>          | PR0               |      | Picture Bus Priority (LSB)        |
| 31             | 3              | ■ GND <sub>D</sub>          | PR1               |      | Picture Bus Priority              |
| 32             | 2              | ■ GND <sub>D</sub>          | PR2               |      | Picture Bus Priority (MSB)        |
| —              | 1              | ■ X                         | VSUB              |      | Substrate                         |
| 33             | 6              | ■ LV                        | VERT              |      | Vertical Sawtooth Output          |

| Pin No.        |                | Connection<br>(if not used) | Pin Name                           | Type | Short Description                 |
|----------------|----------------|-----------------------------|------------------------------------|------|-----------------------------------|
| PLCC<br>68-pin | SDIL<br>64-pin |                             |                                    |      |                                   |
| 34             | 64             | GND <sub>O</sub>            | RIN                                |      | Analog Red Input                  |
| 35             | 5              | LV                          | EW                                 |      | Vertical Parabola                 |
| 36             | 63             | GND <sub>O</sub>            | GIN                                |      | Analog Green Input                |
| 37             | 62             | X                           | VRD/BCS                            |      | DAC Reference/Beam Current Safety |
| 38             | 61             | GND <sub>O</sub>            | BIN                                |      | Analog Blue Input                 |
| 39             | 60             | X                           | V <sub>SUPO</sub>                  |      | Supply Voltage, Analog Backend    |
| 40             | 59             | V <sub>SUPO</sub>           | ROUT                               |      | Analog Output Red                 |
| 41             | 58             | X                           | GND <sub>O</sub>                   |      | Ground, Analog Backend            |
| 42             | 57             | V <sub>SUPO</sub>           | GOUT                               |      | Analog Output Green               |
| 43             | 56             | GND <sub>O</sub>            | FBLIN                              |      | Fast Blank Input                  |
| 44             | 55             | V <sub>SUPO</sub>           | BOUT                               |      | Analog Output Blue                |
| 45             | 54             | GND <sub>D</sub>            | NC                                 |      | Not connected                     |
| 46             | 53             | GND <sub>O</sub>            | SENSE                              |      | Sense ADC Input                   |
| 47             | 52             | X                           | GND <sub>O</sub>                   |      | Ground, Analog Backend            |
| 48             | 51             | GND <sub>O</sub>            | RSW                                |      | Range Switch for Measurement ADC  |
| 49             | 50             | GND <sub>O</sub>            | RSW2                               |      | Range Switch2 for Measurement ADC |
| 50             | 49             | X                           | GND <sub>O</sub>                   |      | Ground, Analog Backend            |
| 51             | 48             | GND <sub>D</sub>            | NC                                 |      | Not connected                     |
| 52             | –              | GND <sub>D</sub>            | NC                                 |      | Not connected                     |
| 53             | –              | GND <sub>D</sub>            | NC                                 |      | Not connected                     |
| 54             | 47             | X                           | V <sub>SUPB</sub>                  |      | Supply Voltage, CLK20 Buffer      |
| 55             | 46             | LV                          | CLK20                              |      | 20 MHz System Clock Output        |
| 56             | 45             | X                           | V <sub>SUPF</sub>                  |      | Supply Voltage, Analog Frontend   |
| 57             | 44             | VRT                         | CIN                                |      | Chroma/Video 4 Analog Input       |
| 58             | 43             | X                           | GND <sub>F</sub>                   |      | Ground, Analog Frontend           |
| 59             | 42             | VRT                         | VIN1                               |      | Video 1 Analog Input              |
| 60             | –              | X                           | V <sub>SUB</sub> /GND <sub>B</sub> |      | Substrate/Ground CLK20 Buffer     |
| –              | 41             | X                           | GND <sub>B</sub>                   |      | Ground CLK20 Buffer               |
| 61             | 40             | VRT                         | VIN2                               |      | Video 2 Analog Input              |
| 62             | 39             | X                           | VRT                                |      | Reference Voltage Top             |
| 63             | 38             | VRT                         | VIN3                               |      | Video 3 Analog Input              |

| Pin No.        |                | Connection<br>(if not used)                                                                        | Pin Name | Type | Short Description              |
|----------------|----------------|----------------------------------------------------------------------------------------------------|----------|------|--------------------------------|
| PLCC<br>68-pin | SDIL<br>64-pin |                                                                                                    |          |      |                                |
| 64             | 37             |  GND <sub>F</sub> | ISGND    |      | Signal Ground for Analog Input |
| 65             | 36             |  H <sub>OUT</sub> | HFLB     |      | Horizontal Flyback Input       |
| 66             | 35             |  GND <sub>O</sub> | SAFETY   |      | Safety Input                   |
| 67             | 34             |  GND <sub>O</sub> | VPROT    |      | Vertical Protection Input      |
| 68             | 33             |  LV               | FSY      |      | Front Sync                     |

### 4.3. Pin Descriptions (pin numbers for 68–PLCC)

**Pin 1 – Main Sync Pulse MSY (Fig. 4–8)**  
This pin supplies the main sync information.

**Pin 2 – Reset Input RES (Fig. 4–5)**  
A low level on this pin resets the VDP3108.

**Pin 3 – Test Input TEST (Fig. 4–5)**  
This pin enables factory test modes. For normal operation it must be connected to ground.

**Pin 4 – Composite Sync Output CSY (Fig. 4–6)**  
This output supplies a standard composite sync signal that is compatible to the analog RGB output signals.

**Pin 5–7, 11–15 Picture Bus Luma L7 – L0 (Fig. 4–8)**  
The Picture Bus Luma lines carry the digital luminance data. The data are sampled at 20.25 MHz.  
In 5-bit RGB mode the 3 LSB L0,L1,L2 are the 1-bit R,G,B color signals.

**Pin 8 – Standby Supply Voltage V<sub>STDBY</sub>**  
In standby mode, only the clock oscillator and the horizontal drive circuitry are active.

**Pin 9 – Horizontal Drive HOUT (Fig. 4–9)**  
This open drain output supplies the the drive pulse for the horizontal output stage. The polarity and gating with the flyback pulse are selectable by software.

**Pin 10 – CCU 5 MHz Clock Output Clk5 (Fig. 4–6)**  
This pin provides a clock frequency for the TV microcontroller, e.g. a CCU3000 controller.

**Pin 16 – Ground, Digital Circuitry GND<sub>D</sub>**

**Pin 17,18 – XTAL1 Crystal Input and XTAL2 Crystal Output (Fig. 4–10)**  
These pins are connected to an 20.25 MHz crystal oscillator is digitally tuned by integrated shunt capacitances. The Clk20 and Clk5 clock signals are derived from this oscillator. An external clock can be fed into XTAL1. In this case clock frequency adjustment must be switched off.

**Pin 19 – Supply Voltage, Digital Circuitry V<sub>SUPD</sub>**

**Pin 20 – I<sup>2</sup>C Data SDA (Fig. 4–18)**  
This pin connects to the I<sup>2</sup>C bus data line.

**Pin 21–25, 27–29 – Picture Bus Chroma C0–C7 (Fig. 4–8)**  
The Picture Bus Chroma lines carry the digital UV chrominance data. The data are sampled at 10.125 MHz and multiplexed. The UV multiplex is reset for each TV line.

In 5-bit RGB mode the two LSB UV0,UV1 are the C0,C1 bits of the 5-bit RGB signal. If C1 is 0 the RGB signals are displayed in half contrast mode; if C1 is 1 the 4 bits C0, R, G, B address one of the 16 entries of the color map.

**Pin 26 – I<sup>2</sup>C Clock SCL (Fig. 4–18)**  
This pin connects to the I<sup>2</sup>C bus clock line.

**Pin 30–32 – Picture Bus Priority PR0–PR2 (Fig. 4–8)**  
The Picture Bus Priority lines carry the digital priority selection signals. The priority interface allows digital switching of up to 8 sources to the backend processor. Switching for different sources is prioritized and can be on a per pixel basis.

**Pin 33 – Vertical Sawtooth Output VERT (Fig. 4–11 )**  
This pin supplies the drive signal for the vertical output stage. The drive signal is generated with 15-bit precision by the internal Fast Processor. The analog voltage is generated with a 4 bit R-DAC and uses digital noise shaping.

**Pin 34,36,38 – Analog RGB Input RIN, GIN, BIN (Fig. 4–12)**

These pins are used to insert an external analog RGB signal, e.g. from a SCART connector, to the analog RGB outputs. The analog backend provides separate brightness and contrast settings for the external analog RGB signals.

**Pin 35 – East–West Parabola Output EW (Fig. 4–11)**  
This pin supplies the parabola signal for the East–West correction. The drive signal is generated with 15 bit precision by the internal Fast Processor. The analog volt-

age is generated by a 4 bit R-DAC and uses digital noise shaping.

**Pin 37 – DAC Reference Decoupling/Beam Current Safety VRD/BCS (Fig. 4–13)**

Via this pin the DAC reference voltage is decoupled by an external capacitance. The DAC output currents depend on this voltage, therefore a pulldown transistor can be used to shut off all beam currents. A decoupling capacitor of 3.3 $\mu$ F//100nF is required.

**Pin 39 – Supply Voltage, Analog Backend  $V_{SUPO}$**

**Pin 40, 42, 44 – Analog RGB Output ROUT, GOUT, BOUT (Fig. 4–14)**

This are the analog Red/Green/Blue outputs of the backend. The outputs sink a current of max. 8mA.

**Pin 41, 47, 50 – Ground, Analog Backend  $GND_O$**

**Pin 43 – Fast Blank Input FBLIN (Fig. 4–12)**

This pin is used to switch the RGB outputs to the external analog RGB inputs.

**Pin 45, 51–53 – not connected**

**Pin 46 – Measurement ADC Input SENSE (Fig. 4–12)**

This is the input of the analog digital converter for the picture and tube measurement.

**Pin 48,49 – Range Switch for Meas. ADC, RSW, RSW2 (Fig. 4–9)**

These pins are open drain pulldown outputs. RSW is switched off during cutoff and whitedrive measurement. RSW2 is switched off during cutoff measurement only.

**Pin 54, 60 – Supply Voltage, Clk20 Output  $V_{SUPB}$ , Ground Clk20 Output  $GND_B$**

**Pin 55 – Main Clock Output Clk20 (Fig. 4–7)**

This is the 20.25 main system clock, that is used by all circuits in a high-end VDP system. All external timing is derived from this clock.

**Pin 56 – Supply Voltage, Analog Frontend  $V_{SUPI}$**

**Pin 57 – Chroma Input CIN (Fig. 4–15)**

This pin is connected to the S-VHS chroma signal. A resistive divider is used to bias the input signal to the middle of the converter input range. CIN can only be connected to the chroma (Video 2) AD converter. The signal must be AC-coupled.

**Pin 58 – Ground, Analog Frontend  $GND_F$**

**Pin 59,61,63 – Video Input 1–3 VIN1,VIN2,VIN3 (Fig. 4–16)**

These are the analog video inputs. A CVBS or S-VHS luma signal is converted using the luma (Video 1) AD converter. The VIN1 input can also be switched to the chroma (Video 2) ADC. The input signal must be AC-coupled.

**Pin 60 – Ground, Clock 20 Buffer,  $GND_B$**

**Pin 62 – Reference Voltage Top VRT (Fig. 4–17)**

Via this pin, the reference voltage for the AD converters is decoupled. The pin is connected with 10  $\mu$ F//47 nF to the Signal Ground Pin.

**Pin 64 – Signal Ground for Analog Input ISGND**

This is the high quality ground reference for the video input signals.

**Pin 65 – Horizontal Flyback Input HFLB (Fig. 4–12)**

This pin is connected to the horizontal flyback pulse from the horizontal deflection stage. This flyback pulse is used for synchronization of the display processor and for generation of the display clock.

**Pin 66 – Safety Input SAFETY (Fig. 4–12)**

**Pin 67 – Vertical Protection Input VPROT (Fig. 4–12)**

The vertical protection circuitry prevents the picture tube from burn-in in the event of a malfunction of the vertical deflection stage. During vertical blanking, a signal level of 2.5V is sensed. If a negative edge cannot be detected, the RGB output signals are blanked.

**Pin 68 – Front Sync Pulse FSF (Fig. 4–8)**

This pin supplies the front sync information.

4.4. Pin Configuration

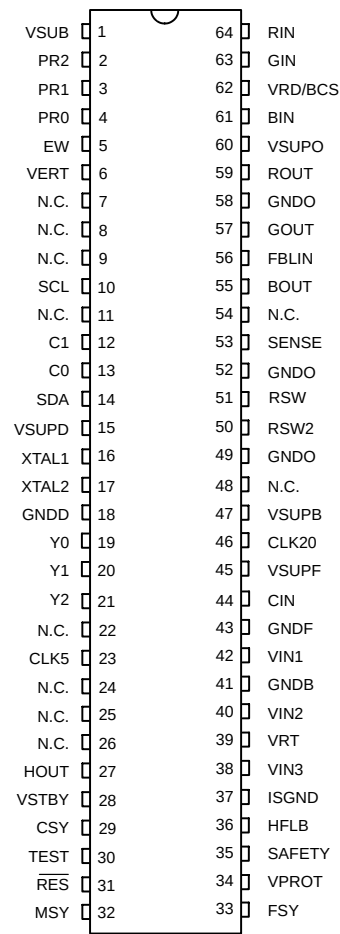


Fig. 4-3: VDP 3108 in 64-pin Shrink DIL package

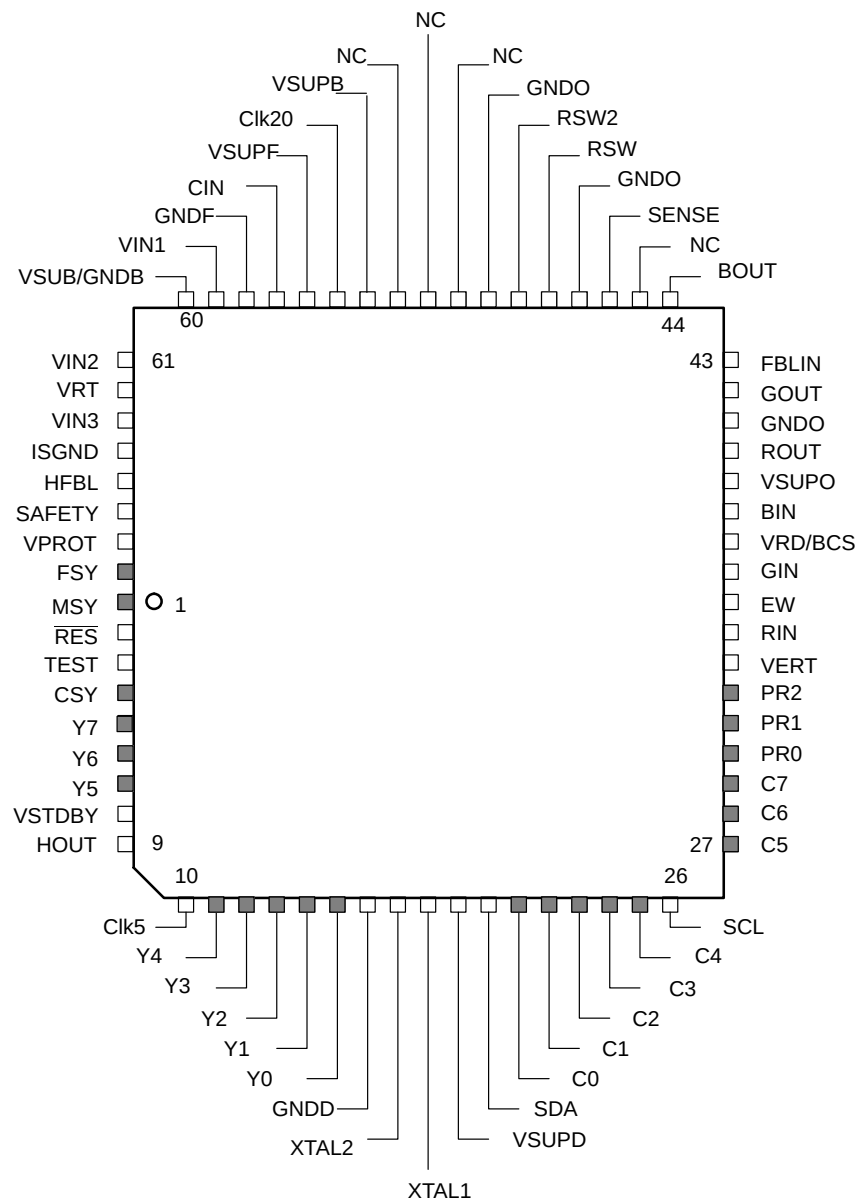


Fig. 4-4: VDP 3108 in 68-pin PLCC package

4.5. Pin Circuits




Fig. 4-5: Input pins 2, 3




Fig. 4-6: Output pin 4, 10

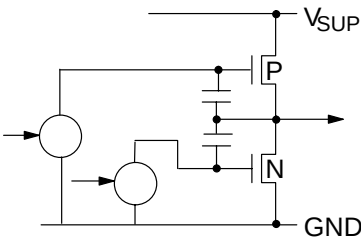


Fig. 4-7: Output pin 55




Fig. 4-8: I/O pins 1, 5, 6, 7, 11-15, 21-25, 27-32, 68




Fig. 4-9: Output pin 9, 48, 49

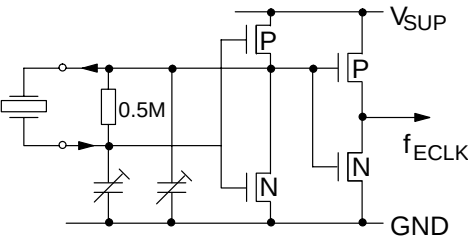


Fig. 4-10: Input pins 17, 18

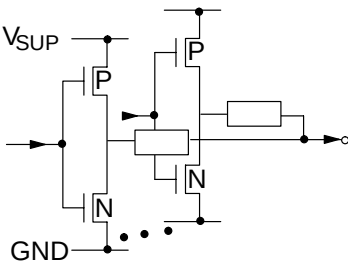


Fig. 4-11: Output pins 33, 35

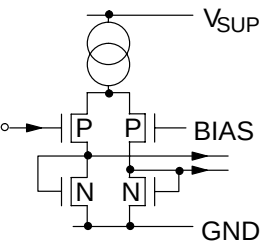


Fig. 4-12: Input pins 34, 36, 38, 65, 66, 67

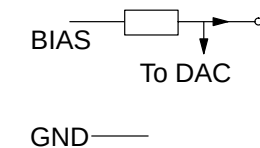


Fig. 4-13: Output pins 37

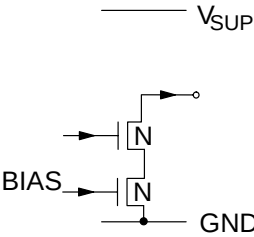


Fig. 4-14: Output pins 40, 42, 44




Fig. 4-15: Chroma input pin 57

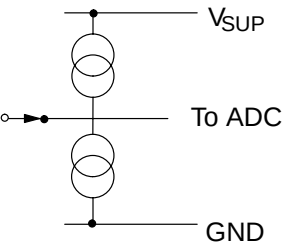


Fig. 4-16: Input pin 59, 61, 63

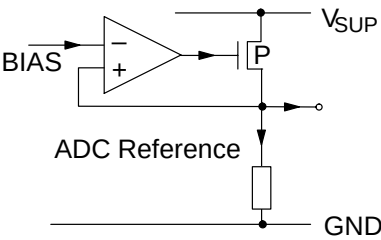


Fig. 4-17: Pin 62




Fig. 4-18: Pins 20, 26,

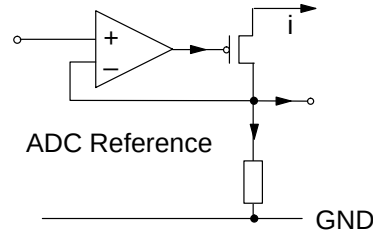


Fig. 4-19: Pin 46




Fig. 4-20: Pin 43

## 4.6. Electrical Characteristics

### 4.6.1. Absolute Maximum Ratings

| Symbol    | Parameter                         | Pin No. | Min. | Max.          | Unit |
|-----------|-----------------------------------|---------|------|---------------|------|
| $T_A$     | Ambient Operating Temperature     | –       | 0    | 65            | ° C  |
| $T_S$     | Storage Temperature               | –       | –40  | 125           | ° C  |
| $V_{SUP}$ | Supply Voltage, all Supply Inputs |         | –0.3 | 6             | V    |
| $V_I$     | Input Voltage, all Inputs         |         | –0.3 | $V_{SUP}+0.3$ | V    |
| $V_O$     | Output Voltage, all Outputs       |         | –0.3 | $V_{SUP}+0.3$ | V    |

### 4.6.2. Recommended Operating Conditions

| Symbol     | Parameter                        | Pin No.         | Min. | Typ.  | Max. | Unit |
|------------|----------------------------------|-----------------|------|-------|------|------|
| $T_A$      | Ambient Operating Temperature    | –               | 0    | –     | 65   | 5C   |
| $V_{SUP}$  | Supply Voltages, all Supply Pins |                 | 4.75 | 5.0   | 5.25 | V    |
| $f_{XTAL}$ | Clock Frequency                  | XTAL1,<br>XTAL2 |      | 20.25 |      | MHz  |

### 4.6.3. Characteristics

| Symbol       | Parameter                   | Pin No.     | Min. | Typ. | Max. | Unit |
|--------------|-----------------------------|-------------|------|------|------|------|
| $I_{VSUPB}$  | Current Consumption Backend | $V_{SUPB}$  | 58   | 70   | 85   | mA   |
| $I_{VSUPF}$  | Current Consumption         | $V_{SUPF}$  |      | 40   |      | mA   |
| $I_{VSUPD}$  | Current Consumption         | $V_{SUPD}$  |      | 140  |      | mA   |
| $I_{VSUPO}$  | Current Consumption         | $V_{SUPO}$  |      | 5    |      | mA   |
| $I_{VSTDBY}$ | Current Consumption         | $V_{STDBY}$ |      | 3    |      | mA   |
| $P_{TOT}$    | Total Power Dissipation     |             |      | 1.3  |      | W    |


### 4.6.4. Recommended Crystal Characteristics

| Symbol           | Parameter                                                     | Min. | Typ.      | Max.   | Unit |
|------------------|---------------------------------------------------------------|------|-----------|--------|------|
| $T_A$            | Operating Ambient Temperature                                 | 0    | –         | 65     | ° C  |
| $f_P$            | Parallel Resonance Frequency with Load Capacitance $C_L=10pF$ | –    | 20.250000 | –      | MHz  |
| $\Delta f_P/f_P$ | Accuracy of Adjustment                                        | –    | –         | +/- 20 | ppm  |
| $\Delta f_P/f_P$ | Frequency Temperature Drift                                   | –    | –         | +/- 30 | ppm  |
| $C_0$            | Shunt Capacitance                                             | 3    | –         | 6      | pF   |

| Symbol | Parameter            | Min. | Typ. | Max. | Unit |
|--------|----------------------|------|------|------|------|
| $C_1$  | Motional Capacitance | 13   | –    | 20   | fF   |
| $R_f$  | Series Resistance    |      |      | 40   | W    |

### Characteristics, Priority Bus: Luma, Chroma, Priority, FSync, MSync

| Symbol    | Parameter              | Pin No.                                     | Min. | Typ. | Max. | Unit | Test Conditions                                                                                                                                          |
|-----------|------------------------|---------------------------------------------|------|------|------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| $V_{OL}$  | Output Low Voltage     | Y[7..0]<br>C[7..0]<br>PR[2:0]<br>MSY<br>FSY | –    | 0.25 | 0.5  | V    | $I_{OL} = 8\text{ mA}$ , strength 3<br>$I_{OL} = 6\text{ mA}$ , strength 2<br>$I_{OL} = 4\text{ mA}$ , strength 1<br>$I_{OL} = 2\text{ mA}$ , strength 0 |
| $V_{OH}$  | Output High Voltage    |                                             | 1.8  | 2.0  | –    | V    | $-I_{OL} = 10\text{ }\mu\text{A}$<br>$C_{LOAD} = 71\text{pF}$                                                                                            |
| $t_{OH}$  | Output Hold Time       |                                             | 5    | 14   | TBD  | ns   | $C_{LOAD} = 71\text{pF}$<br>$I_{PL} = 8.4\text{ mA}$                                                                                                     |
| $t_{ODL}$ | Output Delay Time      |                                             | –    | –    | 35   | ns   | $C_{LOAD} = 71\text{pF}$<br>$I_{PL} = 8.4\text{ mA}$                                                                                                     |
| $I_{PL}$  | Output Pull-up Current |                                             | 1.2  | 1.5  | 1.8  | mA   | $V_{OL} = 0\text{V}$                                                                                                                                     |
| $V_{IL}$  | Input Low Voltage      |                                             | –    | –    | 0.8  | V    |                                                                                                                                                          |
| $V_{IH}$  | Input High Voltage     |                                             | 1.5  | –    | –    | V    |                                                                                                                                                          |
| $t_{IS}$  | Input Setup Time       |                                             | 10   | –    | –    | ns   |                                                                                                                                                          |
| $t_{IH}$  | Input Hold Time        |                                             | 0    | –    | –    | ns   |                                                                                                                                                          |

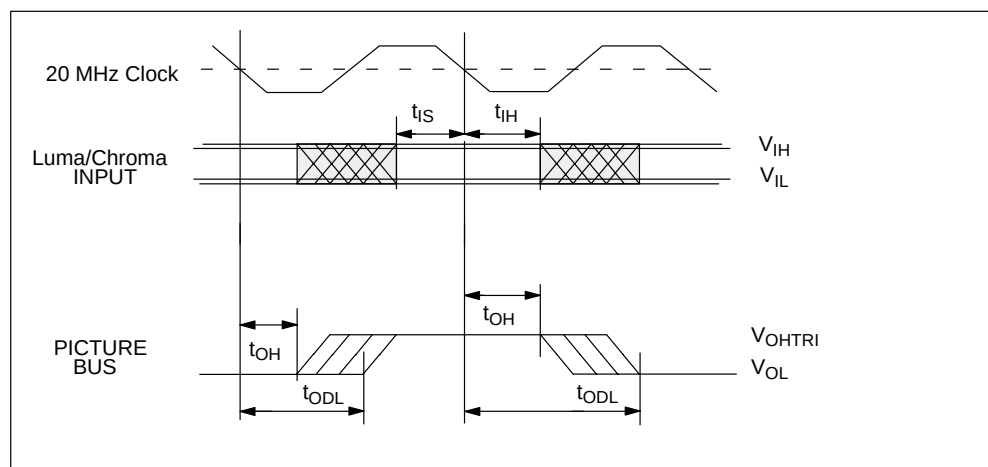

**Characteristics, Combined Sync Output, 5 MHz Clock Output**

| Symbol   | Parameter              | Pin No.     | Min. | Typ. | Max.      | Unit | Test Conditions            |
|----------|------------------------|-------------|------|------|-----------|------|----------------------------|
| $V_{OL}$ | Output Low Voltage     | CSY<br>Clk5 | –    | –    | 0.4       | V    | $I_{OL} = 1.6 \text{ mA}$  |
| $V_{OH}$ | Output High Voltage    |             | 4.0  | –    | $V_{SUP}$ | V    | $-I_{OL} = 1.6 \text{ mA}$ |
| $t_{OT}$ | Output Transition Time | Clk5        | –    | 50   |           | ns   | $C_{LOAD} = 30\text{pF}$   |
| $t_{OT}$ | Output Transition Time | CSY         | –    | 10   | 20        | ns   | $C_{LOAD} = 30\text{pF}$   |

**Characteristics, Horizontal Drive Output**

| Symbol   | Parameter                                 | Pin No. | Min. | Typ. | Max. | Unit | Test Conditions           |
|----------|-------------------------------------------|---------|------|------|------|------|---------------------------|
| $V_{OL}$ | Output Low Voltage                        | HOUT    | –    | –    | 0.4  | V    | $I_{OL} = 10 \text{ mA}$  |
| $V_{OH}$ | Output High Voltage<br>(Open Drain Stage) |         | –    | –    | 8    | V    | external pull-up resistor |
| $t_{OF}$ | Output Fall Time                          |         | –    | 8    | 20   | ns   | $C_{LOAD} = 30\text{pF}$  |

**Characteristics, Reset Input, Test Input**

| Symbol   | Parameter          | Pin No.                         | Min. | Typ. | Max. | Unit | Test Conditions |
|----------|--------------------|---------------------------------|------|------|------|------|-----------------|
| $V_{IL}$ | Input Low Voltage  | $\overline{\text{RES}}$<br>TEST | –    | –    | 2.0  | V    |                 |
| $V_{IH}$ | Input High Voltage |                                 | 3.1  | –    | –    | V    |                 |

**Characteristics, 20 MHz Clock Input/Output, External Clock Input (XTAL1),  $V_R = (\text{spec value}/V_{SUP}) \times 5V$** 

| Symbol     | Parameter              | Pin No. | Min.          | Typ.    | Max.          | Unit     | Test Conditions                        |
|------------|------------------------|---------|---------------|---------|---------------|----------|----------------------------------------|
| $V_{DCAV}$ | DC Average             | Clk20   | $V_R/2 - 0.3$ | $V_R/2$ | $V_R/2 + 0.3$ | V        | $C_{LOAD} = 30\text{pF}$               |
| $V_{PP}$   | $V_{OUT}$ Peak to Peak |         | 1.3           | 1.6     | –             | $V_R$    | $C_{LOAD} = 30\text{pF}$               |
| $t_{OT}$   | Output Transition Time |         | –             | –       | 18            | ns       | $C_{LOAD} = 30\text{pF}$               |
| $V_{IT}$   | Input Trigger Level    |         | 2.1           | 2.5     | 2.9           | V        | only for test purposes                 |
| $V_I$      | Clock Input Voltage    | XTAL1   | 1.3           | –       | –             | $V_{PP}$ | capacitive coupling used<br>XTAL2 open |

**Characteristics, I<sup>2</sup>C Bus Interface**

| Symbol               | Parameter                    | Pin No.     | Min. | Typ. | Max.       | Unit   | Test Conditions                              |
|----------------------|------------------------------|-------------|------|------|------------|--------|----------------------------------------------|
| V <sub>IL</sub>      | Input Low Voltage            | SDA,<br>SCL | –    | –    | 1.5        | V      |                                              |
| V <sub>IH</sub>      | Input High Voltage           |             | 3.0  | –    | –          | V      |                                              |
| V <sub>OL</sub>      | Output Low Voltage           |             | –    | –    | 0.4<br>0.6 | V<br>V | I <sub>I</sub> = 3mA<br>I <sub>I</sub> = 6mA |
| V <sub>IH</sub>      | Input Capacitance            |             | –    | –    | TBD        | pF     |                                              |
| I <sub>I</sub>       | Input Leakage Current        |             | –1   | –    | 1          | μA     |                                              |
| t <sub>F</sub>       | Signal Fall Time             |             | –    | –    | 300        | ns     | C <sub>L</sub> = 400 pF                      |
| t <sub>R</sub>       | Signal Rise Time             |             | –    | –    | 300        | ns     | C <sub>L</sub> = 400 pF                      |
| f <sub>SCL</sub>     | Clock Frequency              | SCL         | 0    | –    | 400        | kHz    |                                              |
| t <sub>LOW</sub>     | Low Period of SCL            |             |      | –    | –          | ns     |                                              |
| t <sub>HIGH</sub>    | High Period of SCL           |             |      | –    | –          | ns     |                                              |
| t <sub>SU Data</sub> | Data Set Up Time to SCL high | SDA         |      | –    | –          | ns     |                                              |
| t <sub>HD Data</sub> | DATA Hold Time to SCL low    |             | 0    | –    | –          | ns     |                                              |

**Characteristics, Sense ADC Input**

| Symbol            | Parameter                         | Pin No.   | Min. | Typ. | Max.             | Unit | Test Conditions                            |
|-------------------|-----------------------------------|-----------|------|------|------------------|------|--------------------------------------------|
| V <sub>I</sub>    | Input Voltage Range               | SENS<br>E | 0    | –    | V <sub>Sup</sub> | V    |                                            |
| V <sub>I255</sub> | Input Voltage for code 255 output |           | 1.4  | 1.54 | 1.7              | V    | read cutoff blue register                  |
| C <sub>0</sub>    | Digital Output for 0 Input        |           |      |      | 16               | LSB  | offset check,<br>read cutoff blue register |
| R <sub>I</sub>    | Input Impedance                   |           | 1    | –    | –                | MΩ   |                                            |

**Characteristics, Range Switch Outputs**

| Symbol            | Parameter            | Pin No.     | Min. | Typ. | Max. | Unit | Test Conditions         |
|-------------------|----------------------|-------------|------|------|------|------|-------------------------|
| R <sub>ON</sub>   | Output On Resistance | RSW<br>RSW2 | –    | –    | 50   | W    | I <sub>OL</sub> = 10 mA |
| I <sub>Max</sub>  | Maximum Current      |             | –    | –    | 15   | mA   |                         |
| I <sub>LEAK</sub> | Leakage Current      |             | –    | –    | 600  | nA   | RSW High Impedance      |
| C <sub>IN</sub>   | Input Capacitance    |             | –    | –    |      | pF   |                         |

**Characteristics, Horizontal Flyback Input**

| Symbol      | Parameter                                     | Pin No. | Min. | Typ. | Max. | Unit | Test Conditions                                |
|-------------|-----------------------------------------------|---------|------|------|------|------|------------------------------------------------|
| $V_{IL}$    | Input Low Voltage                             | HFLB    | –    | –    | 1.8  | V    |                                                |
| $V_{IH}$    | Input High Voltage                            |         | 2.6  | –    | –    | V    |                                                |
| $V_{IHST}$  | Input Hysteresis                              |         | 0.1  | –    | –    | V    |                                                |
| $PSRR_{HF}$ | Power Supply Rejection Ratio of Trigger Level |         | 0    |      |      | dB   | F = 20 MHz                                     |
| $PSRR_{MF}$ | Power Supply Rejection Ratio of Trigger Level |         | –20  |      |      | dB   | F < 15 kHz                                     |
| $PSRR_{LF}$ | Power Supply Rejection Ratio of Trigger Level |         | –40  |      |      | dB   | F < 100 Hz                                     |
| $t_{PID}$   | Internal Delay                                |         |      |      | 12   | ns   | slew rate 500mV / ns<br>swing 1V <sub>pp</sub> |

**Characteristics, Vertical Protection Input**

| Symbol     | Parameter          | Pin No. | Min. | Typ. | Max. | Unit | Test Conditions |
|------------|--------------------|---------|------|------|------|------|-----------------|
| $V_{IL}$   | Input Low Voltage  | VPROT   | –    | –    | 1.8  | V    |                 |
| $V_{IH}$   | Input High Voltage |         | 2.6  | –    | –    | V    |                 |
| $V_{IHST}$ | Input Hysteresis   |         | 0.1  | –    | –    | V    |                 |

**Characteristics, Vertical Safety Input**

| Symbol     | Parameter                | Pin No. | Min. | Typ. | Max. | Unit | Test Conditions |
|------------|--------------------------|---------|------|------|------|------|-----------------|
| $V_{ILA}$  | Input Low Voltage        | SAFE-TY | –    | –    | 1.8  | V    |                 |
| $V_{IHA}$  | Input High Voltage       |         | 2.6  | –    | –    | V    |                 |
| $V_{ILA}$  | Input Low Voltage        |         | –    | –    | 3.1  | V    |                 |
| $V_{IHA}$  | Input High Voltage       |         | 3.9  | –    | –    | V    |                 |
| $V_{IHST}$ | Input Hysteresis A and B |         | 0.1  | –    | –    | V    |                 |
| $t_{PID}$  | Internal Delay           |         |      |      | 100  | ns   |                 |

**Characteristics, Vertical, East–West Drive Output**

| Symbol     | Parameter                         | Pin No.    | Min. | Typ. | Max. | Unit       | Test Conditions |
|------------|-----------------------------------|------------|------|------|------|------------|-----------------|
| $V_O$      | Output Voltage Range              | EW<br>VERT | 0.1  |      | 4.9  | V          |                 |
| PSSR       | Power Supply Rejection Ratio      |            |      | 0    |      | dB         |                 |
| $R_{dacn}$ | R–DAC Output Resistance           |            | 1.0  | 1.25 | 1.7  | k $\Omega$ |                 |
| $R_{dacd}$ | R–DAC Output Resistance discharge |            | 0.47 | 0.65 | 0.8  | k $\Omega$ |                 |

**Characteristics, DAC Reference, BEAM Current Safety Output**

at  $T_A = 0$  to  $65\text{ }^{\circ}\text{C}$ ,  $V_{SUPO} = 4.75$  to  $5.25\text{ V}$ ,  $f = 20.25\text{ MHz}$  for min./max.–values

at  $T_C = 60\text{ }^{\circ}\text{C}$ ,  $V_{SUPO} = 5\text{ V}$ ,  $f = 20.25\text{ MHz}$  for typical values

| Symbol       | Parameter                  | Pin No.     | Min. | Typ. | Max. | Unit       | Test Conditions |
|--------------|----------------------------|-------------|------|------|------|------------|-----------------|
| $V_{DACREF}$ | DAC–Ref. Voltage           | VRD/<br>BCS | 2.38 | 2.52 | 2.67 | V          |                 |
|              | DAC–Ref.–Output resistance | VRD/<br>BCS | 18   | 25   | 32   | k $\Omega$ |                 |

**Characteristics, R,G,B D/A Converters, External Analog RGB Voltage/Current DA Converters**at  $T_A = 0$  to  $65\text{ }^{\circ}\text{C}$ ,  $V_{\text{SUPO}} = 4.75$  to  $5.25\text{ V}$ ,  $f = 20.25\text{ MHz}$  for min./max.-valuesat  $T_C = 60\text{ }^{\circ}\text{C}$ ,  $V_{\text{SUPO}} = 5\text{ V}$ ,  $f = 20.25\text{ MHz}$  for typical values

| Symbol           | Parameter                                                                                                 | Pin No.                | Min. | Typ. | Max. | Unit  | Test Conditions                                                                                  |
|------------------|-----------------------------------------------------------------------------------------------------------|------------------------|------|------|------|-------|--------------------------------------------------------------------------------------------------|
|                  | <b>RGB-DACs</b><br>Resolution                                                                             |                        |      | 10   |      | bits  |                                                                                                  |
| $I_{\text{OUT}}$ | Full Scale Output Current                                                                                 | ROUT,<br>GOUT,<br>BOUT | 3.1  | 3.75 | 4.5  | mA    |                                                                                                  |
| $I_{\text{OUT}}$ | Differential Nonlinearity                                                                                 |                        |      |      | 0.5  | LSB   |                                                                                                  |
| $I_{\text{OUT}}$ | Integral Nonlinearity                                                                                     |                        |      |      | 1    | LSB   |                                                                                                  |
| $I_{\text{OUT}}$ | Glitch Pulse                                                                                              |                        |      | 0.5  |      | pAsec | Ramp, line is terminated on both ends with 50Ohms                                                |
| $I_{\text{OUT}}$ | Rise and Fall Time                                                                                        |                        |      | 3    |      | nsec  | 10% to 90%, 90% to 10%                                                                           |
| $I_{\text{OUT}}$ | Intermodulation                                                                                           |                        |      |      | -50  | dB    | 2/2.5MHz Full Scale                                                                              |
| $I_{\text{OUT}}$ | Signal to Noise                                                                                           |                        | +50  |      |      | dB    | Signal: 1MHz Full Scale<br>Bandwidth: 10MHz                                                      |
| $I_{\text{OUT}}$ | Match R-G, R-B, G-B                                                                                       |                        | -2   |      | 2    | %     |                                                                                                  |
|                  | R/B/G Crosstalk<br>one channel talks<br>two channels talk                                                 |                        |      |      | -46  | dB    | passive channel<br>$I_{\text{OUT}} = 1.88\text{mA}$<br><br>Crosstalk-Signal:<br>1.25MHz 3.75mApp |
|                  | RGB Input Crosstalk from<br>external RGB<br>one channel talks<br>two channels talk<br>three channels talk |                        |      |      | -50  | dB    | passive channel<br>$I_{\text{OUT}} = 1.88\text{mA}$<br><br>Crosstalk-Signal:<br>1.25MHz 3.75mApp |

| Symbol           | Parameter                             | Pin No.                | Min. | Typ. | Max. | Unit             | Test Conditions         |
|------------------|---------------------------------------|------------------------|------|------|------|------------------|-------------------------|
|                  | <b>Brightness–DACs</b><br>Resolution  |                        |      | 9    |      | bits             |                         |
| I <sub>BR</sub>  | Full Scale Output Current             | ROUT,<br>GOUT,<br>BOUT | 39.2 | 40   | 40.8 | %                | ref to max. digital RGB |
| I <sub>BR</sub>  | Full Scale Output Current typical     |                        |      | 1.5  |      | mA <sub>pp</sub> |                         |
| I <sub>BR</sub>  | differential nonlinearity             |                        |      |      | 0.5  | LSB              |                         |
| I <sub>BR</sub>  | integral nonlinearity                 |                        |      |      | 1    | LSB              |                         |
| I <sub>BR</sub>  | Match R–G, R–B, G–B                   |                        | –2   |      | 2    | %                |                         |
| I <sub>BR</sub>  | Match to digital RGB<br>R–R, G–G, B–B |                        | –2   |      | 2    | %                |                         |
|                  |                                       |                        |      |      |      |                  |                         |
|                  | <b>Cutoff–DACs</b><br>Resolution      |                        |      | 9    |      | bits             |                         |
| I <sub>CUT</sub> | Full Scale Output Current             | ROUT,<br>GOUT,<br>BOUT | 58.8 | 60   | 61.2 | %                | ref to max. digital RGB |
| I <sub>CUT</sub> | Full Scale Output Current typical     |                        |      | 2.25 |      | mA <sub>pp</sub> |                         |
| I <sub>CUT</sub> | differential nonlinearity             |                        |      |      | 0.5  | LSB              |                         |
| I <sub>CUT</sub> | integral nonlinearity                 |                        |      |      | 1    | LSB              |                         |
| I <sub>CUT</sub> | Match to digital RGB<br>R–R, G–G, B–B |                        | –2   |      | 2    | %                |                         |
|                  |                                       |                        |      |      |      |                  |                         |
|                  | <b>Ultrablack–DACs</b><br>Resolution  |                        |      | 1    |      | bits             |                         |
| I <sub>UB</sub>  | Full Scale Output Current             | ROUT,<br>GOUT,<br>BOUT | 19.6 | 20   | 20.4 | %                | ref to max. digital RGB |
|                  | Full Scale Output Current typical     |                        |      | 0.75 |      | mA               |                         |
|                  | Match to digital RGB<br>R–R, G–G, B–B |                        | –2   |      | 2    | %                |                         |
|                  |                                       |                        |      |      |      |                  |                         |

| Symbol             | Parameter                                                                                    | Pin No.                | Min. | Typ.       | Max. | Unit | Test Conditions                                                 |
|--------------------|----------------------------------------------------------------------------------------------|------------------------|------|------------|------|------|-----------------------------------------------------------------|
|                    | <b>Ext. RGB Brightn. DACs Resolution</b>                                                     |                        |      | 9          |      | bits |                                                                 |
| I <sub>EXBR</sub>  | Full Scale Output Current of Ex. Brightness DACs                                             | ROUT,<br>GOUT,<br>BOUT | 39.2 | 40         | 40.8 | %    | ref to max. Digital RGB                                         |
|                    | Full Scale Output Current of Ex. Brightness DACs typical                                     |                        |      | 1.5        |      | mA   |                                                                 |
|                    | differential nonlinearity                                                                    |                        |      |            | 0.5  | LSB  |                                                                 |
|                    | integral nonlinearity                                                                        |                        |      |            | 1    | LSB  |                                                                 |
|                    | Match R-G, R-B, G-B                                                                          |                        | -2   |            | 2    | %    |                                                                 |
|                    | Match to digital RGB R-R, G-G, B-B                                                           |                        | -2   |            | 2    | %    |                                                                 |
|                    |                                                                                              |                        |      |            |      |      |                                                                 |
|                    | <b>Ext. RGB V/I-DACs Resolution</b>                                                          |                        |      | 9          |      | bits |                                                                 |
| I <sub>EXOUT</sub> | Full Scale Output Current                                                                    | ROUT<br>GOUT<br>BOUT   | 96   | 100        | 104  | %    | ref to max. Digital RGB<br>V <sub>IN</sub> =0.7 contrast = 323  |
|                    | Full Scale Output Current typical                                                            |                        |      | 3.75       |      | mA   | same as Digital RGB                                             |
| CR                 | Contrast adjust Range                                                                        |                        |      | 16:51<br>1 |      |      |                                                                 |
|                    | Gain Match R-G, R-B, G-B                                                                     |                        | -2   |            | 2    | %    | measured at RGB Outputs<br>V <sub>IN</sub> = 0.7 V Contrast=323 |
|                    | Gain Match to RGB-DACs R-R, G-G, B-B                                                         |                        | -4   |            | 4    | %    |                                                                 |
|                    | R/B/G Input Crosstalk one channel talks two channels talk                                    | ROUT<br>GOUT<br>BOUT   |      |            | -46  | dB   | passive channel:<br>V <sub>IN</sub> = 0.7V contrast =323.       |
|                    | RGB Input Crosstalk from internal RGB one channel talks two channels talk tree channels talk | ROUT<br>GOUT<br>BOUT   |      |            | -50  | dB   | Crosstalk Signal:<br>1.25MHz 3.75mApp                           |

| Symbol             | Parameter                                     | Pin No.              | Min.       | Typ. | Max. | Unit            | Test Conditions                                                                                                       |
|--------------------|-----------------------------------------------|----------------------|------------|------|------|-----------------|-----------------------------------------------------------------------------------------------------------------------|
|                    | RGB Input Noise & Distortion                  | ROUT<br>GOUT<br>BOUT |            |      | −50  | dB              | V <sub>IN</sub> =0.7Vpp 1MHz<br>contrast = 323<br>Bandwidth: 10MHz                                                    |
|                    | RGB Input Bandwidth −3dB                      |                      | 10         | 15   | –    | MHz             | V <sub>IN</sub> = 0.7Vpp contrast =323                                                                                |
|                    | RGB Input THD                                 |                      | −50<br>−40 |      |      | dB<br>dB        | Input signal 1 MHz<br>Input signal 6 MHz<br>V <sub>IN</sub> = 0.7Vpp contrast =323                                    |
|                    | differential nonlinearity of Contrast Adjust  |                      |            |      | 1.0  | LSB             | V <sub>IN</sub> = 0.44V                                                                                               |
|                    | integral nonlinearity of Contrast Adjust      |                      |            |      | 7    | LSB             |                                                                                                                       |
|                    |                                               |                      |            |      |      |                 |                                                                                                                       |
| V <sub>RGO</sub>   | R,G,B Output Voltage                          | ROUT<br>GOUT<br>BOUT | −1.0       |      | 0.3  | V               | referred to VSUP <sub>O</sub>                                                                                         |
|                    | R,G,B Output Load Resistance                  |                      |            |      | 100  | W               | to VSUP <sub>O</sub>                                                                                                  |
| V <sub>OUTC</sub>  | RGB Output Compliance                         |                      | −1.5       | −1.3 | −1.2 | V               | ref. to VSUP <sub>O</sub><br>Sum of max. Current of RGB−DACs and max. Current of Int.Bright-ness DACs is 2% de-graded |
|                    |                                               |                      |            |      |      |                 |                                                                                                                       |
|                    | Ext. RGB Inputs                               |                      |            |      |      |                 |                                                                                                                       |
| V <sub>RGBIN</sub> | External RGB Inputs Voltage Range             | RIN,<br>GIN,<br>BIN  | −0.3       | –    | 1.1  | V               |                                                                                                                       |
| V <sub>RGBIN</sub> | nominal RGB Input Voltage peak/peak           |                      | 0.5        | 0.7  | 1.0  | V <sub>PP</sub> | SCART Spec: 0.7V ±3dB                                                                                                 |
| V <sub>RGBIN</sub> | RGB Inputs Voltage for maximum Output Current |                      |            | 0.44 |      |                 | contrast setting: 511                                                                                                 |
|                    | RGB Inputs Voltage for maximum Output Current |                      |            | 0.7  |      |                 | contrast setting: 323                                                                                                 |
|                    | RGB Inputs Voltage for maximum Output Current |                      |            | 1.1  |      |                 | contrast setting: 204                                                                                                 |

| Symbol             | Parameter                              | Pin No.             | Min. | Typ. | Max. | Unit | Test Conditions                                                  |
|--------------------|----------------------------------------|---------------------|------|------|------|------|------------------------------------------------------------------|
| $C_{\text{RGBIN}}$ | External RGB Input Coupling Capacitor  | RIN,<br>GIN,<br>BIN |      | 15   |      | nF   |                                                                  |
|                    | Clamp Pulse Width                      |                     | 3.1  |      |      | μsec |                                                                  |
| $C_{\text{IN}}$    | Input Capacitance                      |                     | –    | –    | 13   | pF   |                                                                  |
| $I_{\text{IL}}$    | Input Leakage Current                  |                     | –0.5 | –    | 0.5  | μA   | clamping OFF,<br>$V_{\text{IN}} -0.3..3\text{V}$                 |
| $V_{\text{CLIP}}$  | RGB Input Voltage for Clipping Current |                     |      | 2    |      | V    |                                                                  |
| $V_{\text{CLAMP}}$ | Clamp Level at Input                   |                     | 40   | 60   | 80   | mV   | clamping ON                                                      |
| $V_{\text{INOFF}}$ | Offset Level at Input                  |                     | –10  |      | 10   | mV   | extrapolated from<br>$V_{\text{IN}} = 100\text{mV}$<br>and 200mV |
| $V_{\text{INOFF}}$ | Offset Level Match at Input            |                     | –10  |      | 10   | mV   | extrapolated from<br>$V_{\text{IN}} = 100\text{mV}$ and<br>200mV |
| $R_{\text{CLAMP}}$ | Clamping On–Resistance                 |                     |      |      | –    | W    |                                                                  |

**Characteristics, Fast Blank Input**

| Symbol        | Parameter                                                                                            | Pin No. | Min. | Typ. | Max. | Unit  | Test Conditions                                                                                                                                                               |
|---------------|------------------------------------------------------------------------------------------------------|---------|------|------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $V_{FBLOFF}$  | FBLIN Low Level                                                                                      | FBLIN   | –    | –    | 0.5  | V     |                                                                                                                                                                               |
| $V_{FBLON}$   | FBLIN High Level                                                                                     |         | 0.9  | –    | –    | V     |                                                                                                                                                                               |
| $V_{FBLTRIG}$ | Fast Blanking Trigger Level typical                                                                  |         |      | 0.7  |      |       |                                                                                                                                                                               |
| $t_{PID}$     | Delay Fast Blanking to $RGB_{OUT}$ from midst of FBLIN–transition to 90% of $RGB_{OUT}$ – transition |         |      | 8    | 15   | ns    | Int. RGB = 3.75mA Full Scale<br>Int. Brightness = 0<br>ext. Brightness = 1.5mA (Full Scale)<br>RGBin = 0<br>$V_{FBLOFF}=0.4V$<br>$V_{FBLON}=1.0V$<br>rise and fall time = 2ns |
|               | Difference of Internal Delay to ext. RGBin Delay                                                     |         | –5   |      | +5   | ns    |                                                                                                                                                                               |
|               | Switch–over–Glitch                                                                                   |         |      | 0.5  |      | pAsec | switch from 3.75mA (int) to 1.5mA (ext)                                                                                                                                       |

**Characteristics, Analog Video Inputs**

| Symbol    | Parameter                             | Pin No.              | Min. | Typ. | Max. | Unit | Test Conditions  |
|-----------|---------------------------------------|----------------------|------|------|------|------|------------------|
| $V_{VIN}$ | Analog Input Voltage                  | VIN1<br>VIN2<br>VIN3 | 0    |      | 2.5  | V    |                  |
| $C_{IN}$  | Input Capacitance                     | CIN                  |      |      | 13   | pF   | $V_{IN} = 1.5 V$ |
| $C_{CP}$  | Input Coupling Capacitor Video Inputs | VIN1<br>VIN2<br>VIN3 |      | 680  |      | nF   |                  |
| $C_{CP}$  | Input Coupling Capacitor Chroma Input | CIN                  |      | 1    |      | nF   |                  |

## Characteristics, Analog Frontend and ADCs

| Symbol      | Parameter                             | Pin No.                | Min. | Typ. | Max.      | Unit       | Test Conditions                        |
|-------------|---------------------------------------|------------------------|------|------|-----------|------------|----------------------------------------|
| $V_{VIN}$   | Full Scale Input Voltage, Video 1     | VIN1,<br>VIN2,<br>VIN3 | 1.8  | 2.0  | 2.2       | $V_{PP}$   | min. AGC Gain                          |
| $V_{VIN}$   | Full Scale Input Voltage, Video 1     |                        | 0.5  | 0.6  | 0.7       | $V_{PP}$   | max. AGC Gain                          |
| $V_{VINCL}$ | Video 1 Input Clamping Level, CVBS    |                        |      | 1.0  |           | V          | Binary Level = 68 LSB<br>min. AGC Gain |
|             |                                       |                        |      |      |           |            |                                        |
| $V_{CIN}$   | Full Scale Input Voltage, Chroma      | CIN,<br>VIN1           | 1.08 | 1.2  | 1.32      | $V_{PP}$   |                                        |
| $V_{VINCL}$ | Video 2 Input Clamping Level, CVBS    |                        |      | 1.2  |           | V          | Binary Level = 68 LSB                  |
| $V_{CINB}$  | Video 2 Input Bias Level, SVHS Chroma |                        | –    | 1.5  | –         | V          |                                        |
| $R_{CIN}$   | Video 2 Input Resistance SVHS Chroma  |                        | 1.6  | 2    | 2.4       | k $\Omega$ |                                        |
|             | Binary Code for Open Chroma Input     | VIN1<br>CIN            |      | 128  |           |            |                                        |
| $Q_{CL}$    | Input Clamping Current resolution     | VIN1–3,<br>CIN         | –16  |      | 15        | steps      |                                        |
| $I_{CL}$    | Input Clamping Current per step       |                        | 0.7  | 1    | 1.3       | $\mu A$    |                                        |
| $V_{VRT}$   | Reference Voltage Top                 | VRT                    | 2.5  | 2.6  | 2.8       | V          | 10 $\mu F$ /10nF, 1G $\Omega$ Probe    |
|             | Video 1 Bandwidth                     |                        |      | 10   |           | MHz        | –3dB for full scale signal             |
|             | Video 2 Bandwidth                     |                        |      | 10   |           | MHz        | –3dB for full scale signal             |
|             | Crosstalk, any Two Video Inputs       |                        |      | –50  |           | dB         | at 1 MHz                               |
| THD         | Distortion                            |                        |      | –45  | –42       | dB         | at 1 MHz, 5th harmonics                |
|             | Video Signal to Noise & Distortion    | VIN1–3,<br>CIN         | 41   |      |           | dB         | at 1 MHz                               |
|             | Video Integral Non-Linearity, static  | VIN1–3,<br>CIN         |      |      | $\pm 1$   | LSB        | Code Density                           |
|             | Video Differential Non-Linearity,     | VIN1–3,<br>CIN         |      |      | $\pm 0.5$ | LSB        | Code Density                           |
|             | Video Differential Gain               | VIN1–3,<br>CIN         |      |      | $\pm 3$   | %          | 300 mV $_{PP}$ , 4.4 MHz on ramp       |
|             | Video Differential Phase              | VIN1–3,<br>CIN         |      | TBD  |           | 5          | 300 mV $_{PP}$ , 4.4 MHz on ramp       |







## 5. Data Sheet History

1. Advance Information: "VDP 3108 Single-Chip Video Processor", Edition Feb. 7, 1994, 6251-352-1AI.  
First release of the Advance Information.
2. Advance Information: "VDP 3108 Single-Chip Video Processor", Edition May 3, 1994, 6251-352-2AI.  
Second release of the Advance Information.
3. Advance Information: "VDP 3108 Single-Chip Video Processor", Edition Oct. 12, 1994, 6251-352-3AI.  
Third release of the Advance Information.

MICRONAS INTERMETALL GmbH  
Hans-Bunte-Strasse 19  
D-79108 Freiburg (Germany)  
P.O. Box 840  
D-79008 Freiburg (Germany)  
Tel. +49-761-517-0  
Fax +49-761-517-2174  
E-mail: [docservice@intermetall.de](mailto:docservice@intermetall.de)  
Internet: <http://www.intermetall.de>

Printed in Germany  
Order No. 6251-352-3AI

All information and data contained in this data sheet are without any commitment, are not to be considered as an offer for conclusion of a contract nor shall they be construed as to create any liability. Any new issue of this data sheet invalidates previous issues. Product availability and delivery dates are exclusively subject to our respective order confirmation form; the same applies to orders based on development samples delivered. By this publication, MICRONAS INTERMETALL GmbH does not assume responsibility for patent infringements or other rights of third parties which may result from its use. Reprinting is generally permitted, indicating the source. However, our prior consent must be obtained in all cases.

End of Data Sheet

**Back to Summary**



**Back to Data Sheets**

