Interconnection Cord with Appliance Outlet For low voltage, Angled

new



70 C

Description
Power Cord, Protection class II, Pin temperature 70 °C, Cable


References
General Product Information

Weblinks
Approvals, RoHS, CHINA-RoHS, Mating Connectors, e-Store, Distributor-Stock-Check, Accessories

Technical Data

Ratings IEC	7 A / 48 VAC; 50 Hz
Ratings UL/CSA	7 A / 48 VAC; 60 Hz
Dielectric Strength	> 2 kVDC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 2 acc. to IEC 61140
Terminal	moulded
Material: Housing	PVC, black or grey

Dimensions

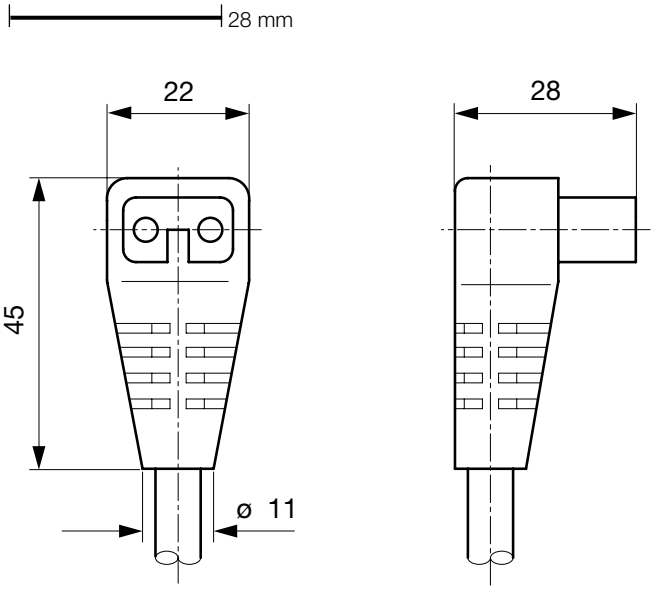

Config. Code

Product Configurator

Type - R - 1253 - D - Length

The characters are placeholders for the correspondingly keys of selections from the key tables.
Typ is placed for the connector type on the second end, length is the cord length in mm.

Type - R - 1253 - D - Length = Cord end 2

Cord end 2
zzzz

Type - R - 1253 - D - Length = cord type

cord type	Configuration key
H03VV-F 2x0,75mm2	A
H03VVH2-F 2x0,75mm2	B
H05VV-F 2x0,75mm2	D
H05VVH2-F 2x0,75mm2	E
SVT 2x18AWG	M
special cord	Z

Cord definition is detailed in general product information XXX

Type - R - 1253 - D - Length = Color

Color	Configuration key
jet black; RAL9005	A
silver grey; RAL7001	B

standard color: black

Type - R - 1253 - D - Length = Cord length

Cord length
zzzz, 000500, 001000, 001500, 002000, 002500, 003000, 005000

Cord length in mm

Mating Inlets/Plugs



Category / Description	
Special Connector Designs Overview complete	
Appliance inlet for low voltage, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	1200
Appliance inlet for low voltage, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	1203
Special Connector Designs further types to 1253	

SCHURTER ELECTRONIC COMPONENTS

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.