
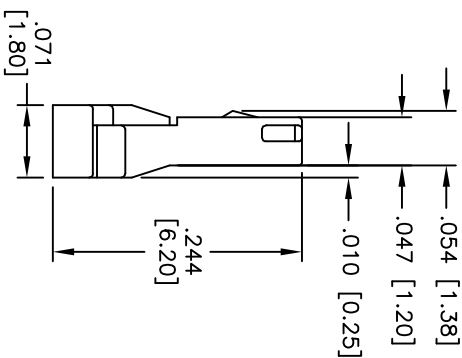
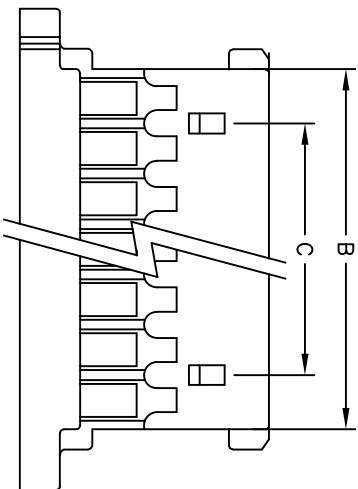


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/24/11	

APPROVED: _____

DATE: _____ TITLE: _____

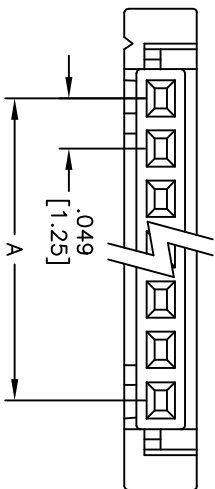

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: White

Electrical:

Voltage rating: 125V AC/DC

Current rating: 1A DC/DC

Withstanding voltage: 250V AC/minute

Insulation resistance: 100M ohms min

Contact resistance: 20m ohms max

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



Positions: 2 thru 16, 18, 20, 22, 24, 26, 28, 30
A = .049 [1.25] X No. of Spaces
B = .049 [1.25] X No. of Positions + .008 [0.20]
C = .049 [1.25] X No of Spaces - .049 [1.25].....above 4 Positions

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.049 [1.25] PITCH CRIMP HOUSING

SINGLE ROW, 2 THRU 30 POSITIONS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	ØX	± .10	.XXX	± .015	ØXXX	± .010
.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
.XXX	± .015	ØXXX	± .010	APPROVALS	DATE		
DRAWN	DY		2/24/11				
CHECKED							
APPROVED							
SIZE	PART NO.	REV.		REF:	SCALE:	NTS	SHEET 1 OF 1
X	125CH-H-XX	-		S00723T			