

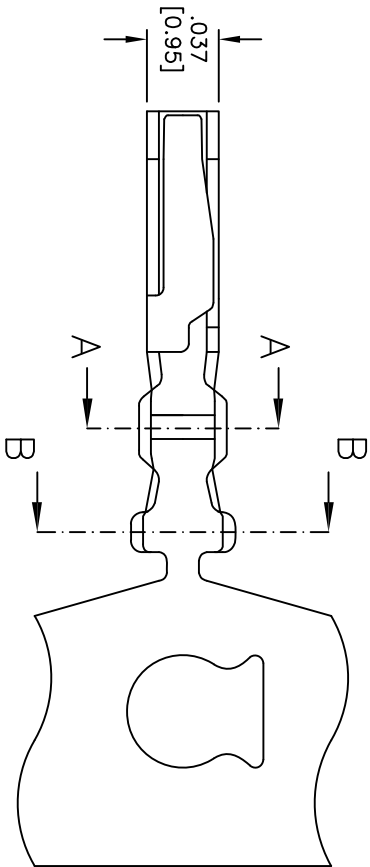



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	

APPROVED: _____
DATE: _____ TITLE: _____

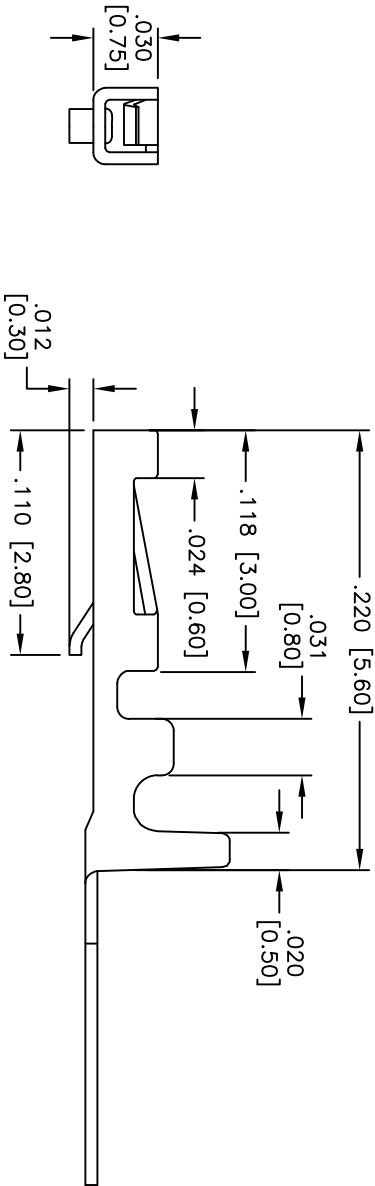

SECTION A-A



SECTION B-B

ADAM P/N	Wire range	Dim. a	Dim. b
125CTG-A-R	#30 ~ #32	.045 [1.15]	.047 [1.20]
125CTG-B-R	#28 ~ #30	.047 [1.20]	.053 [1.35]

SPECIFICATIONS:

Material: Phosphor Bronze

Plating: Gold Plated

Electrical:

Voltage rating: 100 VAC/DC max

Current rating: 1 Amp max

Contact Resistance: 20 mOhms Max.

Dielectric withstanding voltage: 250 VAC for 1 minute

Mechanical:

Wire Range: 28-32 AWG.

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES
.X ± .10 ØX ± .10
.XX ± .020 ØXX ± .015
.XXX ± .015 ØXXX ± .010

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710
1.25mm TERMINAL FOR 125CH-G
CRIMP HOUSING

APPROVALS	DATE	SIZE	PART NO.	REV.
DRAWN AY	11/30/10	X	125CTG-X-R	-
CHECKED AH	11/30/10			
APPROVED		REF: S00123T	SCALE: NTS	SHEET 1 OF 1