

SD

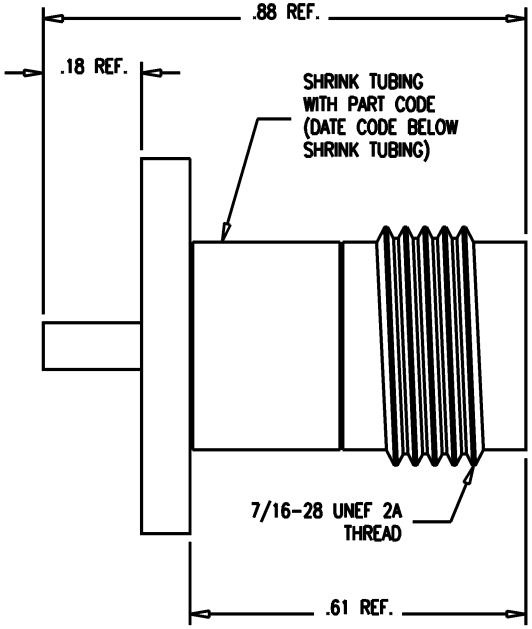

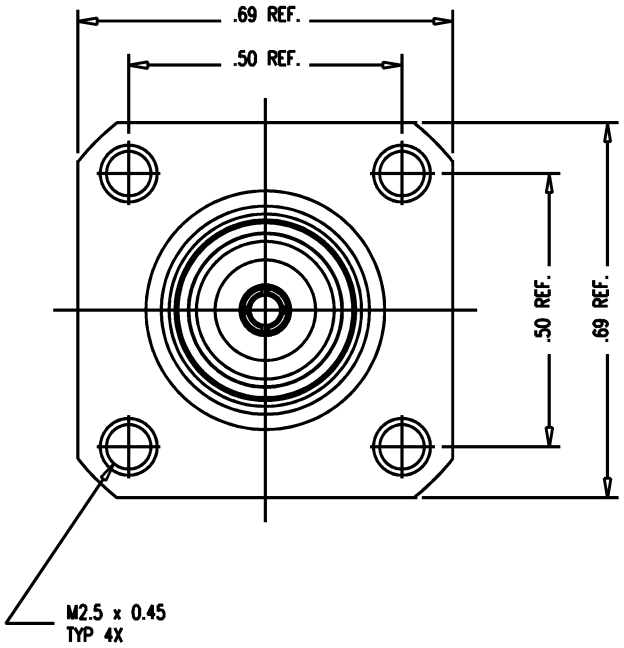

NOTES:
1. INTERFACE TO BE IN ACCORDANCE WITH MIL-STD-348 FIG. 313-2.
2. MATERIALS:
   INSULATOR-TEFLON, ASTM-D-4894
   CENTER CONTACT-BER. COP., ASTM-B-196
   SHRINK TUBING-POLYOLEFIN PER MIL-I-23053/5
   BODY-BRASS, ASTM-B16
3. FINISHES:
   CENTER CONTACT-GOLD PLATE PER MIL-G-45204
   BODY-SILVER PLATE PER QQ-S-365
4. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE-50 OHMS
   FREQUENCY RANGE-DC TO 1.10 GHZ
   WORKING VOLTAGE-500 VOLTS RMS
   VSWR: 1.07 MAX.

KINGS P/N	CODE	MARKING
127-36-1	J1	J1
127-36-2	J2	J2
127-36-3	J3	J3
127-36-4	J4	J4

SD

127-37-*

REVISIONS	
ISSUE	CHANGES
0	ER 38041 JPK 06/30/00
1	CN 38048 D JPK 07/12/00
2	CN 38309 D TML 05/15/2001

127-37D

SCALE 4:1

APPROX SURFACE AREA

USED ON 127-37-*

REF: E-19833

RCPT, PNL, TNC

DRAWN J KENNEDY	DATE 06/30/00
DESIGN J KENNEDY	DATE 06/30/00
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

127-37-*