ADELS contact

## Screw Connectors

# 2000/11 HT

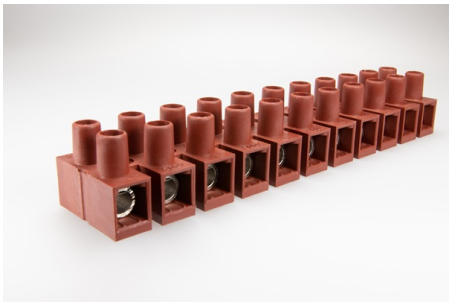

Terminal Block, 11 pole, Insulating Material: PA 6.6-HT, Cross-Section: 16.0 mm², Pin Spacing: 14.5 mm, Fixing: Screw, Voltage Rating: 500 V, Current Rating: 76 A

## Order Info

| | |
|---|---|
| **Reference Number (ref. no.)** | 128411 |
| **Applications** | Installation, Electrical Appliances, Transformers |
| **PU** | 0 |

## Type

| | |
|---|---|
| **Type** | Terminal Block |
| **Number of poles** | 11 pole |
| **Clamping Units per Pole** | 1 |
| **Colour** | brown |
| **Cross-Section** | 16.0 mm² |
| **Connection Type** | Screw |

## Technical Data

| | |
|---|---|
| **Voltage Rating** | 500 V |
| **Current Rating** | 76 A |
| **Insulating Material** | PA 6.6-HT |
| **Contact Material** | Brass |
| **Core Cross-Section min.** | 0.5 mm² |
| **Core Cross-Section max.** | 16.0 mm² |
| **Flammability Rating** | V-2 |
| **max. Ambient Temperature Operation** | 130 °C |
| **Type of Conductor Solid** | yes |
| **Type of Conductor Flexible** | yes |
| **Type of Conductor Stranded** | yes |
| **Stripping Length** | 10.0-10.5 mm |
| **Assembly Contact Screw** | 1.0x5.5 / ↻ 2.0 Nm |
| **Pin Spacing** | 14.5 mm |
| **Fixing** | Screw |
| **Approbation EN60998** | 2000_EN60998_20070823_20160412_VDE_ENEC_40021892_web.p |
| **Approbation UL** | 1500_2000_19890315_20170213_UL_E63492_1-08_Description_we |
| **Approbation CSA** | Schraub_Steck_Schraubenlos_SI_Klemmen_20160429_CSA_700765 |

## Accessories

| | |
|---|---|
| **ZEL 110** | 196420 |