



MATERIAL NO.	ENGINEERING NO.
1302990200	130299-0200

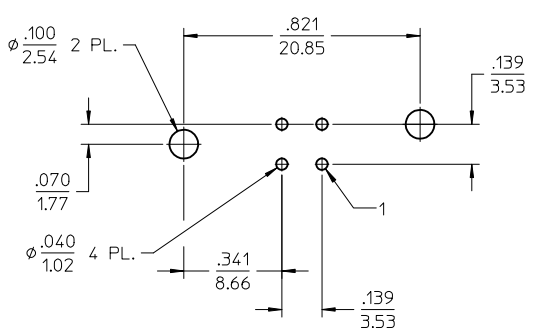


4C PCB HOLE LAYOUT
(COMPONENT SIDE)

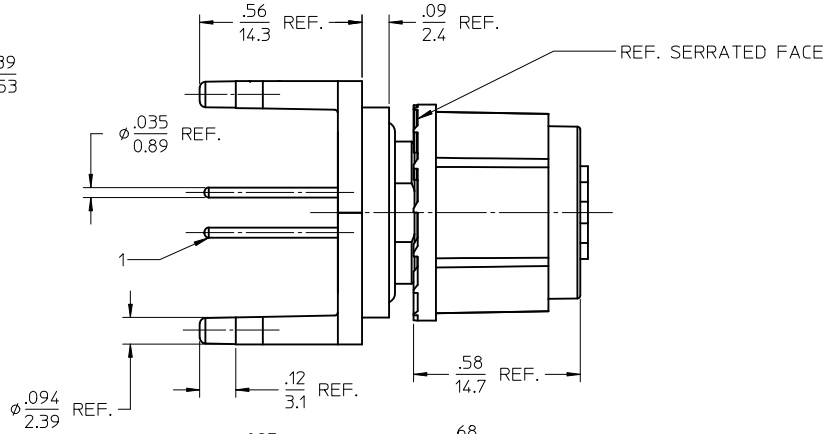


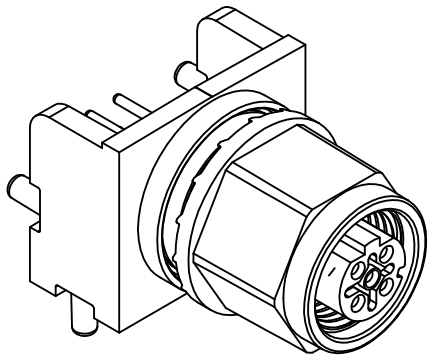


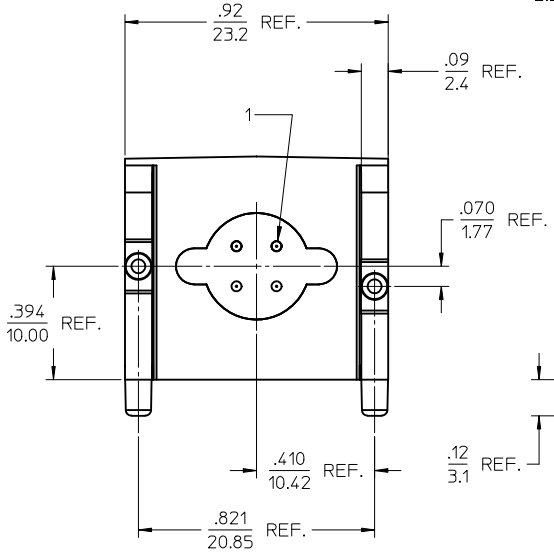

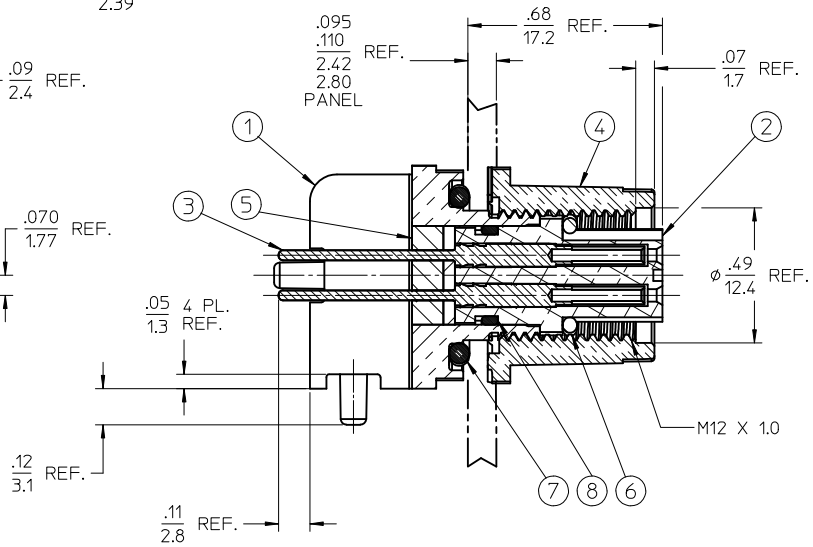

Section Z-Z

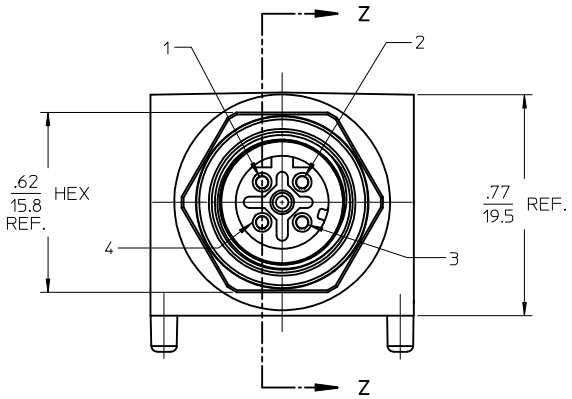

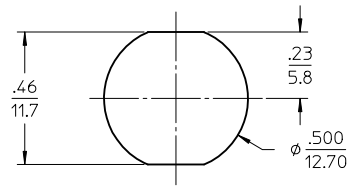

MOUNTING HOLE LAYOUT

NOTES:
1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. PRODUCT SPEC: PS-130299-001
4. PACKAGING: PK-130299-001
5. MATES WITH: MALE D-CODE CABLE ASSEMBLY
6. ELECTRICAL SPECS:
   VOLTAGE: 250V AC/DC
   CURRENT: 4 AMPS
7. PROTECTION: IP67
8. ASSEMBLY IS RoHS COMPLIANT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	INSULATOR O-RING	VITON	BROWN
7	1	PANEL O-RING	VITON	RED
6	1	MATING O-RING	VITON	RED
5	A/R	POTTING COMPOUND	EPOXY	RED
4	1	PANEL NUT	ZINC (DIE-CAST)	CHROME/DUPLEX NICKEL
3	4	CONTACT SOCKET	BRASS	GOLD PLATED
2	1	4/C D-CODE INSULATOR	PUR	BLACK
1	1	RECEPTACLE SHELL, M12	ZINC (DIE-CAST)	WHITE BRONZE PLATING

REMOVED CUST SIGN-OFF
EC NO: WNA2011-0198 2010/10/15
DRWN:RSTONE 2010/10/21
CHKD:K.JOZWIK 2010/12/14
APPR:JFMURPHY 2010/12/14
DESCRIPTION
REV

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .005
2 PLACES	± 0.13	± .010
1 PLACE	± 0.3	± ---

ANGULAR ± 2 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	IN/MM
SCALE	3:1
DESIGN UNITS	INCH
	THIRD ANGLE PROJECTION
DRAWN BY / DATE	RSTONE 2010/05/17
CHECKED BY / DATE	K. JOZWIK 2010/05/25
APPROVED BY / DATE	JFMURPHY 2010/05/20
MATERIAL NO.	SEE CHART
TITLE	MIC PCB RECEPTACLE 4C, D-CODE, STRAIGHT
	MOLEX INCORPORATED
DOCUMENT NO.	SD-130299-006
SHEET NO.	1 OF 1
SIZE	C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION