Low Noise, Rail-to-Rail Precision Op Amp

FEATURES

- **Rail-to-Rail Input and Output**
- **100% Tested Low Voltage Noise:**
  3.2nV/√Hz Typ at 1kHz
  4.5nV/√Hz Max at 1kHz
- **Offset Voltage: 60μV Max**
- Low V_{OS} Drift: 0.2μV/°C Typ
- Low Input Bias Current: 20nA Max
- Wide Supply Range: 3V to ±18V
- High A_{VOL}: 7V/μV Min, R_L = 10k
- High CMRR: 109dB Min
- High PSRR: 108dB Min
- Gain Bandwidth Product: 7.2MHz
- Slew Rate: 2.5V/μs
- Operating Temperature Range: –40°C to 85°C

APPLICATIONS

- Low Noise Signal Processing
- Microvolt Accuracy Threshold Detection
- Strain Gauge Amplifiers
- Tape Head Preamplifiers
- Direct Coupled Audio Gain Stages
- Infrared Detectors
- Battery-Powered Microphones

DESCRIPTION

The LT®1677 features the lowest noise performance available for a rail-to-rail operational amplifier: 3.2nV/√Hz wideband noise, 1/f corner frequency of 13Hz and 90nV peak-to-peak 0.1Hz to 10Hz noise. Low noise is combined with outstanding precision: 20μV offset voltage and 0.2μV/°C drift, 130dB common mode and power supply rejection and 7.2MHz gain bandwidth product. The common mode range exceeds the power supply by 100mV.


The voltage gain of the LT1677 is extremely high, 19 million (typical) driving a 10k load.

In the design, processing and testing of the device, particular attention has been paid to the optimization of the entire distribution of several key parameters. Consequently, the specifications have been spectacularly improved compared to competing rail-to-rail amplifiers.


LT, LTC and LTM are registered trademarks of Linear Technology Corporation.
All other trademarks are the property of their respective owners.

TYPICAL APPLICATION

3V Electret Microphone Amplifier

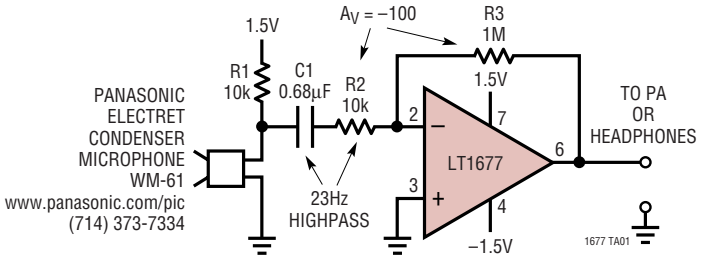

Distribution of Offset Voltage

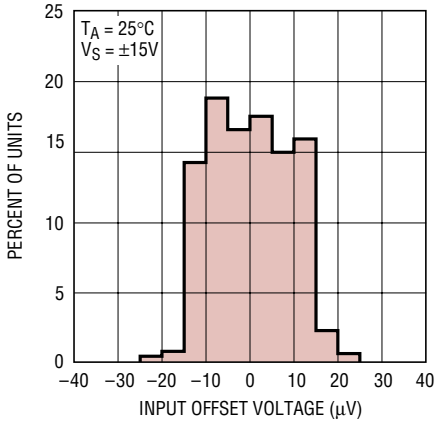


ABSOLUTE MAXIMUM RATINGS

(Note 1)

Supply Voltage ..... ±22V
Input Voltages (Note 2) ..... 0.3V Beyond Either Rail
Differential Input Current (Note 2) ..... ±25mA
Output Short-Circuit Duration (Note 3) ..... Indefinite
Storage Temperature Range ..... –65°C to 150°C
Lead Temperature (Soldering, 10 sec.) ..... 300°C
Operating Temperature Range
LT1677C (Note 4) ..... –40°C to 85°C
LT1677I ..... –40°C to 85°C
Specified Temperature Range
LT1677C (Note 5) ..... –40°C to 85°C
LT1677I ..... –40°C to 85°C

PACKAGE/ORDER INFORMATION



N8 PACKAGE 8-LEAD PDIP
S8 PACKAGE 8-LEAD PLASTIC SO

T_{JMAX} = 150°C, θ_{JA} = 150°C/W (N8)
T_{JMAX} = 150°C, θ_{JA} = 190°C/W (S0-8)

ORDER PART NUMBER	S8 PART MARKING
LT1677CS8 LT1677IS8 LT1677CN8 LT1677IN8	1677 1677I

Order Options Tape and Reel: Add #TR
Lead Free: Add #PBF Lead Free Tape and Reel: Add #TRPBF
Lead Free Part Marking: http://www.linear.com/leadfree/

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = 3V, V_{CM} = V_O = 1.7V; V_S = 5V, V_{CM} = V_O = 2.5V unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 6)		MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage (Note 11)				35	90	µV
		0°C ≤ T_A ≤ 70°C	●		55	150	µV
		–40°C ≤ T_A ≤ 85°C	●		75	210	µV
		V_{CM} = V_S + 0.1V			150	400	µV
		V_{CM} = V_S – 0.2V, 0°C ≤ T_A ≤ 70°C	●		180	550	µV
		V_{CM} = V_S – 0.3V, –40°C ≤ T_A ≤ 85°C	●		200	650	µV
		V_{CM} = –0.1V			1.5	5.0	mV
		V_{CM} = 0V, 0°C ≤ T_A ≤ 70°C	●		1.8	6.0	mV
		V_{CM} = 0V, –40°C ≤ T_A ≤ 85°C	●		2.0	6.5	mV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Drift (Note 10)	SO-8	●		0.40	2.0	µV/°C
		N8	●		0.20	1.5	µV/°C
$\frac{\Delta V_{OS}}{\Delta Time}$	Long Term Input Voltage Stability				0.3		µV/Mo
I_B	Input Bias Current (Note 11)				±2	±20	nA
		0°C ≤ T_A ≤ 70°C	●		±3	±35	nA
		–40°C ≤ T_A ≤ 85°C	●		±7	±50	nA
		V_{CM} = V_S + 0.1V			0.19	0.40	µA
		V_{CM} = V_S – 0.2V, 0°C ≤ T_A ≤ 70°C	●		0.19	0.60	µA
		V_{CM} = V_S – 0.3V, –40°C ≤ T_A ≤ 85°C	●		0.25	0.75	µA
		V_{CM} = –0.1V		–1.2	–0.41		µA
		V_{CM} = 0V, 0°C ≤ T_A ≤ 70°C	●	–2.0	–0.45		µA
		V_{CM} = 0V, –40°C ≤ T_A ≤ 85°C	●	–2.3	–0.47		µA
I_{OS}	Input Offset Current (Note 11)				4	15	nA
		0°C ≤ T_A ≤ 70°C	●		5	20	nA
		–40°C ≤ T_A ≤ 85°C	●		8	40	nA
		V_{CM} = V_S + 0.1V			6	30	nA
		V_{CM} = V_S – 0.2V, 0°C ≤ T_A ≤ 70°C	●		10	40	nA
		V_{CM} = V_S – 0.3V, –40°C ≤ T_A ≤ 85°C	●		15	65	nA
		V_{CM} = –0.1V			20	100	nA
		V_{CM} = 0V, 0°C ≤ T_A ≤ 70°C	●		25	150	nA
		V_{CM} = 0V, –40°C ≤ T_A ≤ 85°C	●		30	160	nA

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = 3V, V_{CM} = V_O = 1.7V; V_S = 5V, V_{CM} = V_O = 2.5V unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 6)		MIN	TYP	MAX	UNITS
e_n	Input Noise Voltage	0.1Hz to 10Hz (Note 7)			90		nV_{P-P}
		V_{CM} = V_S			180		nV_{P-P}
		V_{CM} = 0V			600		nV_{P-P}
	Input Noise Voltage Density (Note 8)	f_O = 10Hz			5.2		$nV/\sqrt{Hz}$
		V_{CM} = V_S, f_O = 10Hz			7		$nV/\sqrt{Hz}$
		V_{CM} = 0V, f_O = 10Hz			25		$nV/\sqrt{Hz}$
		f_O = 1kHz			3.2	4.5	$nV/\sqrt{Hz}$
		V_{CM} = V_S, f_O = 1kHz			5.3		$nV/\sqrt{Hz}$
		V_{CM} = 0V, f_O = 1kHz			17		$nV/\sqrt{Hz}$
i_n	Input Noise Current Density	f_O = 10Hz			1.2		$pA/\sqrt{Hz}$
		f_O = 1kHz			0.3		$pA/\sqrt{Hz}$
V_{CM}	Input Voltage Range			–0.1		V_S + 0.1V	V
		0°C ≤ T_A ≤ 70°C	●	0		V_S – 0.2V	V
		–40°C ≤ T_A ≤ 85°C	●	0		V_S – 0.3V	V
R_{IN}	Input Resistance	Common Mode			2		GΩ
C_{IN}	Input Capacitance				4.2		pF
CMRR	Common Mode Rejection Ratio (Note 11)	V_S = 3V					
		V_{CM} = –0.1V to 3.1V		55	68		dB
		V_{CM} = 0V to 2.7V	●	53	67		dB
		V_S = 5V					
		V_{CM} = –0.1V to 5.1V		60	73		dB
		V_{CM} = 0V to 4.7V	●	58	72		dB
PSRR	Power Supply Rejection Ratio	V_S = 2.7V to 40V, V_{CM} = V_O = 1.7V		108	125		dB
		V_S = 3.1V to 40V, V_{CM} = V_O = 1.7V	●	105	120		dB
A_{VOL}	Large-Signal Voltage Gain	V_S = 3V, R_L ≥ 10k, V_O = 2.5V to 0.7V		0.6	4		V/µV
		0°C ≤ T_A ≤ 70°C	●	0.4	3		V/µV
		–40°C ≤ T_A ≤ 85°C	●	0.4	3		V/µV
		V_S = 3V, R_L ≥ 2k, V_O = 2.2V to 0.7V		0.5	1		V/µV
		0°C ≤ T_A ≤ 70°C	●	0.4	0.9		V/µV
		–40°C ≤ T_A ≤ 85°C	●	0.4	0.8		V/µV
		V_S = 3V, R_L ≥ 600Ω, V_O = 2.2V to 0.7V		0.20	0.43		V/µV
		0°C ≤ T_A ≤ 70°C	●	0.15	0.40		V/µV
		–40°C ≤ T_A ≤ 85°C	●	0.10	0.35		V/µV
		V_S = 5V, R_L ≥ 10k, V_O = 4.5V to 0.7V		0.8	5		V/µV
		0°C ≤ T_A ≤ 70°C	●	0.7	4		V/µV
		–40°C ≤ T_A ≤ 85°C	●	0.7	4		V/µV
		V_S = 5V, R_L ≥ 2k, V_O = 4.2V to 0.7V		0.40	0.9		V/µV
		0°C ≤ T_A ≤ 70°C	●	0.35	0.8		V/µV
		–40°C ≤ T_A ≤ 85°C	●	0.25	0.6		V/µV
		V_S = 5V, R_L ≥ 600Ω, V_O = 4.2V to 0.7V		0.35	0.67		V/µV
		0°C ≤ T_A ≤ 70°C	●	0.30	0.60		V/µV
		–40°C ≤ T_A ≤ 85°C	●	0.20	0.45		V/µV

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = 3V, V_{CM} = V_O = 1.7V; V_S = 5V, V_{CM} = V_O = 2.5V unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 6)		MIN	TYP	MAX	UNITS
V_{OL}	Output Voltage Swing Low (Note 11)	Above GND					
		I_{SINK} = 0.1mA			110	170	mV
		0°C ≤ T_A ≤ 70°C	●		125	200	mV
		–40°C ≤ T_A ≤ 85°C	●		130	230	mV
		Above GND					
		I_{SINK} = 2.5mA			170	250	mV
		0°C ≤ T_A ≤ 70°C	●		195	320	mV
		–40°C ≤ T_A ≤ 85°C	●		205	350	mV
		Above GND					
		I_{SINK} = 10mA			370	500	mV
		0°C ≤ T_A ≤ 70°C	●		440	600	mV
		–40°C ≤ T_A ≤ 85°C	●		465	650	mV
V_{OH}	Output Voltage Swing High (Note 11)	Below V_S					
		I_{SOURCE} = 0.1mA			75	170	mV
		0°C ≤ T_A ≤ 70°C	●		85	200	mV
		–40°C ≤ T_A ≤ 85°C	●		93	250	mV
		Below V_S					
		I_{SOURCE} = 2.5mA			170	300	mV
		0°C ≤ T_A ≤ 70°C	●		195	350	mV
		–40°C ≤ T_A ≤ 85°C	●		205	375	mV
		Below V_S					
		I_{SOURCE} = 10mA			450	700	mV
		0°C ≤ T_A ≤ 70°C	●		510	800	mV
		–40°C ≤ T_A ≤ 85°C	●		525	850	mV
I_{SC}	Output Short-Circuit Current (Note 3)	V_S = 3V		15	22		mA
		0°C ≤ T_A ≤ 70°C	●	14	20		mA
		–40°C ≤ T_A ≤ 85°C	●	13	19		mA
		V_S = 5V		20	29		mA
		0°C ≤ T_A ≤ 70°C	●	18	27		mA
		–40°C ≤ T_A ≤ 85°C	●	17	25		mA
SR	Slew Rate (Note 13)	A_V = –1		1.7	2.5		V/µs
		R_L ≥ 10k, 0°C ≤ T_A ≤ 70°C	●	1.5	2.3		V/µs
		R_L ≥ 10k, –40°C ≤ T_A ≤ 85°C	●	1.2	2.0		V/µs
GBW	Gain Bandwidth Product (Note 11)	f_O = 100kHz		4.5	7.2		MHz
		f_O = 100kHz, 0°C ≤ T_A ≤ 70°C	●	3.8	6.2		MHz
		f_O = 100kHz, –40°C ≤ T_A ≤ 85°C	●	3.7	5.8		MHz
t_S	Settling Time	2V Step 0.1%, A_V = +1			2.1		µs
		2V Step 0.01%, A_V = +1			3.5		µs
R_O	Open-Loop Output Resistance	I_{OUT} = 0			80		Ω
	Closed-Loop Output Resistance	A_V = 100, f = 10kHz			1		Ω
I_S	Supply Current (Note 12)				2.60	3.4	mA
		0°C ≤ T_A ≤ 70°C	●		2.75	3.7	mA
		–40°C ≤ T_A ≤ 85°C	●		2.80	3.8	mA

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = ±15V, V_{CM} = V_O = 0V unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 6)		MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage				20	60	µV
		0°C ≤ T_A ≤ 70°C	●		30	120	µV
		–40°C ≤ T_A ≤ 85°C	●		45	180	µV
		V_{CM} = 15.1V			150	400	µV
		V_{CM} = 14.8V, 0°C ≤ T_A ≤ 70°C	●		180	550	µV
		V_{CM} = 14.7V, –40°C ≤ T_A ≤ 85°C	●		200	650	µV
		V_{CM} = –15.1V			1.5	5.0	mV
		V_{CM} = –15V, 0°C ≤ T_A ≤ 70°C	●		1.8	6.0	mV
		V_{CM} = –15V, –40°C ≤ T_A ≤ 85°C	●		2.0	6.5	mV
$\frac{\Delta V_{OS}}{\Delta Temp}$	Average Input Offset Drift (Note 10)	SO-8	●		0.40	2.0	µV/°C
		N8	●		0.20	1.5	µV/°C
$\frac{\Delta V_{OS}}{\Delta Time}$	Long Term Input Voltage Stability				0.3		µV/Mo
I_B	Input Bias Current				±2	±20	nA
		0°C ≤ T_A ≤ 70°C	●		±3	±35	nA
		–40°C ≤ T_A ≤ 85°C	●		±7	±50	nA
		V_{CM} = 15.1V			0.19	0.40	µA
		V_{CM} = 14.8V, 0°C ≤ T_A ≤ 70°C	●		0.20	0.60	µA
		V_{CM} = 14.7V, –40°C ≤ T_A ≤ 85°C	●		0.25	0.75	µA
		V_{CM} = –15.1V		–1.2	–0.42		µA
		V_{CM} = –15V, 0°C ≤ T_A ≤ 70°C	●	–2.0	–0.46		µA
		V_{CM} = –15V, –40°C ≤ T_A ≤ 85°C	●	–2.3	–0.48		µA
I_{OS}	Input Offset Current				3	15	nA
		0°C ≤ T_A ≤ 70°C	●		5	20	nA
		–40°C ≤ T_A ≤ 85°C	●		8	40	nA
		V_{CM} = 15.1V			5	25	nA
		V_{CM} = 14.8V, 0°C ≤ T_A ≤ 70°C	●		8	35	nA
		V_{CM} = 14.7V, –40°C ≤ T_A ≤ 85°C	●		12	60	nA
		V_{CM} = –15.1V			20	105	nA
		V_{CM} = –15V, 0°C ≤ T_A ≤ 70°C	●		25	160	nA
		V_{CM} = –15V, –40°C ≤ T_A ≤ 85°C	●		30	170	nA
e_n	Input Noise Voltage	0.1Hz to 10Hz (Note 7)			90		nV_{P-P}
		V_{CM} = 15V			180		nV_{P-P}
		V_{CM} = –15V			600		nV_{P-P}
	Input Noise Voltage Density	f_O = 10Hz			5.2		$nV/\sqrt{Hz}$
		V_{CM} = 15V, f_O = 10Hz			7		$nV/\sqrt{Hz}$
		V_{CM} = –15V, f_O = 10Hz			25		$nV/\sqrt{Hz}$
		f_O = 1kHz			3.2	4.5	$nV/\sqrt{Hz}$
		V_{CM} = 15V, f_O = 1kHz			5.3		$nV/\sqrt{Hz}$
		V_{CM} = –15V, f_O = 1kHz			17		$nV/\sqrt{Hz}$
i_n	Input Noise Current Density	f_O = 10Hz			1.2		$pA/\sqrt{Hz}$
		f_O = 1kHz			0.3		$pA/\sqrt{Hz}$
V_{CM}	Input Voltage Range			–15.1		15.1	V
		0°C ≤ T_A ≤ 70°C	●	–15.0		14.8	V
		–40°C ≤ T_A ≤ 85°C	●	–15.0		14.7	V
R_{IN}	Input Resistance	Common Mode			2		GΩ
C_{IN}	Input Capacitance				4.2		pF

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = ±15V, V_{CM} = V_O = 0V unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 6)		MIN	TYP	MAX	UNITS
CMRR	Common Mode Rejection Ratio	V_{CM} = –13.3V to 14V		109	130		dB
			●	105	124		dB
		V_{CM} = –15.1V to 15.1V		74	95		dB
		V_{CM} = –15V to 14.7V	●	72	91		dB
PSRR	Power Supply Rejection Ratio	V_S = ±1.7V to ±18V		106	130		dB
			●	103	125		dB
		V_S = 2.7V to 40V		108	125		dB
		V_S = 3.1V to 40V	●	105	120		dB
A_{VOL}	Large-Signal Voltage Gain	R_L ≥ 10k, V_O = ±14V		7	19		V/µV
		0°C ≤ T_A ≤ 70°C	●	4	13		V/µV
		–40°C ≤ T_A ≤ 85°C	●	3	8		V/µV
		R_L ≥ 2k, V_O = ±13.5V		0.50	0.75		V/µV
		0°C ≤ T_A ≤ 70°C	●	0.30	0.67		V/µV
		–40°C ≤ T_A ≤ 85°C	●	0.15	0.24		V/µV
		R_L ≥ 600Ω, V_O = ±10V		0.2	0.5		V/µV
V_{OL}	Output Voltage Swing Low	Above $–V_S$					
		I_{SINK} = 0.1mA			110	170	mV
		0°C ≤ T_A ≤ 70°C	●		125	200	mV
		–40°C ≤ T_A ≤ 85°C	●		130	230	mV
		Above $–V_S$					
		I_{SINK} = 2.5mA			170	250	mV
		0°C ≤ T_A ≤ 70°C	●		195	320	mV
		–40°C ≤ T_A ≤ 85°C	●		205	350	mV
		Above $–V_S$					
		I_{SINK} = 10mA			370	500	mV
		0°C ≤ T_A ≤ 70°C	●		440	600	mV
		–40°C ≤ T_A ≤ 85°C	●		450	650	mV
V_{OH}	Output Voltage Swing High	Below $+V_S$					
		I_{SOURCE} = 0.1mA			110	170	mV
		0°C ≤ T_A ≤ 70°C	●		130	200	mV
		–40°C ≤ T_A ≤ 85°C	●		140	250	mV
		Below $+V_S$					
		I_{SOURCE} = 2.5mA			210	300	mV
		0°C ≤ T_A ≤ 70°C	●		240	350	mV
		–40°C ≤ T_A ≤ 85°C	●		250	375	mV
		Below $+V_S$					
		I_{SOURCE} = 10mA			520	700	mV
		0°C ≤ T_A ≤ 70°C	●		590	800	mV
		–40°C ≤ T_A ≤ 85°C	●		620	850	mV
I_{SC}	Output Short-Circuit Current (Note 3)			25	35		mA
		0°C ≤ T_A ≤ 70°C	●	20	30		mA
		–40°C ≤ T_A ≤ 85°C	●	18	28		mA
SR	Slew Rate	R_L ≥ 10k (Note 9)		1.7	2.5		V/µs
		R_L ≥ 10k (Note 9) 0°C ≤ T_A ≤ 70°C	●	1.5	2.3		V/µs
		R_L ≥ 10k (Note 9) –40°C ≤ T_A ≤ 85°C	●	1.2	2.0		V/µs
GBW	Gain Bandwidth Product	f_O = 100kHz		4.5	7.2		MHz
		f_O = 100kHz, 0°C ≤ T_A ≤ 70°C	●	3.8	6.2		MHz
		f_O = 100kHz, –40°C ≤ T_A ≤ 85°C	●	3.7	5.8		MHz

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V_S = ±15V, V_{CM} = V_O = 0V unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS (Note 6)		MIN	TYP	MAX	UNITS
THD	Total Harmonic Distortion	R_L = 2k, A_V = 1, f_O = 1kHz, V_O = 10V_{P-P}			0.0006		%
t_S	Settling Time	10V Step 0.1%, A_V = +1 10V Step 0.01%, A_V = +1			5 6		µs µs
R_O	Open-Loop Output Resistance Closed-Loop Output Resistance	I_{OUT} = 0 A_V = 100, f = 10kHz			80 1		Ω Ω
I_S	Supply Current	 0°C ≤ T_A ≤ 70°C –40°C ≤ T_A ≤ 85°C	 ● ●		2.75 3.00 3.10	3.5 3.9 4.0	mA mA mA

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: The inputs are protected by back-to-back diodes. Current limiting resistors are not used in order to achieve low noise. If differential input voltage exceeds ±1.4V, the input current should be limited to 25mA. If the common mode range exceeds either rail, the input current should be limited to 10mA.

Note 3: A heat sink may be required to keep the junction temperature below absolute maximum.

Note 4: The LT1677C and LT1677I are guaranteed functional over the Operating Temperature Range of –40°C to 85°C.

Note 5: The LT1677C is guaranteed to meet specified performance from 0°C to 70°C. The LT1677C is designed, characterized and expected to meet specified performance from –40°C to 85°C but is not tested or QA sampled at these temperatures. The LT1677I is guaranteed to meet specified performance from –40°C to 85°C.

Note 6: Typical parameters are defined as the 60% yield of parameter distributions of individual amplifier; i.e., out of 100 LT1677s, typically 60 op amps will be better than the indicated specification.

Note 7: See the test circuit and frequency response curve for 0.1Hz to 10Hz tester in the Applications Information section of the LT1677 data sheet.

Note 8: Noise is 100% tested at ±15V supplies.

Note 9: Slew rate is measured in A_V = –1; input signal is ±7.5V, output measured at ±2.5V.

Note 10: This parameter is not 100% tested. V_S = 3V and 5V limits are guaranteed by correlation to V_S = ±15V test.


Note 11: V_S = 5V limits are guaranteed by correlation to V_S = 3V and V_S = ±15V tests.

Note 12: V_S = 3V limits are guaranteed by correlation to V_S = 5V and V_S = ±15V tests.


Note 13: Guaranteed by correlation to slew rate at V_S = ±15V and GBW at V_S = 3V and V_S = ±15V tests.

TYPICAL PERFORMANCE CHARACTERISTICS


Voltage Noise vs Frequency

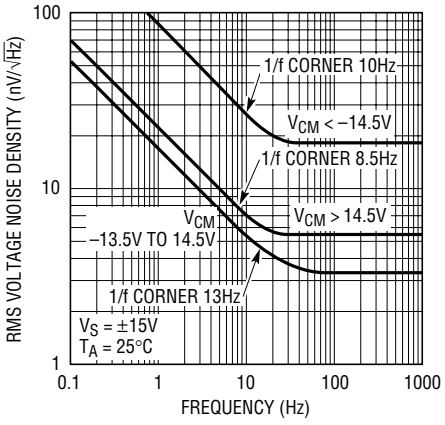

0.1Hz to 10Hz Voltage Noise

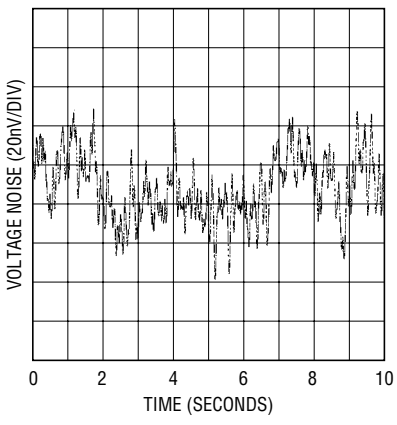


0.01Hz to 1Hz Voltage Noise

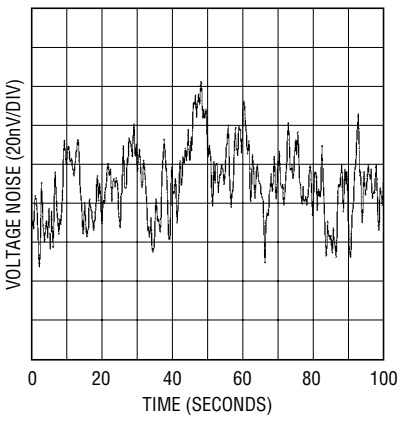


TYPICAL PERFORMANCE CHARACTERISTICS

Voltage Noise vs Temperature

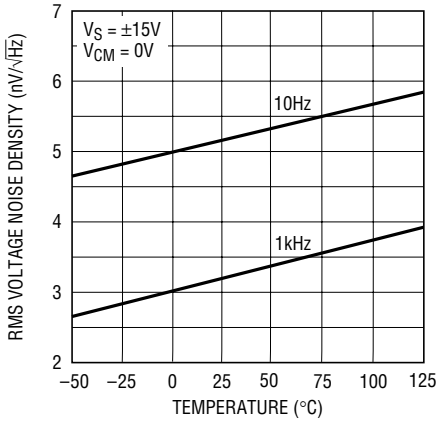


1677 G08

Current Noise vs Frequency

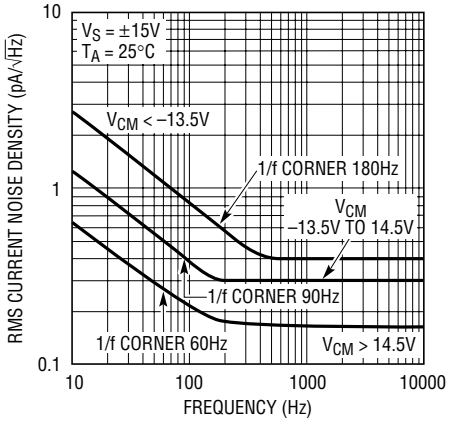


1677 G07

Input Bias Current vs Temperature

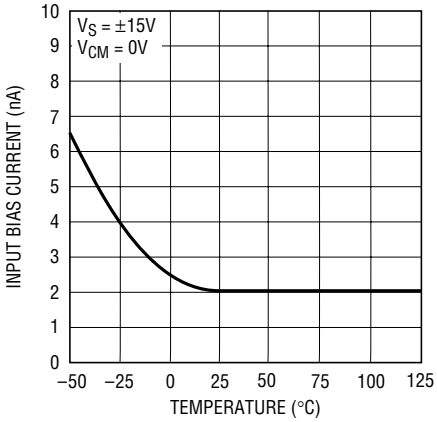


1677 G05

Input Bias Current vs Temperature

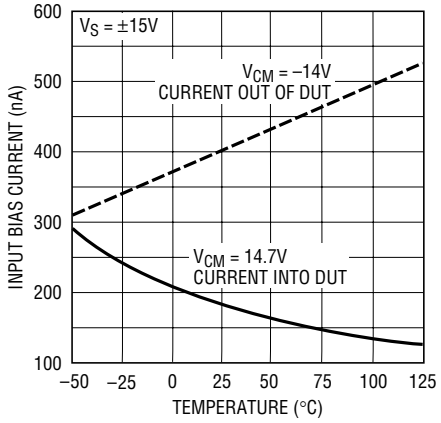


1677 G06

Input Bias Current Over the Common Mode Range

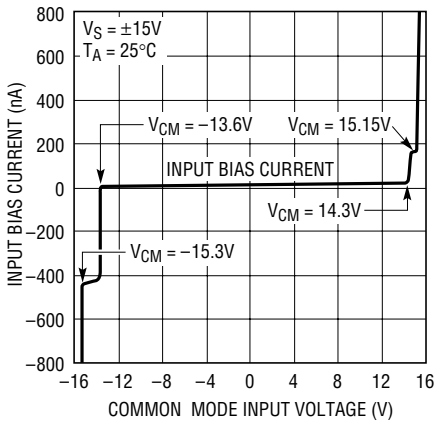


1677 G09

Offset Voltage Shift vs Common Mode

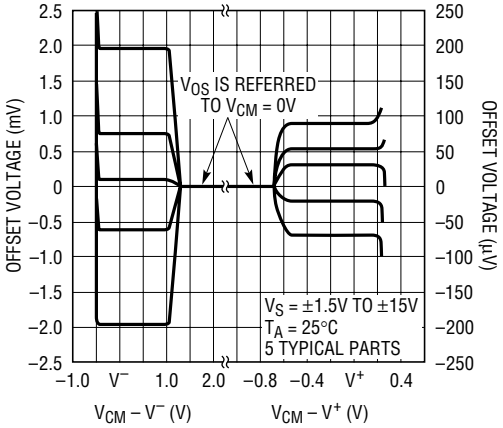


1677 G10

Warm-Up Drift

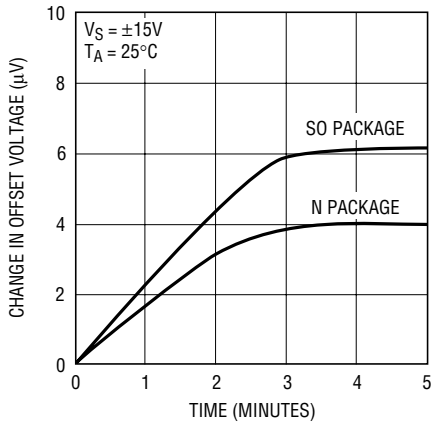


1677 G02

Distribution of Input Offset Voltage Drift (N8)

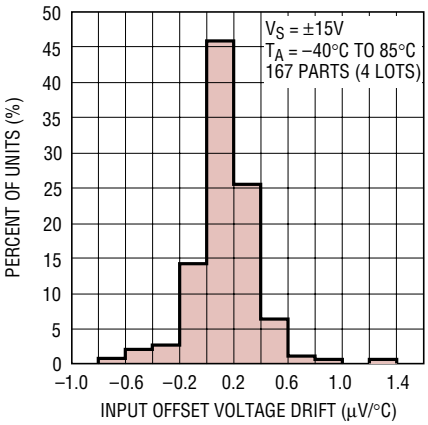

1677 G13


Distribution of Input Offset Voltage Drift (SO-8)

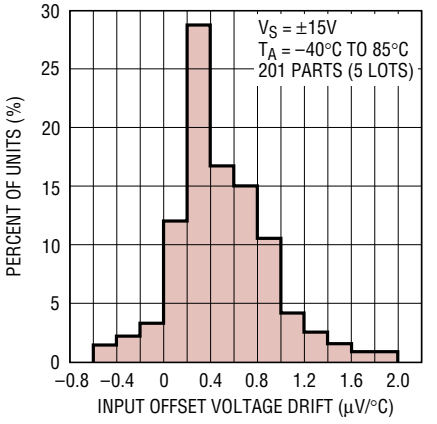


1677 G37

TYPICAL PERFORMANCE CHARACTERISTICS


V_{OS} vs Temperature of Representative Units

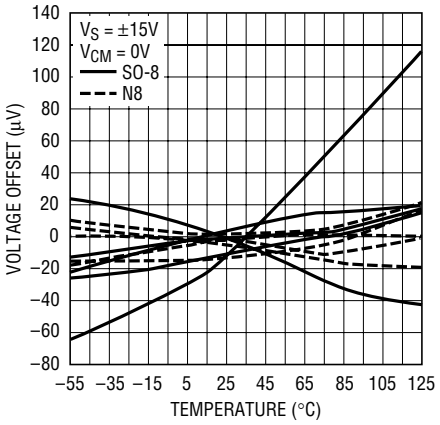


Common Mode Range vs Temperature

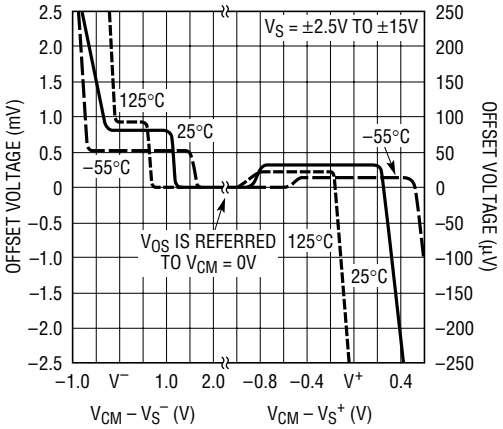


Long-Term Stability of Four Representative Units

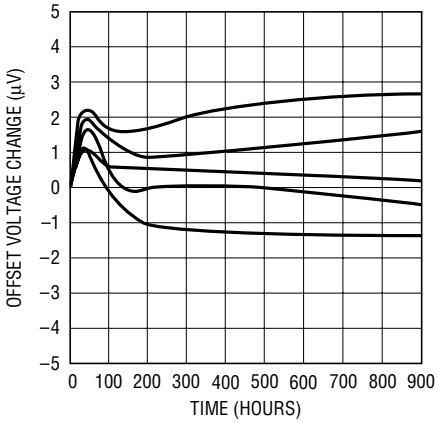


Supply Current vs Supply Voltage

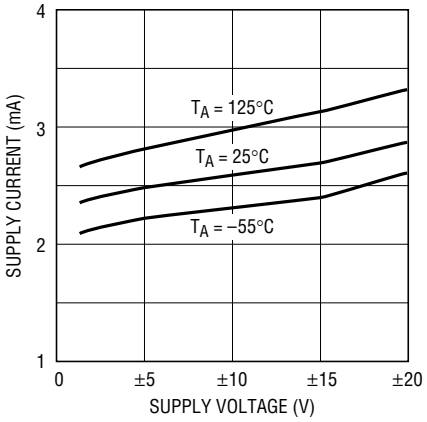


Common Mode Rejection Ratio vs Frequency

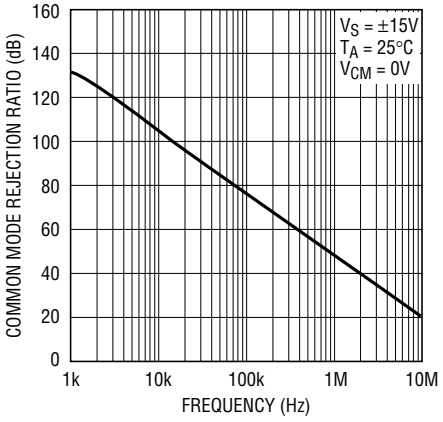


Power Supply Rejection Ratio vs Frequency

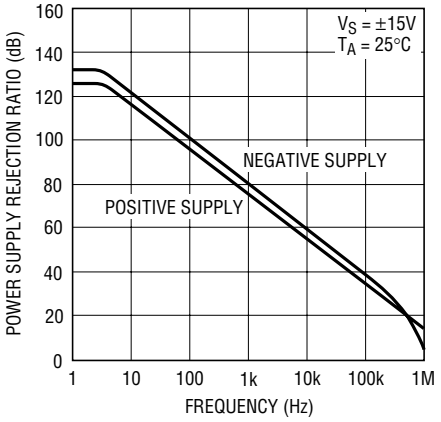


Voltage Gain vs Frequency

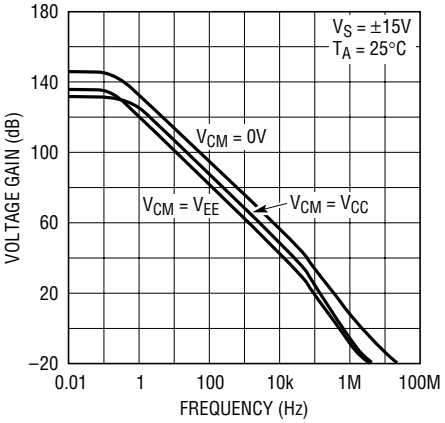

Voltage Gain vs Supply Voltage (Single Supply)

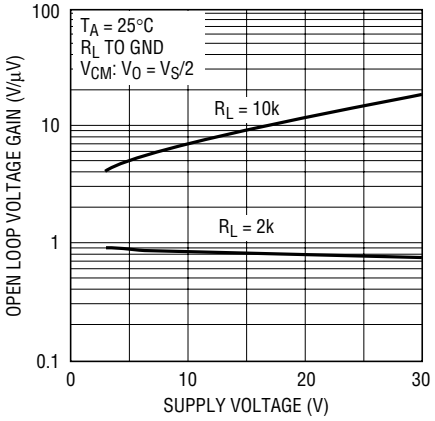


Overshoot vs Load Capacitance

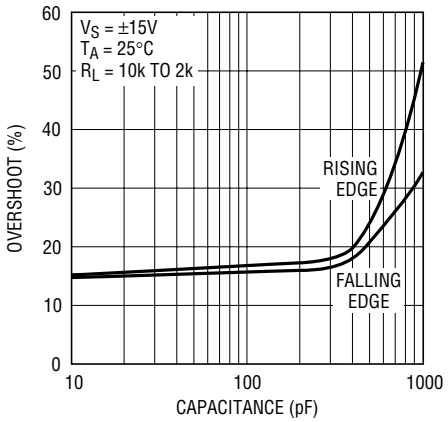


TYPICAL PERFORMANCE CHARACTERISTICS

PM, GBWP, SR vs Temperature

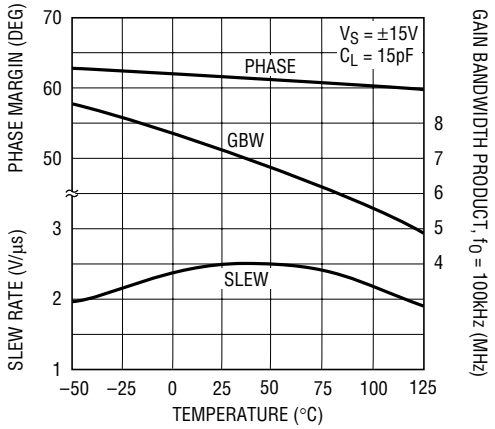

1677 G22


Large-Signal Transient Response

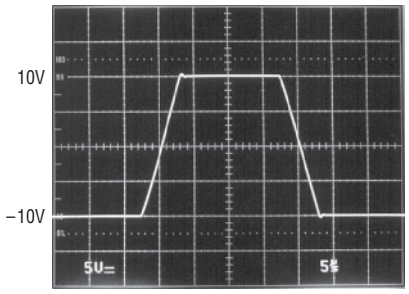

AVCL = –1
VS = ±15V

5µs/DIV


Small-Signal Transient Response

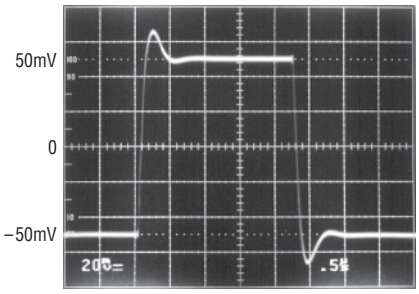

AVCL = 1
VS = ±15V
CL = 15pF


0.5µs/DIV

Settling Time vs Output Step (Inverting)

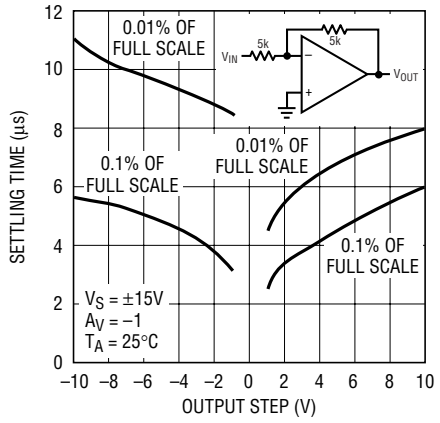


1677 G25

Settling Time vs Output Step (Noninverting)

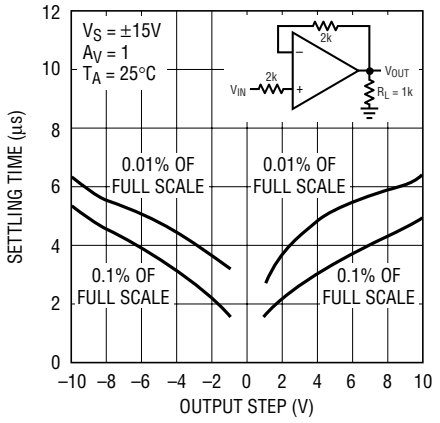


1677 G26

Gain, Phase Shift vs Frequency

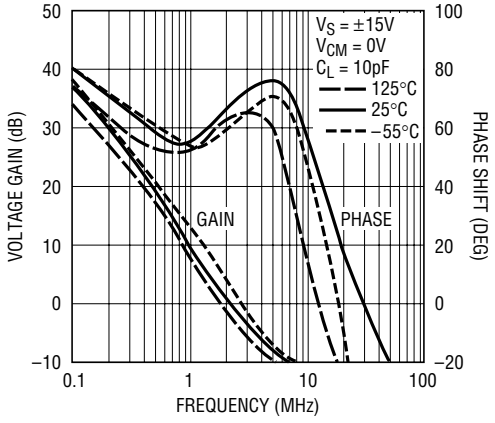


1677 G34

Gain, Phase Shift vs Frequency

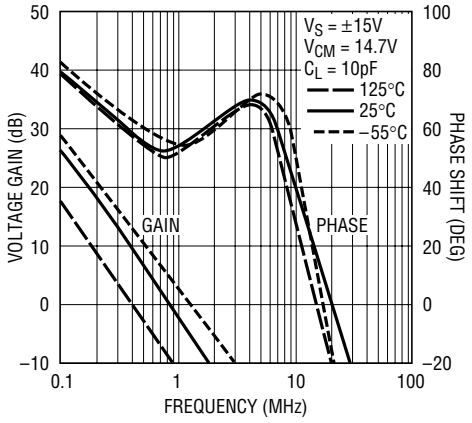


1677 G35

Gain, Phase Shift vs Frequency

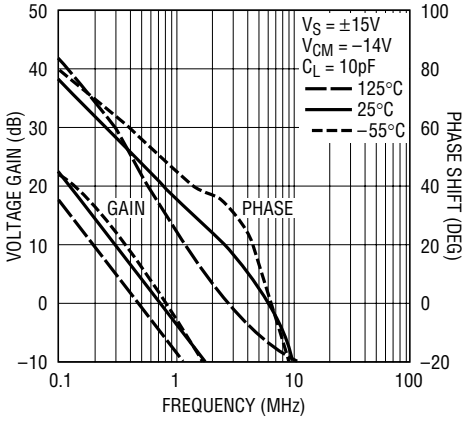

1677 G36


Output Voltage Swing vs Load Current

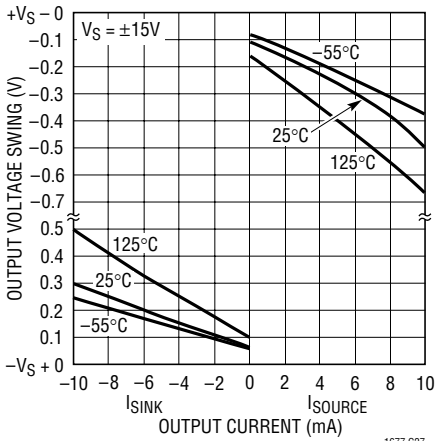


1677 G27

TYPICAL PERFORMANCE CHARACTERISTICS


Closed-Loop Output Impedance vs Frequency

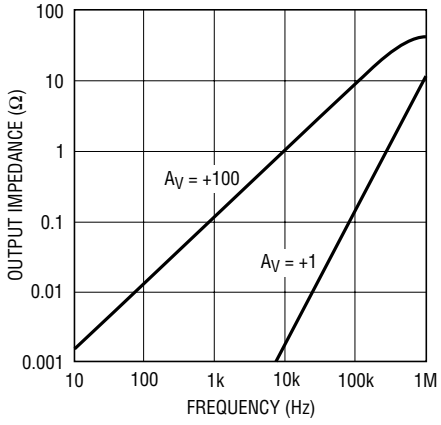


Output Short-Circuit Current vs Time

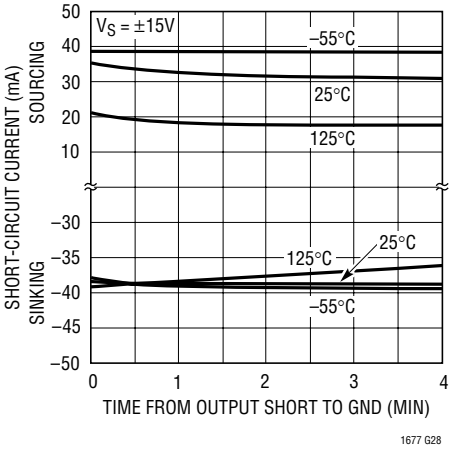


Total Harmonic Distortion and Noise vs Frequency for Noninverting Gain

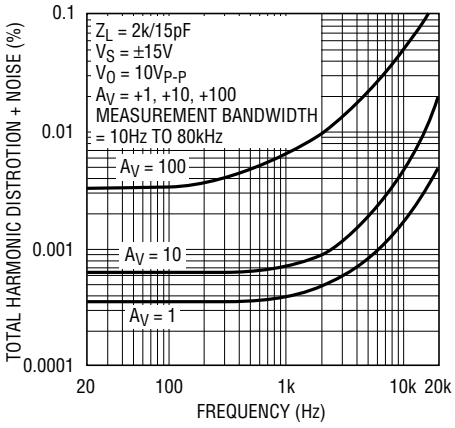


Total Harmonic Distortion and Noise vs Frequency for Inverting Gain

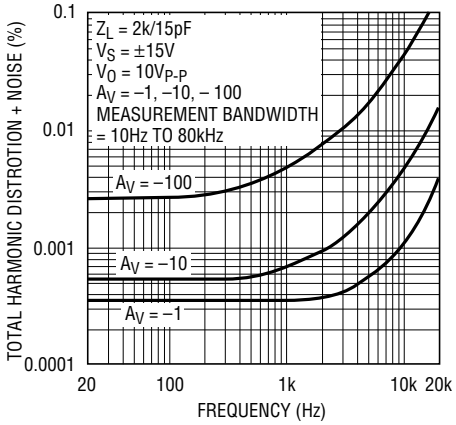

Total Harmonic Distortion and Noise vs Output Amplitude for Noninverting Gain

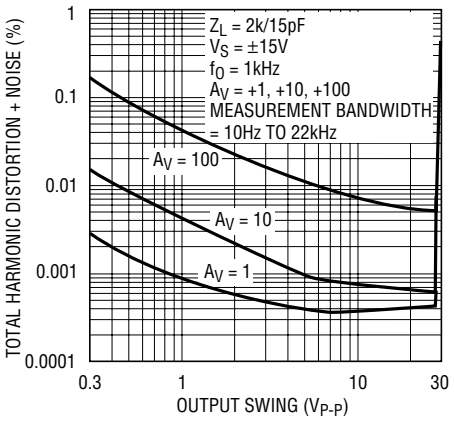

Total Harmonic Distortion and Noise vs Output Amplitude for Inverting Gain

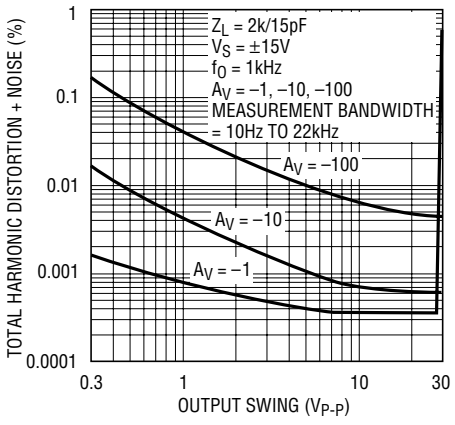

APPLICATIONS INFORMATION

General

The LT1677 series devices may be inserted directly into OP-07, OP-27, OP-37 and sockets with or without removal of external compensation or nulling components. In addition, the LT1677 may be fitted to 741 sockets with the removal or modification of external nulling components.

Rail-to-Rail Operation

To take full advantage of an input range that can exceed the supply, the LT1677 is designed to eliminate phase reversal. Referring to the photographs shown in Figure 1, the LT1677 is operating in the follower mode ($A_V = +1$) at a single 3V supply. The output of the LT1677 clips cleanly and recovers with no phase reversal. This has the benefit of preventing lock-up in servo systems and minimizing distortion components.

Offset Voltage Adjustment

The input offset voltage of the LT1677 and its drift with temperature are permanently trimmed at wafer testing to a low level. However, if further adjustment of V_{OS} is necessary, the use of a 10kΩ nulling potentiometer will not degrade drift with temperature. Trimming to a value other than zero creates a drift of $(V_{OS}/300)\mu V/°C$, e.g., if V_{OS} is adjusted to 300μV, the change in drift will be 1μV/°C (Figure 2).

The adjustment range with a 10kΩ pot is approximately ±2.5mV. If less adjustment range is needed, the sensitivity and resolution of the nulling can be improved by using a smaller pot in conjunction with fixed resistors. The example has an approximate null range of ±200μV (Figure 3).

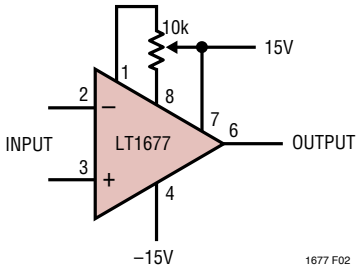


Figure 2. Standard Adjustment





Figure 3. Improved Sensitivity Adjustment

Input = –0.5V to 3.5V

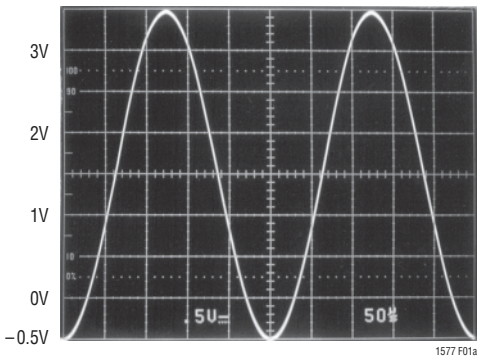

LT1677 Output

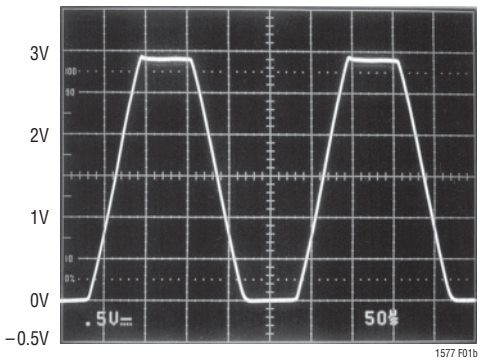


Figure 1. Voltage Follower with Input Exceeding the Supply Voltage (V_S = 3V)

APPLICATIONS INFORMATION

Offset Voltage and Drift

Thermocouple effects, caused by temperature gradients across dissimilar metals at the contacts to the input terminals, can exceed the inherent drift of the amplifier unless proper care is exercised. Air currents should be minimized, package leads should be short, the two input leads should be close together and maintained at the same temperature.

The circuit shown to measure offset voltage is also used as the burn-in configuration for the LT1677, with the supply voltages increased to ±20V (Figure 4).

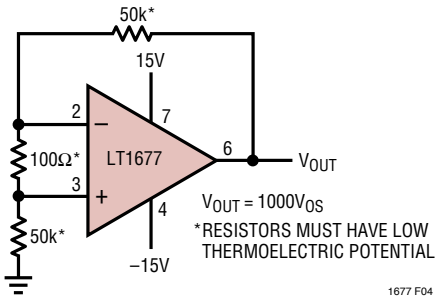


Figure 4. Test Circuit for Offset Voltage and Offset Voltage Drift with Temperature

Unity-Gain Buffer Application

When $R_F \leq 100\Omega$ and the input is driven with a fast, large-signal pulse (>1V), the output waveform will look as shown in the pulsed operation diagram (Figure 5).

During the fast feedthrough-like portion of the output, the input protection diodes effectively short the output to the input and a current, limited only by the output short-circuit protection, will be drawn by the signal generator. With $R_F \geq 500\Omega$, the output is capable of handling the current requirements ($I_L \leq 20$mA at 10V) and the amplifier stays in its active mode and a smooth transition will occur.

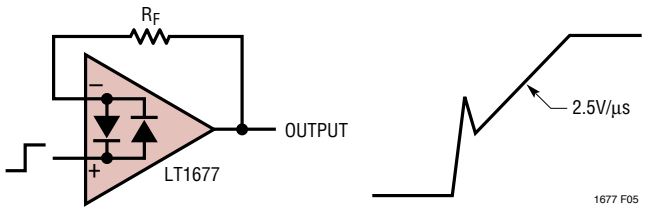


Figure 5. Pulsed Operation

As with all operational amplifiers when $R_F > 2k$, a pole will be created with R_F and the amplifier's input capacitance, creating additional phase shift and reducing the phase margin. A small capacitor (20pF to 50pF) in parallel with R_F will eliminate this problem.

Noise Testing

The 0.1Hz to 10Hz peak-to-peak noise of the LT1677 is measured in the test circuit shown (Figure 6a). The frequency response of this noise tester (Figure 6b) indicates that the 0.1Hz corner is defined by only one zero. The test time to measure 0.1Hz to 10Hz noise should not exceed ten seconds, as this time limit acts as an additional zero to eliminate noise contributions from the frequency band below 0.1Hz.

Measuring the typical 90nV peak-to-peak noise performance of the LT1677 requires special test precautions:

1. The device should be warmed up for at least five minutes. As the op amp warms up, its offset voltage changes typically 3µV due to its chip temperature increasing 10°C to 20°C from the moment the power supplies are turned on. In the ten-second measurement interval these temperature-induced effects can easily exceed tens of nanovolts.
2. For similar reasons, the device must be well shielded from air currents to eliminate the possibility of thermoelectric effects in excess of a few nanovolts, which would invalidate the measurements.
3. Sudden motion in the vicinity of the device can also "feedthrough" to increase the observed noise.

Current noise is measured in the circuit shown in Figure 7 and calculated by the following formula:

$$i_n = \frac{\left[\left(e_{no}\right)^2 - \left(130nV \bullet 101\right)^2\right]^{1/2}}{\left(1M\Omega\right)\left(101\right)}$$

The LT1677 achieves its low noise, in part, by operating the input stage at 100µA versus the typical 10µA of most other op amps. Voltage noise is inversely proportional while current noise is directly proportional to the square

APPLICATIONS INFORMATION

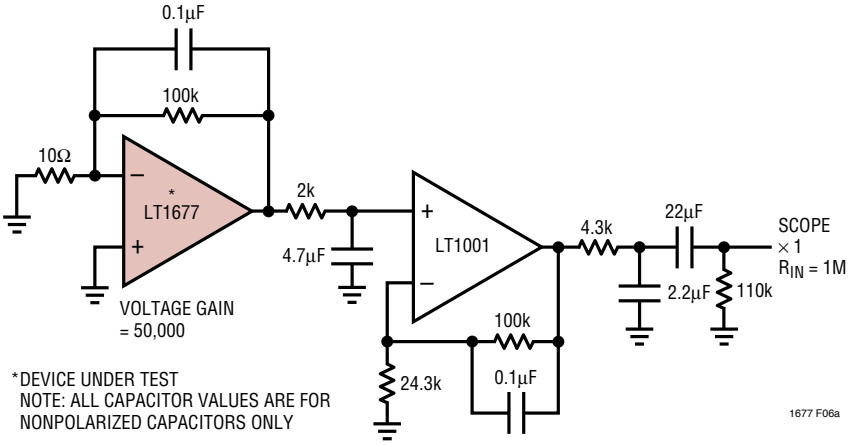


Figure 6a. 0.1Hz to 10Hz Noise Test Circuit

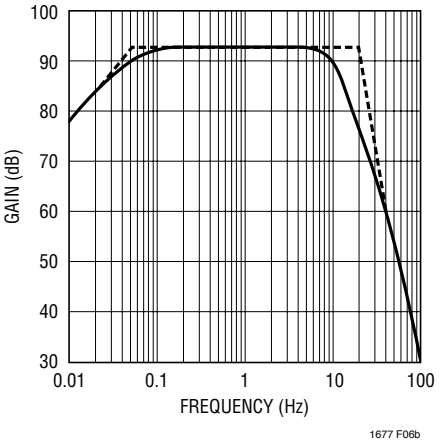


Figure 6b. 0.1Hz to 10Hz Peak-to-Peak Noise Tester Frequency Response

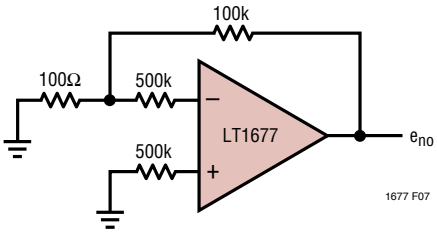


Figure 7

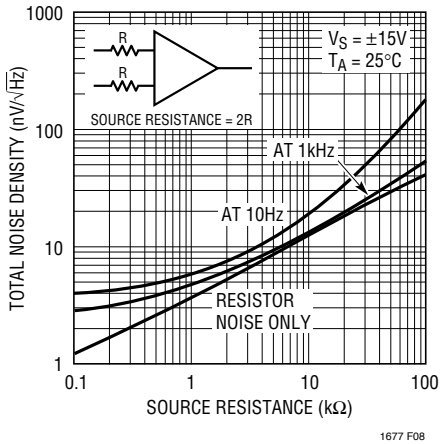


Figure 8. Total Noise vs Source Resistance

root of the input stage current. Therefore, the LT1677's current noise will be relatively high. At low frequencies, the low 1/f current noise corner frequency (≈90Hz) minimizes current noise to some extent.

In most practical applications, however, current noise will not limit system performance. This is illustrated in the Total Noise vs Source Resistance plot (Figure 8) where:

Total Noise = $[(\text{op amp voltage noise})^2 + (\text{resistor noise})^2 + (\text{current noise } R_S)^2]^{1/2}$

Three regions can be identified as a function of source resistance:

(i) $R_S \leq 400\Omega$. Voltage noise dominates

(ii) $400\Omega \leq R_S \leq 50k$ at 1kHz
$400\Omega \leq R_S \leq 8k$ at 10Hz
} Resistor noise dominates

(iii) $R_S > 50k$ at 1kHz
$R_S > 8k$ at 10Hz
} Current noise dominates

Clearly the LT1677 should not be used in region (iii), where total system noise is at least six times higher than the voltage noise of the op amp, i.e., the low voltage noise specification is completely wasted. In this region the LT1792 or LT1793 is the best choice.

APPLICATIONS INFORMATION

Rail-to-Rail Input

The LT1677 has the lowest voltage noise, offset voltage and highest gain when compared to any rail-to-rail op amp. The input common mode range for the LT1677 can exceed the supplies by at least 100mV. As the common mode voltage approaches the positive rail ($+V_S$ – 0.7V), the tail current for the input pair (Q1, Q2) is reduced, which prevents the input pair from saturating (refer to the Simplified Schematic). The voltage drop across the load resistors R_{C1}, R_{C2} is reduced to less than 200mV, degrading the slew rate, bandwidth, voltage noise, offset voltage and input bias current (the cancellation is shut off).

When the input common mode range goes below 1.5V above the negative rail, the NPN input pair (Q1, Q2) shuts off and the PNP input pair (Q8, Q9) turns on. The offset voltage, input bias current, voltage noise and bandwidth are also degraded. The graph of Offset Voltage Shift vs Common Mode shows where the knees occur by displaying the change in offset voltage. The change-over points are temperature dependent, see the graph Common Mode Range vs Temperature.

Rail-to-Rail Output

The rail-to-rail output swing is achieved by using transistor collectors (Q28, Q29) instead of customary class A-B emitter followers for the output stage. Referring to the Simplified Schematic, the output NPN transistor (Q29) sinks the current necessary to move the output in the negative direction. The change in Q29's base emitter voltage is reflected directly to the gain node (collectors of Q20 and Q16). For large sinking currents, the delta V_{BE} of Q29 can dominate the gain. Figure 9 shows the change in input voltage for a change in output voltage for different load resistors connected between the supplies. The gain is much higher for output voltages above ground (Q28 sources current) since the change in base emitter voltage of Q28 is attenuated by the gain in the PNP portion of the output stage. Therefore, for positive output swings (output sourcing current) there is hardly any change in input voltage for any load resistance. Highest gain and best linearity is achieved when the output is sourcing current, which is the case in single supply operation when the load is ground referenced. Figure 10 shows gains for both sinking and sourcing load currents for a worst-case load of 600Ω.

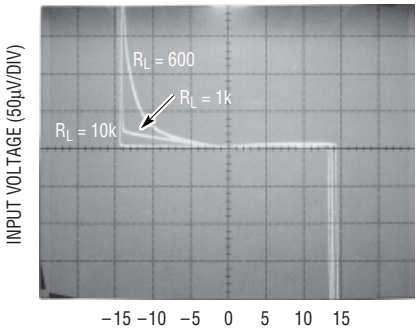


Figure 9. Voltage Gain Split Supply


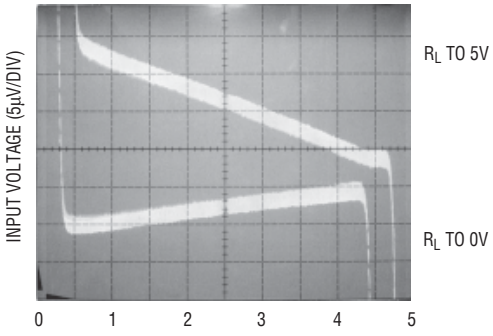


Figure 10. Voltage Gain Single Supply

TYPICAL APPLICATIONS


Microvolt Comparator with Hysteresis

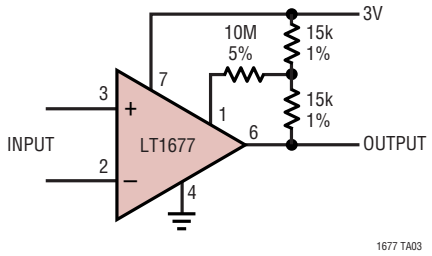

POSITIVE FEEDBACK TO ONE OF THE NULLING TERMINALS CREATES APPROXIMATELY 5µV OF HYSTERESIS. OUTPUT CAN SINK 16mA

INPUT OFFSET VOLTAGE IS TYPICALLY CHANGED LESS THAN 5µV DUE TO THE FEEDBACK

3V Strain Gauge Amplifier

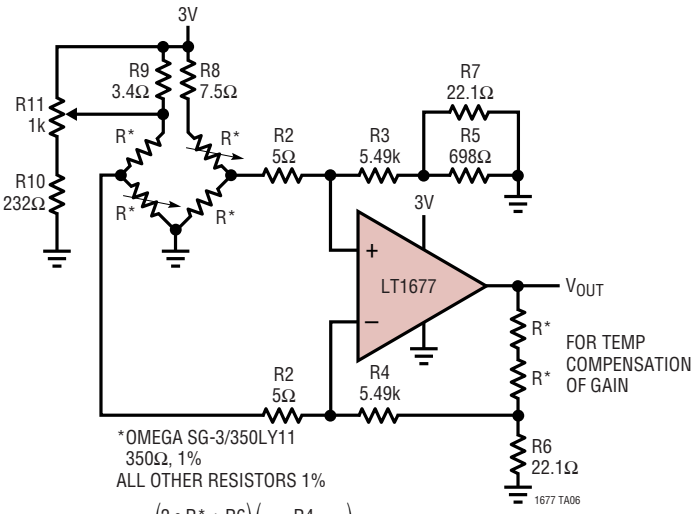


*OMEGA SG-3/350LY11
350Ω, 1%
ALL OTHER RESISTORS 1%

$$A_V = \left(\frac{2 \bullet R^* + R6}{R6}\right)\left(\frac{R4}{R2 + (R^*/2)}\right) \cong 1000$$

TRIM R11 FOR BRIDGE BALANCE

Precision High Side Current Sense

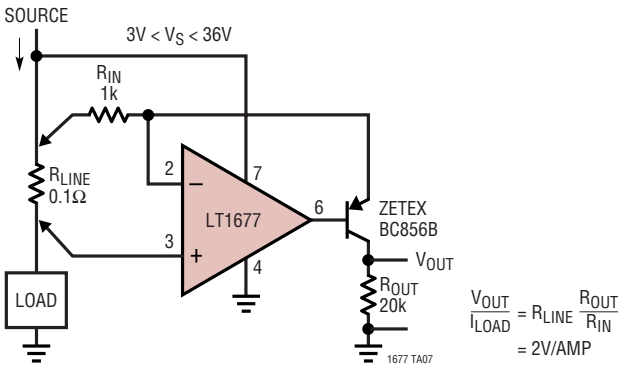


$$\frac{V_{OUT}}{I_{LOAD}} = R_{LINE}\frac{R_{OUT}}{R_{IN}}$$


= 2V/AMP

TYPICAL APPLICATIONS

3V Super Electret Microphone Amplifier with DC Servo

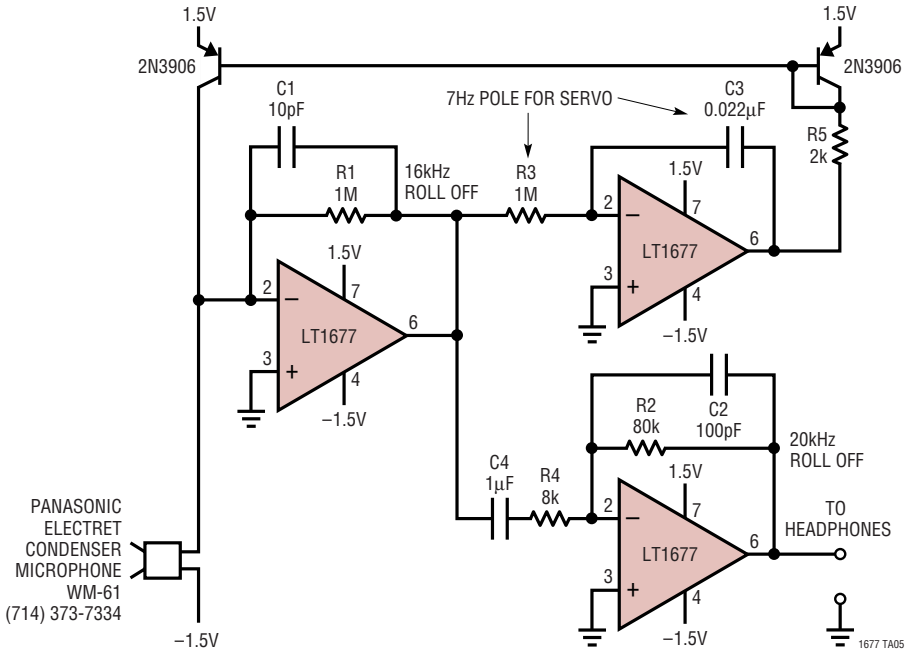


SIMPLIFIED SCHEMATIC

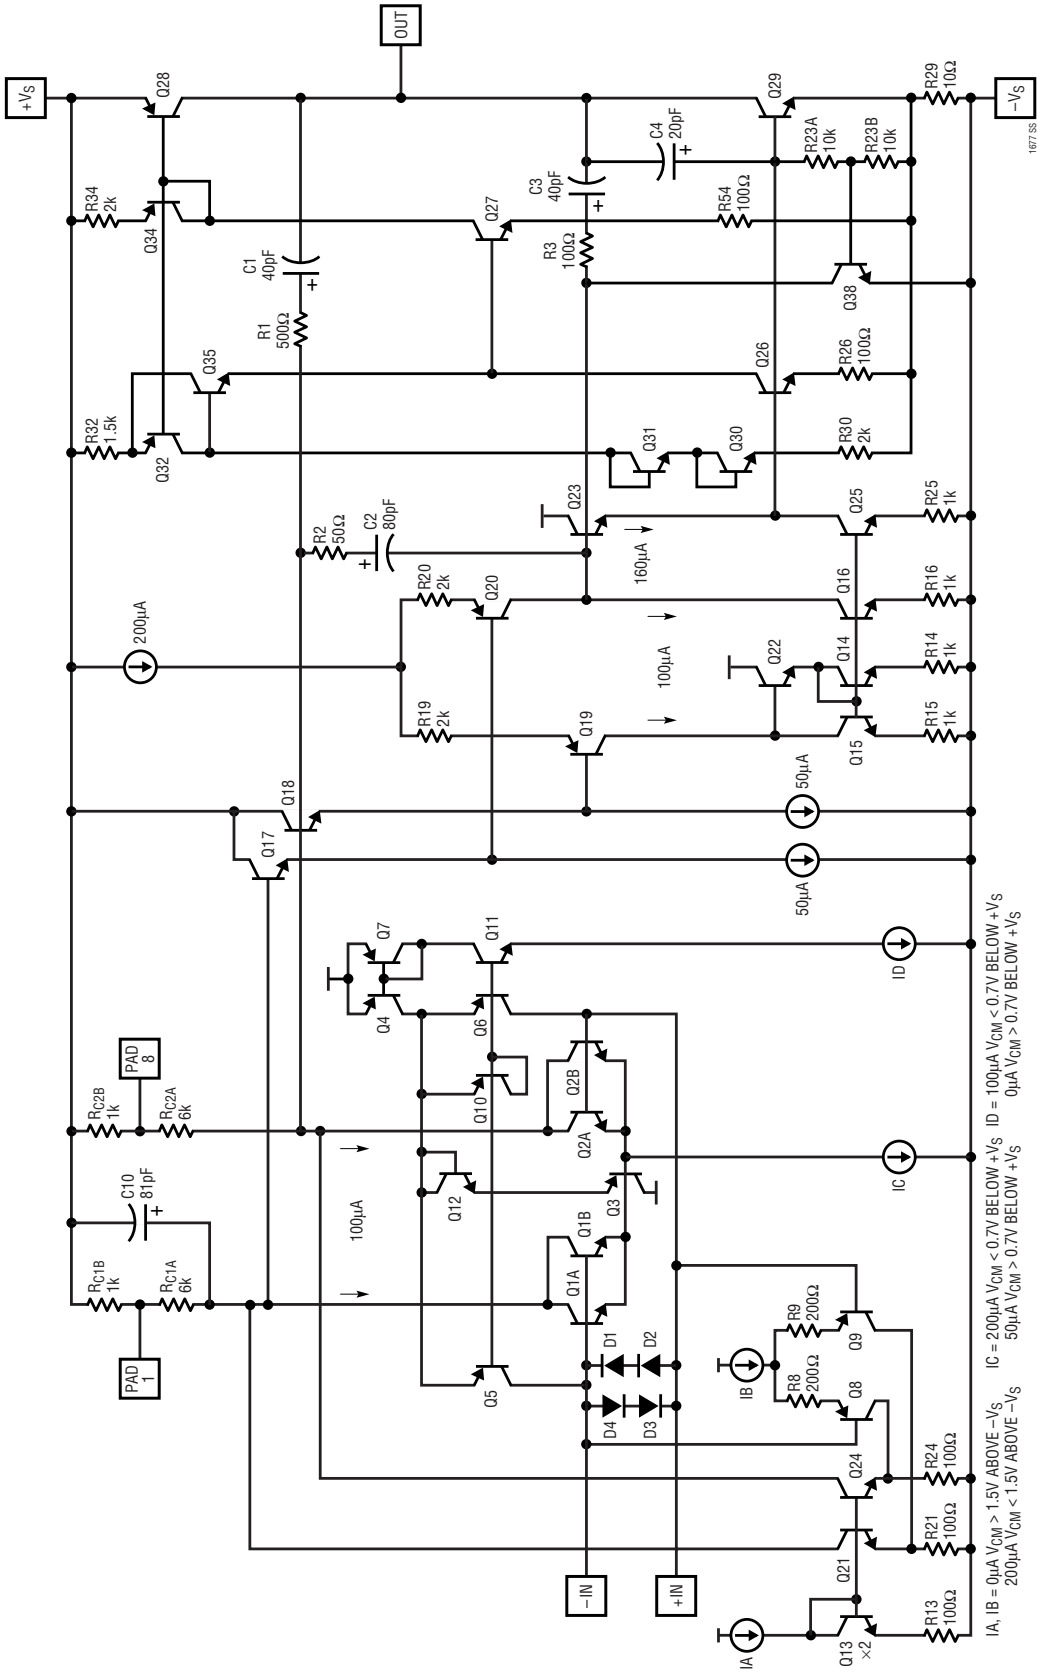

PACKAGE DESCRIPTION

Dimensions in inches (millimeters) unless otherwise noted.


N8 Package
8-Lead PDIP (Narrow 0.300)
(LTC DWG # 05-08-1510)

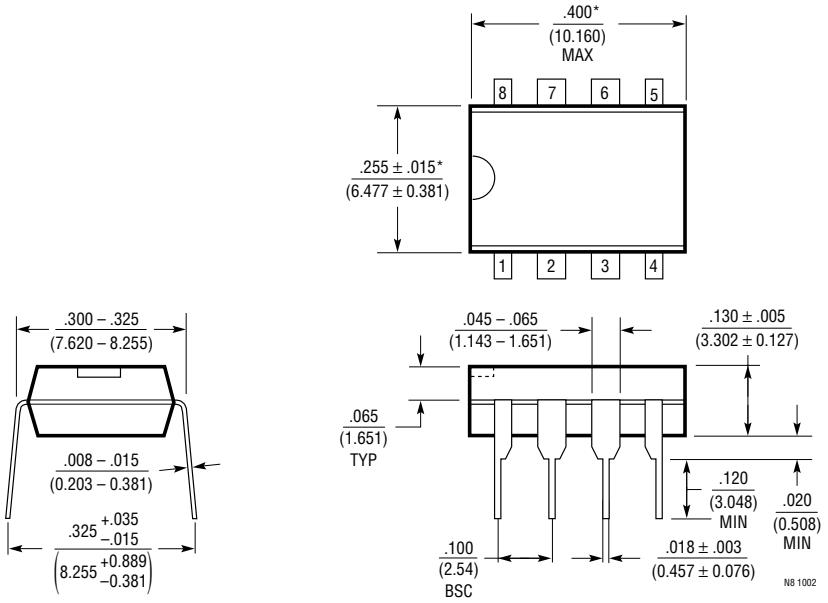

NOTE:
1. DIMENSIONS ARE INCHES / MILLIMETERS

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

S8 Package
8-Lead Plastic Small Outline (Narrow 0.150)
(LTC DWG # 05-08-1610)

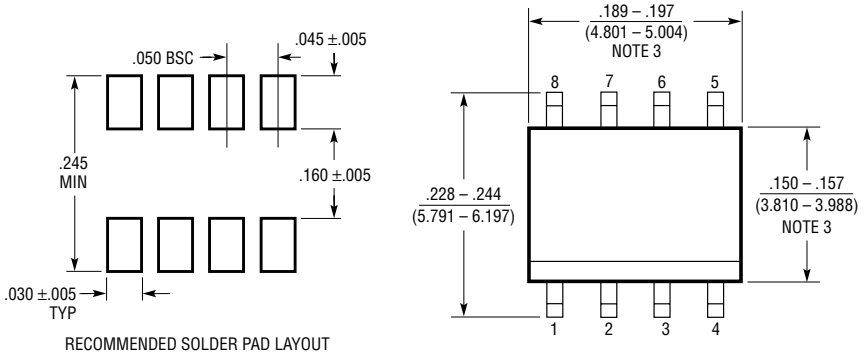

NOTE:
1. DIMENSIONS IN INCHES / (MILLIMETERS)
2. DRAWING NOT TO SCALE
3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .006" (0.15mm)


SO8 0303

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

TYPICAL APPLICATION

This 2-wire remote Geophone preamp operates on a current-loop principle and so has good noise immunity. Quiescent current is ≈10mA for a V_{OUT} of 2.5V. Excitation will cause AC currents about this point of ~±4mA for a V_{OUT} of ~±1V max. The op amp is configured for a voltage gain of ~107. Components R5 and Q1 convert the voltage into a current for transmission back to R10, which converts it into a voltage again. The LM334 and 2N3904 are not temperature compensated so the DC output contains temperature information.

2-Wire Remote Geophone Preamp

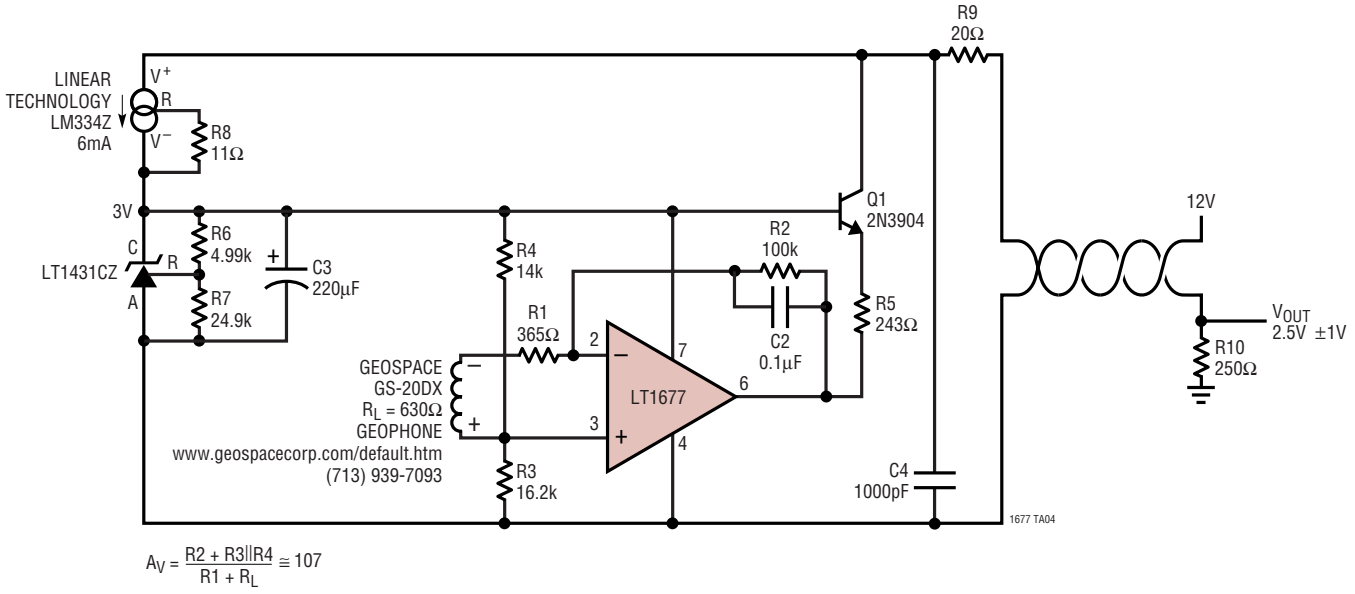

$$A_V = \frac{R2 + R3||R4}{R1 + R_L} \cong 107$$

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1028/LT1128	Ultralow Noise Precision Op Amps	Lowest Noise 0.85nV/√Hz
LT1115	Ultralow Noise, Low distortion Audio Op Amp	0.002% THD, Max Noise 1.2nV/√Hz
LT1124/LT1125	Dual/Quad Low Noise, High Speed Precision Op Amps	Similar to LT1007
LT1126/LT1127	Dual/Quad Decompensated Low Noise, High Speed Precision Op Amps	Similar to LT1037
LT1226	Low Noise, Very High Speed Op Amp	1GHz, 2.6nV/√Hz, Gain of 25 Stable
LT1498/LT1499	10MHz, 5V/µs, Dual/Quad Rail-to-Rail Input and Output Op Amps	Precision C-Load™ Stable
LT1792	Low Noise, Precision JFET Input Op Amp	4.2nV/√Hz, 10fA/√Hz
LT1793	Low Noise, Picoampere Bias Current Op Amp	6nV/√Hz, 1fA/√Hz, I_B = 10pA Max
LT1806	Low Noise, 325MHz Rail-to-Rail Input and Output Op Amp	3.5nV/√Hz
LT1881/LT1882	Dual/Quad Rail-to-Rail Output Picoamp Input Precision Op Amps	C_{LOAD} to 1000pF, I_B = 200pA Max
LT1884/LT1885	Dual/Quad Rail-to-Rail Output Picoamp Input Precision Op Amps	2.2MHz Bandwidth, 1.2V/µs SR

C-Load is a trademark of Linear Technology Corporation.

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7417
(408)432-1900 • FAX: (408) 434-0507 • www.linear-tech.com

LT 0306 REV A • PRINTED IN USA

© LINEAR TECHNOLOGY CORPORATION 2000