

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0014451809

Status:

Active

Overview:

cgrid_sl_products

Description:

2.54mm (.100") Pitch SL™ Insulation Displacement Connector Assembly, Male, Single Row, Version D, Back Ribs, for Wire Size 28, 3.81µm (150µ") Tin (Sn), 9 Circuits

Documents:

3D Model

Drawing (PDF)

Product Specification PS-70400 (PDF)

RoHS Certificate of Compliance (PDF)


Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Ribbon Cable / Wire Trap Connectors
Series	70475
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Compliant	No
Overview	cgrid_sl_products
Product Name	SL™

Physical	
Circuits (Loaded)	9
Durability (mating cycles max)	25
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	None
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Polarized to Mating Part	No
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Wire Insulation Diameter	1.35mm (.053") max.
Wire Size AWG	28
Wire/Cable Type	Discrete Wire, Ribbon Cable

Electrical	
Current - Maximum per Contact	1.2A
Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers	
Product Specification	PS-70400

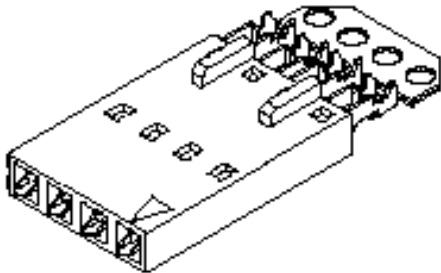

Series
image - Reference only

EU RoHS

China RoHS

Compliance Status

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)



Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
70475Series


Mates With
70004 Interim Clip (Single Row), 70013 Interim Clip (Dual Row)

Use With
7307 Tinned 28AWG, 7767 Topcoat 28AWG, 24241 Tinned 26AWG, 8996 Topcoat 26AWG, 24226 Tinned 24AWG, 8997 Topcoat 24AWG, 24369 High Flex 26AWG, 24389 High Flex 24AWG


OPTION D

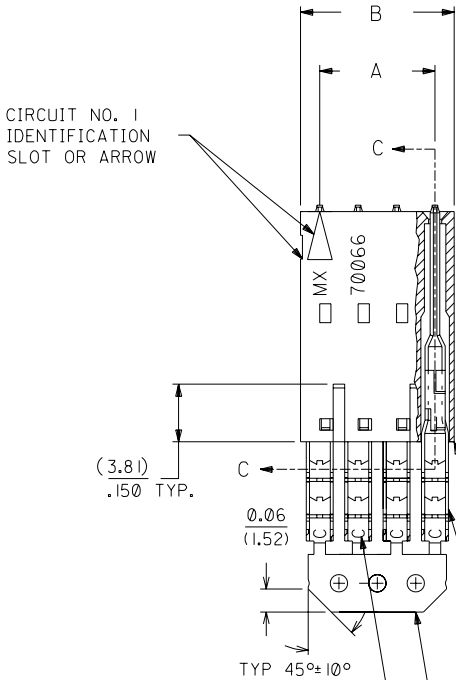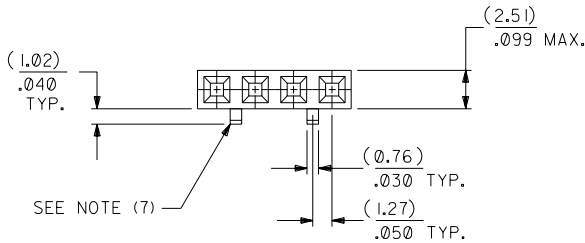

SECTION C-C



PRE-LOADED
ASSEMBLY

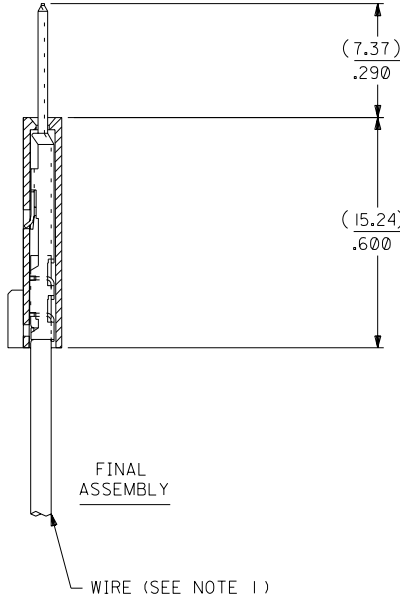

HOUSING PART NO. 70066-****
MATERIAL: G.F. POLYESTER, 94V-0

TERMINAL PART NO. 70110-****
MATERIAL: PHOSPHOR BRONZE
PLATING PER ES-88-***

TIN - .000150 MINIMUM TIN OVER
.000050 MINIMUM NICKEL PLATE.

*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

I.D. SLOT CODE TO WIRE GAUGE CHART	
I.D. SLOT CODE	WIRE GAUGE
C	28 AWG.

PLATING CODE (STRIPE ON CARRIER STRIP)	
PLATING	COLOR
TIN	NONE

NOTES:

- 1) TO BE USED WITH (28) AWG. STRANDED WIRE WITH
(.135)/.053 DIA. MAX. INSULATION.
- 2) SEE CHART FOR CIRCUIT SIZES.
- 3) STANDARD PACKAGING PER PK-70873-0001. OPTIONAL
PACKAGING MAY BE AVAILABLE, REQUEST DWG.
PK-70475.
- 4) PARTS STACKABLE END TO END
ON (2.54)/.100 CENTERS.
- 5) REFER TO PRODUCT SPECIFICATION: PS-70475.
- 6) SEE DWG. SDA-70475-**** (SHT.3) FOR OPTIONAL
HOUSING DETAILS.
- 7) 4 CIRCUIT SHOWN. 3 - 25 CKT'S. HAVE (2) RIBS.
- 8) TO MATE WITH MOLEX PART NO'S.: 70018-****,
70022-****, 70104-****.
- 9) 2 CIRCUIT ASSEMBLIES SUPPLIED AS GROUPED PAIRS.

CKT. SIZE	A	B	EDP. NO.	ENG. NO.
2	(2.54) 1.00	(5.05) 1.99	14-45-1802	A-70475-0421
3	(5.08) 2.00	(7.59) 2.99	14-45-1803	A-70475-0422
4	(7.62) 3.00	(10.13) 3.99	14-45-1804	A-70475-0423
5	(10.16) 4.00	(12.67) 4.99	14-45-1805	A-70475-0424
6	(12.70) 5.00	(15.21) 5.99	14-45-1806	A-70475-0425
7	(15.24) 6.00	(17.75) 6.99	14-45-1807	A-70475-0426
8	(17.78) 7.00	(20.29) 7.99	14-45-1808	A-70475-0427
9	(20.32) 8.00	(22.83) 8.99	14-45-1809	A-70475-0428
10	(22.86) 9.00	(25.37) 9.99	14-45-1810	A-70475-0429
11	(25.54) 1.000	(27.91) 1.099	14-45-1811	A-70475-0430
12	(27.94) 1.100	(30.45) 1.199	14-45-1812	A-70475-0431
13	(30.48) 1.200	(32.99) 1.299	14-45-1813	A-70475-0432
14	(33.02) 1.300	(35.53) 1.399	14-45-1814	A-70475-0433
15	(35.56) 1.400	(38.07) 1.499	14-45-1815	A-70475-0434
16	(38.01) 1.500	(40.61) 1.599	14-45-1816	A-70475-0435
17	(40.64) 1.600	(43.15) 1.699	14-45-1817	A-70475-0436
18	(43.18) 1.700	(45.69) 1.799	14-45-1818	A-70475-0437
19	(45.72) 1.800	(48.23) 1.899	14-45-1819	A-70475-0438
20	(48.26) 1.900	(50.77) 1.999	14-45-1820	A-70475-0439
21	(50.80) 2.000	(53.31) 2.099	14-45-1821	A-70475-0440
22	(53.34) 2.100	(55.85) 2.199	14-45-1822	A-70475-0441
23	(55.88) 2.200	(58.39) 2.299	14-45-1823	A-70475-0442
24	(58.42) 2.300	(60.93) 2.399	14-45-1824	A-70475-0443
25	(60.96) 2.400	(63.47) 2.499	14-45-1825	A-70475-0444

F	LEAD FREE UCP2004-1769 RWHITE 04/03/24	D	REVISED PER ECR NO. 081224 10-17-88 MGB	DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR = 1/2° <table><tr><th></th><th>INCH</th><th>METRIC</th></tr><tr><td>3 PLACE ±</td><td>0.10</td><td>---</td></tr><tr><td>2 PLACE ±</td><td>0.14</td><td>0.25</td></tr><tr><td>1 PLACE ---</td><td>---</td><td>0.35</td></tr></table> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			INCH	METRIC	3 PLACE ±	0.10	---	2 PLACE ±	0.14	0.25	1 PLACE ---	---	0.35	▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM	
	INCH	METRIC																	
3 PLACE ±	0.10	---																	
2 PLACE ±	0.14	0.25																	
1 PLACE ---	---	0.35																	
E1	ADD CARRIER CHAMF ECN #UDT1998-0280 05/20/98 LMCGRATH	C	REVISE PER ECR #081370 5/20/88 MJM	TITLE ASSEMBLY, SL CONNECTOR (SINGLE ROW- (2.54)/.100 GRID)		MOLEX INCORPORATED LISLE, ILL. 60532 U.S.A.	SHEET NO. 1	DATE 10/13/84											
E	I64 PLATING WAS 102 PER ECR # U31149 08/09/93 REED	B	REDRAWN ON CAD ECR #842 5/9/86 W.Z.	PART NO. SEE CHART					DRWG. NO. SDA-70475-0421-0444										
L.T.R.	REVISIONS	L.T.R.	REVISIONS	DRWG. BY WAZ APP'D. BY RL SCALE 4 : 1					FILE NAME T5704750X3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEY INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	DIV.	SIZE C							