

SONY

ICX038DLB

Diagonal 8mm (Type 1/2) CCD Image Sensor for EIA Black-and-White Video Cameras

16 pin DIP (Ceramic)



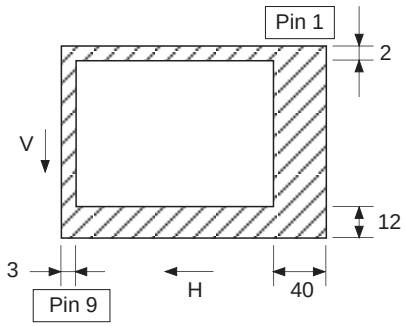

Optical black position (Top View)

Description

The ICX038DLB is an interline CCD solid-state image sensor suitable for EIA black-and-white video cameras with a diagonal 8mm (Type 1/2) system. Smear, sensitivity, D-range, S/N and other characteristics have been greatly improved compared with the ICX038BLB. High sensitivity and low dark current are achieved through the adoption of HAD (Hole-Accumulation Diode) sensors.

This chip features a field period readout system and an electronic shutter with variable charge-storage time. Also, this outline is miniaturized by using original package.

This chip is compatible with and can replace the ICX038BLB.

Features

- Low smear (–20dB compared with the ICX038BLB)
- High sensitivity (+3.0dB compared with the ICX038BLB)
- High D range (+2.5dB compared with the ICX038BLB)
- High S/N
- High resolution and low dark current
- Excellent antiblooming characteristics
- Continuous variable-speed shutter
- Substrate bias: Adjustment free (external adjustment also possible with 6 to 14V)
- Reset gate pulse: 5Vp-p adjustment free (drive also possible with 0 to 9V)
- Horizontal register: 5V drive
- Maximum package dimensions: ϕ13.2mm

Device Structure


- Interline CCD image sensor
- Image size: Diagonal 8mm (Type 1/2)
- Number of effective pixels: 768 (H) $\times$ 494 (V) approx. 380K pixels
- Total number of pixels: 811 (H) $\times$ 508 (V) approx. 410K pixels
- Chip size: 7.95mm (H) $\times$ 6.45mm (V)
- Unit cell size: 8.4µm (H) $\times$ 9.8µm (V)
- Optical black: Horizontal (H) direction: Front 3 pixels, rear 40 pixels
  Vertical (V) direction : Front 12 pixels, rear 2 pixels
- Number of dummy bits: Horizontal 22
  Vertical 1 (even fields only)
- Substrate material: Silicon

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

E96125B99

Block Diagram and Pin Configuration

(Top View)

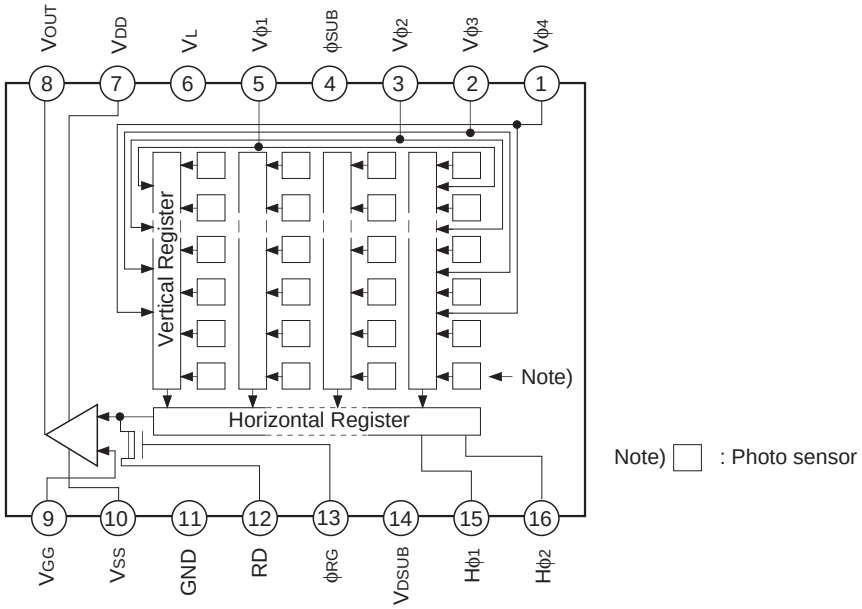

Pin Description

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	$V\phi_4$	Vertical register transfer clock	9	V_{GG}	Output circuit gate bias
2	$V\phi_3$	Vertical register transfer clock	10	V_{SS}	Output circuit source
3	$V\phi_2$	Vertical register transfer clock	11	GND	GND
4	ϕ_{SUB}	Substrate clock	12	RD	Reset drain bias
5	$V\phi_1$	Vertical register transfer clock	13	ϕ_{RG}	Reset gate clock
6	V_L	Protective transistor bias	14	V_{DSUB}	Substrate bias circuit supply voltage
7	V_{DD}	Output circuit supply voltage	15	$H\phi_1$	Horizontal register transfer clock
8	V_{OUT}	Signal output	16	$H\phi_2$	Horizontal register transfer clock

Absolute Maximum Ratings

Item		Ratings	Unit	Remarks
Substrate clock ϕ_{SUB} – GND		–0.3 to +50	V	
Supply voltage	V_{DD}, V_{RD}, V_{DSUB}, V_{OUT}, V_{SS} – GND	–0.3 to +18	V	
	V_{DD}, V_{RD}, V_{DSUB}, V_{OUT}, V_{SS} – ϕ_{SUB}	–55 to +10	V	
Clock input voltage	$V\phi_1$, $V\phi_2$, $V\phi_3$, $V\phi_4$ – GND	–15 to +20	V	
	$V\phi_1$, $V\phi_2$, $V\phi_3$, $V\phi_4$ – ϕ_{SUB}	to +10	V	
Voltage difference between vertical clock input pins		to +15	V	*1
Voltage difference between horizontal clock input pins		to +17	V	
$H\phi_1$, $H\phi_2$ – $V\phi_4$		–17 to +17	V	
ϕ_{RG}, V_{GG} – GND		–10 to +15	V	
ϕ_{RG}, V_{GG} – ϕ_{SUB}		–55 to +10	V	
V_L – ϕ_{SUB}		–65 to +0.3	V	
Pins other than GND and ϕ_{SUB} – V_L		–0.3 to +30	V	
Storage temperature		–30 to +80	°C	
Operating temperature		–10 to +60	°C	

*1 +27V (Max.) when clock width < 10µs, clock duty factor < 0.1%.

Bias Conditions 1 [when used in substrate bias internal generation mode]

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Output circuit supply voltage	V_{DD}	14.55	15.0	15.45	V	
Reset drain voltage	V_{RD}	14.55	15.0	15.45	V	$V_{RD} = V_{DD}$
Output circuit gate voltage	V_{GG}	1.75	2.0	2.25	V	
Output circuit source	V_{SS}	Grounded with 390Ω resistor				
Protective transistor bias	V_L	*1				
Substrate bias circuit supply voltage	V_{DSUB}	14.55	15.0	15.45	V	
Substrate clock	ϕ_{SUB}	*2				

*1 V_L setting is the V_{VL} voltage of the vertical transfer clock waveform, or the same power supply as the V_L power supply for the V driver should be used. (When CXD1267AN is used.)

*2 Do not apply a DC bias to the substrate clock pin, because a DC bias is generated within the CCD.

Bias Conditions 2 [when used in substrate bias external adjustment mode]

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Output circuit supply voltage	V_{DD}	14.55	15.0	15.45	V	
Reset drain voltage	V_{RD}	14.55	15.0	15.45	V	$V_{RD} = V_{DD}$
Output circuit gate voltage	V_{GG}	1.75	2.0	2.25	V	
Output circuit source	V_{SS}	Grounded with 390Ω resistor				
Protective transistor bias	V_L	*3				
Substrate bias circuit supply voltage	V_{DSUB}	*4				
Substrate voltage adjustment range	V_{SUB}	6.0		14.0	V	*5
Substrate voltage adjustment precision	ΔV_{SUB}	–3		+3	%	*5

*3 V_L setting is the V_{VL} voltage of the vertical transfer clock waveform, or the same power supply as the V_L power supply for the V driver should be used. (When CXD1267AN is used.)

*4 Connect to GND or leave open.

*5 The setting value of the substrate voltage (V_{SUB}) is indicated on the back of the image sensor by a special code. When adjusting the substrate voltage externally, adjust the substrate voltage to the indicated voltage. The adjustment precision is ±3%. However, this setting value has not significance when used in substrate bias internal generation mode.

V_{SUB} code — one character indication

Code and optimal setting correspond to each other as follows.

V_{SUB} code	E	f	G	h	J	K	L	m	N	P	Q	R	S	T	U	V	W
Optimal setting	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0

<Example> "L" → V_{SUB} = 9.0V

DC Characteristics

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Output circuit supply current	I_{DD}		5.0	10.0	mA	

Clock Voltage Conditions


Item	Symbol	Min.	Typ.	Max.	Unit	Waveform diagram	Remarks
Readout clock voltage	V_{VT}	14.55	15.0	15.45	V	1	
Vertical transfer clock voltage	V_{VH1}, V_{VH2}	–0.05	0	0.05	V	2	$V_{VH} = (V_{VH1} + V_{VH2})/2$
	V_{VH3}, V_{VH4}	–0.2	0	0.05	V	2	
	V_{VL1}, V_{VL2}, V_{VL3}, V_{VL4}	–9.6	–9.0	–8.5	V	2	$V_{VL} = (V_{VL3} + V_{VL4})/2$
	$V\phi_V$	8.3	9.0	9.65	Vp-p	2	$V\phi_V = V_{VH}n – V_{VL}n$ (n = 1 to 4)
	$\lvert V_{VH1} – V_{VH2} \rvert$			0.1	V	2	
	$V_{VH3} – V_{VH}$	–0.25		0.1	V	2	
	$V_{VH4} – V_{VH}$	–0.25		0.1	V	2	
	V_{VHH}			0.5	V	2	High-level coupling
	V_{VHL}			0.5	V	2	High-level coupling
	V_{VLH}			0.5	V	2	Low-level coupling
	V_{VLL}			0.5	V	2	Low-level coupling
Horizontal transfer clock voltage	$V\phi_H$	4.75	5.0	5.25	Vp-p	3	
	V_{HL}	–0.05	0	0.05	V	3	
Reset gate clock voltage*1	V_{RGL}	*1			V	4	
	$V\phi_{RG}$	4.5	5.0	5.5	Vp-p	4	
	$V_{RGLH} – V_{RGLL}$			0.8	V	4	Low-level coupling
Substrate clock voltage	$V\phi_{SUB}$	23.0	24.0	25.0	Vp-p	5	

*1 Input the reset gate clock without applying a DC bias. In addition, the reset gate clock can also be driven with the following specifications.


Item	Symbol	Min.	Typ.	Max.	Unit	Waveform diagram	Remarks
Reset gate clock voltage	V_{RGL}	–0.2	0	0.2	V	4	
	$V\phi_{RG}$	8.5	9.0	9.5	Vp-p	4	

Clock Equivalent Circuit Constant

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Capacitance between vertical transfer clock and GND	$C_{\phi V1}$, $C_{\phi V3}$		1800		pF	
	$C_{\phi V2}$, $C_{\phi V4}$		2200		pF	
Capacitance between vertical transfer clocks	$C_{\phi V12}$, $C_{\phi V34}$		450		pF	
	$C_{\phi V23}$, $C_{\phi V41}$		270		pF	
Capacitance between horizontal transfer clock and GND	$C_{\phi H1}$		64		pF	
	$C_{\phi H2}$		62		pF	
Capacitance between horizontal transfer clocks	$C_{\phi HH}$		47		pF	
Capacitance between reset gate clock and GND	$C_{\phi RG}$		8		pF	
Capacitance between substrate clock and GND	$C_{\phi SUB}$		400		pF	
Vertical transfer clock series resistor	R_1, R_2, R_3, R_4		68		Ω	
Vertical transfer clock ground resistor	R_{GND}		15		Ω	

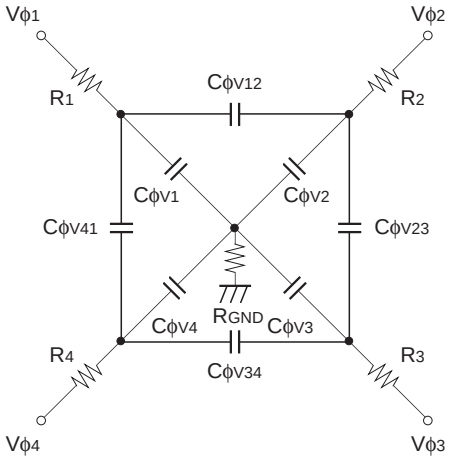


Vertical transfer clock equivalent circuit

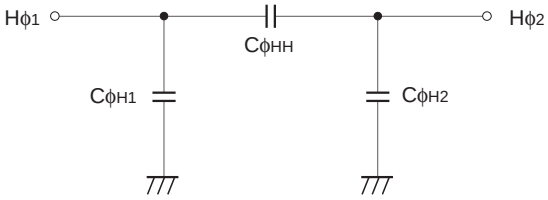


Horizontal transfer clock equivalent circuit

Drive Clock Waveform Conditions

(1) Readout clock waveform

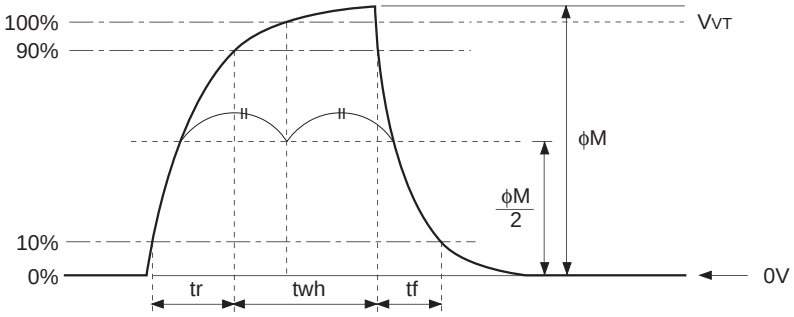

(2) Vertical transfer clock waveform

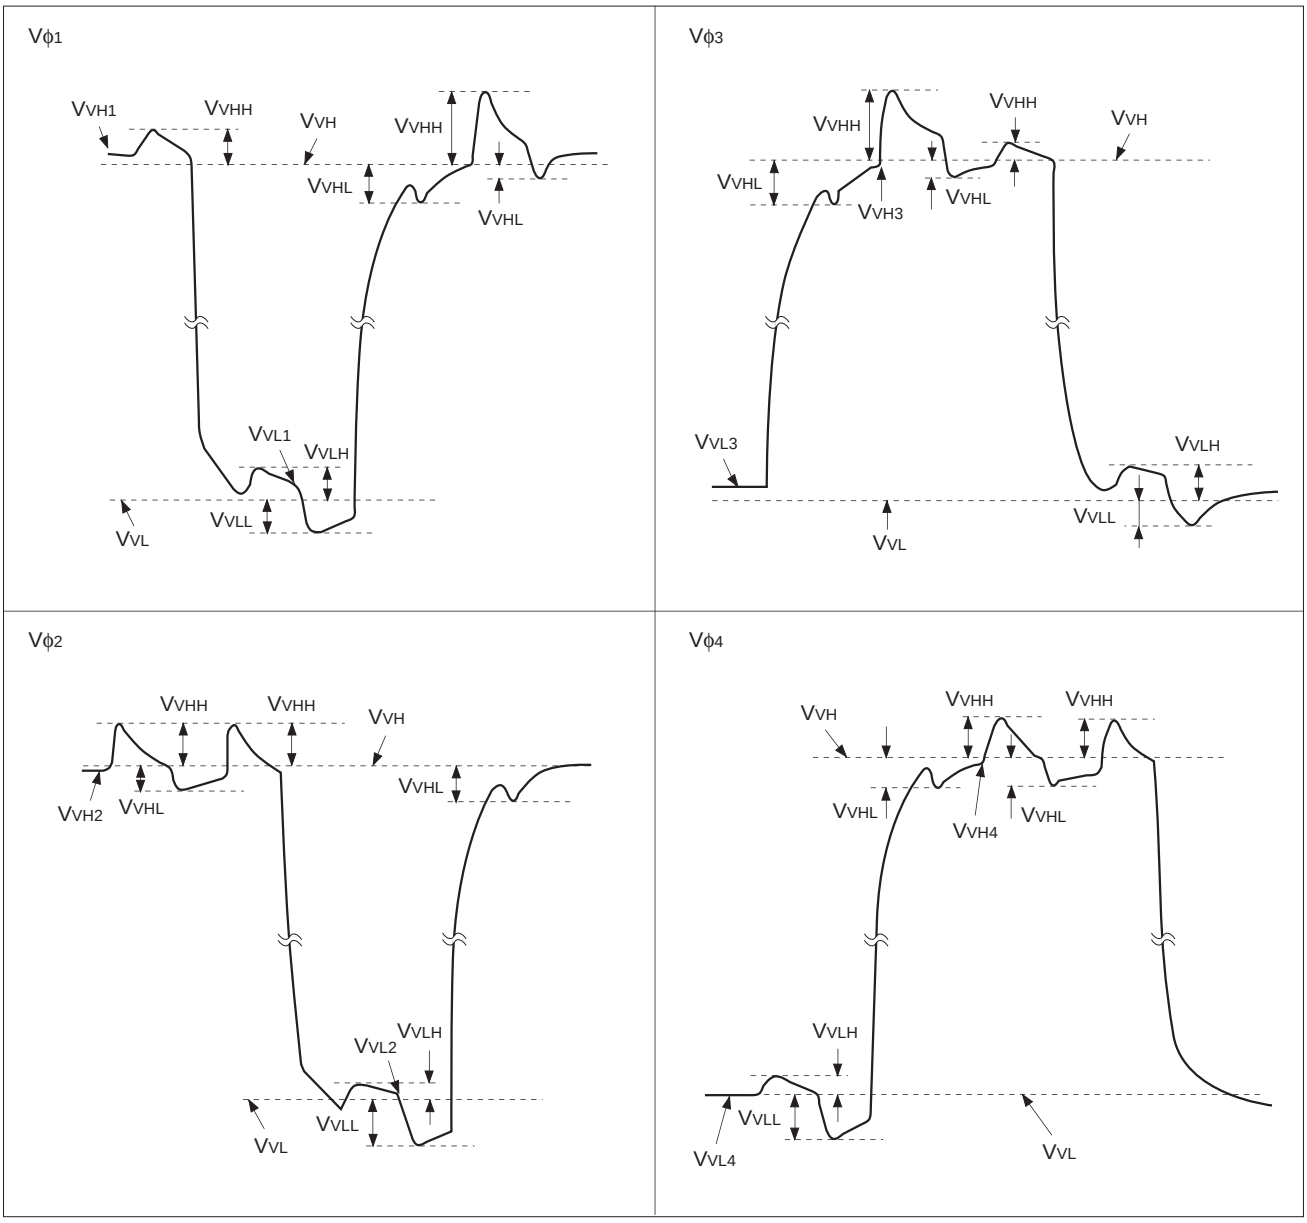


$V_{VH} = (V_{VH1} + V_{VH2})/2$


$V_{VL} = (V_{VL3} + V_{VL4})/2$

$V_{\phi V} = V_{VHn} – V_{VLn}$ (n = 1 to 4)

(3) Horizontal transfer clock waveform

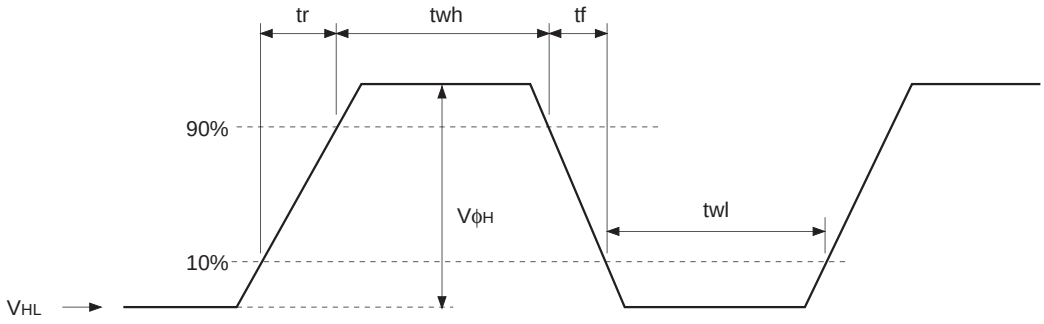

(4) Reset gate clock waveform

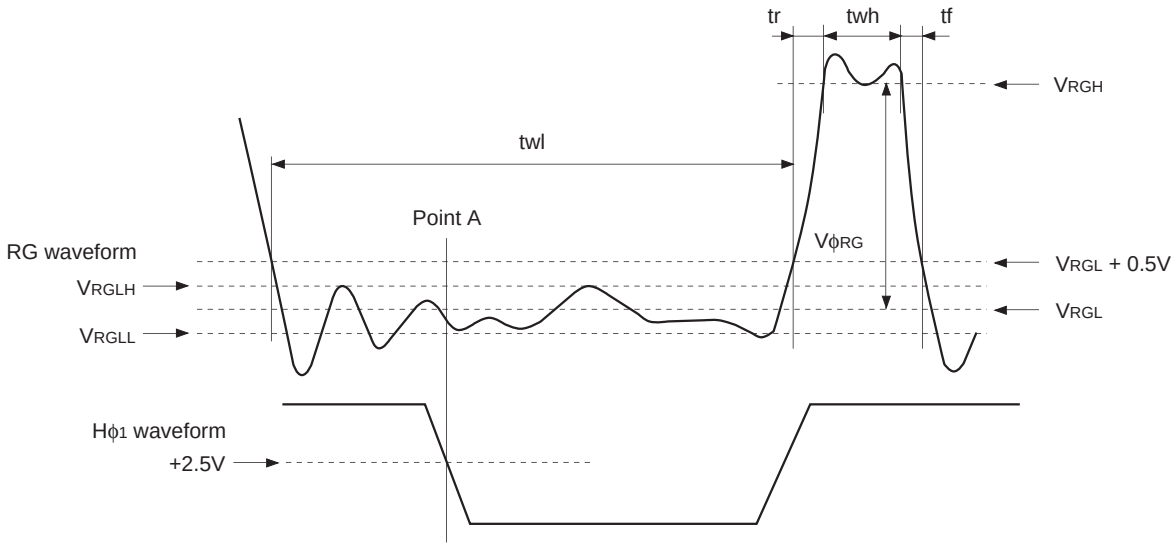


V_{RGLH} is the maximum value and V_{RGLL} is the minimum value of the coupling waveform during the period from Point A in the above diagram until the rising edge of RG. In addition, V_{RGL} is the average value of V_{RGLH} and V_{RGLL}.

$$V_{RGL} = (V_{RGLH} + V_{RGLL})/2$$

Assuming V_{RGH} is the minimum value during the interval twh, then:

$$V_{\phi RG} = V_{RGH} - V_{RGL}$$

(5) Substrate clock waveform

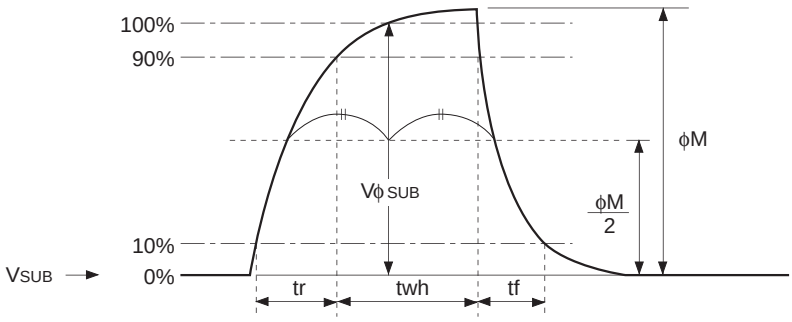

Clock Switching Characteristics

Item		Symbol	twh			twl			tr			tf			Unit	Remarks
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.		
Readout clock		V_T	2.3	2.5					0.5			0.5			µs	During readout
Vertical transfer clock		$V\phi_1$, $V\phi_2$, $V\phi_3$, $V\phi_4$										15		250	ns	*1
Horizontal transfer clock	During imaging	$H\phi$		20			20			15	19		15	19	ns	*2
Horizontal transfer clock	During parallel-serial conversion	$H\phi_1$		5.38						0.01			0.01		µs	
Horizontal transfer clock	During parallel-serial conversion	$H\phi_2$					5.38			0.01			0.01		µs	
Reset gate clock		ϕ_{RG}	11	13			51			3			3		ns	
Substrate clock		ϕ_{SUB}	1.5	1.8							0.5			0.5	µs	During drain charge

*1 When vertical transfer clock driver CXD1267AN is used.

*2 tf ≥ tr – 2ns.

Item	Symbol	two			Unit	Remarks
		Min.	Typ.	Max.		
Horizontal transfer clock	$H\phi_1$, $H\phi_2$	16	20		ns	*3

*3 The overlap period for twh and twl of horizontal transfer clocks $H\phi_1$ and $H\phi_2$ is two.

Image Sensor Characteristics (Ta = 25°C)

Item	Symbol	Min.	Typ.	Max.	Unit	Measurement method	Remarks
Sensitivity	S	500	600		mV	1	
Saturation signal	Vsat	800			mV	2	Ta = 60°C
Smear	Sm		0.00032	0.00056	%	3	
Video signal shading	SH			20	%	4	Zone 0 and I
				25	%	4	Zone 0 to II'
Dark signal	Vdt			2	mV	5	Ta = 60°C
Dark signal shading	ΔVdt			1	mV	6	Ta = 60°C
Flicker	F			2	%	7	
Lag	Lag			0.5	%	8	

Zone Definition of Video Signal Shading

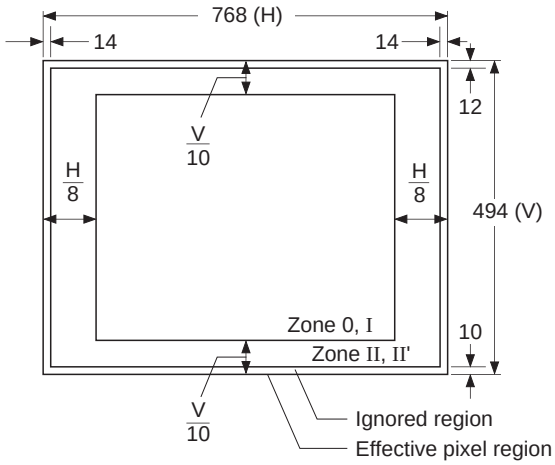


Image Sensor Characteristics Measurement Method

Measurement conditions

1) In the following measurements, the device drive conditions are at the typical values of the bias and clock voltage conditions. (When used with substrate bias external adjustment, set the substrate voltage to the value indicated on the device.)

2) In the following measurements, spot blemishes are excluded and, unless otherwise specified, the optical black (OB) level is used as the reference for the signal output, and the value measured at point [*A] in the drive circuit example is used.

Definition of standard imaging conditions

1) Standard imaging condition I:
Use a pattern box (luminance: 706cd/m^2, color temperature of 3200K halogen source) as a subject. (Pattern for evaluation is not applicable.) Use a testing standard lens with CM500S (t = 1.0mm) as an IR cut filter and image at F8. The luminous intensity to the sensor receiving surface at this point is defined as the standard sensitivity testing luminous intensity.

2) Standard imaging condition II:
Image a light source (color temperature of 3200K) with a uniformity of brightness within 2% at all angles. Use a testing standard lens with CM500S (t = 1.0mm) as an IR cut filter. The luminous intensity is adjusted to the value indicated in each testing item by the lens diaphragm.

1. Sensitivity
Set to standard imaging condition I. After selecting the electronic shutter mode with a shutter speed of 1/250 s, measure the signal output (Vs) at the center of the screen and substitute the value into the following formula.

$$S = Vs \times \frac{250}{60} \text{ [mV]}$$

2. Saturation signal
Set to standard imaging condition II. After adjusting the luminous intensity to 10 times the intensity with the average value of the signal output, 200mV, measure the minimum value of the signal output.

3. Smear
Set to standard imaging condition II. With the lens diaphragm at F5.6 to F8, adjust the luminous intensity to 500 times the intensity with the average value of the signal output, 200mV. When the readout clock is stopped and the charge drain is executed by the electronic shutter at the respective H blankings, measure the maximum value (VSm [mV]) of the signal output and substitute the value into the following formula.

$$Sm = \frac{VSm}{200} \times \frac{1}{500} \times \frac{1}{10} \times 100 \text{ [\%] (1/10V method conversion value)}$$

4. Video signal shading
Set to standard imaging condition II. With the lens diaphragm at F5.6 to F8, adjust the luminous intensity so that the average value of the signal output is 200mV. Then measure the maximum (Vmax [mV]) and minimum (Vmin [mV]) values of the signal output and substitute the values into the following formula.

$$SH = (Vmax - Vmin)/200 \times 100 \text{ [\%]}$$

5. Dark signal
   Measure the average value of the signal output (Vdt [mV]) with the device ambient temperature 60°C and the device in the light-obstructed state, using the horizontal idle transfer level as a reference.

6. Dark signal shading
   After measuring 5, measure the maximum (Vdmax [mV]) and minimum (Vdmin [mV]) values of the dark signal output and substitute the values into the following formula.


   $\Delta Vdt = Vdmax - Vdmin$ [mV]

7. Flicker
   Set to standard imaging condition II. Adjust the luminous intensity so that the average value of the signal output is 200mV, and then measure the difference in the signal level between fields (ΔVf [mV]). Then substitute the value into the following formula.


   $F = (\Delta Vf/200) \times 100$ [%]

8. Lag
   Adjust the signal output value generated by strobe light to 200mV. After setting the strobe light so that it strobes with the following timing, measure the residual signal (Vlag). Substitute the value into the following formula.


   $Lag = (Vlag/200) \times 100$ [%]

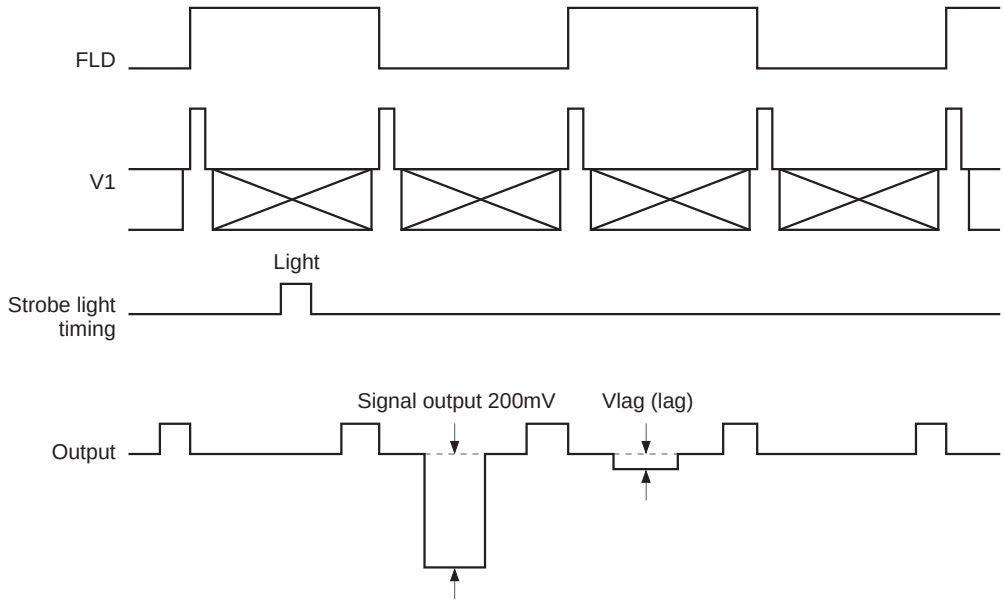


Drive Circuit 1 (substrate bias internal generation mode)

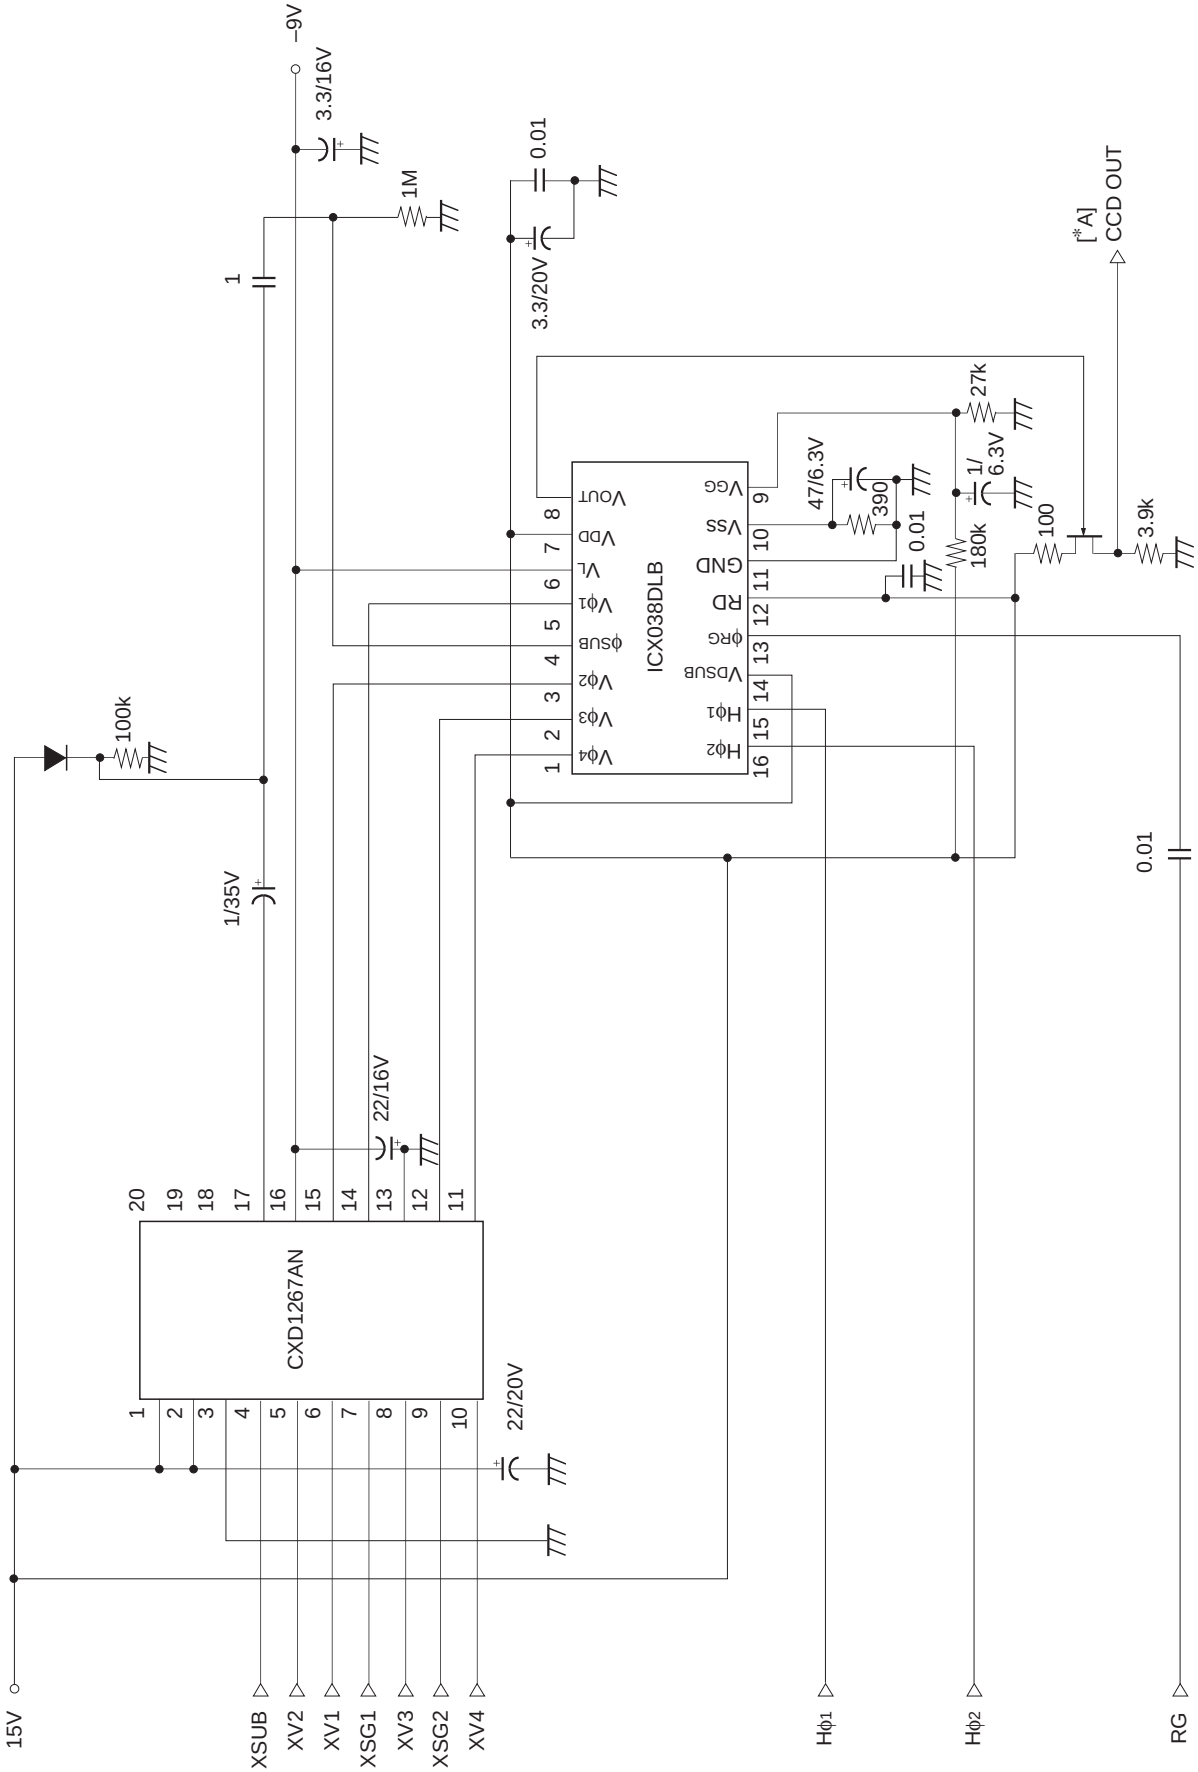


Drive Circuit 2 (substrate bias external adjustment mode)

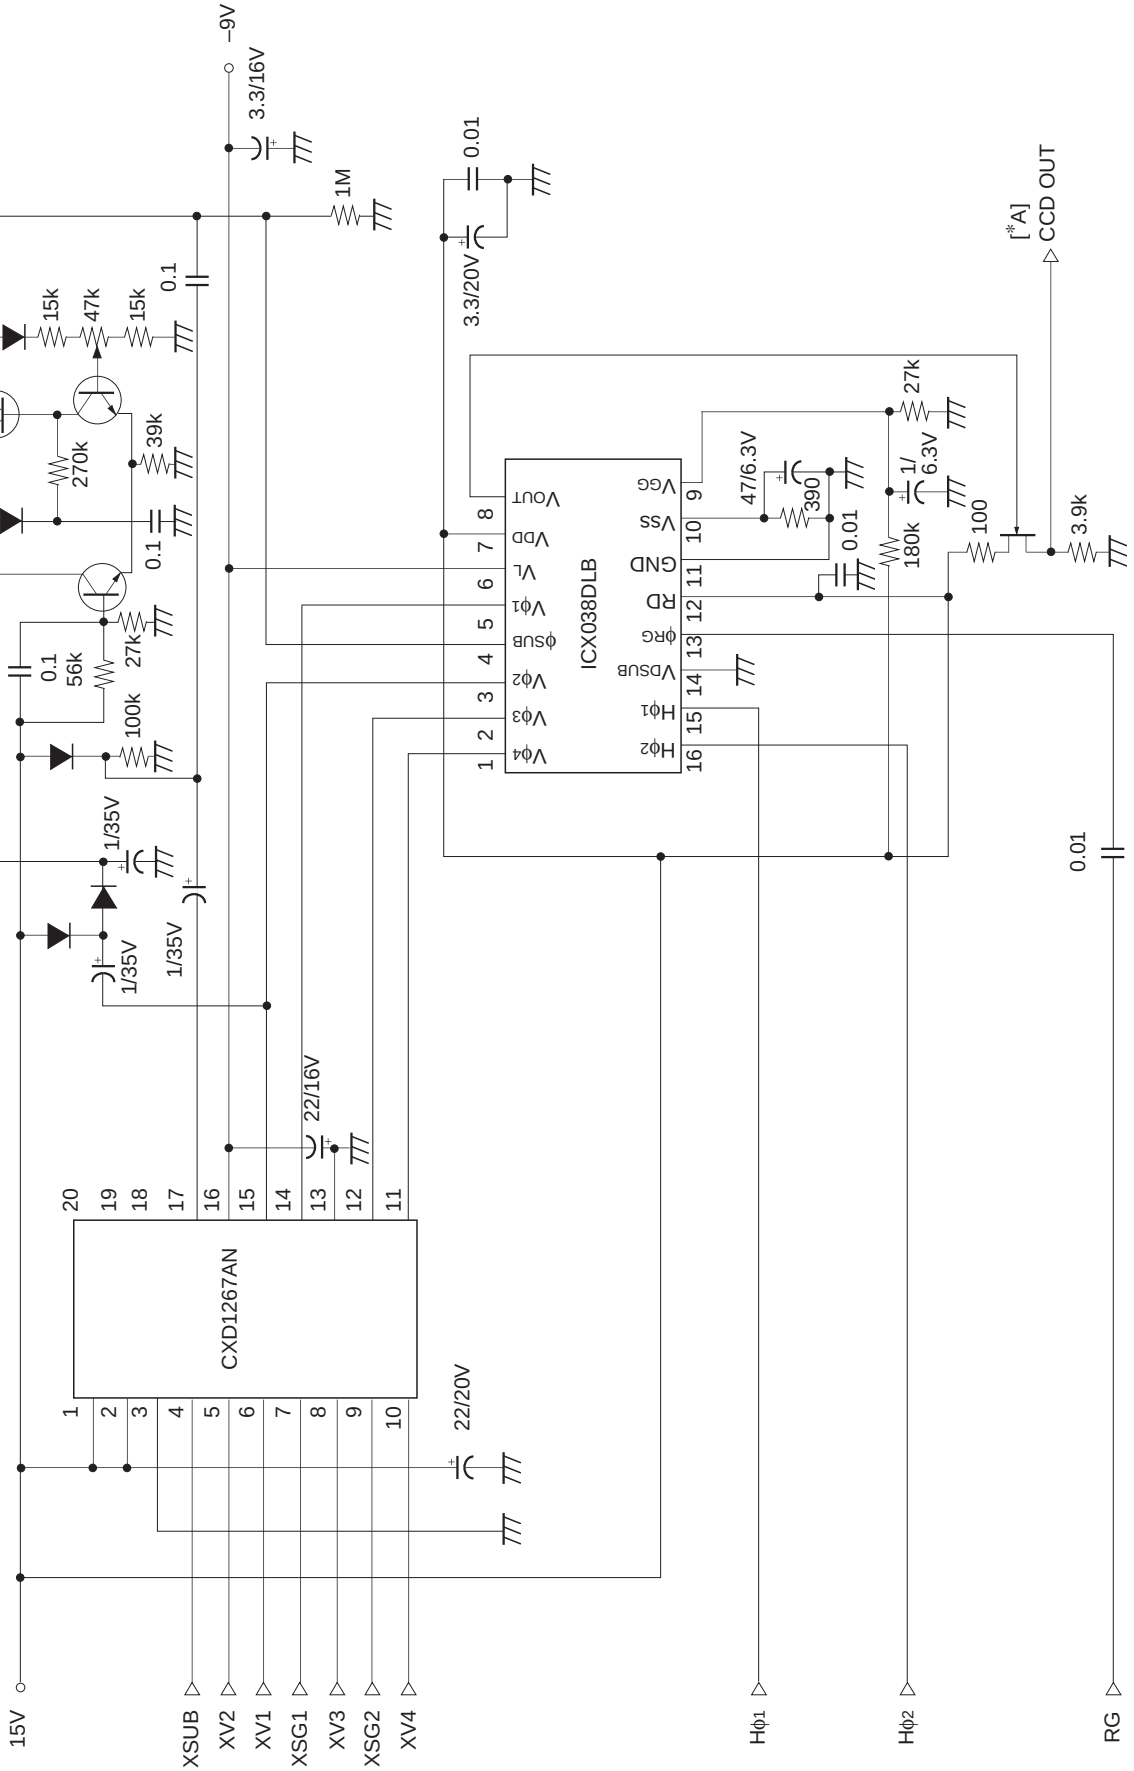


Spectral Sensitivity Characteristics
(Includes lens characteristics, excludes light source characteristics)

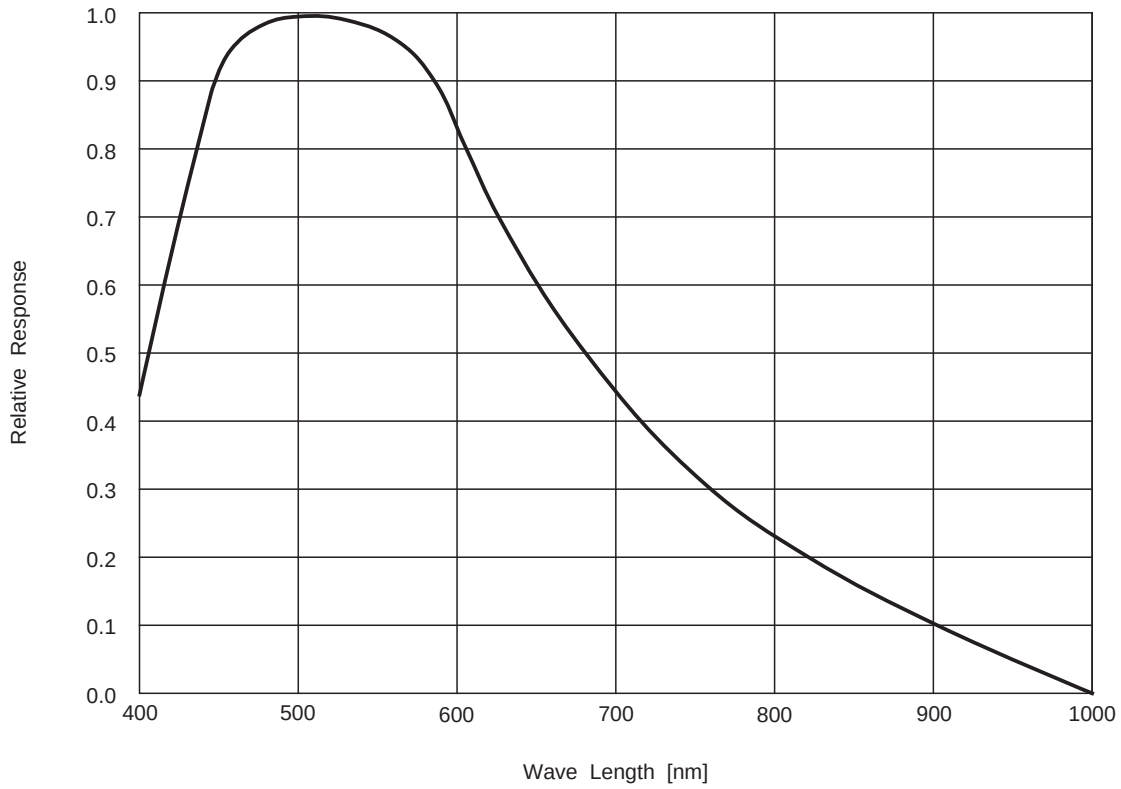


Sensor Readout Clock Timing Chart

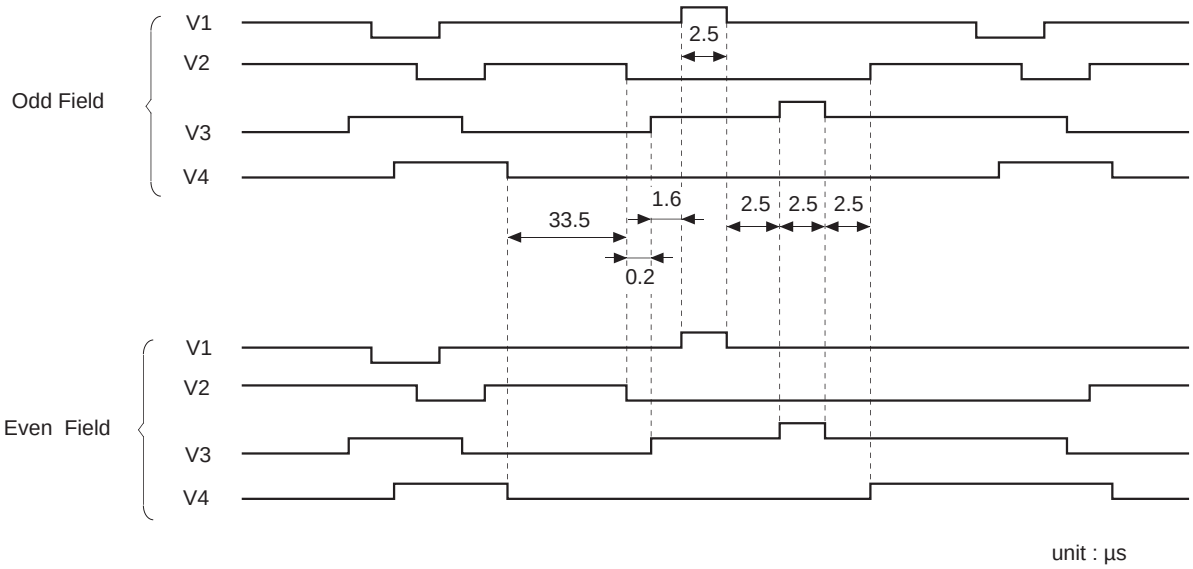

Drive Timing Chart (Vertical Sync)

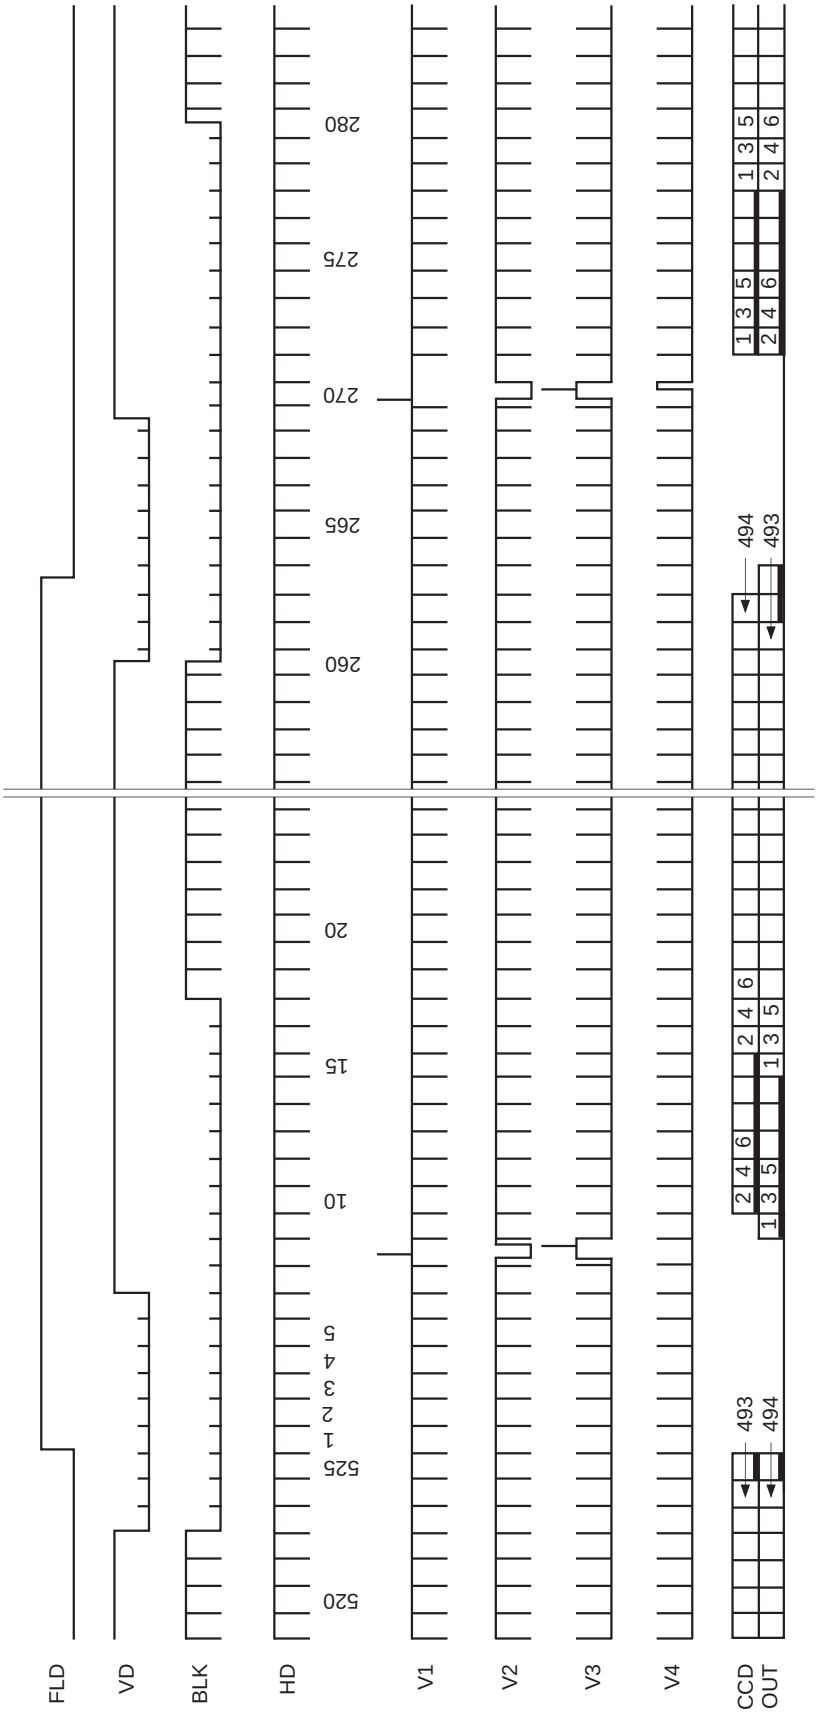

Drive Timing Chart (Horizontal Sync)

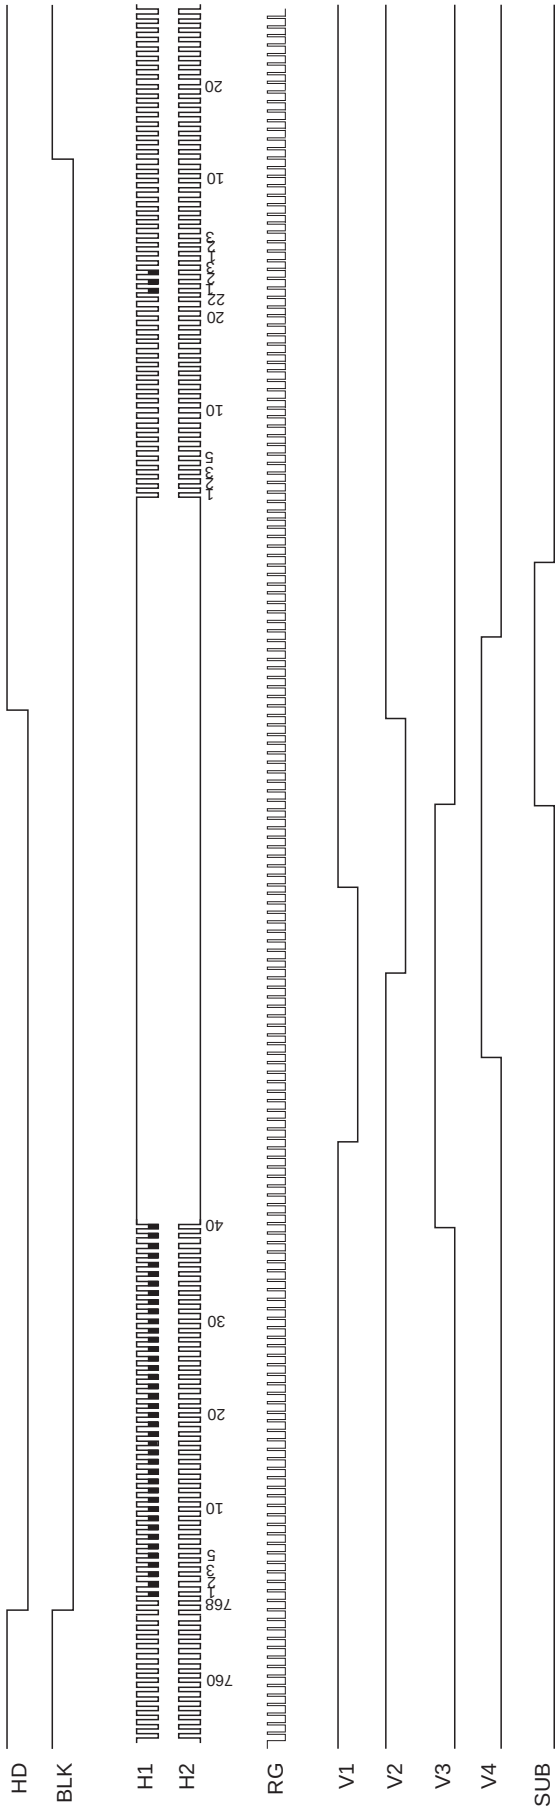

Notes on Handling

1) Static charge prevention
   CCD image sensors are easily damaged by static discharge. Before handling be sure to take the following protective measures.
   a) Either handle bare handed or use non-chargeable gloves, clothes or material. Also use conductive shoes.
   b) When handling directly use an earth band.
   c) Install a conductive mat on the floor or working table to prevent the generation of static electricity.
   d) Ionized air is recommended for discharge when handling CCD image sensors.
   e) For the shipment of mounted substrates, use boxes treated for the prevention of static charges.

2) Soldering
   a) Make sure the package temperature does not exceed 80°C.
   b) Solder dipping in a mounting furnace causes damage to the glass and other defects. Use a grounded 30W soldering iron and solder each pin in less than 2 seconds. For repairs and remount, cool sufficiently.
   c) To dismount an image sensor, do not use solder suction equipment. When using an electric desoldering tool, use a thermal controller of the zero cross On/Off type and connect it to ground.

3) Dust and dirt protection
   Image sensors are packed and delivered by taking care of protecting its glass plates from harmful dust and dirt. Clean glass plates with the following operation as required, and use them.
   a) Operate in clean environments (around class 1000 is appropriate).
   b) Do not either touch glass plates by hand or have any object come in contact with glass surfaces. Should dirt stick to a glass surface, blow it off with an air blower. (For dirt stuck through static electricity ionized air is recommended.)
   c) Clean with a cotton bud and ethyl alcohol if grease stained. Be careful not to scratch the glass.
   d) Keep in a case to protect from dust and dirt. To prevent dew condensation, preheat or precool when moving to a room with great temperature differences.
   e) When protective tape is applied before shipping, just before use remove the tape applied for electrostatic protection. Do not reuse the tape.


4) Do not expose to strong light (sun rays) for long periods. For continuous using under cruel condition exceeding the normal using condition, consult our company.

5) Exposure to high temperature or high humidity will affect the characteristics. Accordingly, avoid storage or usage in such conditions.

6) CCD image sensors are precise optical equipment that should not be subject to too much mechanical shocks.

Package Outline Unit: mm

16pin DIP (300mil)

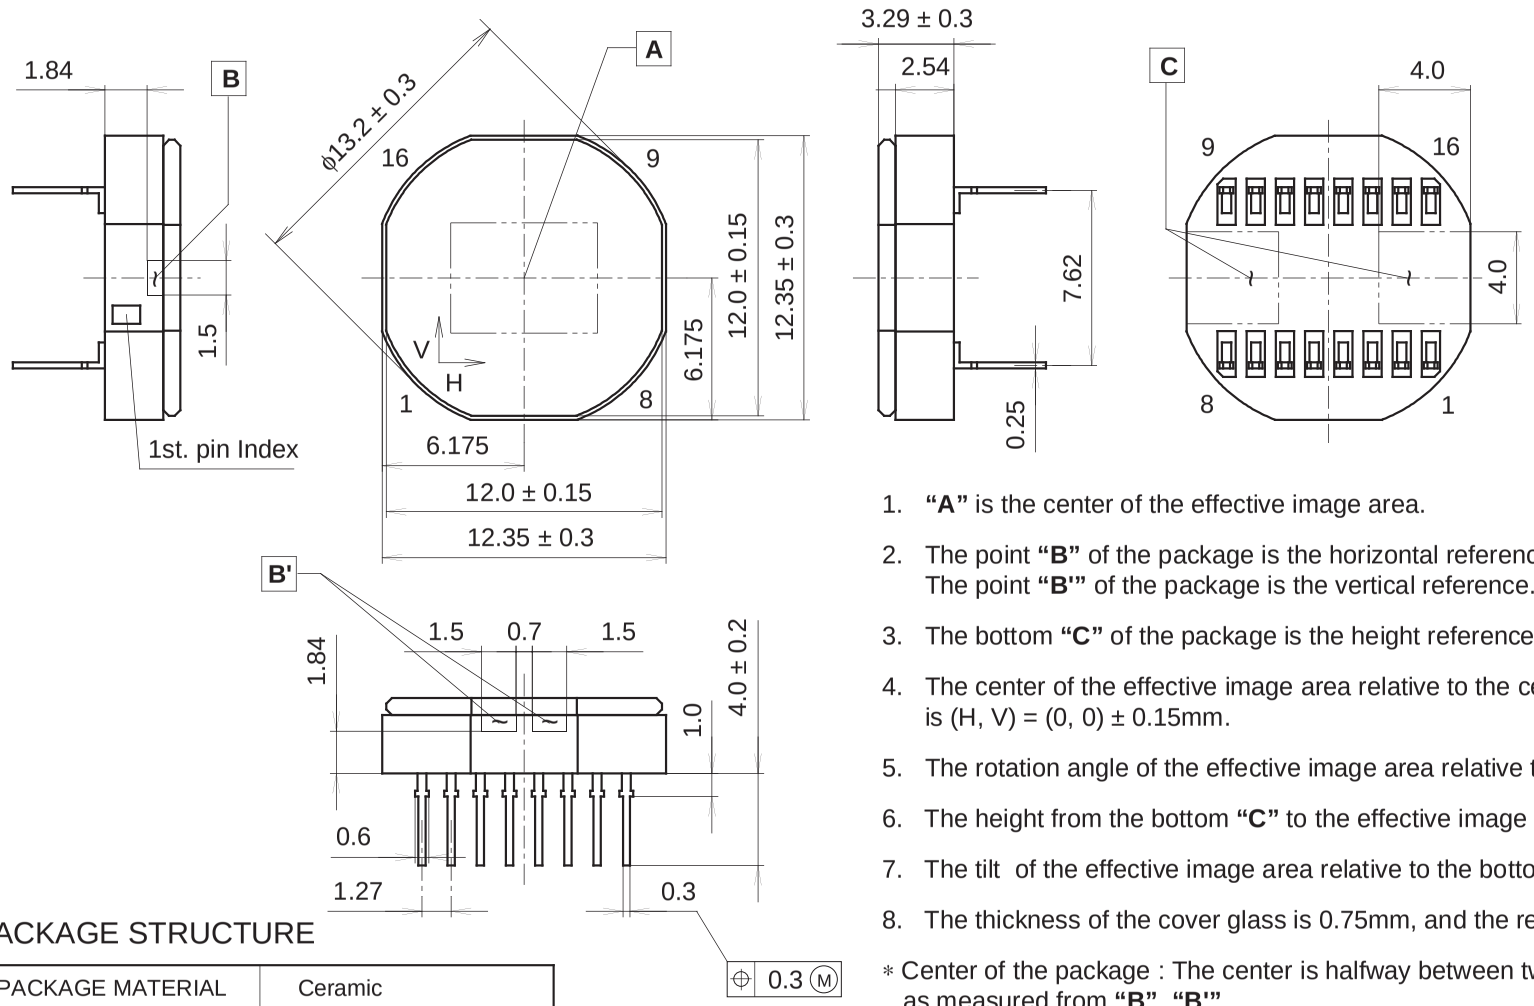

1. **"A"** is the center of the effective image area.
2. The point **"B"** of the package is the horizontal reference.
   The point **"B'"** of the package is the vertical reference.
3. The bottom **"C"** of the package is the height reference.
4. The center of the effective image area relative to the center of the package (*) is (H, V) = (0, 0) ± 0.15mm.
5. The rotation angle of the effective image area relative to H and V is ± 1°.
6. The height from the bottom **"C"** to the effective image area is 1.41 ± 0.15mm.
7. The tilt of the effective image area relative to the bottom **"C"** is less than 60µm.
8. The thickness of the cover glass is 0.75mm, and the refractive index is 1.5.

* Center of the package : The center is halfway between two pairs of opposite sides, as measured from **"B"**, **"B'"**.

PACKAGE STRUCTURE

PACKAGE MATERIAL	Ceramic
LEAD TREATMENT	GOLD PLATING
LEAD MATERIAL	42 ALLOY
PACKAGE WEIGHT	0.9g