
STGIPS15C60

SLLIMM™ small low-loss intelligent molded module IPM, 3-phase inverter - 15 A, 600 V short-circuit rugged IGBT

Datasheet - production data

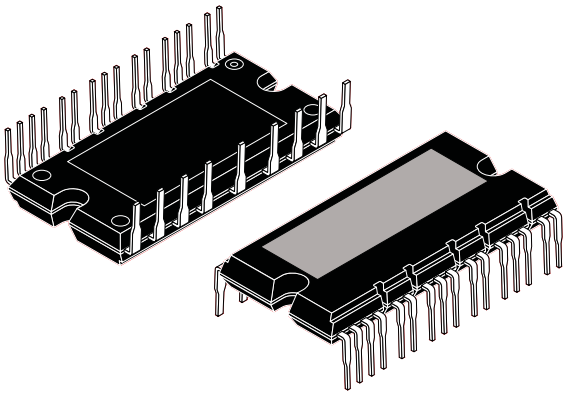

SDIP-25L

Applications

- 3-phase inverters for motor drives
- Home appliance, air conditioners

Description

This intelligent power module provides a compact, high performance AC motor drive in a simple, rugged design. Combining ST proprietary control ICs with the most advanced short-circuit-rugged IGBT system technology, this device is ideal for 3-phase inverters in applications such as motor drives and air conditioners. SLLIMM™ is a trademark of STMicroelectronics.

Features

- IPM 15 A, 600 V 3-phase IGBT inverter bridge including control ICs for gate driving and free-wheeling diodes
- Short-circuit rugged IGBTs
- 3.3 V, 5 V, 15 V CMOS/TTL inputs comparators with hysteresis and pull-down / pull-up resistors
- Undervoltage lockout
- Internal bootstrap diode
- Interlocking function
- Smart shutdown function
- Comparator for fault protection against overtemperature and overcurrent
- DBC leading to low thermal resistance
- Isolation rating of 2500 V_{rms}/min
- UL recognized: UL1557 file E81734

Table 1. Device summary

Order code	Marking	Package	Packing
STGIPS15C60	GIPS15C60	SDIP-25L	Tube

This is information on a product in full production. www.st.com

Contents

1 Internal block diagram and pin configuration 3

2 Electrical ratings 5

2.1 Absolute maximum ratings 5

2.2 Thermal data 6

3 Electrical characteristics 7

3.1 Control part 9

3.2 Waveform definitions 11

4 Smart shutdown function 12

5 Application information 14

5.1 Recommendations 15

6 Package information 16

6.1 SDIP-25L package information 16

6.2 Packing information 18

7 Revision history 19

1 Internal block diagram and pin configuration

Figure 1. Internal block diagram


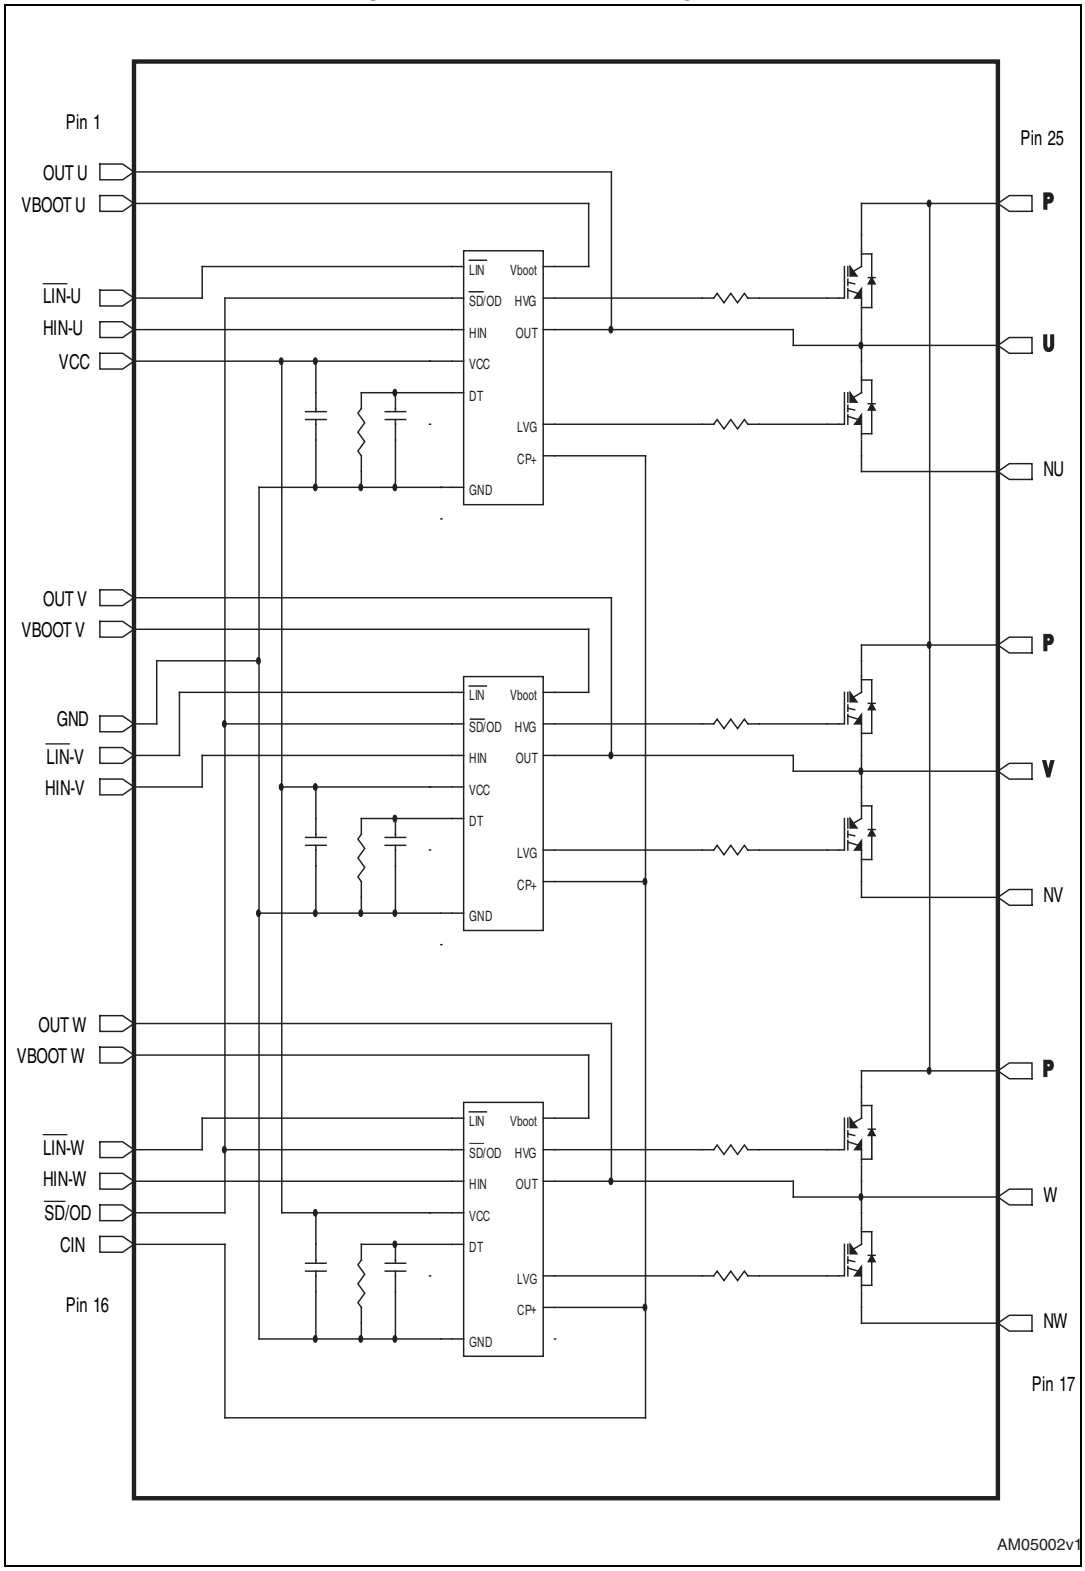


Table 2. Pin description

Pin n°	Symbol	Description
1	OUT_U	High-side reference output for U phase
2	V_{bootU}	Bootstrap voltage for U phase
3	$\overline{LIN}_U$	Low-side logic input for U phase
4	HIN_U	High-side logic input for U phase
5	V_{CC}	Low voltage power supply
6	OUT_V	High-side reference output for V phase
7	$V_{boot\ V}$	Bootstrap voltage for V phase
8	GND	Ground
9	$\overline{LIN}_V$	Low-side logic input for V phase
10	HIN_V	High-side logic input for V phase
11	OUT_W	High-side reference output for W phase
12	$V_{boot\ W}$	Bootstrap voltage for W phase
13	$\overline{LIN}_W$	Low-side logic input for W phase
14	HIN_W	High-side logic input for W phase
15	$\overline{SD}$ / OD	Shutdown logic input (active low) / open-drain (comparator output)
16	CIN	Comparator input
17	N_W	Negative DC input for W phase
18	W	W phase output
19	P	Positive DC input
20	N_V	Negative DC input for V phase
21	V	V phase output
22	P	Positive DC input
23	N_U	Negative DC input for U phase
24	U	U phase output
25	P	Positive DC input

Figure 2. Pin layout (bottom view)

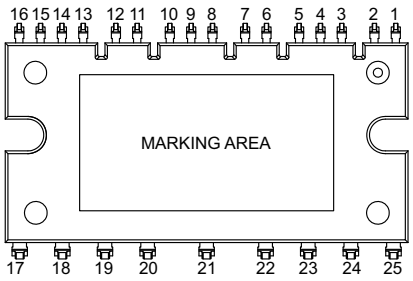

2 Electrical ratings

2.1 Absolute maximum ratings

Table 3. Inverter part

Symbol	Parameter	Value	Unit
V_{PN}	Supply voltage applied between P - N_U, N_V, N_W	450	V
$V_{PN(surge)}$	Supply voltage (surge) applied between P - N_U, N_V, N_W	500	V
V_{CES}	Each IGBT collector emitter voltage (V_{IN}(1) = 0)	600	V
± I_C	Each IGBT continuous collector current at T_C = 25°C	15	A
± I_{CP} (2)	Each IGBT pulsed collector current	30	A
P_{TOT}	Each IGBT total dissipation at T_C = 25°C	42	W
t_{scw}	Short circuit withstand time, V_{CE} = 0.5 $V_{(BR)CES}$ T_J = 125 °C, V_{CC} = V_{boot}= 15 V, $V_{IN\ (1)}$= 0 - 5 V	5	µs

1. Applied between HIN_i, $\overline{LIN}_{i\ and}$ GND for i = U, V, W
2. Pulse width limited by max junction temperature

Table 4. Control part

Symbol	Parameter	Value	Unit
V_{OUT}	Output voltage applied between OUT_U, OUT_V, OUT_W - GND	V_{boot} - 21 to V_{boot} + 0.3	V
V_{CC}	Low voltage power supply	- 0.3 to +21	V
V_{CIN}	Comparator input voltage	- 0.3 to V_{CC} +0.3	V
V_{boot}	Bootstrap voltage applied between $V_{boot\ i}$ - OUT_i for i = U, V, W	- 0.3 to 620	V
V_{IN}	Logic input voltage applied between HIN, $\overline{LIN}$ and GND	- 0.3 to 15	V
$V_{\overline{SD}/OD}$	Open drain voltage	- 0.3 to 15	V
dV_{OUT}/dt	Allowed output slew rate	50	V/ns

Table 5. Total system

Symbol	Parameter	Value	Unit
V_{ISO}	Isolation withstand voltage applied between each pin and heatsink plate (AC voltage, t = 60 s)	2500	V
T_j	Power chips operating junction temperature	- 40 to 150	°C
T_C	Module case operation temperature	- 40 to 125	°C

2.2 Thermal data

Table 6. Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance junction-case single IGBT	3	°C/W
	Thermal resistance junction-case single diode	5.5	°C/W

3 Electrical characteristics

T_J = 25 °C unless otherwise specified.

Table 7. Inverter part

Symbol	Parameter	Test conditions	Value			Unit
			Min.	Typ.	Max.	
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{CC} = V_{boot} = 15 V, V_{IN}(1)= 0 - 5 V, I_C = 15 A	-	1.6	2	V
		V_{CC} = V_{boot} = 15 V, V_{IN}(1)= 0 - 5 V, I_C = 15 A, T_J = 125 °C	-	1.7		
I_{CES}	Collector-cut off current (V_{IN}(1)= 0 “logic state”)	V_{CE} = 550 V, V_{CC} = V_{Boot} = 15 V	-		100	µA
V_F	Diode forward voltage	V_{IN}(1) = 0 “logic state”, I_C = 15 A	-		2.3	V
Inductive load switching time and energy						
t_{on}	Turn-on time	V_{PN} = 300 V, V_{CC} = V_{boot} = 15 V, V_{IN}(1) = 0 - 5 V, I_C = 15 A (see *Figure 3*)	-	330	-	ns
$t_{c(on)}$	Crossover time (on)		-	150	-	
t_{off}	Turn-off time		-	925	-	
$t_{c(off)}$	Crossover time (off)		-	135	-	
t_{rr}	Reverse recovery time		-	190	-	
E_{on}	Turn-on switching losses		-	385	-	µJ
E_{off}	Turn-off switching losses		-	294	-	

1. Applied between HIN_i, $\overline{LIN}_{i\ and}$ GND for i = U, V, W. ($\overline{LIN}$ inputs are active-low).

Note: t_{ON} and t_{OFF} include the propagation delay time of the internal drive. $t_{C(ON)}$ and $t_{C(OFF)}$ are the switching time of IGBT itself under the internally given gate driving condition.

Figure 3. Switching time test circuit


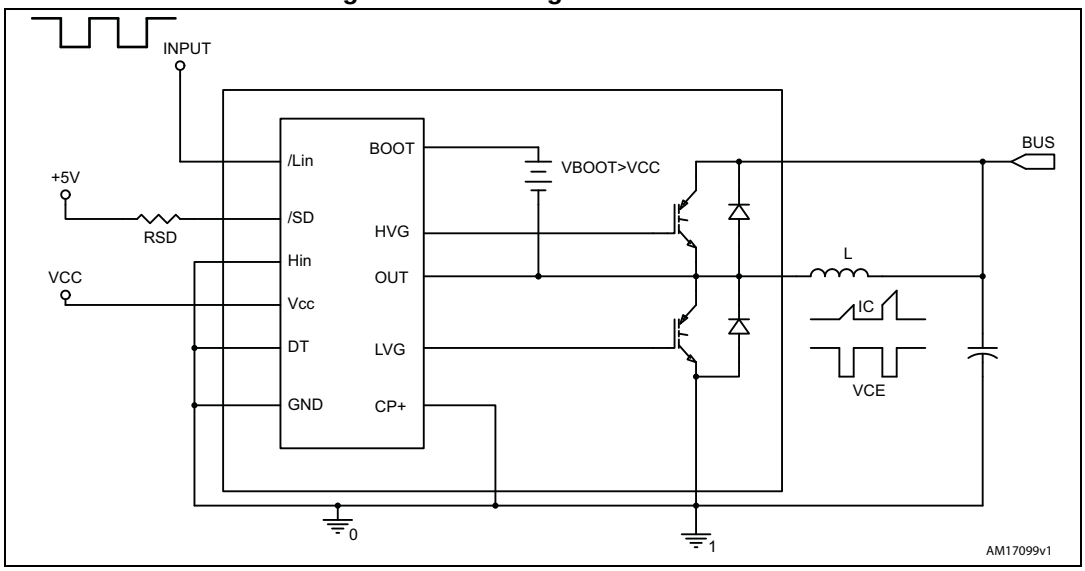


Figure 4. Switching time definition

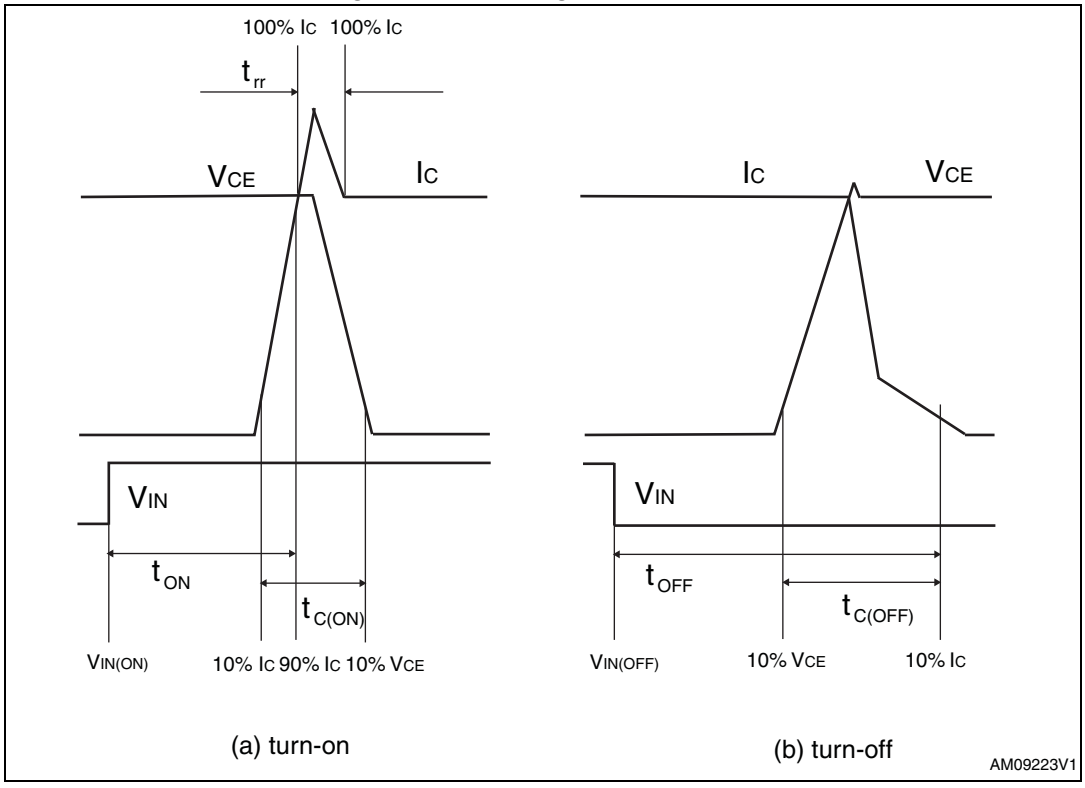

Note: Figure 4 "Switching time definition" refers to HIN inputs (active high). For $\overline{LIN}$ inputs (active low), V_{IN} polarity must be inverted for turn-on and turn-off.

3.1 Control part

Table 8. Low voltage power supply (V_{CC} = 15 V unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{cc_hys}	V_{cc} UV hysteresis		1.2	1.5	1.8	V
V_{cc_thON}	V_{cc} UV turn ON threshold		11.5	12	12.5	V
V_{cc_thOFF}	V_{cc} UV turn OFF threshold		10	10.5	11	V
I_{qccu}	Undervoltage quiescent supply current	V_{CC} = 10 V $\overline{SD}$/OD = 5 V; $\overline{LIN}$ = 5 V; H_{IN} = 0, C_{IN} = 0			450	µA
I_{qcc}	Quiescent current	V_{CC} = 15 V $\overline{SD}$/OD= 5 V; $\overline{LIN}$ = 5 V H_{IN} = 0, C_{IN} = 0			3.5	mA
V_{ref}	Internal comparator (CIN) reference voltage		0.5	0.54	0.58	V

Table 9. Bootstrapped voltage (V_{CC} = 15 V unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{BS_hys}	V_{BS} UV hysteresis		1.2	1.5	1.8	V
V_{BS_thON}	V_{BS} UV turn ON threshold		11.1	11.5	12.1	V
V_{BS_thOFF}	V_{BS} UV turn OFF threshold		9.8	10	10.6	V
I_{QBSU}	Undervoltage V_{BS} quiescent current	V_{BS} < 9 V $\overline{SD}$/OD = 5 V; $\overline{LIN}$ and HIN = 5 V; C_{IN} = 0		70	110	µA
I_{QBS}	V_{BS} quiescent current	V_{BS} = 15 V $\overline{SD}$/OD = 5 V; $\overline{LIN}$ and HIN = 5 V; C_{IN} = 0		200	300	µA
$R_{DS(on)}$	Bootstrap driver on resistance	LIN= 5 V; HIN= 0 V		120		Ω

Table 10. Logic inputs (V_{CC} = 15 V unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_{il}	Low level logic threshold voltage		0.8		1.1	V
V_{ih}	High level logic threshold voltage		1.9		2.25	V
I_{HINh}	HIN logic “1” input bias current	HIN = 15 V	110	175	260	µA
I_{HINl}	HIN logic “0” input bias current	HIN = 0 V			1	µA
I_{LINl}	$\overline{LIN}$ logic “1” input bias current	$\overline{LIN}$ = 0 V	3	6	20	µA
I_{LINh}	$\overline{LIN}$ logic “0” input bias current	$\overline{LIN}$ = 15 V			1	µA
I_{SDh}	$\overline{SD}$ logic “0” input bias current	$\overline{SD}$ = 15 V	30	120	300	µA
I_{SDl}	$\overline{SD}$ logic “1” input bias current	$\overline{SD}$ = 0 V			3	µA
Dt	Dead time	see *Figure 5* and *Table 13*		1.2		µs

Table 11. Sense comparator characteristics (V_{CC} = 15 V unless otherwise specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{ib}	Input bias current	V_{CIN} = 1 V	-		3	µA
V_{ol}	Open-drain low-level output voltage	I_{od} = 3 mA	-		0.5	V
t_{d_comp}	Comparator delay	$\overline{SD}$/OD pulled to 5 V through 100 kΩ resistor	-	90	130	ns
SR	Slew rate	C_L = 180 pF; R_{pu} = 5 kΩ	-	60		V/µsec
t_{sd}	Shut down to high / low side driver propagation delay	V_{OUT} = 0, V_{boot} = V_{CC}, V_{IN} = 0 to 3.3 V	50	125	200	ns
t_{isd}	Comparator triggering to high / low side driver turn-off propagation delay	Measured applying a voltage step from 0 V to 3.3 V to pin CIN	50	200	250	


Table 12. Truth table

Condition	Logic input (V_I)			Output	
	$\overline{SD}$/OD	$\overline{LIN}$	HIN	LVG	HVG
Shutdown enable half-bridge tri-state	L	X	X	L	L
Interlocking half-bridge tri-state	H	L	H	L	L
0 ‘’logic state” half-bridge tri-state	H	H	L	L	L
1 “logic state” low side direct driving	H	L	L	H	L
1 “logic state” high side direct driving	H	H	H	L	H

Note: X: don’t care

3.2 Waveform definitions


Figure 5. Dead time and interlocking waveforms definition

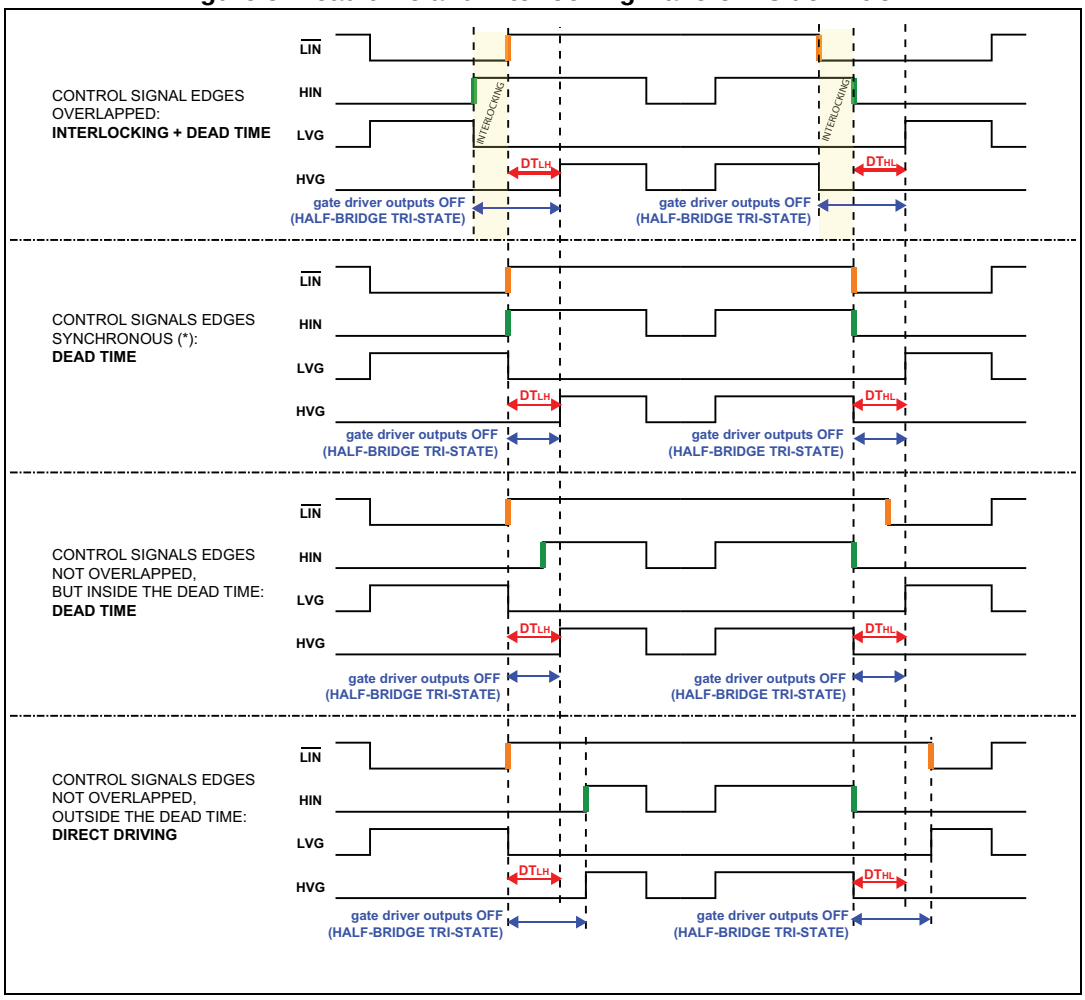

4 Smart shutdown function

The STGIPS15C60 integrates a comparator for fault sensing purposes. The comparator has an internal voltage reference V_{ref} connected to the inverting input, while the non-inverting input, available on pin (C_{IN}), can be connected to an external shunt resistor in order to implement a simple over-current protection function. When the comparator triggers, the device is set in shutdown state and both its outputs are set to low-level leading the halfbridge in tri-state. In the common overcurrent protection architectures the comparator output is usually connected to the shutdown input through a RC network, in order to provide a mono-stable circuit, which implements a protection time that follows the fault condition. Our smart shutdown architecture allows to immediately turn-off the output gate driver in case of overcurrent, the fault signal has a preferential path which directly switches off the outputs. The time delay between the fault and the outputs turn-off is no more dependent on the RC values of the external network connected to the shutdown pin. At the same time the DMOS connected to the open-drain output (pin $\overline{SD}$/OD) is turned on by the internal logic which holds it on until the shutdown voltage is lower than the logic input lower threshold (V_{il}). Finally the smart shutdown function provides the possibility to increase the real disable time without increasing the constant time of the external RC network.

Figure 6. Smart shutdown timing waveforms

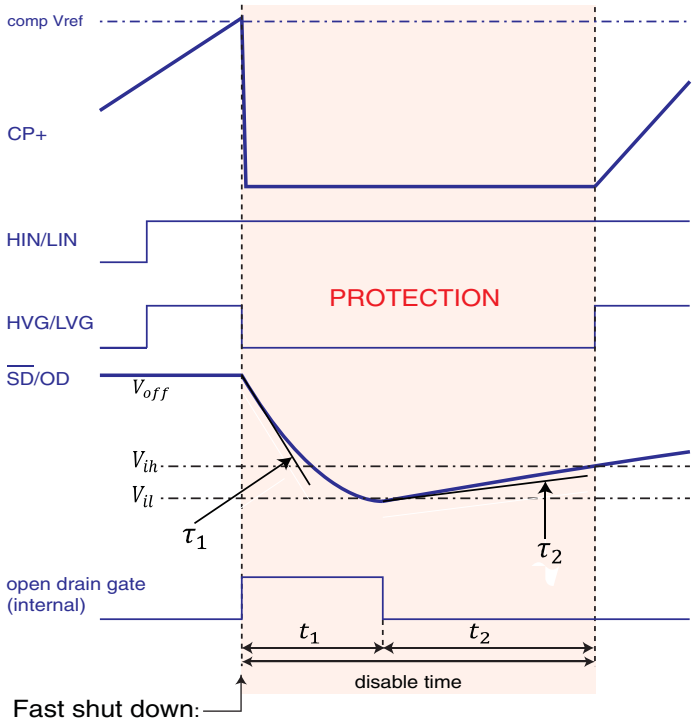

An approximation of the disable time is given by:

$$t_1 \cong \tau_1 \cdot ln\left(\frac{V_{off} - V_{on}}{V_{il} - V_{on}}\right)$$

$$t_2 \cong \tau_2 \cdot ln\left(\frac{V_{il} - V_{off}}{V_{ih} - V_{off}}\right)$$

where:


$$\tau_1 = \left(R_{ON_OD} // R_{SD}\right) \cdot C_{SD}$$

$$\tau_2 = \left(R_{PD_SD} // R_{SD}\right) \cdot C_{SD}$$

$$V_{on} = \frac{R_{ON_OD}}{R_{ON_OD} + R_{SD}} \cdot V_{BIAS}$$

$$V_{off} = \frac{R_{PD_SD}}{R_{PD_SD} + R_{SD}} \cdot V_{BIAS}$$

SHUT DOWN CIRCUIT

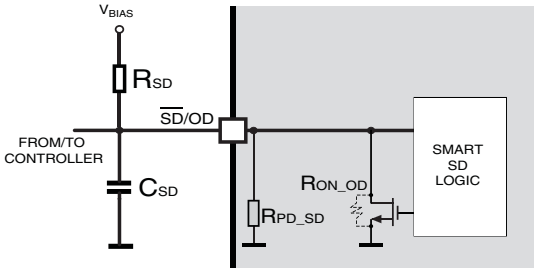


AM12947v1

Please refer to *Table 11* for internal propagation delay time details.

5 Application information

Figure 7. Typical application circuit

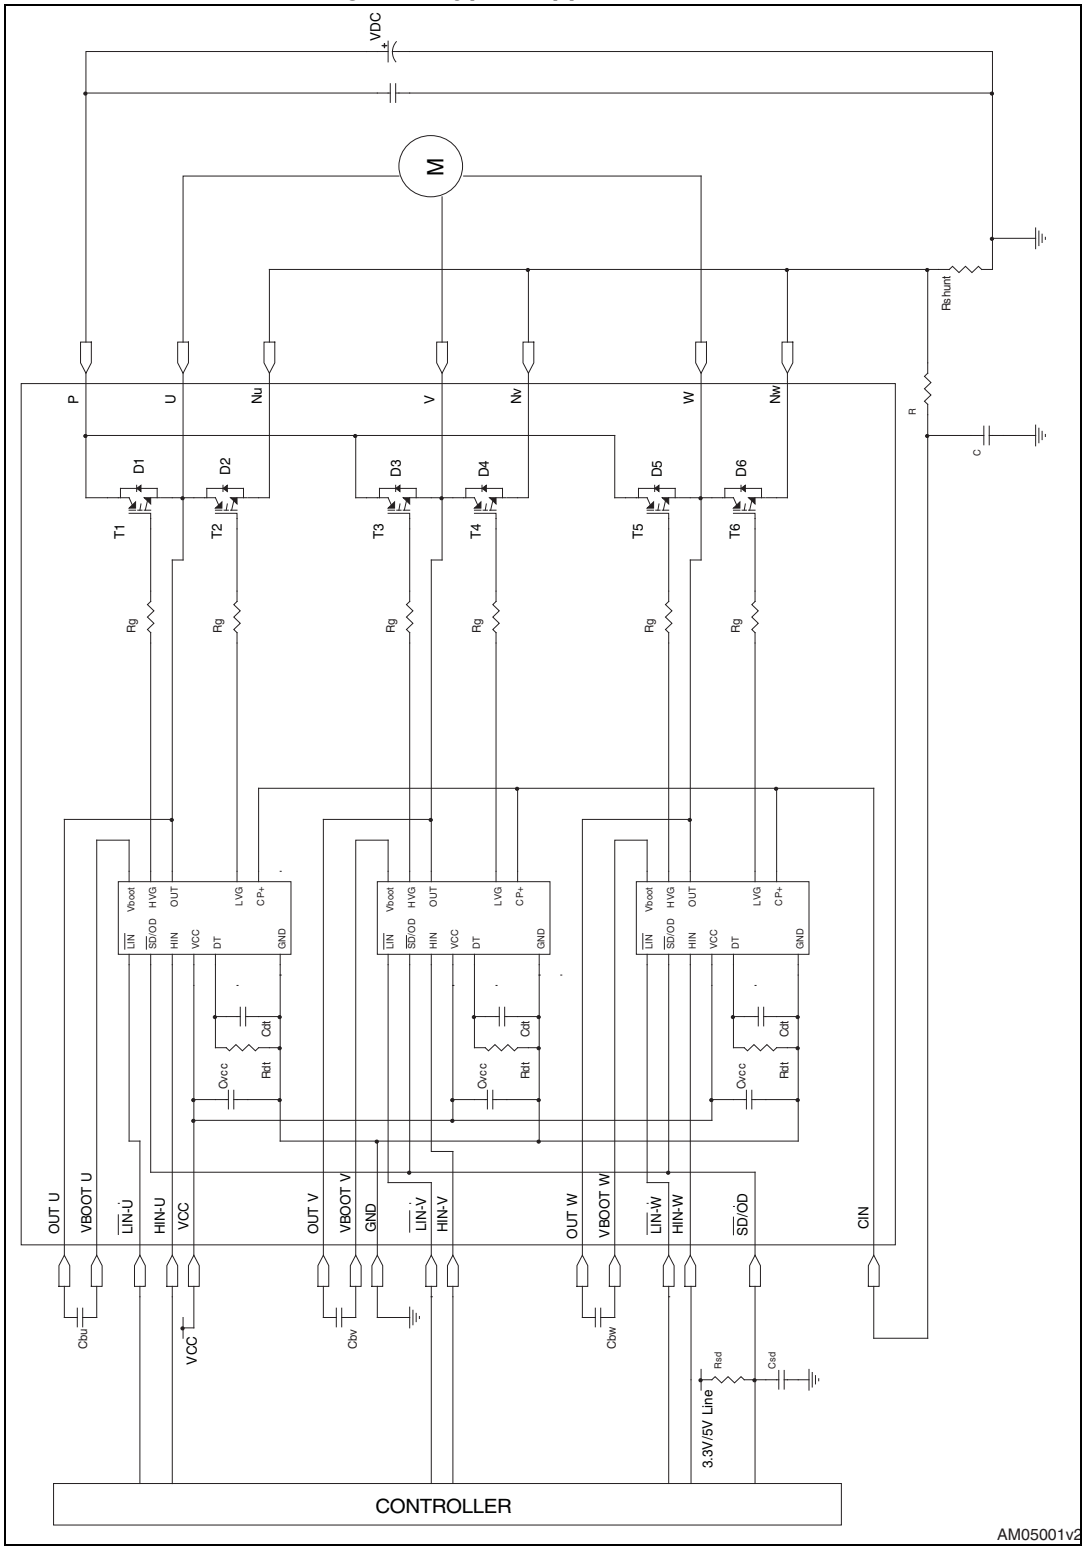

5.1 Recommendations

- Input signal HIN is active high logic. A 85 kΩ (typ.) pull down resistor is built-in for each high side input. If an external RC filter is used, for noise immunity, pay attention to the variation of the input signal level.
- Input signal $\overline{\text{LIN}}$ is active low logic. A 720 kΩ (typ.) pull-up resistor, connected to an internal 5 V regulator through a diode, is built-in for each low side input.
- To prevent the input signals oscillation, the wiring of each input should be as short as possible.
- By integrating an application specific type HVIC inside the module, direct coupling to MCU terminals without any opto-coupler is possible.
- Each capacitor should be located as nearby the pins of IPM as possible.
- Low inductance shunt resistors should be used for phase leg current sensing.
- Electrolytic bus capacitors should be mounted as close to the module bus terminals as possible. Additional high frequency ceramic capacitor mounted close to the module pins will further improve performance.
- The $\overline{\text{SD}}$/OD signal should be pulled up to 5 V / 3.3 V with an external resistor (see *Section 4: Smart shutdown function* for detailed info).

Table 13. Recommended operating conditions

Symbol	Parameter	Conditions	Value			Unit
			Min.	Typ.	Max.	
V_{PN}	Supply Voltage	Applied between P-Nu,Nv,Nw		300	400	V
V_{CC}	Control supply voltage	Applied between V_{CC}-GND	13.5	15	18	V
V_{BS}	High side bias voltage	Applied between V_{BOOTi}-OUT_i for i=U,V,W	13		18	V
t_{dead}	Blanking time to prevent Arm-short	For each input signal	1.5			µs
f_{PWM}	PWM input signal	-40°C < T_c < 100°C -40°C < T_j < 125°C			20	kHz
T_C	Case operation temperature				100	°C

Note: For further details refer to AN3338.

6 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: *www.st.com*. ECOPACK® is an ST trademark.

Please refer to dedicated technical note TN0107 for mounting instructions.

6.1 SDIP-25L package information

Figure 8. SDIP-25L package outline


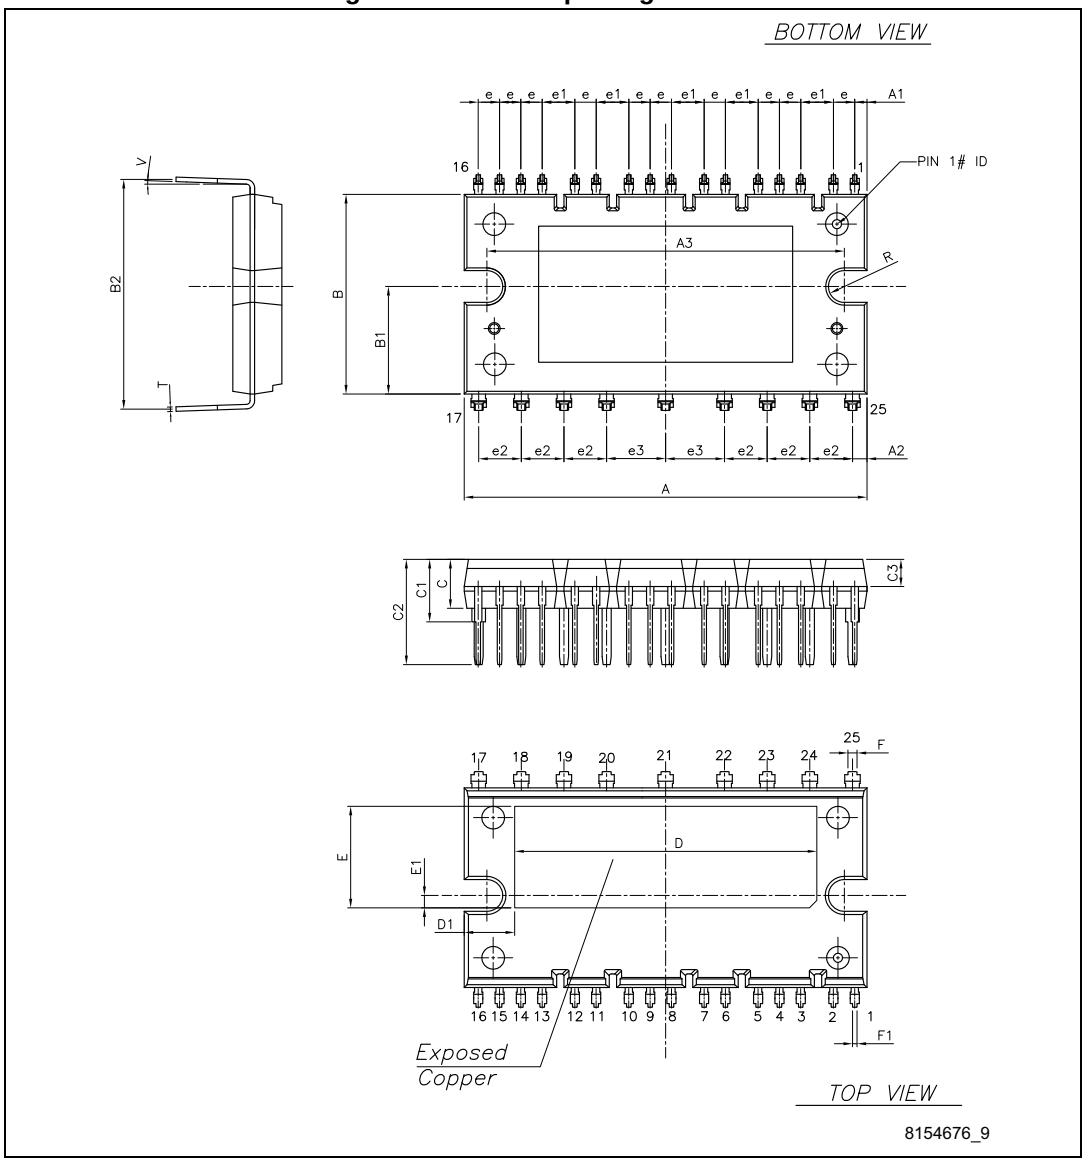


Table 14. SDIP-25L mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	43.90	44.40	44.90
A1	1.15	1.35	1.55
A2	1.40	1.60	1.80
A3	38.90	39.40	39.90
B	21.50	22.00	22.50
B1	11.25	11.85	12.45
B2	24.83	25.23	25.63
C	5.00	5.40	6.00
C1	6.50	7.00	7.50
C2	11.20	11.70	12.20
C3	2.90	3.00	3.10
e	2.15	2.35	2.55
e1	3.40	3.60	3.80
e2	4.50	4.70	4.90
e3	6.30	6.50	6.70
D		33.30	
D1		5.55	
E		11.20	
E1		1.40	
F	0.85	1.00	1.15
F1	0.35	0.50	0.65
R	1.55	1.75	1.95
T	0.45	0.55	0.65
V	0°		6°

6.2 Packing information

Figure 9. SDIP-25L packing information

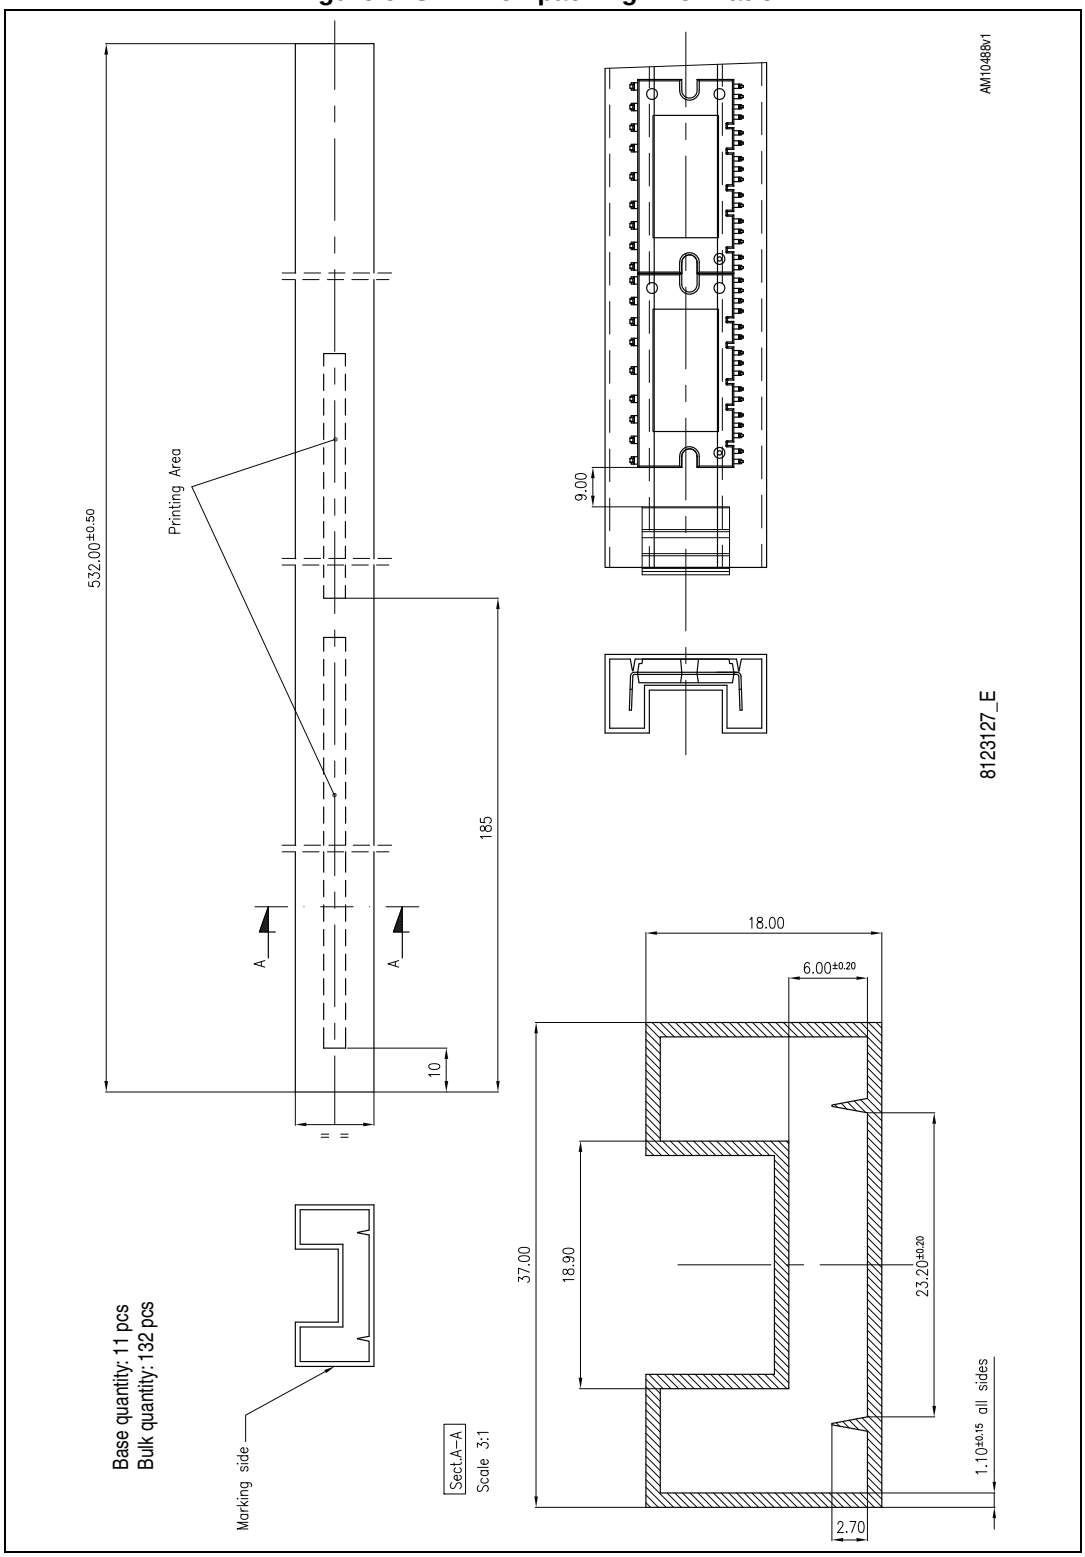

7 Revision history

Table 15. Document revision history

Date	Revision	Changes
19-Aug-2013	1	Initial release.
16-May-2014	2	Updated *Table 3: Inverter part*, *Table 6: Thermal data*, *Table 7: Inverter part* and *Section 6.2: Packing information*. Minor text changes.
09-Apr-2015	3	Text edits and formatting changes throughout document Updated *Figure 2: Pin layout (bottom view)* Updated *Section 6: Package information*

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved