

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

OCT ,2001.



© COPYRIGHT 2001 By --

ALL RIGHTS RESERVED.


LOC
JDIST
/

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	K3	REVISED PER ECO-11-005033	28MAR11	RK	HMR

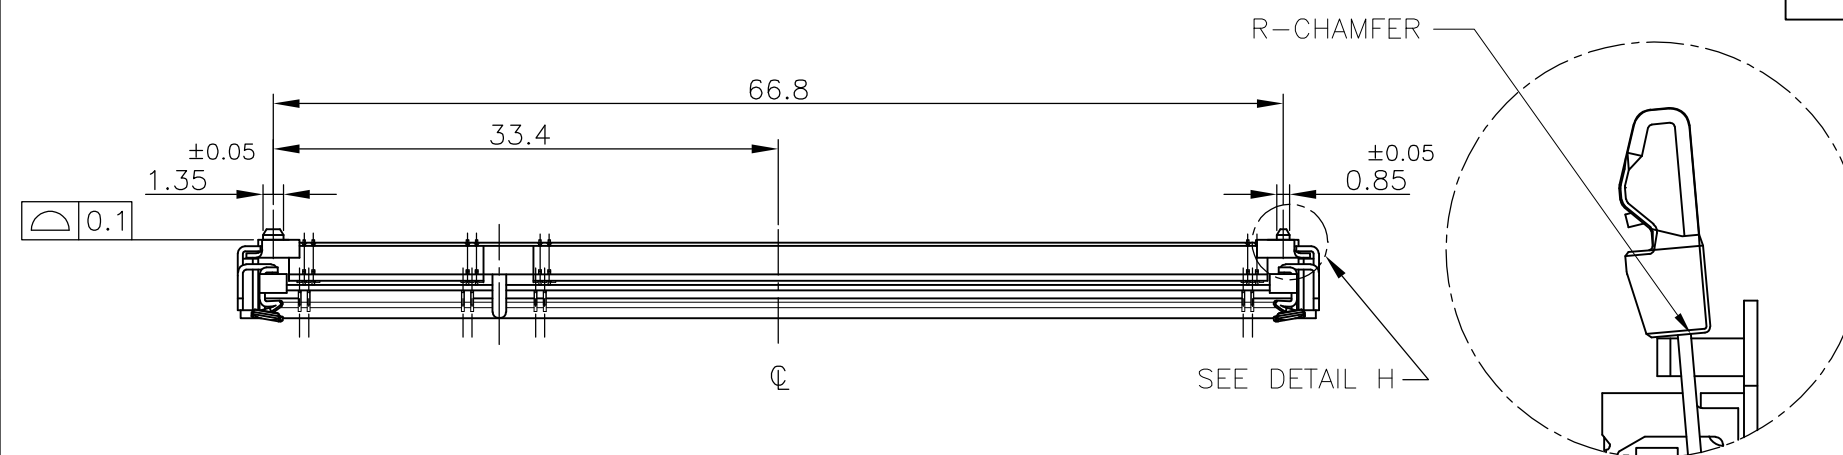

DDR1(2.5V)





DDR2(1.8V)

DETAIL L
(SCALE 5:1)DETAIL A
(SCALE 5:1)




HOW TO MATE AND UNMATE

MATE: ① → ④
UNMATE: ⑤ → ⑦

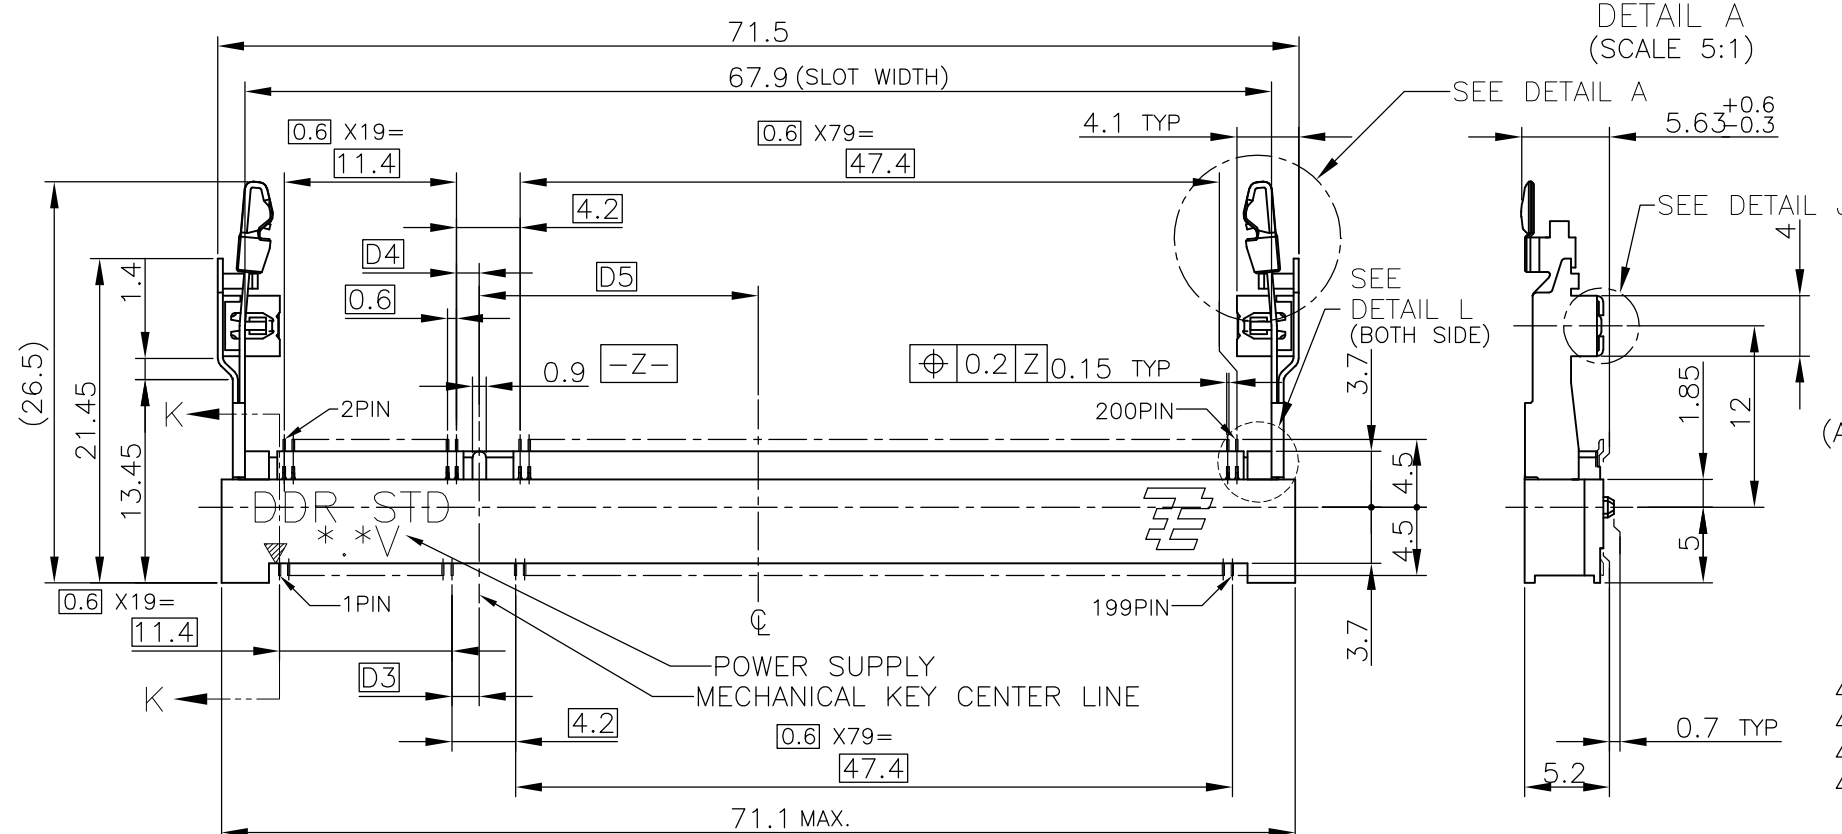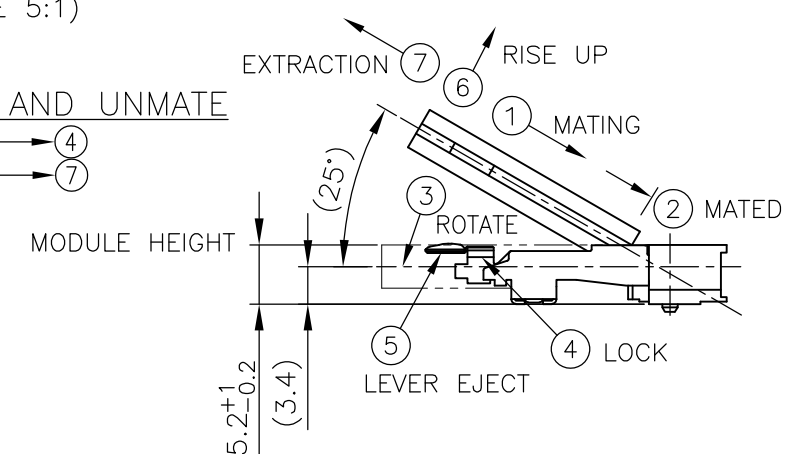

(APPLIED TO SHEET 1-2)

- MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
CONTACT: COPPER ARROY
LOCK LEVER STAINLESS STEEL
SOLDER PEG: COPPER ARROY
- FINISH ; CONTACT AREA: GOLD FLASH ON 0.0013MIN ALL OVER NICKEL.
SOLDERING AREA: GOLD FLASH PLT.
SOLDER PEG: TIN PLATING.
- MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.
- TOLERANCES NON-CUMULATIVE.
- NOT TO SCALE.
- INSIDE MUST BE RESIST COAT EXCEPT SOLDER PATTERN.
- IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY,
OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE
INSERTED AND LOCKED IN THE LATCH.

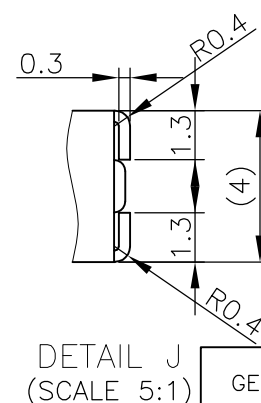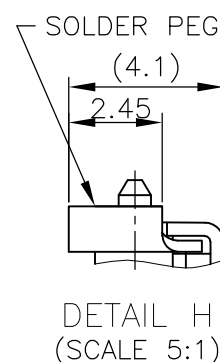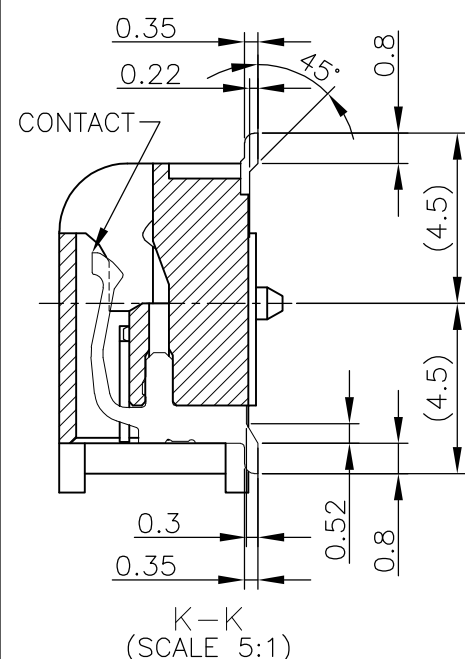

GENERAL TOLERANCE
10 ≥: ±0.2
30 ≥ >10: ±0.25
100 ≥ >30: ±0.3
ANGLES: ±3°

TIN PLATING	AVAILABLE	1.8V (DDR2)	17.55	2.4	2.7	200	1-1473149-4
	AVAILABLE	1.8V (DDR2)	17.55	2.4	2.7	200	1473149-4
	AVAILABLE	2.5V (DDR1)	18.45	1.5	1.8	200	1473149-1
REMARK (PEG)	TOOLING STATUS	POWER SUPPLY	D5	D4	D3	POS	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN T.FUMIKURA 16JAN02	 TE Connectivity			
			CHK T.KUSUHARA 17JAN02				
			APVD I.ENOMOTO 17JAN02				
			PRODUCT SPEC 108-5701				
			APPLICATION SPEC	NAME			
			WEIGHT 4.7g	DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS STANDARD PROFILE STANDARD TYPE (NEW LATCH TYPE)			
			CUSTOMER DRAWING	SIZE A3	CAGE CODE 00779	DRAWING NO C-1473149	RESTRICTED TO
			SCALE 2:1	SHEET 1 OF 4		REV K3	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

OCT ,2001.

© COPYRIGHT 2001 By -

ALL RIGHTS RESERVED.


LOC
J

DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-


REFERENCE P.C.BOARD PATTERN LAYOUT (CONNECTOR MOUNTING SIDE)

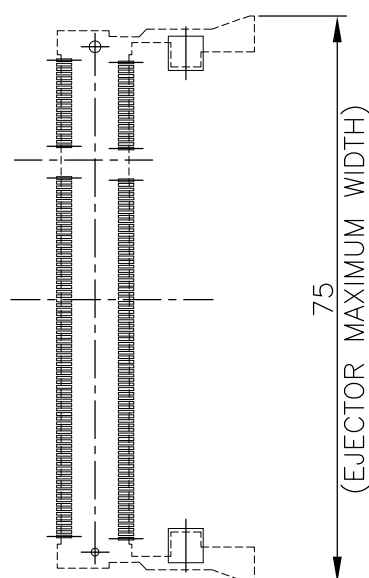

REAL SIZE (SCALE 1:1)

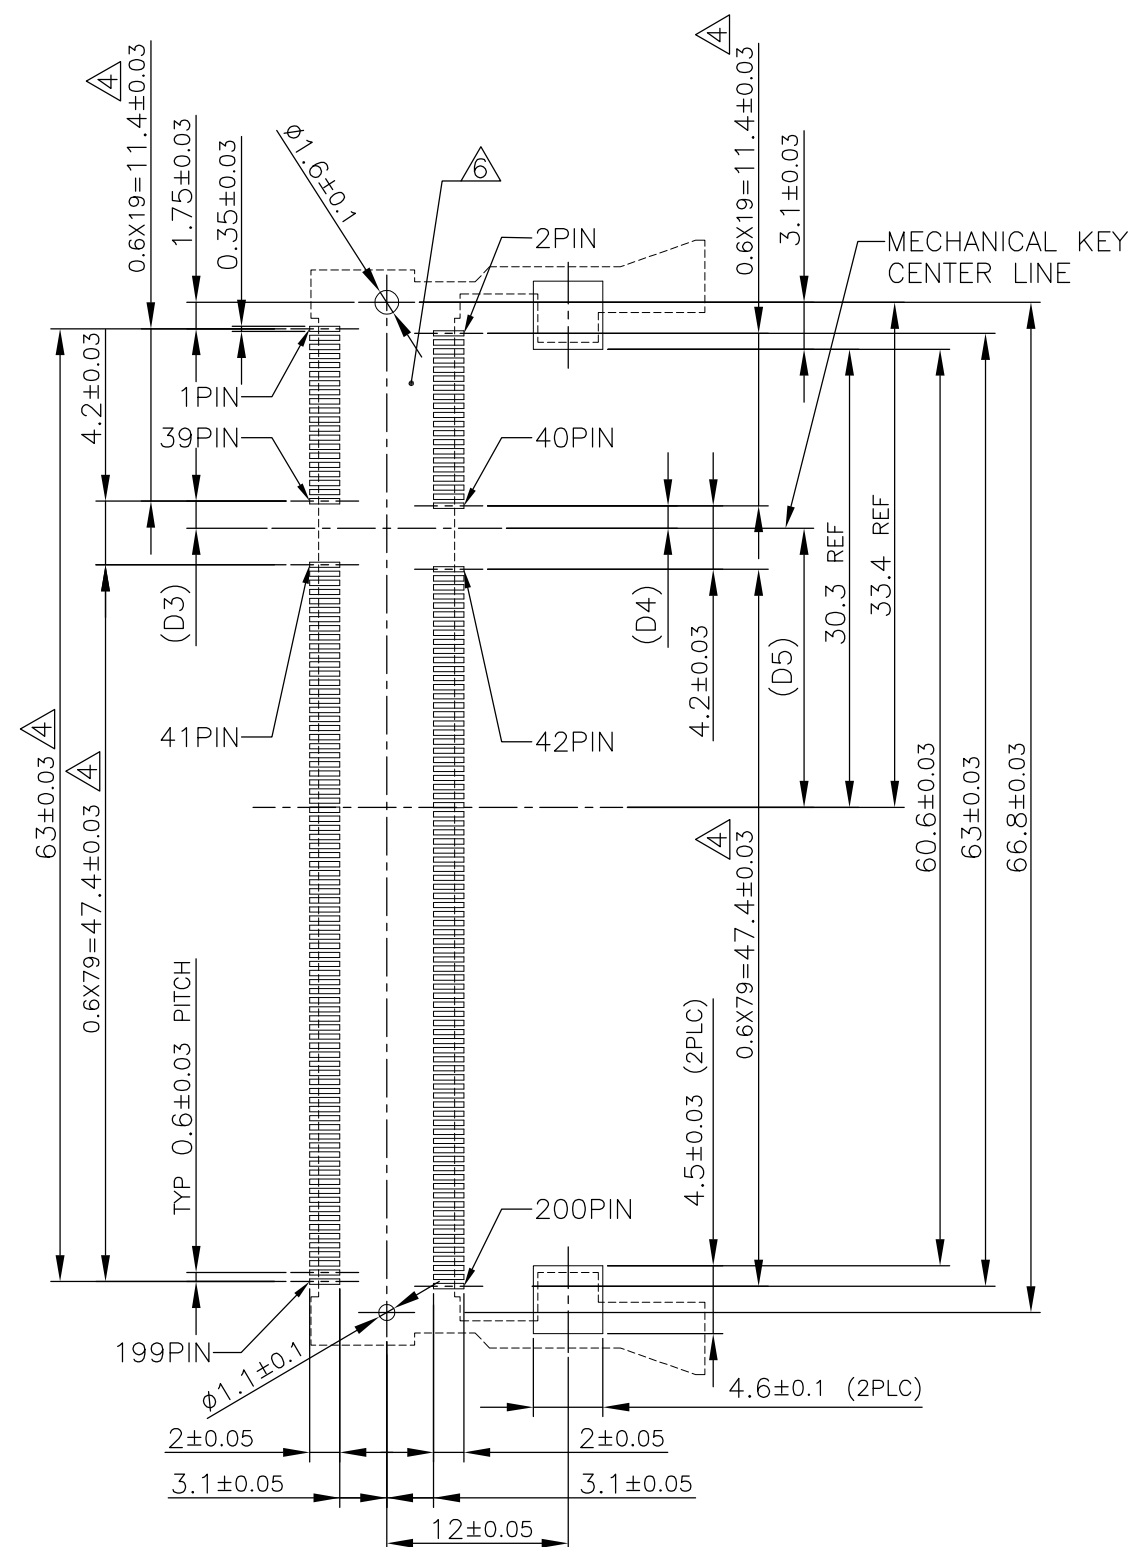

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MMTOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±
FINISH

MATERIAL

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

DDR1 & DDR2 SODIMM SOCKET
0.6mm PITCH 200POS

STANDARD PROFILE STANDARD TYPE (NEW LATCH TYPE)


SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1473149	-

SCALE 2:1

SHEET 2 OF 4

REV K3

1.8V	17.55	2.4	2.7
2.5V	18.45	1.5	1.8
POWER SUPPLY	D5	D4	D3

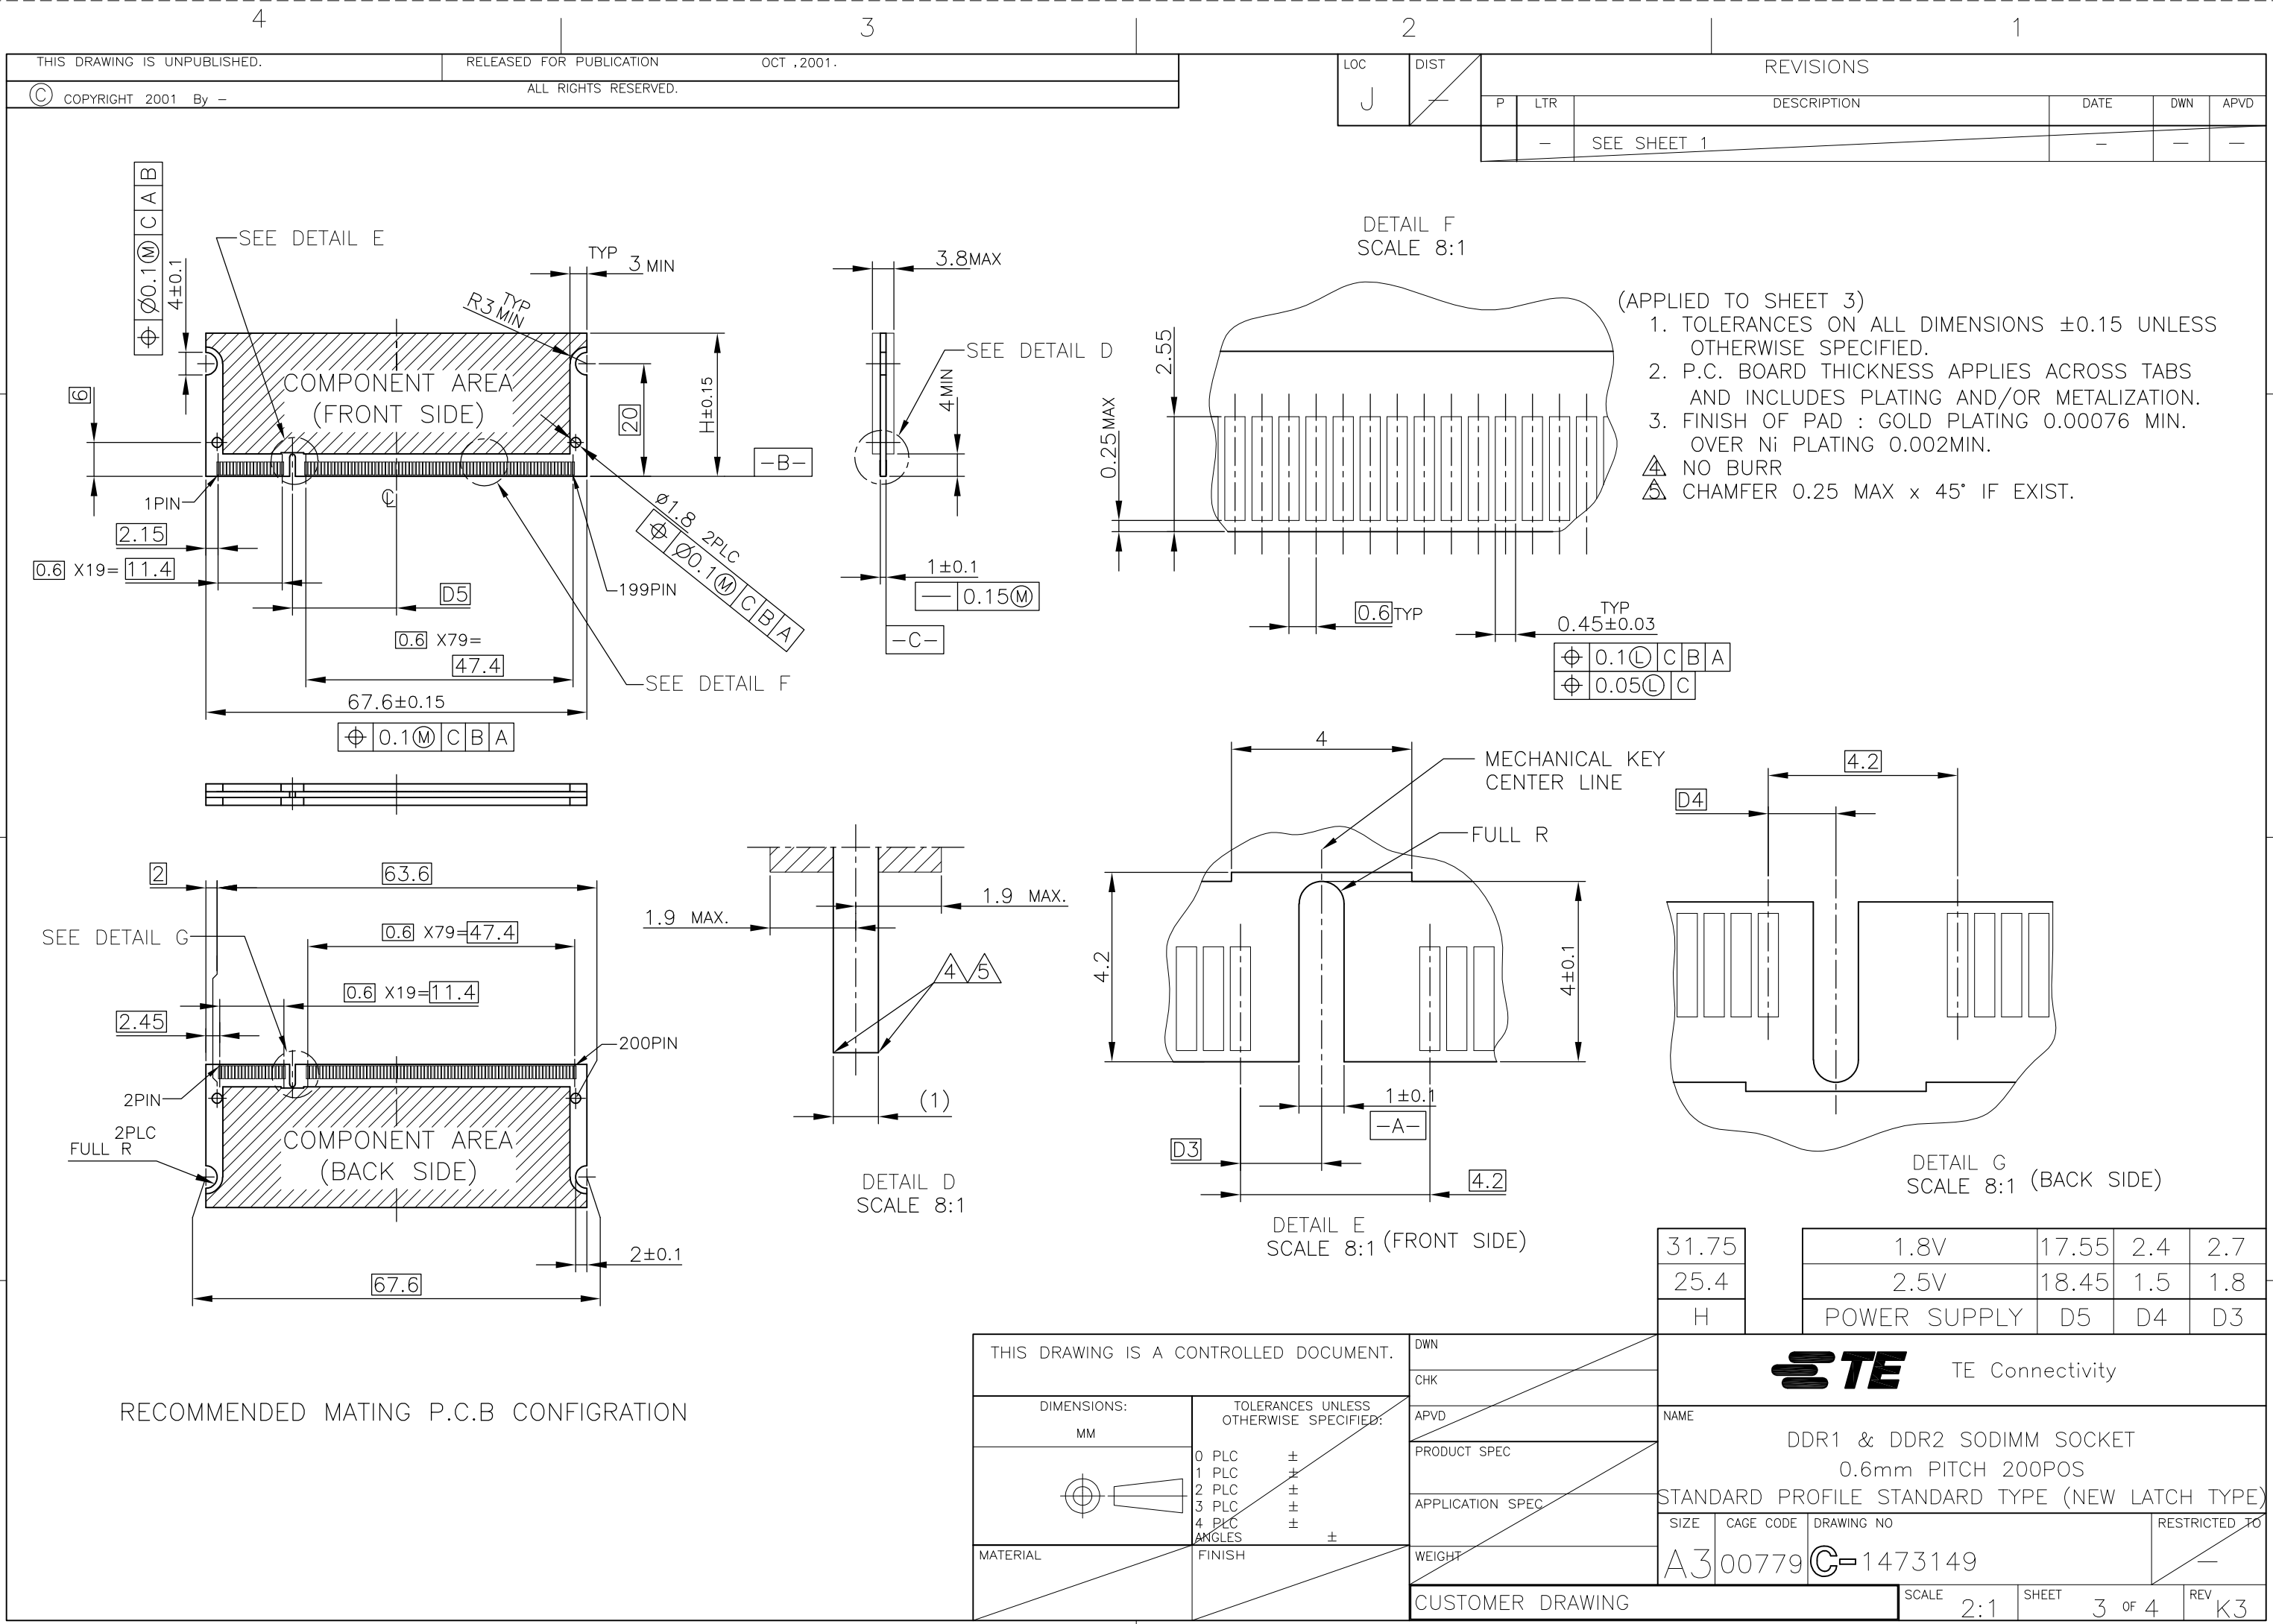

LOC		DIST		REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD		
	-	SEE SHEET 1			-	-	-		

