
Miniature Short Lever

Spade/Solder Type Terminal




Product Facts

- **.187 [4.75] tab with solder hole**
- **Use .187 [4.75] FASTON receptacles or solder wire directly to terminal**
- **Short lever to increase operating position**

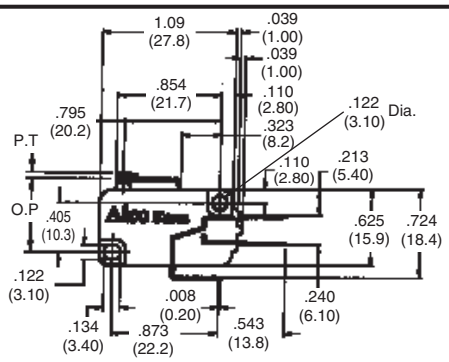

*** Refer to Pages L2 for Product Specifications**

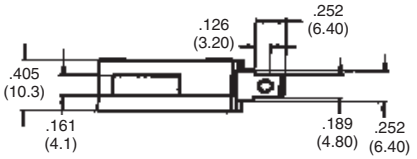


AMP	Switch Position	Operating Force	Releasing Force	Pre Travel (P.T.)	Operating Position	Over Travel	Movement Differential	Part Number
16	SPDT	120g	20g	1.6 m/m [.063]	14.8 ±0.4 [.606±.016]	0.8 m/m [.031]	0.4 m/m [.016]	1478603-2
		200g	50g					1478604-2
		330g	70g					1478605-2
	SPNC	120g	20g	1.6 m/m [.063]	14.8 ±0.4 [.606±.016]	0.8 m/m [.031]	0.4 m/m [.016]	1478609-2
		200g	50g					1478610-2
		330g	70g					1478611-2
	SPNO	120g	20g	1.6 m/m [.063]	14.8 ±0.4 [.606±.016]	0.8 m/m [.031]	0.4 m/m [.016]	1478615-2
		200g	50g					1478616-2
		330g	70g					1478617-2
5	SPDT	120g	20g	1.6 m/m [.063]	14.8 ±0.4 [.606±.016]	0.8 m/m [.031]	0.4 m/m [.016]	1478667-2
	SPNC							1478668-2
	SPNO							1478669-2
0.1	SPDT	60g	12g	1.6 m/m [.063]	14.8 ±0.4 [.606±.016]	0.8 m/m [.031]	0.4 m/m [.016]	1478670-2
	SPNC							1478671-2
	SPNO							1478672-2


Spade Type Terminal



Product Facts

- **.250 [6.35] tab for use with .250 [6.35] FASTON receptacles**
- **Short lever to increase operating positions**

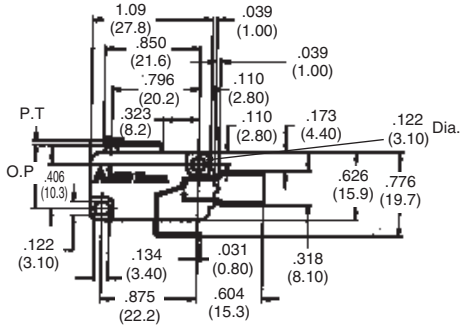

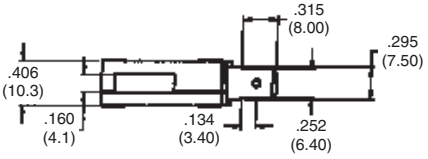

AMP	Switch Position	Operating Force	Releasing Force	Pre Travel (P.T.)	Operating Position	Over Travel	Movement Differential	Part Number
16	SPDT	120g	20g	1.6 m/m [.063]	15.4 ±0.4 [.606±.016]	0.8 m/m [.031]	0.4 m/m [.016]	1478606-2
		200g	50g					1478607-2
		330g	70g					1478608-2
	SPNC	120g	20g	1.6 m/m [.063]	15.4 ±0.4 [.606±.016]	0.8 m/m [.031]	0.4 m/m [.016]	1478612-2
		200g	50g					1478613-2
		330g	70g					1478614-2
	SPNO	120g	20g	1.6 m/m [.063]	15.4 ±0.4 [.606±.016]	0.8 m/m [.031]	0.4 m/m [.016]	1478618-2
		200g	50g					1478619-2
		330g	70g					1478620-2

Catalog 1308390
Issued 9-04
www.tycoelectronics.com

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses or brackets are metric equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425
South America: 55-11-3611-1514
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-141-810-8967


Miniature Normal Lever

Spade/Solder Type Terminal




Product Facts

- **.187 [4.75] tab with solder hole**
- **Use .187 [4.75] FASTON receptacles or solder wire directly to terminal**
- **Lever to increase travel and operating position as well as reduce operating force**

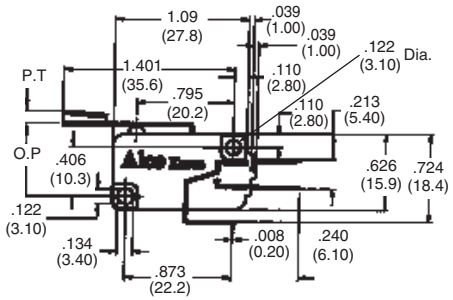

*** Refer to Pages L2 for Product Specifications**

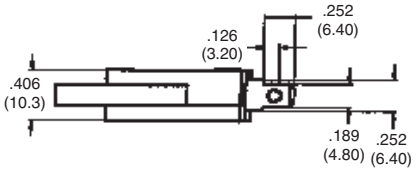


AMP	Switch Position	Operating Force	Releasing Force	Pre Travel (P.T.)	Operating Position	Over Travel	Movement Differential	Part Number
16	SPDT	60g	10g	4.0 m/m [.157]	15.4 ±1.4 [.606±.055]	1.3 m/m [.051]	1.2 m/m [.047]	1478603-3
		120g	20g					1478604-3
		180g	30g					1478605-3
	SPNC	60g	10g	4.0 m/m [.157]	15.4 ±1.4 [.606±.055]	1.3 m/m [.051]	1.2 m/m [.047]	1478609-3
		120g	20g					1478610-3
		180g	30g					1478611-3
	SPNO	60g	10g	4.0 m/m [.157]	15.4 ±1.4 [.606±.055]	1.3 m/m [.051]	1.2 m/m [.047]	1478615-3
		120g	20g					1478616-3
		180g	30g					1478617-3
5	SPDT	60g	10g	4.0 m/m [.157]	15.4 ±1.4 [.606±.055]	1.3 m/m [.051]	1.2 m/m [.047]	1478667-3
	SPNC							1478668-3
	SPNO							1478669-3
0.1	SPDT	35g	6g	4.0 m/m [.157]	15.4 ±1.4 [.606±.055]	1.3 m/m [.051]	1.2 m/m [.047]	1478670-3
	SPNC							1478671-3
	SPNO							1478672-3


Spade Type Terminal



Product Facts

- **.250 [6.35] tab for use with .250 [6.35] FASTON receptacles**
- **Lever to increase travel and operating position as well as reduce operating force**

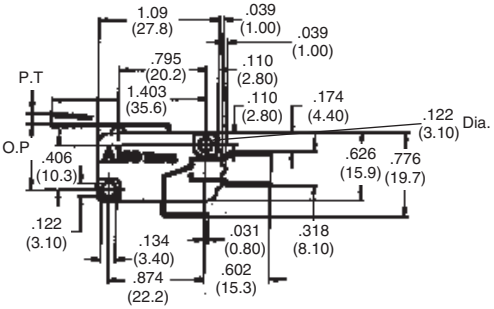

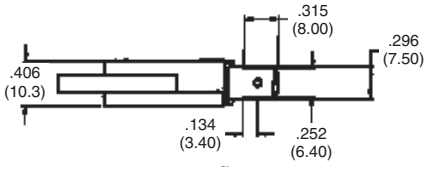

AMP	Switch Position	Operating Force	Releasing Force	Pre Travel (P.T.)	Operating Position	Over Travel	Movement Differential	Part Number
16	SPDT	60g	10g	4.0 m/m [.157]	15.4 ±1.4 [.606±.055]	1.3 m/m [.051]	1.2 m/m [.047]	1478606-3
		120g	20g					1478607-3
		180g	30g					1478608-3
	SPNC	60g	10g	4.0 m/m [.157]	15.4 ±1.4 [.606±.055]	1.3 m/m [.051]	1.2 m/m [.047]	1478612-3
		120g	20g					1478613-3
		180g	30g					1478614-3
	SPNO	60g	10g	4.0 m/m [.157]	15.4 ±1.4 [.606±.055]	1.3 m/m [.051]	1.2 m/m [.047]	1478618-3
		120g	20g					1478619-3
		180g	30g					1478620-3

Catalog 1308390
Issued 9-04
www.tycoelectronics.com

Dimensions are in inches and millimeters unless otherwise specified. Values in parentheses or brackets are metric equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-5-729-0425
South America: 55-11-3611-1514
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-141-810-8967