

## 8-bit 120MSPS Flash A/D Converter


### Description

The CXA3026Q is an 8-bit high-speed flash A/D converter capable of digitizing analog signals at the maximum rate of 120MSPS. ECL, PECL or TTL can be selected as the digital input level in accordance with the application. The TTL digital output level allows 1:2 demultiplexed output.

### Features

- Differential linearity error:  $\pm 0.5\text{LSB}$  or less
- Integral linearity error:  $\pm 0.5\text{LSB}$  or less
- High-speed operation with a maximum conversion rate of 120MSPS
- Low input capacitance: 21pF
- Wide analog input bandwidth: 150MHz
- Low power consumption: 760mW
- Low error rate
- Excellent temperature characteristics
- 1:2 demultiplexed output
- 1/2 frequency divided clock output (with reset function)
- Compatible with ECL, PECL and TTL digital input levels
- Single +5V power supply operation available
- Surface mounting package

48 pin QFP (Plastic)



LEAD TREATMENT: PALLADIUM PLATING


### Structure

Bipolar silicon monolithic IC

### Applications

- Magnetic recording (PRML)
- Communications (QPSK, QAM)
- LCDs
- Digital oscilloscopes

### Pin Configuration (Top View)

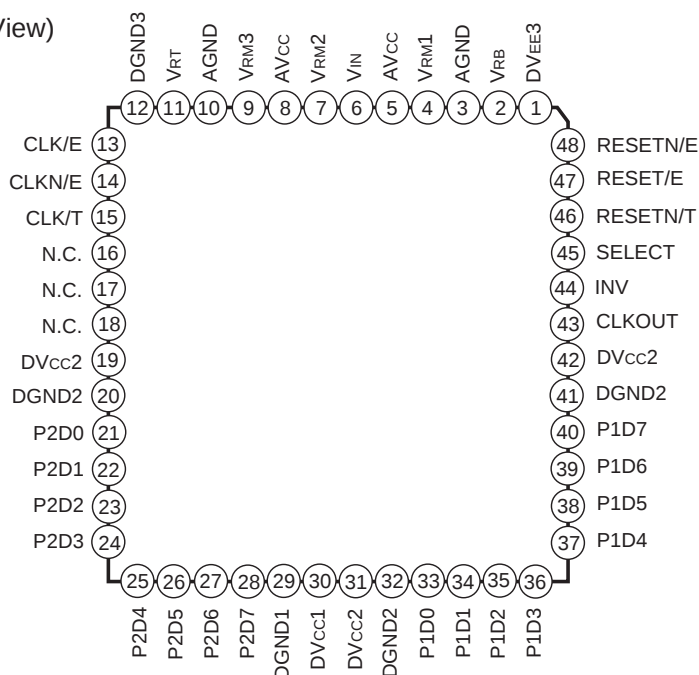

Sony reserves the right to change products and specifications without prior notice. This information does not convey any license by any implication or otherwise under any patents or other right. Application circuits shown, if any, are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits.

**Absolute Maximum Ratings** (Ta = 25°C)

|                               |                                                           |                                           | Unit |
|-------------------------------|-----------------------------------------------------------|-------------------------------------------|------|
| • Supply voltage              | AV <sub>CC</sub> , DV <sub>CC</sub> 1, DV <sub>CC</sub> 2 | −0.5 to +7.0                              | V    |
|                               | DGND3                                                     | −0.5 to +7.0                              | V    |
|                               | DV <sub>EE</sub> 3                                        | −7.0 to +0.5                              | V    |
|                               | DGND3 − DV <sub>EE</sub> 3                                | −0.5 to +7.0                              | V    |
| • Analog input voltage        | V <sub>IN</sub>                                           | V <sub>RT</sub> − 2.7 to AV <sub>CC</sub> | V    |
| • Reference input voltage     | V <sub>RT</sub>                                           | 2.7 to AV <sub>CC</sub>                   | V    |
|                               | V <sub>RB</sub>                                           | V <sub>IN</sub> − 2.7 to AV <sub>CC</sub> | V    |
|                               | V <sub>RT</sub> − V <sub>RB</sub>                         | 2.5                                       | V    |
| • Digital input voltage       | ECL (***/E*1)                                             | DV <sub>EE</sub> 3 to +0.5                | V    |
|                               | PECL (***/E)                                              | −0.5 to DGND3                             | V    |
|                               | TTL (***/T, INV)                                          | −0.5 to DV <sub>CC</sub> 1                | V    |
|                               | other (SELECT)                                            | −0.5 to DV <sub>CC</sub> 1                | V    |
|                               | VID*2 ( ***/E − ***/N/E )                                 | 2.7                                       | V    |
| • Storage temperature         | T <sub>stg</sub>                                          | −65 to +150                               | °C   |
| • Allowable power dissipation | P <sub>D</sub>                                            | 2                                         | W    |


(when mounted on a glass fabric base epoxy board with 50mm x 50mm, 1.6mm thick)

**Recommended Operating Conditions**


|                           |                                                          | With a single power supply           |      |                 | With dual power supplies |      |                 | Unit |
|---------------------------|----------------------------------------------------------|--------------------------------------|------|-----------------|--------------------------|------|-----------------|------|
|                           |                                                          | Min.                                 | Typ. | Max.            | Min.                     | Typ. | Max.            |      |
| • Supply voltage          | DV <sub>CC</sub> 1, DV <sub>CC</sub> 2, AV <sub>CC</sub> | +4.75                                | +5.0 | +5.25           | +4.75                    | +5.0 | +5.25           | V    |
|                           | DGND1, DGND2, AGND                                       | −0.05                                | 0    | +0.05           | −0.05                    | 0    | +0.05           | V    |
|                           | DGND3                                                    | +4.75                                | +5.0 | +5.25           | −0.05                    | 0    | +0.05           | V    |
|                           | DV <sub>EE</sub> 3                                       | −0.05                                | 0    | +0.05           | −5.5                     | −5.0 | −4.75           | V    |
| • Analog input voltage    | V <sub>IN</sub>                                          | V <sub>RB</sub>                      |      | V <sub>RT</sub> | V <sub>RB</sub>          |      | V <sub>RT</sub> | V    |
| • Reference input voltage | V <sub>RT</sub>                                          | +2.9                                 |      | +4.1            | +2.9                     |      | +4.1            | V    |
|                           | V <sub>RB</sub>                                          | +1.4                                 |      | +2.6            | +1.4                     |      | +2.6            | V    |
|                           | V <sub>RT</sub> − V <sub>RB</sub>                        | 1.5                                  |      | 2.1             | 1.5                      |      | 2.1             | V    |
| • Digital input voltage   | ECL (***/E)                                              | : V <sub>IH</sub>                    |      |                 | DGND3 − 1.05             |      | DGND3 − 0.5     | V    |
|                           |                                                          | : V <sub>IL</sub>                    |      |                 | DGND3 − 3.2              |      | DGND3 − 1.4     | V    |
|                           | PECL (***/E)                                             | : V <sub>IH</sub> DGND3 − 1.05       |      |                 | DGND3 − 0.5              |      |                 | V    |
|                           |                                                          | : V <sub>IL</sub> DGND3 − 3.2        |      |                 | DGND3 − 1.4              |      |                 | V    |
|                           | TTL (***/T, INV)                                         | : V <sub>IH</sub> 2.0                |      |                 | 2.0                      |      |                 | V    |
|                           |                                                          | : V <sub>IL</sub>                    |      |                 | 0.8                      |      | 0.8             | V    |
|                           | other (SELECT)                                           | : V <sub>IH</sub> DV <sub>CC</sub> 1 |      |                 | DV <sub>CC</sub> 1       |      |                 | V    |
|                           |                                                          | : V <sub>IL</sub> DGND1              |      |                 | DGND1                    |      |                 | V    |
| • Maximum conversion rate | F <sub>c</sub> (Straight mode)                           | 0.4                                  | 0.8  |                 | 0.4                      | 0.8  |                 | V    |
|                           |                                                          | 100                                  |      |                 | 100                      |      |                 | MSPS |
|                           | (DMUX mode)                                              | 120                                  |      |                 | 120                      |      |                 | MSPS |
| • Ambient temperature     | T <sub>a</sub>                                           | −20                                  |      | +75             | −20                      |      | +75             | °C   |

\*1 \*\*\*/E and \*\*\*/T indicate CLK/E and CLK/T, etc. for the pin name.

\*2 VID: Input Voltage Differential

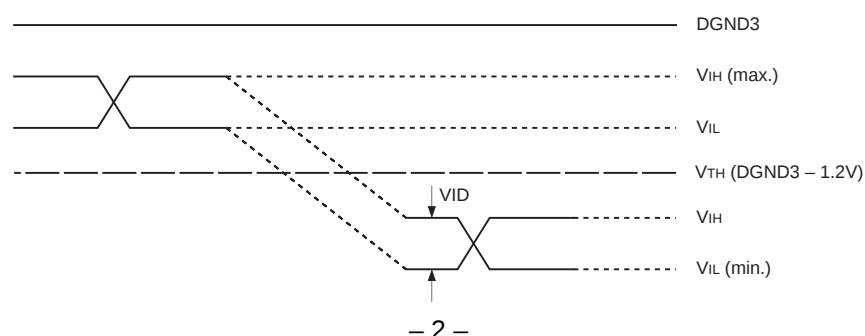**ECL and PECL switching level**



## Block Diagram

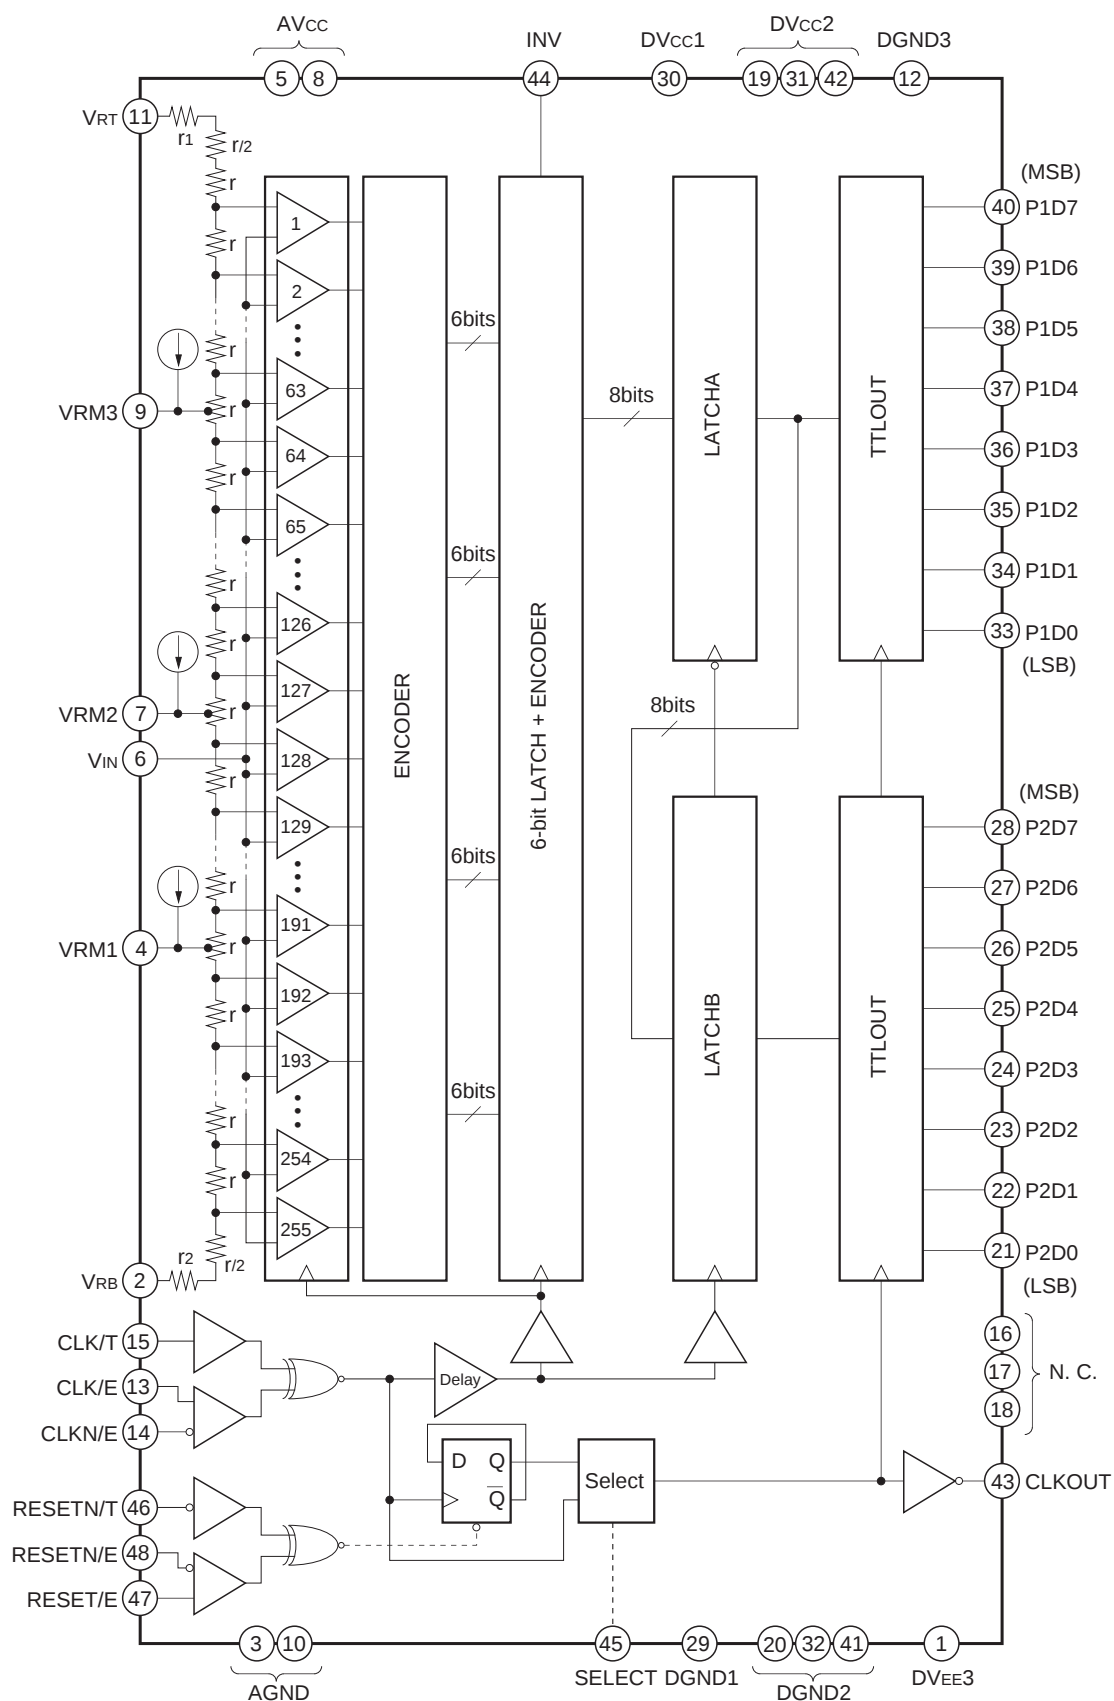

## Pin Description and I/O Pin Equivalent Circuit

| Pin No.          | Symbol                                   | I/O | Standard voltage level                                                                   | Equivalent circuit | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------|------------------------------------------|-----|------------------------------------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3, 10            | AGND                                     |     | GND                                                                                      |                    | Analog ground.<br>Separated from the digital ground.                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 5, 8             | AV <sub>CC</sub>                         |     | +5V (typ.)                                                                               |                    | Analog power supply.<br>Separated from the digital power supply.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 20, 29<br>32, 41 | DGND1<br>DGND2                           |     | GND                                                                                      |                    | Digital ground.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 19, 30<br>31, 42 | DV <sub>CC</sub> 1<br>DV <sub>CC</sub> 2 |     | +5V (typ.)                                                                               |                    | Digital power supply.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 12               | DGND3                                    |     | +5V (Typ.)<br>(With a single power supply)<br>-----<br>GND<br>(With dual power supplies) |                    | Digital power supply.<br>Ground for ECL input.<br>+5V for PECL and TTL input.                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 1                | DV <sub>EE</sub> 3                       |     | GND<br>(With a single power supply)<br>-----<br>–5V (Typ.)<br>(With dual power supplies) |                    | Digital power supply.<br>–5V for ECL input.<br>Ground for PECL and TTL input.                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 16, 17<br>18     | N.C.                                     |     |                                                                                          |                    | No connected pin.<br>Not connected with the internal circuits.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 13               | CLK/E                                    | I   | ECL/<br>PECL                                                                             |                    | <p>Clock input.</p> <p>CLK/E complementary input.<br/>When left open, this pin goes to the threshold potential.<br/>Only CLK/E can be used for operation, but complementary input is recommended to attain fast and stable operation.</p> <p>Reset input.<br/>When the input is set to low level, the built-in CLK frequency divider circuit can be reset.</p> <p>RESETN/E complementary input.<br/>When left open, this pin goes to the threshold voltage. Only RESETN/E can be used for operation.</p> |
| 14               | CLKN/E                                   | I   |                                                                                          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 48               | RESETN/E                                 | I   |                                                                                          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 47               | RESET/E                                  | I   |                                                                                          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

| Pin No. | Symbol           | I/O | Standard voltage level                  | Equivalent circuit | Description                                                                                                                                                 |
|---------|------------------|-----|-----------------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15      | CLK/T            | I   | TTL                                     |                    | Clock input.                                                                                                                                                |
| 46      | RESETN/T         | I   |                                         |                    | Reset input.<br>When left open, this input goes to high level. When the input is set to low level, the built-in CLK frequency divider circuit can be reset. |
| 44      | INV              | I   | TTL                                     |                    | Data output polarity inversion input.<br>When left open, this input goes to high level.<br>(See Table 1. I/O Correspondence Table.)                         |
| 45      | SELECT           |     | Vcc or GND                              |                    | Data output mode selection.<br>(See Table 2. Operating Mode Table.)                                                                                         |
| 11      | V <sub>RT</sub>  | I   | 4.0V (typ.)                             |                    | Top reference voltage.<br>By-pass to AGND with a 1μF tantalum capacitor and a 0.1μF chip capacitor.                                                         |
| 9       | V <sub>RM3</sub> |     | $V_{RB} + \frac{3}{4}(V_{RT} - V_{RB})$ |                    | Reference voltage mid point.<br>By-pass to AGND with a 0.1μF chip capacitor.                                                                                |
| 7       | V <sub>RM2</sub> |     | $V_{RB} + \frac{2}{4}(V_{RT} - V_{RB})$ |                    | Reference voltage mid point.<br>By-pass to AGND with a 0.1μF chip capacitor.                                                                                |
| 4       | V <sub>RM1</sub> |     | $V_{RB} + \frac{1}{4}(V_{RT} - V_{RB})$ |                    | Reference voltage mid point.<br>By-pass to AGND with a 0.1μF chip capacitor.                                                                                |
| 2       | V <sub>RB</sub>  | I   | 2.0V (typ.)                             |                    | Bottom reference voltage.<br>By-pass to AGND with a 1μF tantalum capacitor and a 0.1μF chip capacitor.                                                      |
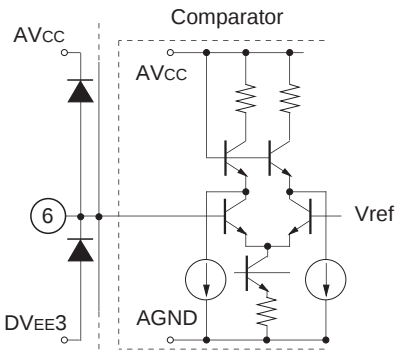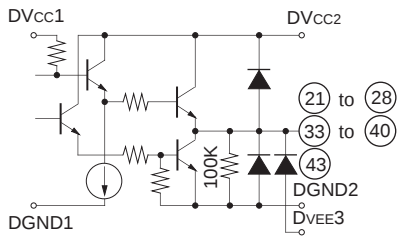
| Pin No.  | Symbol       | I/O | Standard voltage level | Equivalent circuit                                                                 | Description                                           |
|----------|--------------|-----|------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------|
| 6        | $V_{IN}$     | I   | $V_{RT}$ to $V_{RB}$   |   | Analog input.                                         |
| 33 to 40 | P1D0 to P1D7 | O   | TTL                    |  | Port 1 side data output.                              |
| 21 to 28 | P2D0 to P2D7 | O   |                        |                                                                                    | Port 2 side data output.                              |
| 43       | CLKOUT       | O   |                        |                                                                                    | Clock output.<br>(See Table 2. Operating Mode Table.) |

## Electrical Characteristics

(DV<sub>CC1</sub>, 2, AV<sub>CC</sub>, DGND3 = +5V, DGND1, 2, AGND, DV<sub>EE3</sub> = 0V, V<sub>RT</sub> = 4V, V<sub>RB</sub> = 2V, Ta = 25°C)

| Item                                | Symbol              | Conditions                                                       | Min.         | Typ.        | Max.        | Unit |
|-------------------------------------|---------------------|------------------------------------------------------------------|--------------|-------------|-------------|------|
| Resolution                          |                     |                                                                  |              | 8           |             | bits |
| DC characteristics                  |                     |                                                                  |              |             |             |      |
| Integral linearity error            | E <sub>IL</sub>     | V <sub>IN</sub> = 2Vp-p, F <sub>c</sub> = 5MSPS                  |              |             | ±0.5        | LSB  |
| Differential linearity error        | E <sub>DL</sub>     |                                                                  |              |             | ±0.5        | LSB  |
| Analog input                        |                     |                                                                  |              |             |             |      |
| Analog input capacitance            | C <sub>IN</sub>     | V <sub>IN</sub> = +3.0V + 0.07V <sub>rms</sub>                   |              | 21          |             | pF   |
| Analog input resistance             | R <sub>IN</sub>     |                                                                  | 4            |             | 50          | kΩ   |
| Analog input current                | I <sub>IN</sub>     |                                                                  | 0            |             | 500         | μA   |
| Reference input                     |                     |                                                                  |              |             |             |      |
| Reference resistance                | R <sub>ref</sub> *3 |                                                                  | 75           | 115         | 155         | Ω    |
| Reference current                   | I <sub>ref</sub> *4 |                                                                  | 9.7          | 17.4        | 28          | mA   |
| Offset voltage V <sub>RT</sub> side | E <sub>OT</sub>     |                                                                  | 2            |             | 15          | mV   |
| Offset voltage V <sub>RB</sub> side | E <sub>OB</sub>     |                                                                  | 2            |             | 10          | mV   |
| Digital input (ECL, PECL)           |                     |                                                                  |              |             |             |      |
| Digital input voltage: High         | V <sub>IH</sub>     | V <sub>IH</sub> = DGND3 – 0.8V<br>V <sub>IL</sub> = DGND3 – 1.6V | DGND3 – 1.05 | DGND3 – 1.2 | DGND3 – 0.5 | V    |
| : Low                               | V <sub>IL</sub>     |                                                                  | DGND3 – 3.2  |             | DGND3 – 1.4 | V    |
| Threshold voltage                   | V <sub>TH</sub>     |                                                                  |              |             |             | V    |
| Digital input current: High         | I <sub>IH</sub>     |                                                                  | –50          |             | +50         | μA   |
| : Low                               | I <sub>IL</sub>     |                                                                  | –75          |             | 0           | μA   |
| Digital input capacitance           |                     |                                                                  |              |             | 5           | pF   |
| Digital input (TTL)                 |                     |                                                                  |              |             |             |      |
| Digital input voltage: High         | V <sub>IH</sub>     | V <sub>IH</sub> = 3.5V<br>V <sub>IL</sub> = 0.2V                 | 2.0          | 1.5         | 0.8         | V    |
| : Low                               | V <sub>IL</sub>     |                                                                  |              |             |             | V    |
| Threshold voltage                   | V <sub>TH</sub>     |                                                                  |              |             |             | V    |
| Digital input current: High         | I <sub>IH</sub>     |                                                                  | –50          |             | 0           | μA   |
| : Low                               | I <sub>IL</sub>     |                                                                  | –500         |             | 0           | μA   |
| Digital input capacitance           |                     |                                                                  |              |             | 5           | pF   |
| Digital output (TTL)                |                     |                                                                  |              |             |             |      |
| Digital output voltage: High        | V <sub>OH</sub>     | I <sub>OH</sub> = –2mA<br>I <sub>OL</sub> = 1mA                  | 2.4          |             |             | V    |
| : Low                               | V <sub>OL</sub>     |                                                                  |              |             | 0.5         | V    |
| Switching characteristics           |                     |                                                                  |              |             |             |      |
| Maximum conversion rate             | F <sub>c</sub>      | DMUX mode                                                        | 120          |             |             | MSPS |
| Aperture jitter                     | T <sub>aj</sub>     |                                                                  |              | 10          |             | ps   |
| Sampling delay                      | T <sub>ds</sub>     |                                                                  | 3            | 4.5         | 6           | ns   |
| Clock high pulse width              | T <sub>pw1</sub>    | CLK                                                              | 3.2          |             |             | ns   |
| Clock low pulse width               | T <sub>pw0</sub>    | CLK                                                              | 3.2          |             |             | ns   |
| RESETN_CLK setup                    | T <sub>rs</sub>     | RESETN – CLK                                                     | 3.5          |             |             | ns   |
| RESETN_CLK hold time                | T <sub>rh</sub>     | RESETN – CLK                                                     | 0            |             |             | ns   |
| CLKOUT output delay                 | T <sub>d_clk</sub>  | (C <sub>L</sub> = 5pF)                                           | 4.5          | 7           | 8           | ns   |
| Data output delay                   | T <sub>do1</sub>    | DMUX mode (C <sub>L</sub> = 5pF)                                 | T*5          | T + 1       | T + 2       | ns   |
|                                     | T <sub>do2</sub>    | (C <sub>L</sub> = 5pF)                                           | 6.5          | 8           | 10          | ns   |
| Output rise time                    | T <sub>r</sub>      | 0.8 to 2.0V (C <sub>L</sub> = 5pF)                               |              | 2           |             | ns   |
| Output fall time                    | T <sub>f</sub>      | 0.8 to 2.0V (C <sub>L</sub> = 5pF)                               |              | 2           |             | ns   |

\* These characteristics are for PECL input, unless otherwise specified.

| Item                    | Symbol               | Conditions                                                                                                                              | Min. | Typ. | Max.       | Unit              |
|-------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------|------|------|------------|-------------------|
| Dynamic characteristics |                      |                                                                                                                                         |      |      |            |                   |
| Input bandwidth         |                      | $V_{IN} = 2V_{p-p}, -3dB$                                                                                                               | 150  | 46   |            | MHz               |
| S/N ratio               |                      | $\left\{ \begin{array}{l} F_c = 120MSPS, \\ fin = 1kHz \text{ } F_s \\ DMUX \text{ mode} \end{array} \right.$                           |      | 40   |            | dB                |
| Error rate              |                      | $\left\{ \begin{array}{l} F_c = 120MSPS, \\ fin = 29.999MHz \text{ } F_s \\ DMUX \text{ mode} \\ Error > 16LSB \end{array} \right.$     |      |      | $10^{-12}$ | TPS* <sup>6</sup> |
|                         |                      | $\left\{ \begin{array}{l} F_c = 120MSPS, \\ fin = 1kHz \text{ } F_s \\ DMUX \text{ mode} \\ Error > 16LSB \end{array} \right.$          |      |      | $10^{-9}$  | TPS               |
|                         |                      | $\left\{ \begin{array}{l} F_c = 100MSPS, \\ fin = 24.999MHz \text{ } F_s \\ Straight \text{ mode} \\ Error > 16LSB \end{array} \right.$ |      |      | $10^{-9}$  | TPS               |
| Power supply            |                      |                                                                                                                                         |      |      |            |                   |
| Supply current          | $I_{CC}$             |                                                                                                                                         | 125  | 145  | 185        | mA                |
| Supply current          | $I_{EE}$             |                                                                                                                                         | 0.4  | 0.6  | 0.8        | mA                |
| Power consumption       | $P_d$ * <sup>7</sup> |                                                                                                                                         | 660  | 760  | 960        | mW                |

\*<sup>3</sup> Rref: Resistance value between  $V_{RT}$  and  $V_{RB}$

$$*^4 I_{ref} = \frac{V_{RT} - V_{RB}}{R_{ref}}$$

$$*^5 T = \frac{1}{F_c}$$

\*<sup>6</sup> TPS: Times Per Sample


$$*^7 P_d = (I_{CC} + I_{EE}) \cdot V_{CC} + \frac{(V_{RT} - V_{RB})^2}{R_{ref}}$$

| $V_{IN}$  | Step | INV |   |   |   |    |   |   |   |    |   |   |   |    |   |   |   |
|-----------|------|-----|---|---|---|----|---|---|---|----|---|---|---|----|---|---|---|
|           |      | 1   |   |   |   |    |   |   |   | 0  |   |   |   |    |   |   |   |
|           |      | D7  |   |   |   | D0 |   |   |   | D7 |   |   |   | D0 |   |   |   |
| $V_{RT}$  | 255  | 1   | 1 | 1 | 1 | 1  | 1 | 1 | 1 | 0  | 0 | 0 | 0 | 0  | 0 | 0 | 0 |
|           | 254  | 1   | 1 | 1 | 1 | 1  | 1 | 1 | 0 | 0  | 0 | 0 | 0 | 0  | 0 | 0 | 1 |
| $V_{RM2}$ | ⋮    |     |   |   |   |    |   |   |   |    |   |   |   |    |   |   | ⋮ |
|           | 128  | 1   | 0 | 0 | 0 | 0  | 0 | 0 | 0 | 0  | 1 | 1 | 1 | 1  | 1 | 1 | 1 |
|           | 127  | 0   | 1 | 1 | 1 | 1  | 1 | 1 | 1 | 1  | 0 | 0 | 0 | 0  | 0 | 0 | 0 |
|           | ⋮    |     |   |   |   |    |   |   |   |    |   |   |   |    |   |   | ⋮ |
| $V_{RB}$  | 1    | 0   | 0 | 0 | 0 | 0  | 0 | 0 | 0 | 1  | 1 | 1 | 1 | 1  | 1 | 1 | 0 |
|           | 0    | 0   | 0 | 0 | 0 | 0  | 0 | 0 | 0 | 0  | 1 | 1 | 1 | 1  | 1 | 1 | 1 |

Table 1. I/O Correspondence Table


## Electrical Characteristics Measurement Circuit

### Current Consumption Measurement Circuit

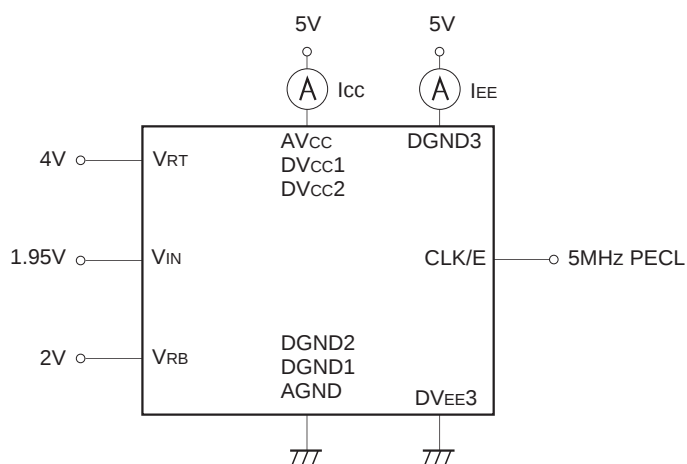


## Sampling Delay Measurement Circuit

### Aperture Jitter Measurement Circuit

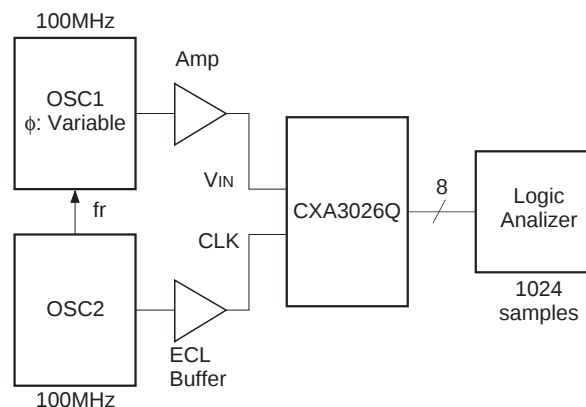


## Integral Linearity Error Measurement Circuit

### Differential Linearity Error Measurement Circuit

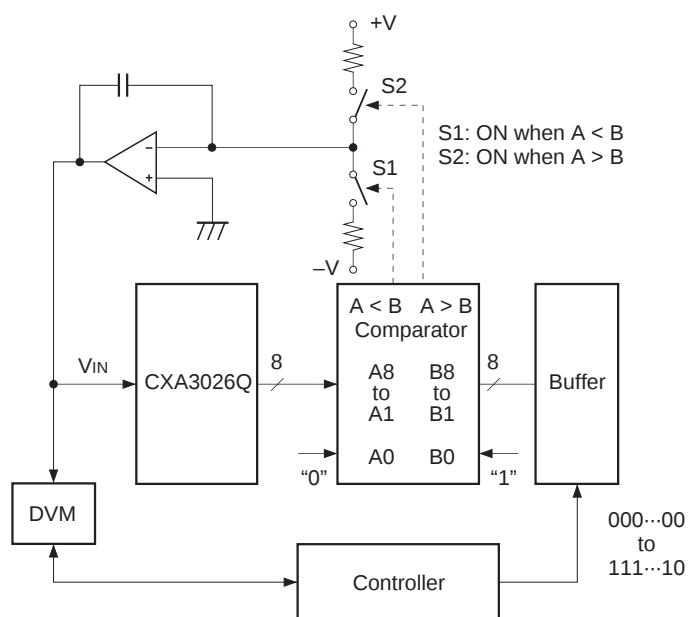


## Aperture Jitter Measurement Method

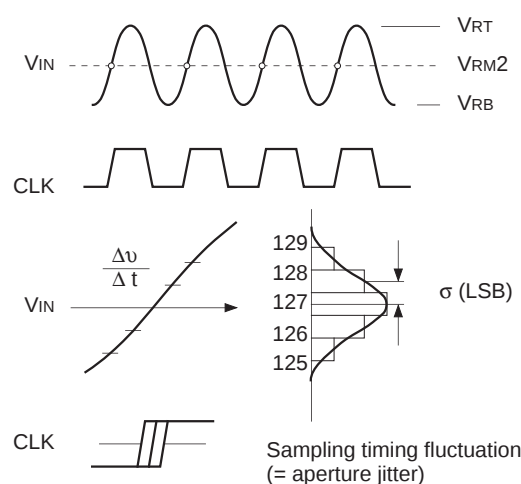

Where σ (LSB) is the deviation of the output codes when the largest slew rate point is sampled at the clock which has exactly the same frequency as the analog input signal, the aperture jitter T<sub>aj</sub> is:

$$T_{aj} = \sigma / \frac{\Delta v}{\Delta t} = \sigma / \left( -\frac{256}{2} \times 2\pi f \right)$$

## Error Rate Measurement Circuit

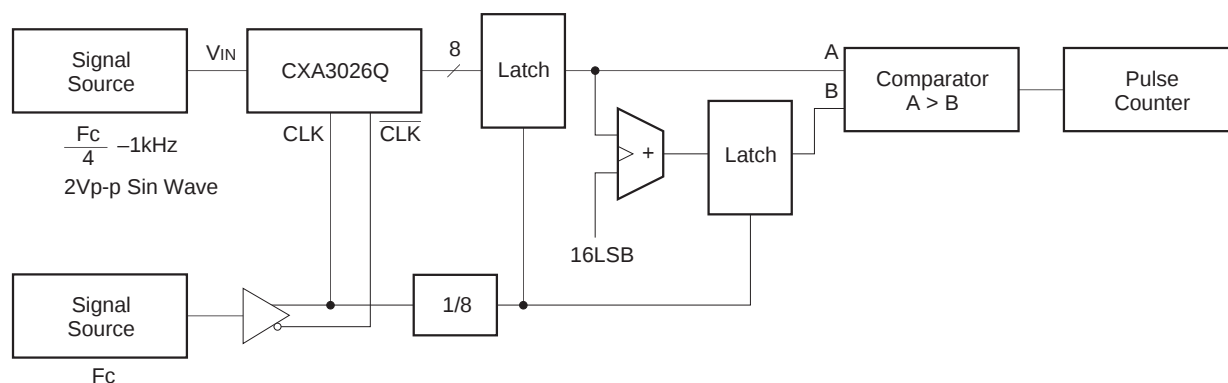

### Description of Operating Modes

The CXA3026Q has two types of operating modes which are selected with Pin 45 (SELECT).

| Operating mode | SELECT          | Maximum conversion rate | Data output                    | Clock output                                                  |
|----------------|-----------------|-------------------------|--------------------------------|---------------------------------------------------------------|
| DMUX mode      | V <sub>cc</sub> | 120MSPS                 | Demultiplexed output<br>60Mbps | The input clock is 1/2 frequency divided and output.<br>60MHz |
| Straight mode  | GND             | 100MSPS                 | Straight output<br>100Mbps     | The input clock is inverted and output.<br>100MHz             |

**Table 2. Operating Mode Table**

#### 1. DMUX mode (See Application Circuit 1-(1), (2) and (3).)

Set the SELECT pin to V<sub>cc</sub> for this mode. In this mode, the clock frequency is divided by 2 in the IC, and the data is output after being demultiplexed by this 1/2 frequency divided clock. The 1/2 frequency divided clock, which has adequate setup time and hold time for the output data, is output from the CLKOUT pin.


When resetting this 1/2 frequency divided clock, the low level of the RESET signal should be input to the RESETN pin (Pin 46 or 48). The RESET signal requires the setup time ( $T_{rs} \geq 3.5\text{ns}$ ) and hold time ( $T_{rh} \geq 0\text{ns}$ ) to the clock rising edge because it is synchronized with and taken in the clock. Therefore, set the RESET signal to low for  $T_{rs}(\text{min.}) + T_{rh}(\text{min.}) = 3.5\text{ns}$  or longer to the clock rising edge.

The reset period can be extended by making the low level period of the RESET signal longer because the clock output pin is fixed to low (reset) during the low level period at the clock rising edge. If the reset start timing is regarded as not important, the timing where the RESET signal is set from high to low is not so consequence. However, when the reset is released this timing must become significant because the timing is used to commence the 1/2 frequency divided clock. In this case, the setup time ( $T_{rs}$ ) is also necessary.


See the timing chart for detail. (This chart shows the example of reset for 2T.)

The A/D converter can operate at FC (min.) = 120MSPS in this mode.

When the RESET signal is not used.

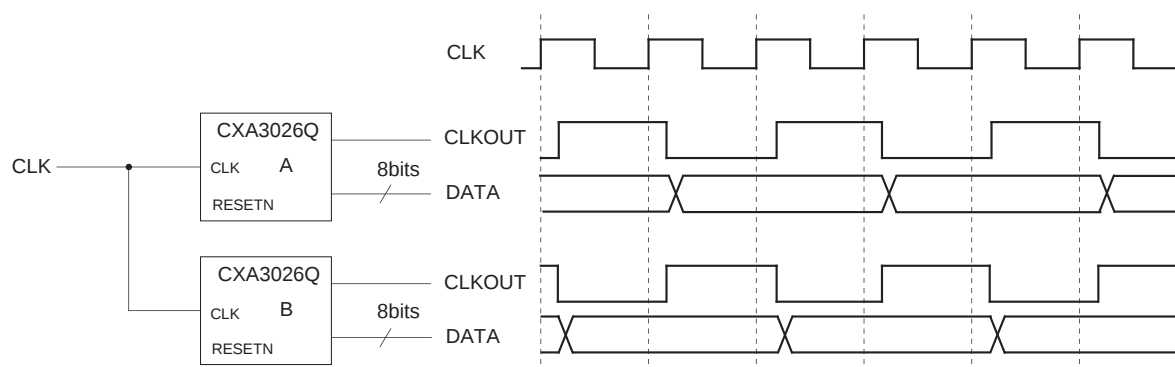

When the RESET signal is used.

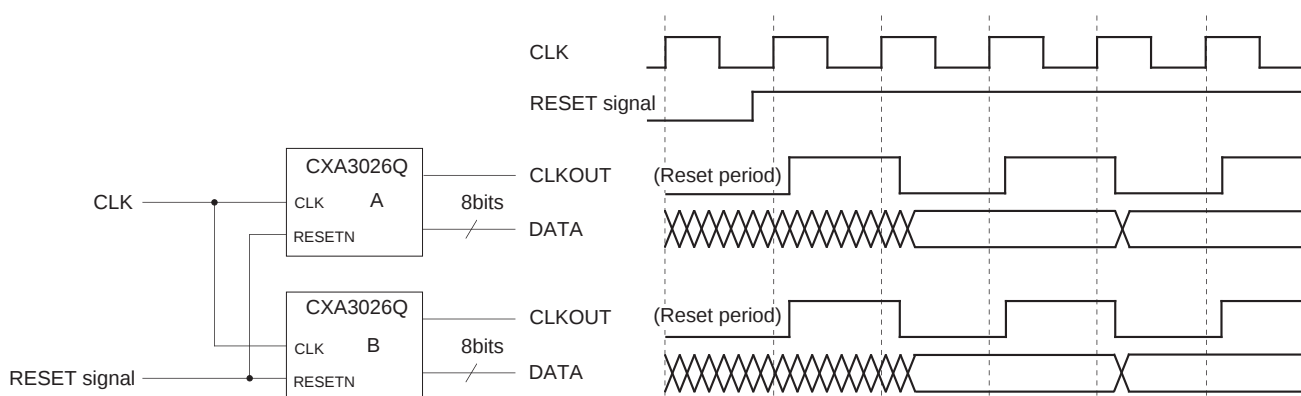

## 2. Straight mode (See Application Circuits 1-(4), (5) and (6).)

Set the SELECT pin to GND for this mode. In this mode, data output can be obtained in accordance with the clock frequency applied to the A/D converter for applications which use the clock applied to the A/D converter as the system clock.

The A/D converter can operate at  $F_c$  (min.) = 100MSPS in this mode.

### Digital input level and supply voltage settings

The logic input level for the CXA3026Q supports ECL, PECL and TTL levels.

The power supplies (DV<sub>EE3</sub>, DGND3) for the logic input block must be set to match the logic input (CLK and RESET signals) level.


| Digital input level | DV <sub>EE3</sub> | DGND3 | Supply voltage | Application circuits |
|---------------------|-------------------|-------|----------------|----------------------|
| ECL                 | −5V               | 0V    | ±5V            | (1) (4)              |
| PECL                | 0V                | +5V   | +5V            | (2) (5)              |
| TTL                 | 0V                | +5V   | +5V            | (3) (6)              |

Table 3. Logic Input Level and Power Supply Settings


### (1) DMUX ECL input




#### (4) Straight ECL input

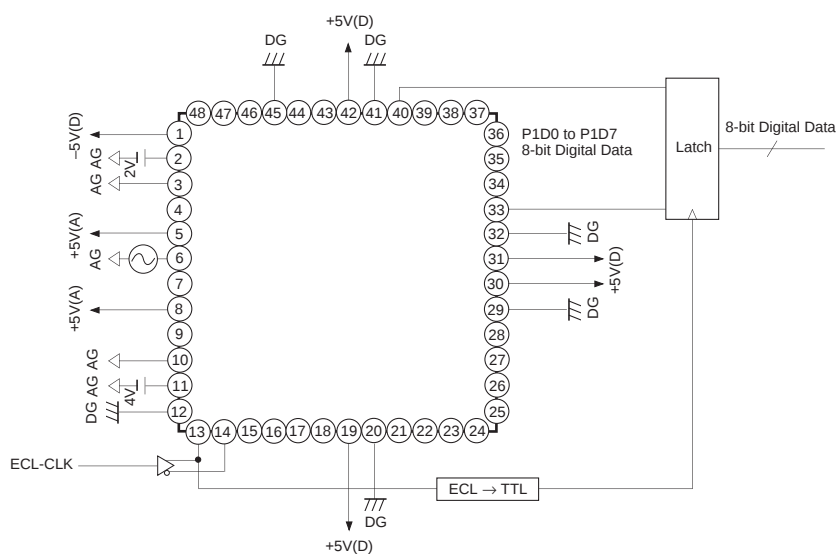


#### (5) Straight PECL input

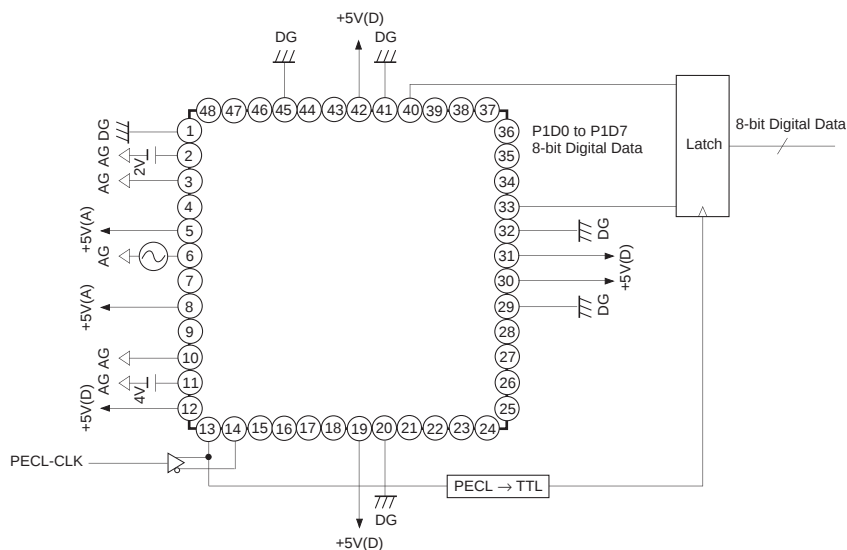

#### (6) Straight TTL input

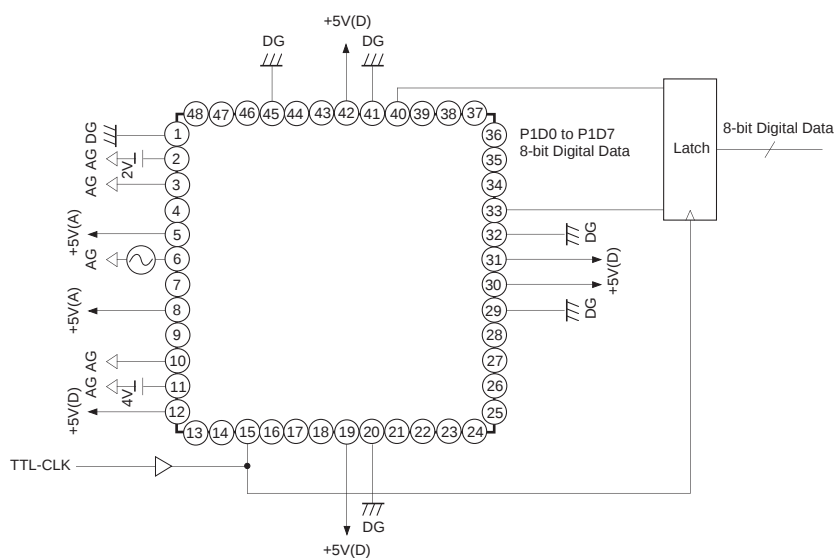


## Application Circuit 2      Straight Mode TTL I/O (When a single power supply is used)

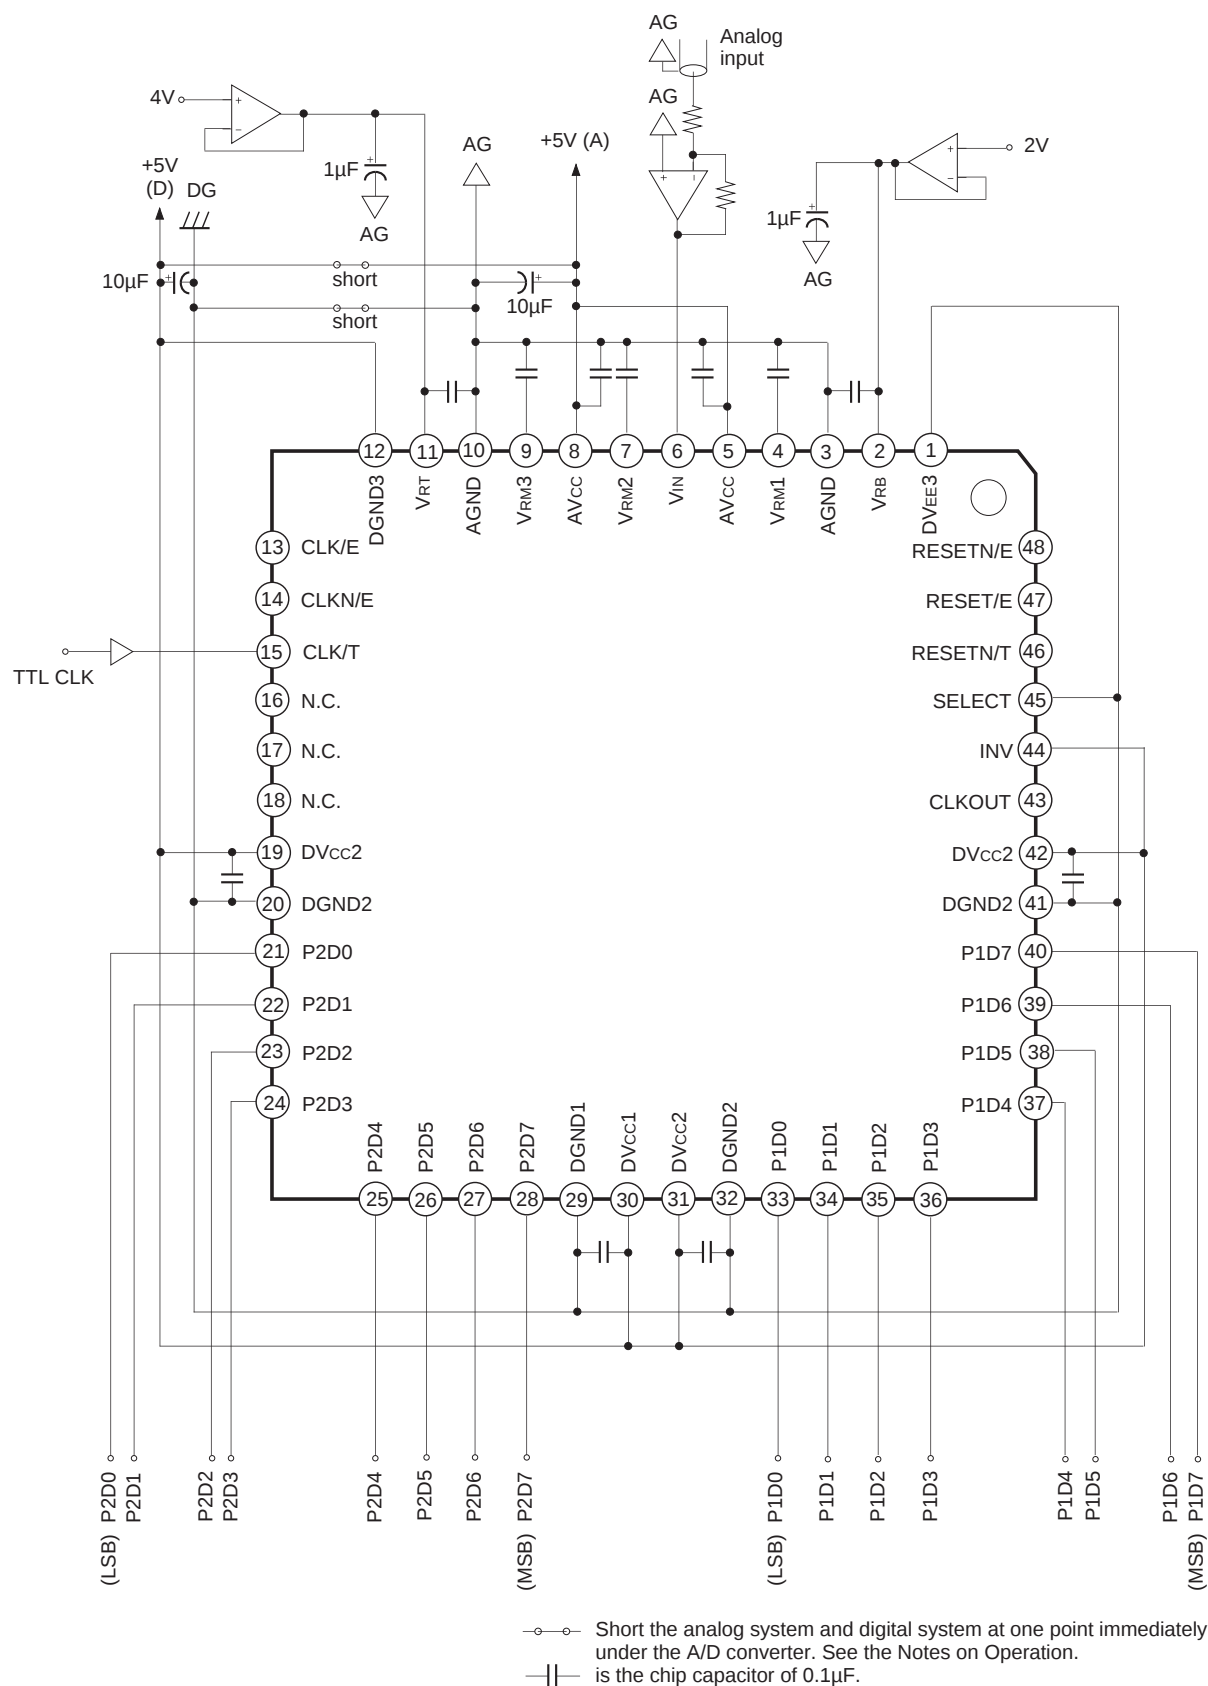


Application circuits shown are typical examples illustrating the operation of the devices. Sony cannot assume responsibility for any problems arising out of the use of these circuits or for any infringement of third party patent and other right due to same.

## DMUX Mode Timing Chart (Select = Vcc)

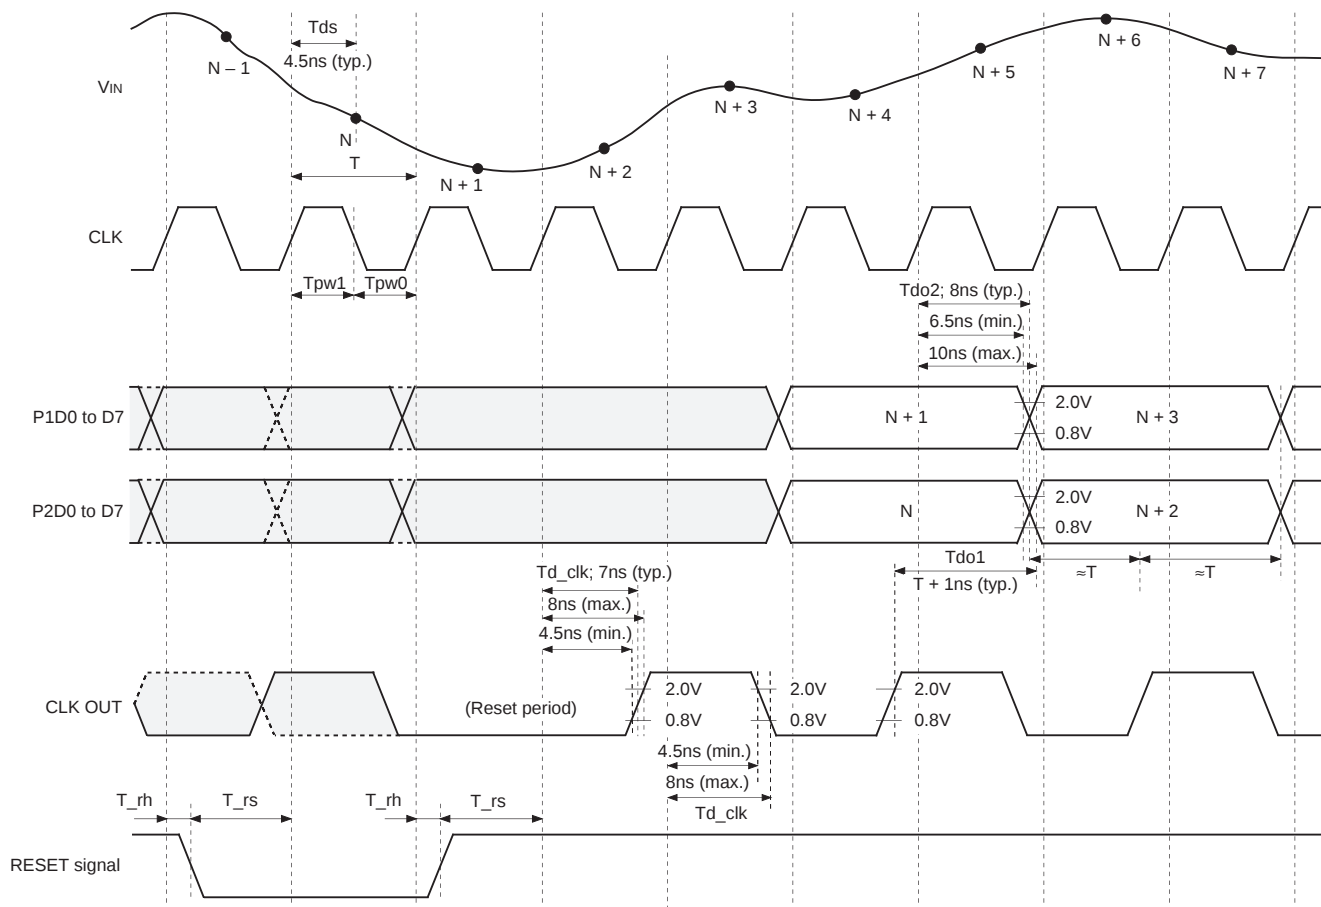

## Straight Mode Timing Chart (Select = GND)

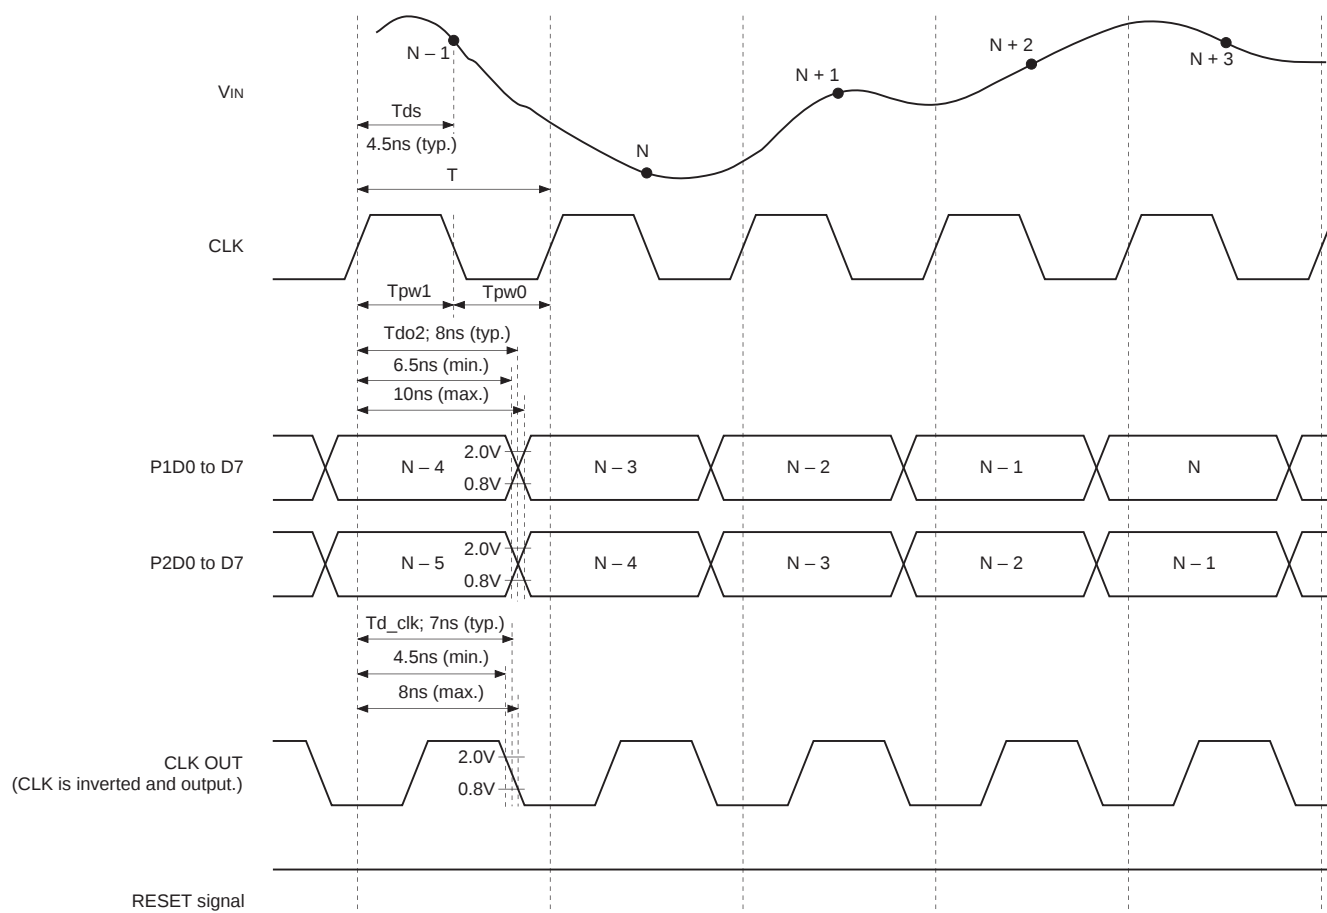

## Timing of A/D Converter and Peripheral Circuit

In the maximum clock rate of the DEMUX Mode, the timing of 3 channels of ADC CLK OUT in same phase is described in detail as below.

For example, the CLK OUT from one of the ADC is used as the data latch clock. The clock delay and data delay are showed in the following specification, i.e.

Td\_clk 4.5ns (min.) to 8.0ns (max.)

Tdo2 6.5ns (min.) to 10ns (max.)


These values are considered in all the temperature change and power supply variation. When the maximum clock rate 120MSPS is used, the set-up time (ts) is seemed to be very small from above specifications. But the 3 channels of ADC are in the same circuit board, so that the DATA OUT delay and CLK OUT delay will be changed in same trend at the same condition of the temperature change and power supply variation. As a result, 0.5ns of the delay will be faster, when the highest temperature and highest power supply is used. Also, 0.5ns of the delay will be later, when the lowest temperature and lowest power supply is used. These delay can be omitted in this case.

When Ta = 25°C, Vcc = +5V, the clock delay and data delay are

Td\_clk 5.0ns (min.) to 7.5ns (max.)

Tdo2 7.0ns (min.) to 9.5ns (max.)

The timing of the DATA OUT and CLK OUT with above delay variation is showed in below. Consequently, the set-up time for the data latching can be obtained as ts (min.) = 3.5ns. The output delay change of the DATA OUT and CLK OUT due to the temperature change and the power supply variation should have the same trend of the delay change, the minimum ts = 3.5ns can be guaranteed at any temperature change and power supply variation.




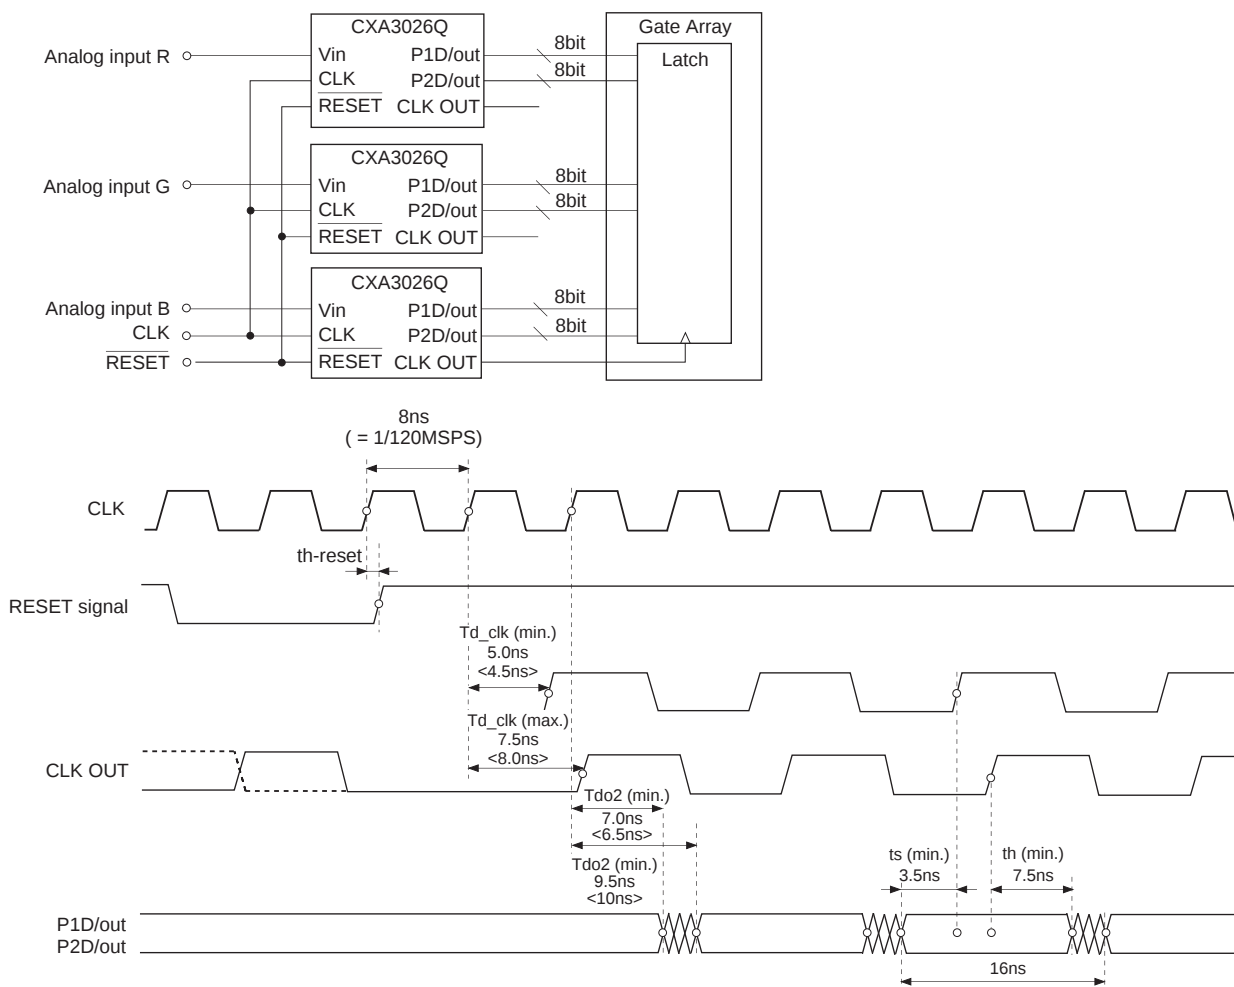





**Note:** In the timing chart, the values in the brackets < > are included all the temperature change and the power supply variation.

## Notes on Operation

- The CXA3026Q is a high-speed A/D converter which is capable of TTL, ECL and PECL level clock input. Characteristic impedance should be properly matched to ensure optimum performance during high-speed operation.
- The power supply and grounding have a profound influence on converter performance. The power supply and grounding method are particularly important during high-speed operation. General points for caution are as follows.
  - The ground pattern should be as large as possible. It is recommended to make the power supply and ground patterns wider at an inner layer using a multi-layer board.
  - To prevent interference between AGND and DGND and between AVcc and DVcc, make sure the respective patterns are separated. To prevent a DC offset in the power supply pattern, connect the AVcc and DVcc lines at one point each via a ferrite-bead filter. Shorting the AGND and DGND patterns in one place immediately under the A/D converter improves A/D converter performance.
  - Ground the power supply pins (AVcc, DVcc1, DVcc2, DV<sub>EE</sub>3) as close to each pin as possible with a 0.1μF or larger ceramic chip capacitor.  
(Connect the AVcc pin to the AGND pattern and the DVcc1, DVcc2 and DV<sub>EE</sub>3 pins to the DGND pattern.)
  - The digital output wiring should be as short as possible. If the digital output wiring is long, the wiring capacitance will increase, deteriorating the output slew rate and resulting in reflection to the output waveform since the original output slew rate is quite fast.
- The analog input pin V<sub>IN</sub> has an input capacitance of approximately 21pF. To drive the A/D converter with proper frequency response, it is necessary to prevent performance deterioration due to parasitic capacitance or parasitic inductance by using a large capacity drive circuit. Keeping wiring as short as possible, and using chip parts for resistors and capacitors, etc.
- The V<sub>RT</sub> and V<sub>RB</sub> pins must have adequate by-pass to protect them from high-frequency noise. By-pass them to AGND with approximately 1μF tantalum capacitor and, 0.1μF chip capacitor as short as possible.
- If the CLK/E pin is not used, by-pass this pin to DGND with an approximately 0.1μF capacitor. At this time, approximately DGND3 – 1.2V voltage is generated. However, this is not recommended for use as threshold voltage V<sub>BB</sub> as it is too weak.
- When the digital input level is ECL or PECL level, \*\*\*/E pins should be used and \*\*\*/T pins left open. When the digital input level is TTL, \*\*\*/T pins should be used and \*\*\*/E pins left open.

## Example of Representative Characteristics

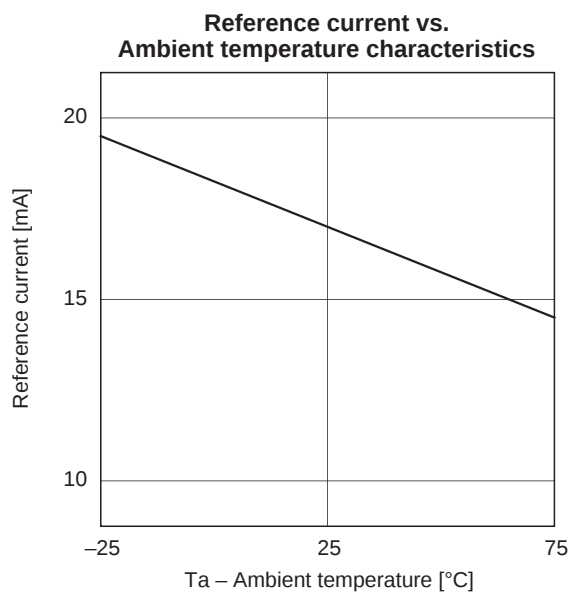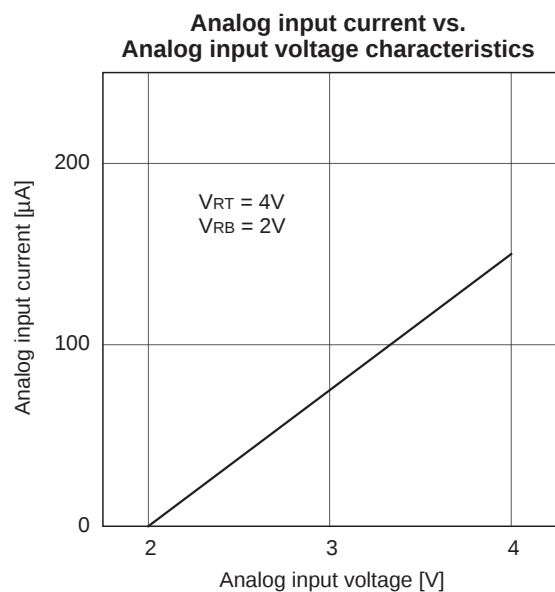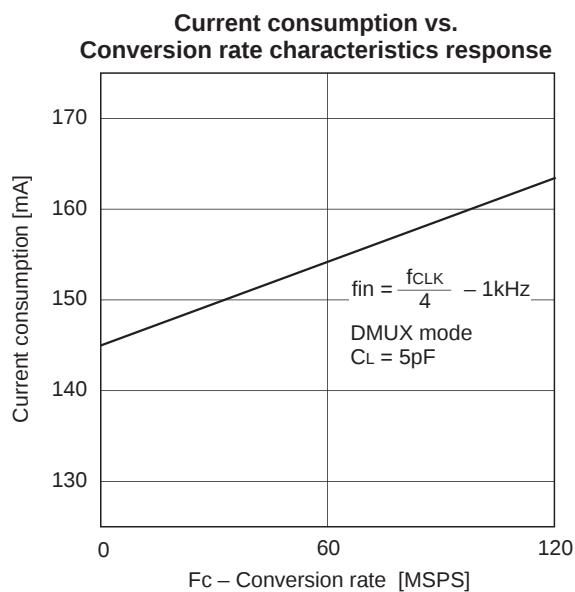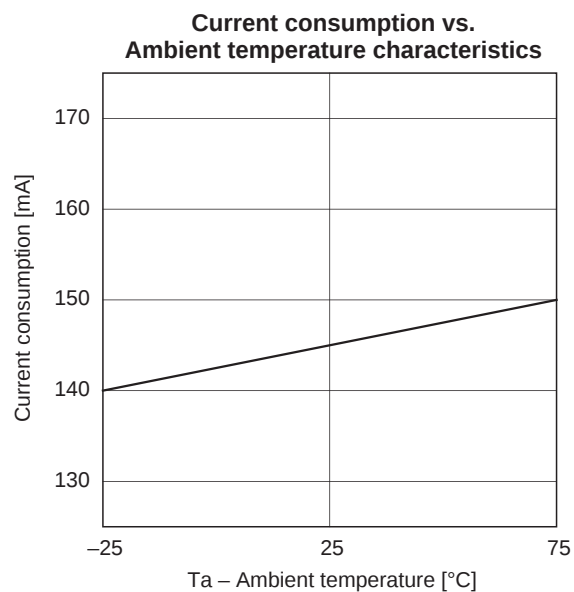

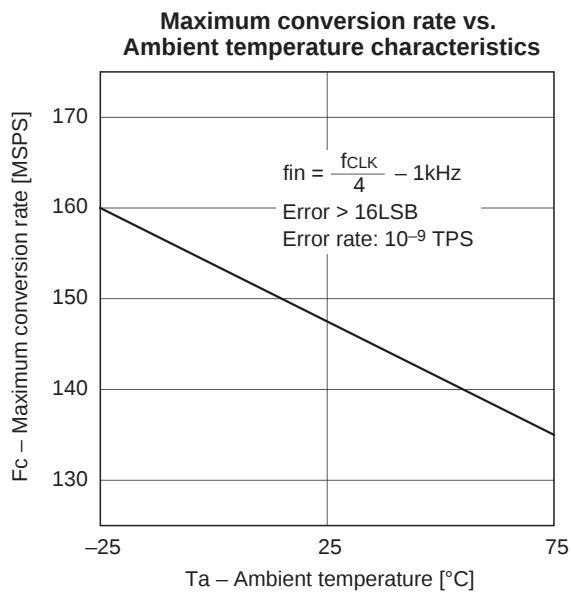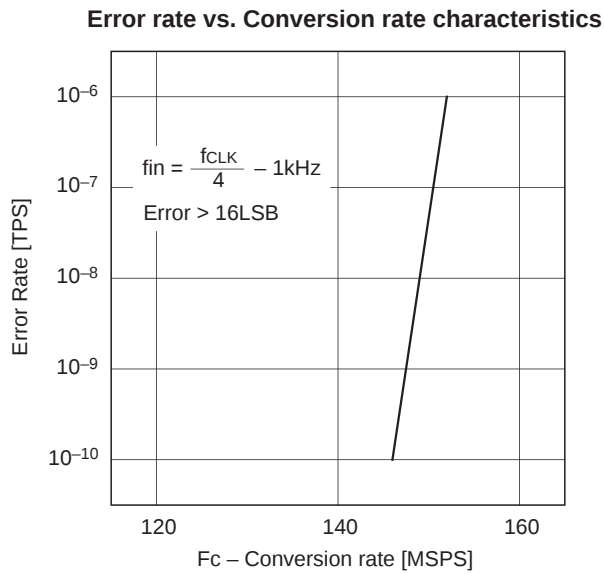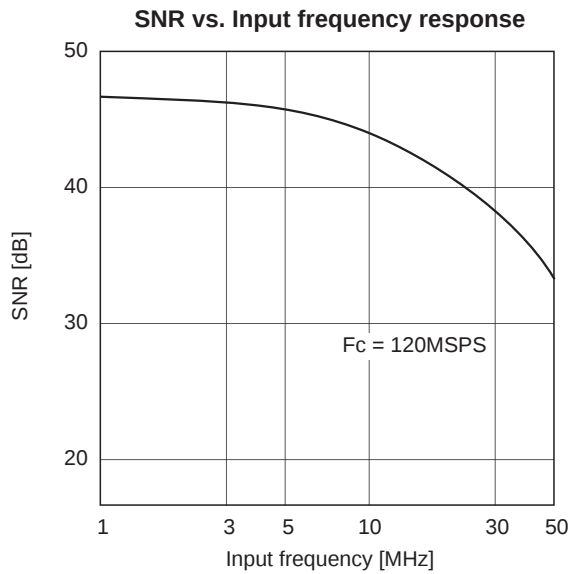

## CXA3026Q Evaluation Board

### Description

The CXA3026Q Evaluation Board is a special board designed to maximize and facilitate the evaluation performance of the CXA3026Q. After latching the CXA3026Q output data with a frequency divided clock, the analog signal can be regenerated by a 10-bit high-speed D/A converter. The latched data can also be extracted externally via a 24-pin cable connector.

### Features

- Resolution: 8 bits
- Maximum conversion rate: 120MSPS (min.)
- Supply voltage:  $\pm 5.0\text{V}$
- Dual analog input pins: DIR.IN: AC coupling input pin  
AMP.IN: Operational amplifier input pin
- Clock frequency division: 1/1 to 1/16


### Absolute Maximum Ratings

|                  |          |              |   |
|------------------|----------|--------------|---|
| • Supply voltage | $V_{CC}$ | −0.5 to +7.0 | V |
|                  | $V_{EE}$ | −7.0 to +0.5 | V |
|                  | +AMP     | −0.5 to +7.0 | V |
|                  | −AMP     | −7.0 to +0.5 | V |

### Recommended Operating Conditions

|                  |                     | Min.  | Typ. | Max.  |      |
|------------------|---------------------|-------|------|-------|------|
| • Supply voltage | $V_{CC}$            | +4.75 | +5.0 | +5.25 | V    |
|                  | GND                 |       | 0    |       | V    |
|                  | $V_{EE}$            | −5.50 | −5.0 | −4.75 | V    |
|                  | +AMP                | +3    | +5   | +7    | V    |
|                  | −AMP                | −7    | −5   | −3    | V    |
|                  | $ (+AMP) - (-AMP) $ | 9     | 10   | 11    | V    |
| • Analog input   | AMP. IN             | −0.75 | 0    | +1.05 | V    |
|                  | DIR. IN             | 1.5   | 2.0  | 2.2   | Vp-p |
| • Clock input    | CLK. IN             | 0.8   | 1.0  | 1.2   | Vp-p |

Block Diagram

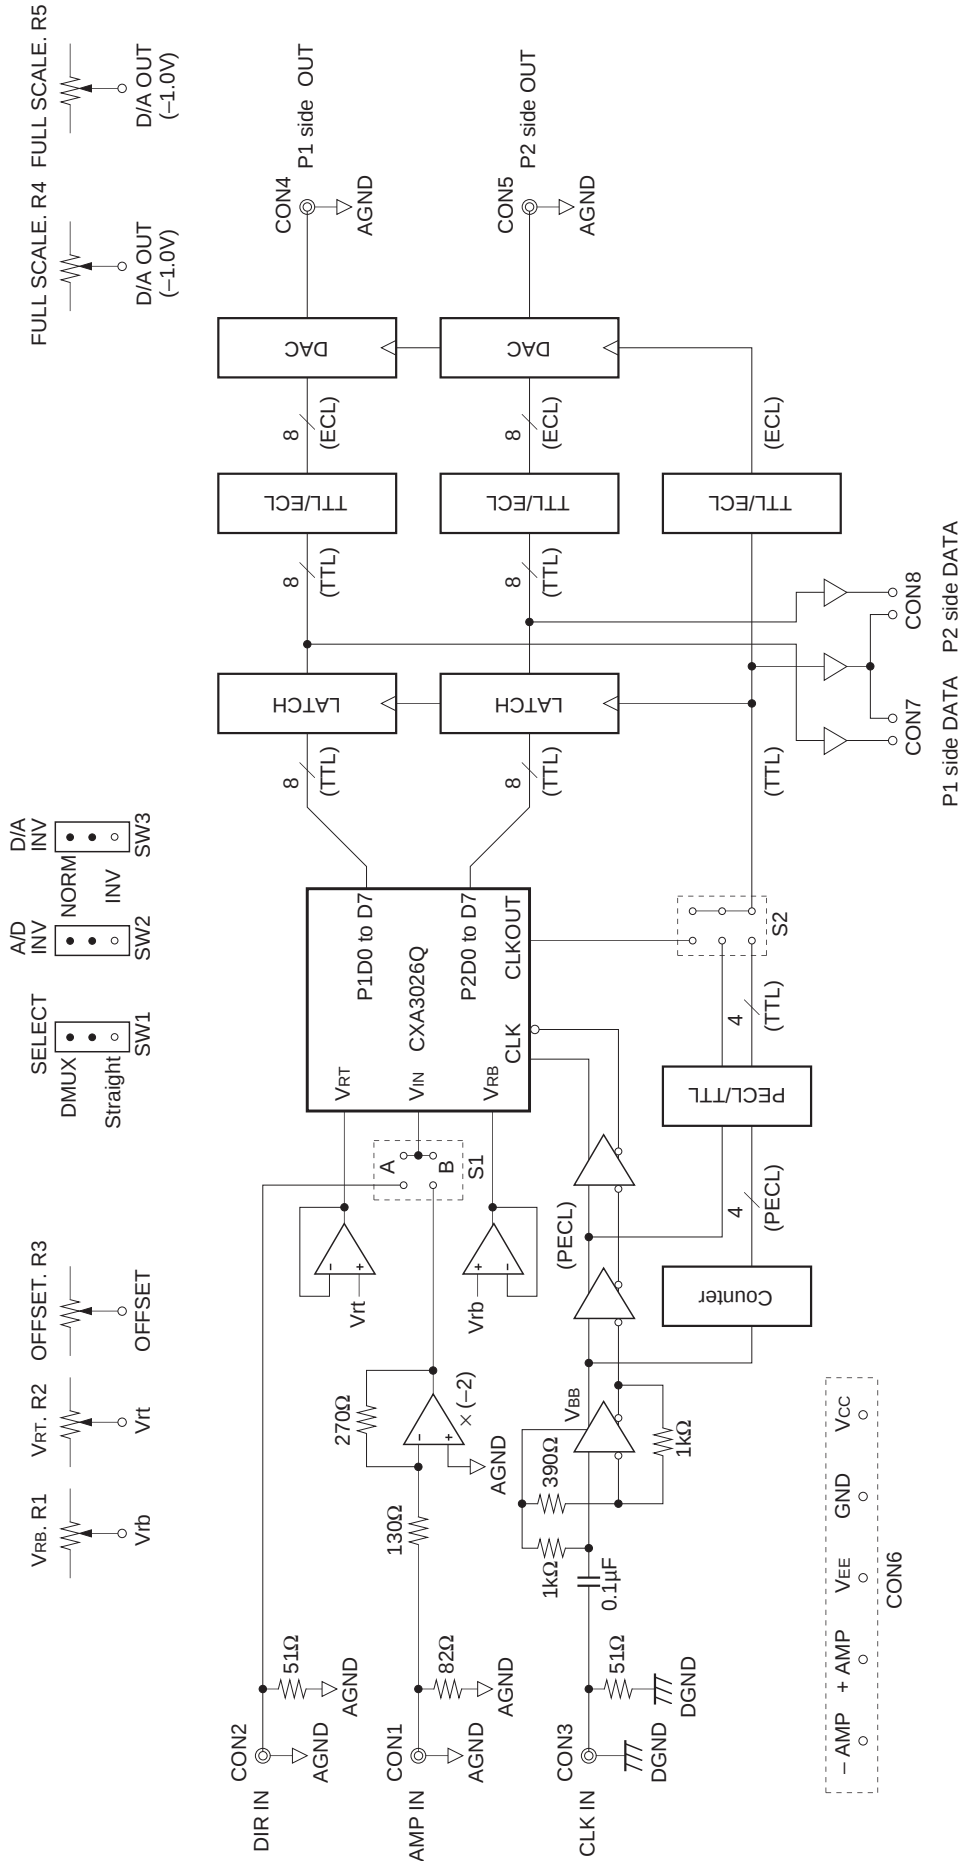

## Pin Description and I/O Level

| Pin No. | Symbol          | I/O | Standard I/O level | Current | Description                                                                                                               |
|---------|-----------------|-----|--------------------|---------|---------------------------------------------------------------------------------------------------------------------------|
| CON1    | AMP. IN         | I   | 0.95Vp-p           |         | Doubles the analog input signal amplitude using the operational amplifier. The input impedance is 50Ω.                    |
| CON2    | DIR. IN         | I   | 2.0Vp-p            |         | AC coupling input. Suitable for sine waves and other repeating waveforms. The input impedance is 50Ω.                     |
| CON3    | CLK. IN         | I   | 1.0Vp-p            |         | The CXA3026Q operates at the PECL level clock using the sine wave-to-PECL conversion circuit. The input impedance is 50Ω. |
| CON4    | P1 side OUT     | O   | 0 to -1V           |         | Allows the D/A converted waveform of the CXA3026Q port 1 side data to be observed. The output impedance is 50Ω.           |
| CON5    | P2 side OUT     | O   | 0 to -1V           |         | Allows the D/A converted waveform of the CXA3026Q port 2 side data to be observed. The output impedance is 50Ω.           |
| CON6    | V <sub>CC</sub> | I   | +5.0V              | 0.8A    | The inside of the board is divided into analog and digital systems.                                                       |
|         | GND             | I   | 0V                 |         |                                                                                                                           |
|         | V <sub>EE</sub> | I   | -5.0V              | -0.6A   |                                                                                                                           |
|         | +AMP            | I   | +5.0V              | 40mA    | + side power supply for the operation amplifier.                                                                          |
|         | -AMP            | I   | -5.0V              | -40mA   | - side power supply for the operation amplifier.                                                                          |
| CON7    | P1 side DATA    | O   | TTL                |         | The CXA3026Q port 1 side data output is latched at the frequency divided clock and then output.                           |
| CON8    | P2 side DATA    | O   | TTL                |         | The CXA3026Q port 2 side data output is latched at the frequency divided clock and then output.                           |

## Board Adjustments and Settings

1. V<sub>RB</sub>.R1: CXA3026Q V<sub>RB</sub> voltage adjusting volume.
2. V<sub>RT</sub>.R2: CXA3026Q V<sub>RT</sub> voltage adjusting volume.
3. OFFSET.R3: Adjusting volume for matching the AMP.IN input and DIR.IN input signal ranges to the CXA3026Q input range.
4. FULL SCALE.R4: Full-scale adjusting volume for the port 1 D/A output. (-1V: Typ.)
5. FULL SCALE.R5: Full-scale adjusting volume for the port 2 D/A output. (-1V: Typ.)
6. S1: Switching junction for the dual analog input pins.  
Set as follows according to the input pins used.

| Junction |  | A     | B     |
|----------|--|-------|-------|
| Symbol   |  |       |       |
| AMP.IN   |  | OPEN  | SHORT |
| DIR.IN   |  | 0.1μF | 10kΩ  |

7. S2: Setting junction for the clock frequency division ratio. The operating speed after latching is determined by the frequency division ratio set here.  
When set to CLK OUT, it operates according to the CXA3026Q clock output.
8. SW1 SELECT: CXA3026Q output mode selector switch.
9. SW2 A/D INV: CXA3026Q output polarity inversion switch.
10. SW3 D/A INV: D/A converter output polarity inversion switch.


## Notes on Board Operation

1. The factory settings for the CXA3026Q Evaluation Board are as follows.


|                                                                 |                                                  |                                                                                         |
|-----------------------------------------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------|
| $V_{RB}.R1 = 1.5V$<br>$V_{RT}.R2 = 3.0V$<br>$OFFSET.R3 = 2.25V$ | $FULL\ SCALE.R4 = -1V$<br>$FULL\ SCALE.R5 = -1V$ | $S1\ A \cdots OPEN, B \cdots SHORT$<br>$S2\ 8 \cdots SHORT\ (1/8\ frequency\ division)$ |
|-----------------------------------------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------|

When using the board in this condition, the input signals should be input at the amplitudes shown below. (The frequency is set as desired.)

Analog input signal: CON1 (AMP.IN)




Clock input signal: CON3 (CLK.IN)




2. When the analog signal is input from the CON1 (AMP.IN) pin, IC2:CLC404 limits the input dynamic range of the A/D converter's analog input signal according to the +AMP and –AMP supply voltages. The power supply for the operational amplifier can also be shifted to +AMP = +7.0V and –AMP = –3.0V to allow use with a wider input dynamic range.
3. When the analog input signal is a sine wave or other repeating waveform, the signal can be input from the CON2 (DIR.IN) pin with AC coupling. In these cases, the input dynamic range is not limited by the +AMP and –AMP supply voltages, but the  $V_{RT}$  level may be limited by IC3:NJM3403A. Therefore, the power supply for the operational amplifier should be shifted in the same manner as in 2. above.
4. In the evaluation board of the CXA3026Q, CLC404 (Comlinear) is employed for IC2 to drive the analog input signal. Though, CLC505 (Comlinear) can also be used instead of CLC404, there should be a little change in the peripheral circuit in this case.


# CXA3026Q Evaluation Board Timing Chart

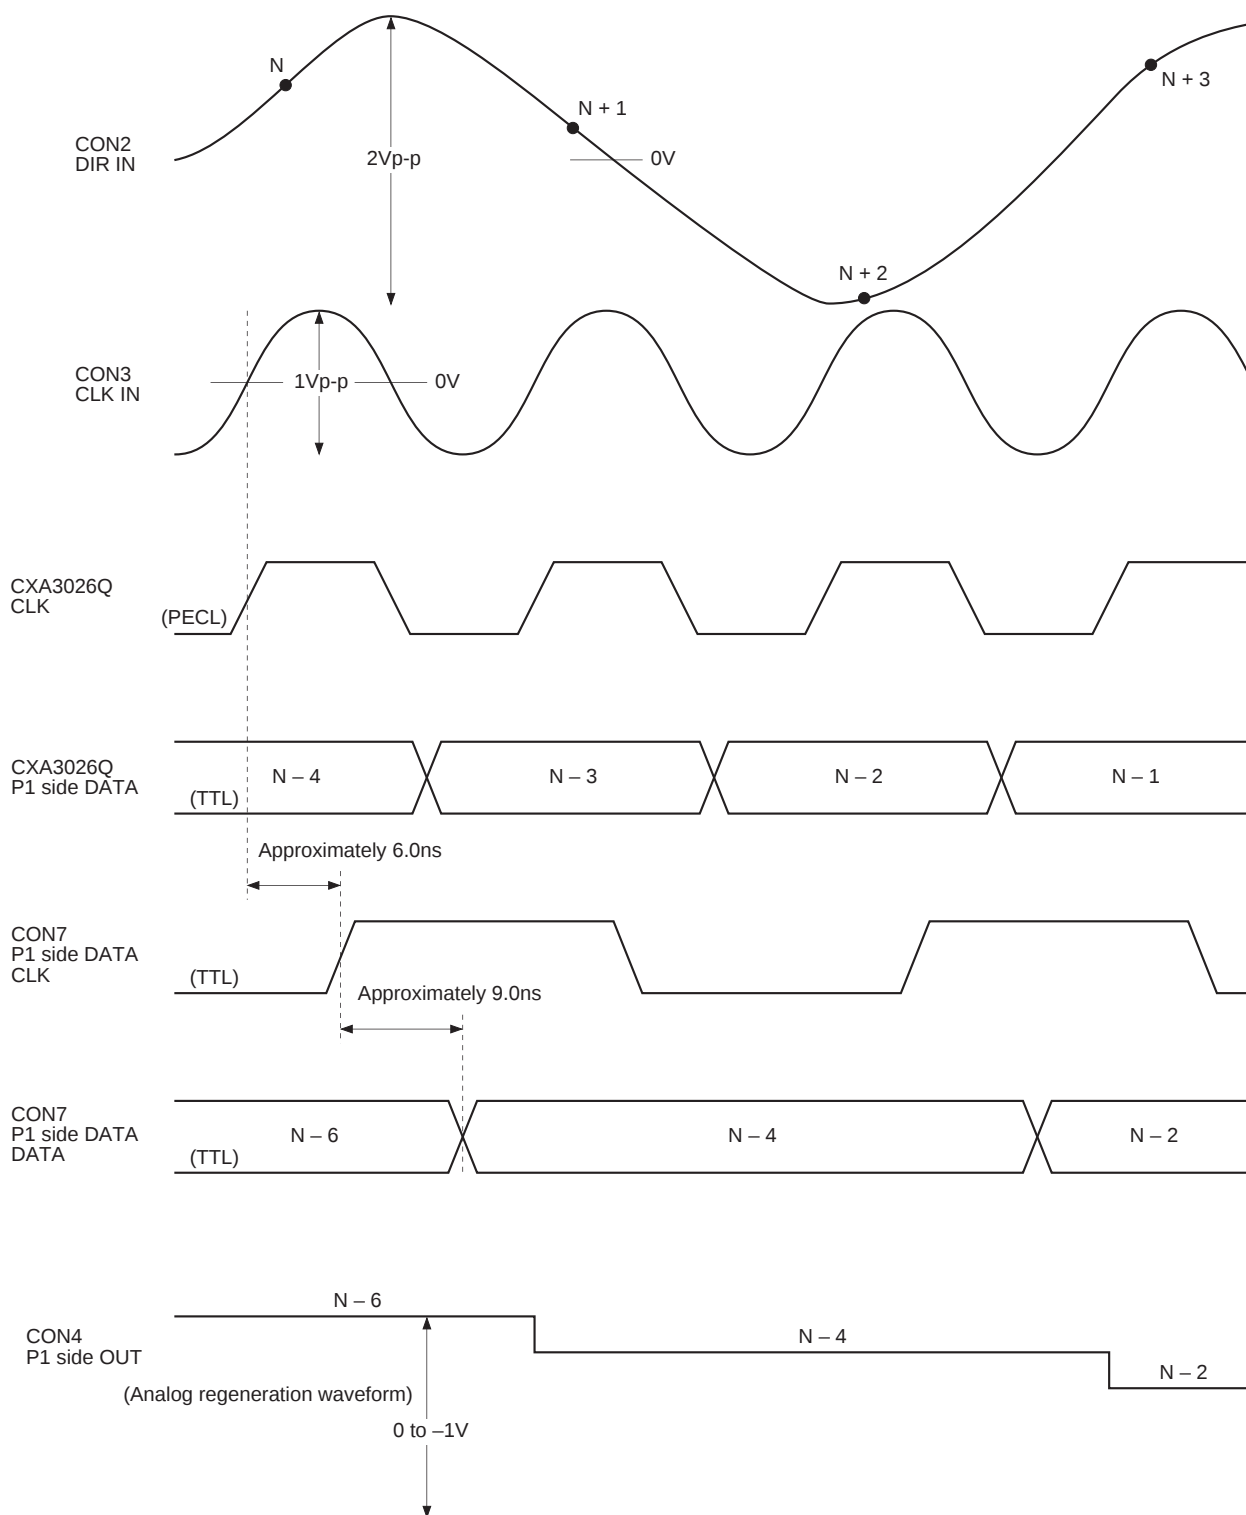

Operating Conditions ( CXA3026Q operating mode: Straight mode  
 Analog input : DIR IN pin input  
 S2 setting : 1/2 frequency divided clock

# Circuit Diagram

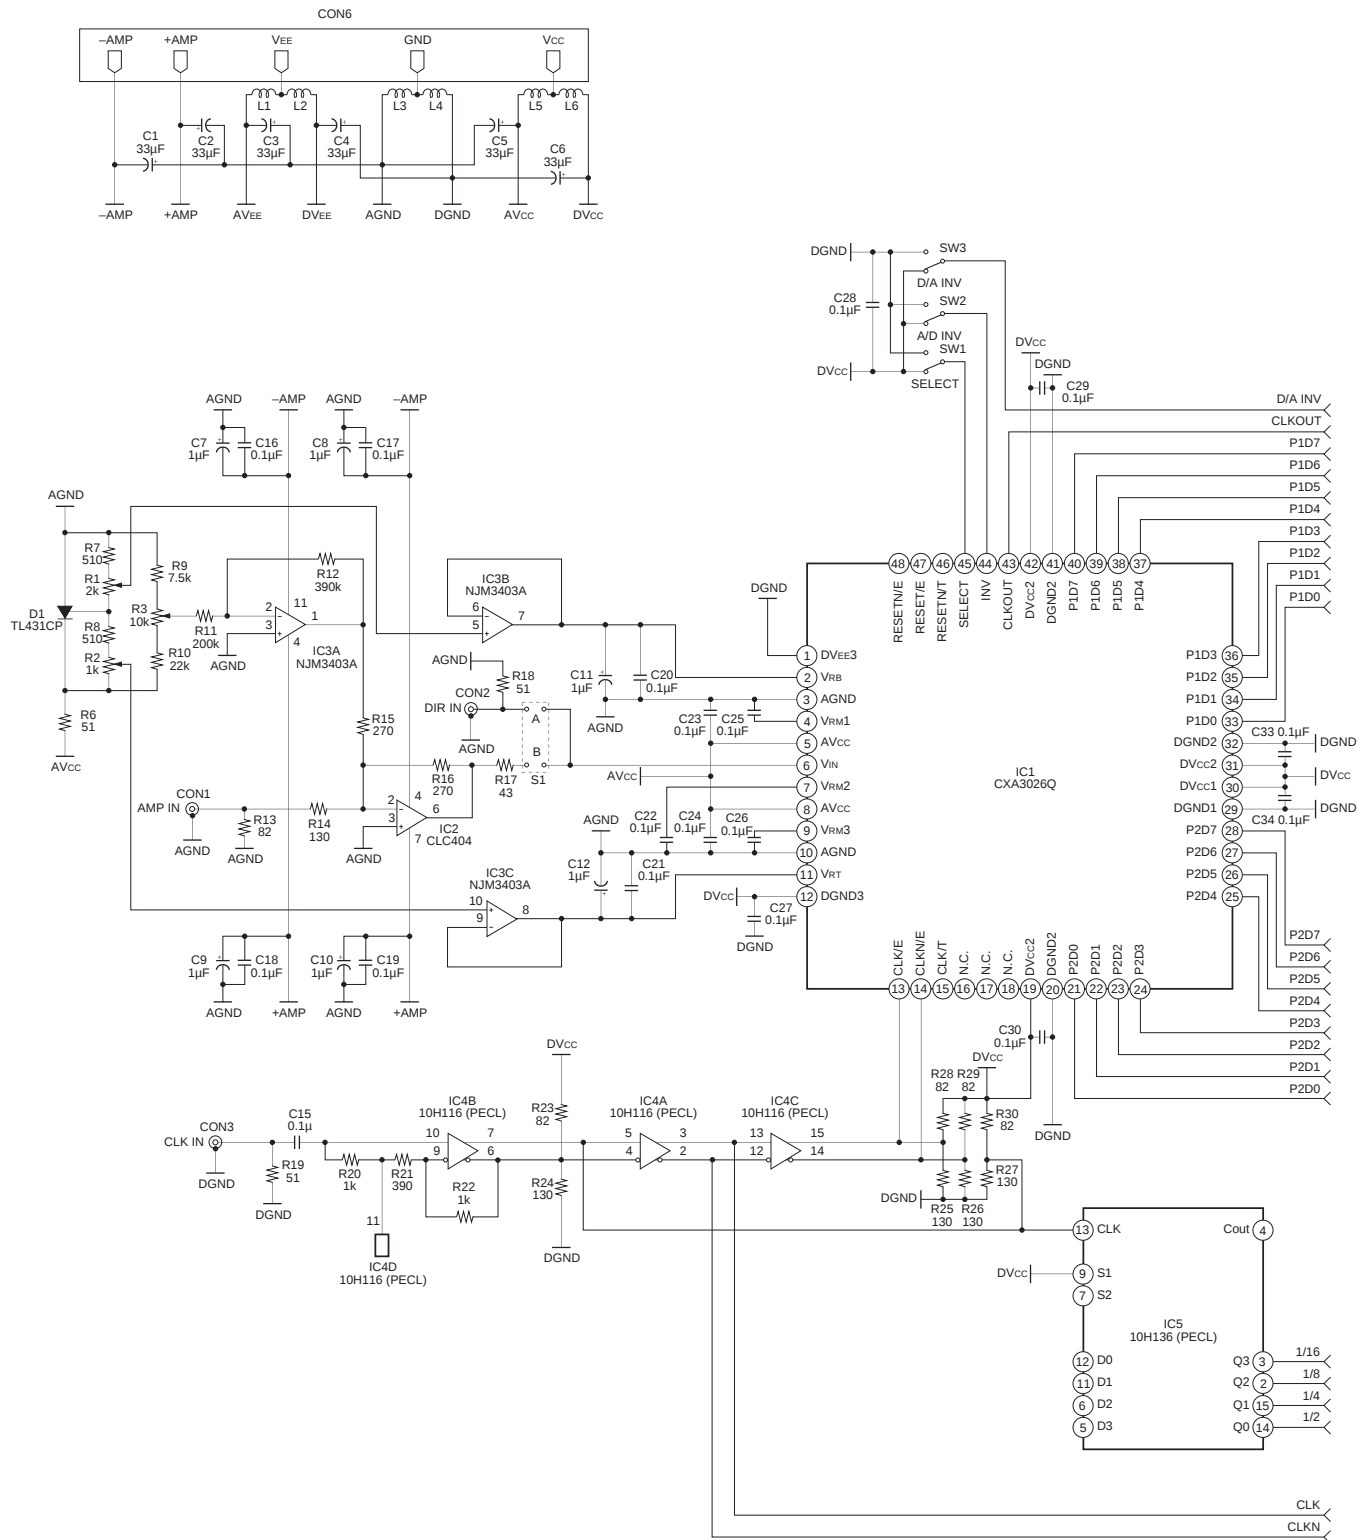


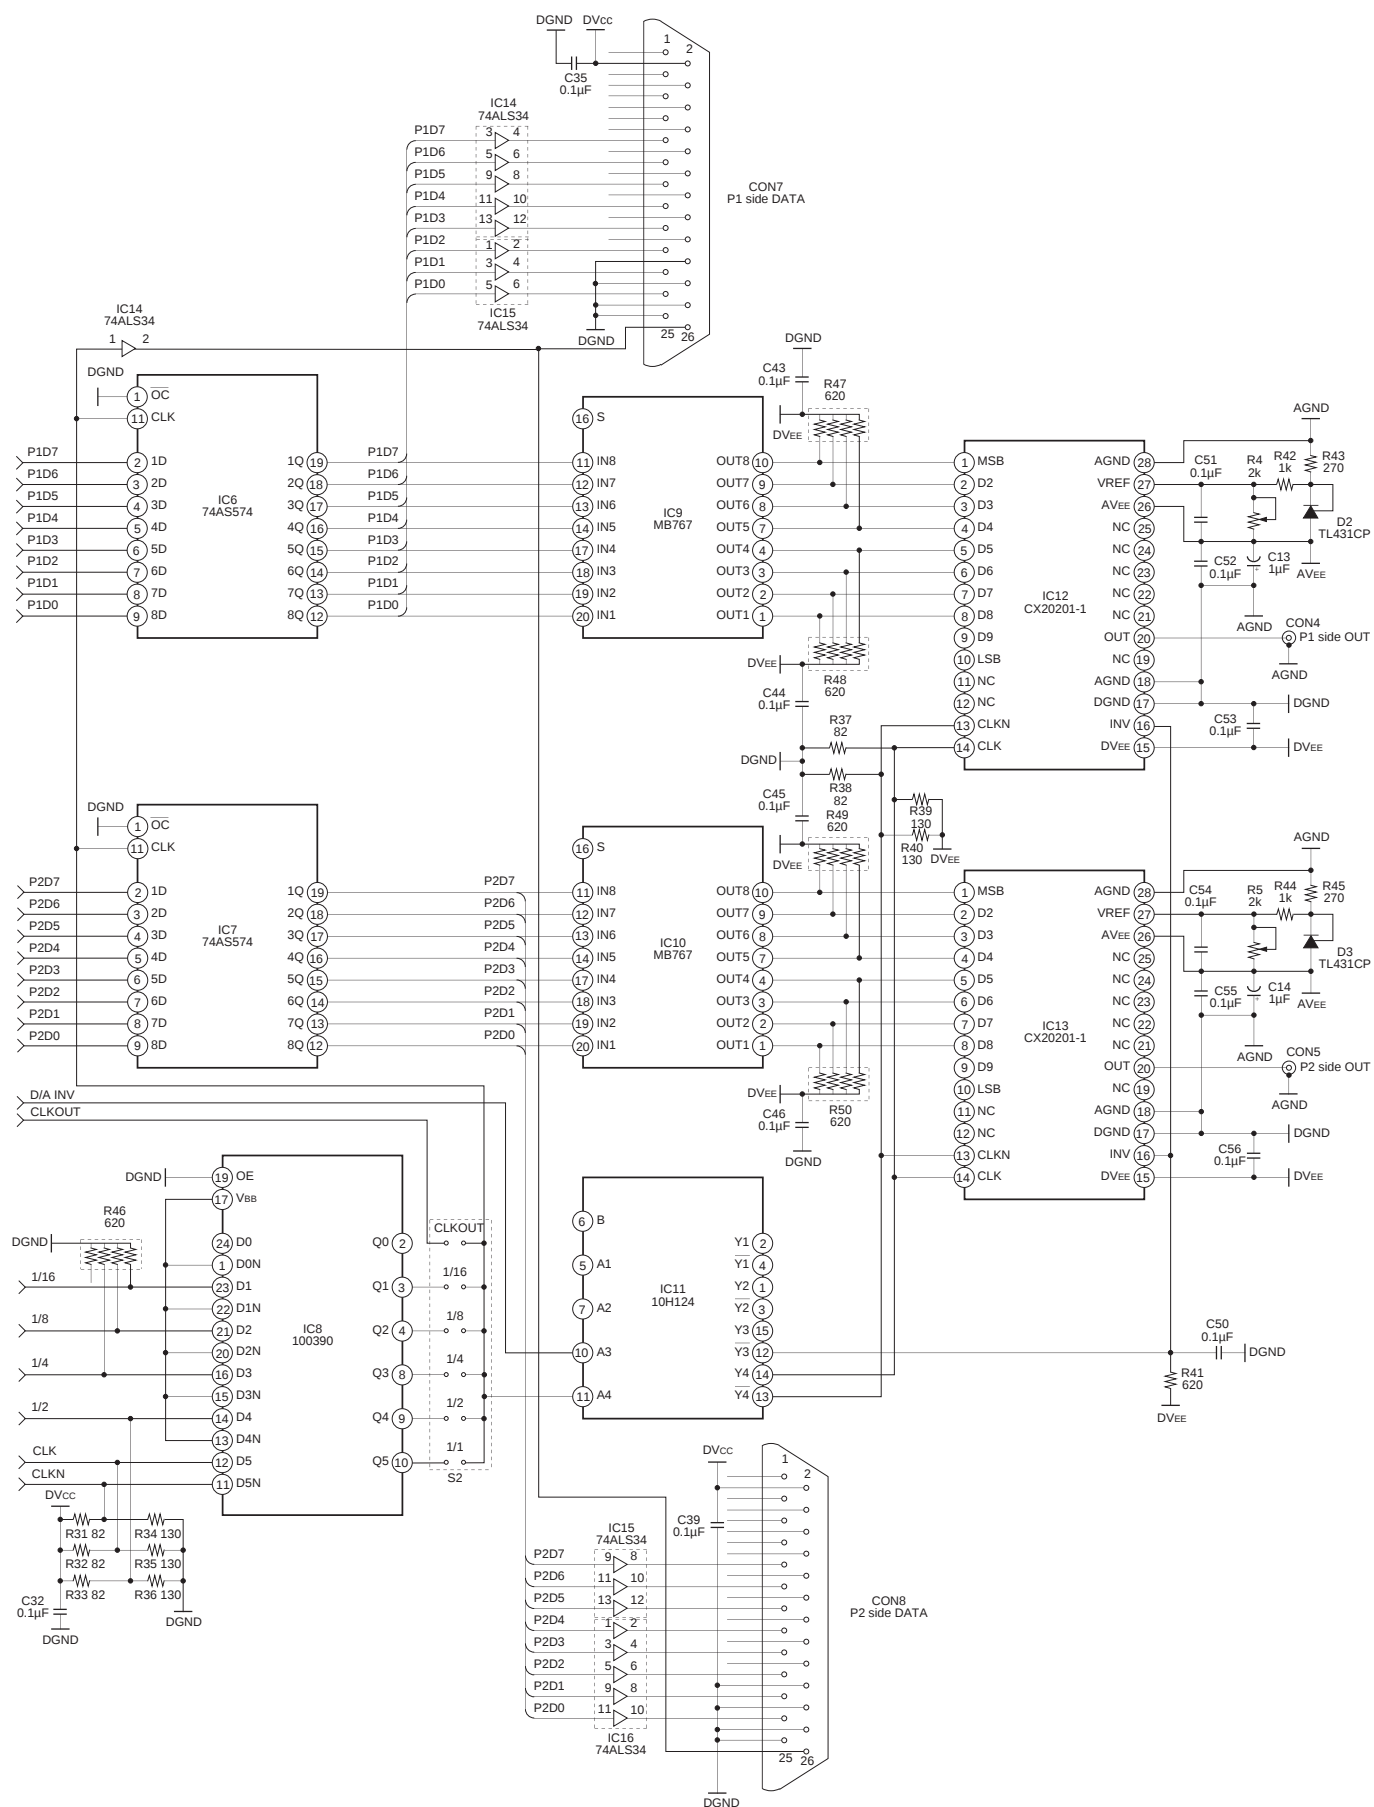


## Component List

| No.                                     | Product name      | Function               | No.                             | Product name     | Function              |
|-----------------------------------------|-------------------|------------------------|---------------------------------|------------------|-----------------------|
| IC1                                     | CXA3026Q          | 8-bit A/D converter    | R2                              | RJ-5W-1K         | 1kΩ volume resistor   |
| IC2                                     | CLC404AJE         | OP-AMP                 | R1, 4, 5                        | RJ-5W-2K         | 2kΩ volume resistor   |
| IC3                                     | NJM3403AM         | OP-AMP                 | R3                              | RJ-5W-10K        | 10kΩ volume resistor  |
| IC4                                     | MC10H116L         | ECL Buffer             | R46 to 50                       | RGLD4X621J       | 620Ω network resistor |
| IC5                                     | MC10H136L         | ECL Countor            |                                 |                  |                       |
| IC6, 7                                  | 74AS574N          | TTL Latch              | R6, 18, 19                      | FRD-25SR (0.25W) | 51Ω                   |
| IC8                                     | 100390            | PECL → TTL conversion  | R7.8                            | FRD-25SR (0.25W) | 510Ω                  |
| IC9, 10                                 | MB767P            | TTL → ECL conversion   | R9                              | FRD-25SR (0.25W) | 7.5kΩ                 |
| IC11                                    | MC10H124L         | TTL → ECL conversion   | R10                             | FRD-25SR (0.25W) | 22kΩ                  |
| IC12, 13                                | CXA20201A-1       | 10-bit D/A converter   | R11                             | FRD-25SR (0.25W) | 200kΩ                 |
| IC14 to 16                              | 74ALS34           | TTL Buffer             | R12                             | FRD-25SR (0.25W) | 390kΩ                 |
| D1 to 3                                 | TL431CP           | Shunt regulator        | R13, 23, 28 to 33, 37, 38       | FRD-25SR (0.25W) | 82Ω                   |
| SW1 to 3                                | ATE1D-2F3-10      | Toggle switch          | R14, 24 to 27, 34 to 36, 39, 40 | FRD-25SR (0.25W) | 130Ω                  |
| S1, 2                                   | JX-1              | Short pin              | R15, 16, 43, 45                 | FRD-25SR (0.25W) | 270Ω                  |
| CON1 to 5                               | 01K0315           | BNC connector          | R17                             | FRD-25SR (0.25W) | 43Ω                   |
| CON6                                    | TJ-563            | Power supply connector | R20, 22, 42, 44                 | FRD-25SR (0.25W) | 1kΩ                   |
| CON7, 8                                 | (FAP-2601-1202)   | Flat cable connector   | R21                             | FRD-25SR (0.25W) | 390Ω                  |
| L1 to 6                                 | ZBF503D-00        | Ferrite-bead filter    | R41                             | FRD-25SR (0.25W) | 620Ω                  |
| C1 to 6                                 | Tantal capacitor  | 33μF                   |                                 |                  |                       |
| C7 to 12                                | Tantal capacitor  | 1μF                    |                                 |                  |                       |
| C15                                     | Ceramic capacitor | 0.1μF                  |                                 |                  |                       |
| All parts other than those listed above |                   |                        |                                 |                  |                       |
|                                         | Chip capacitor    | 0.1μF                  |                                 |                  |                       |


\* CON7 and 8 are not mounted when boards are shipped. (Manufacturer: YAMAICHI Electronics Co., Ltd.)

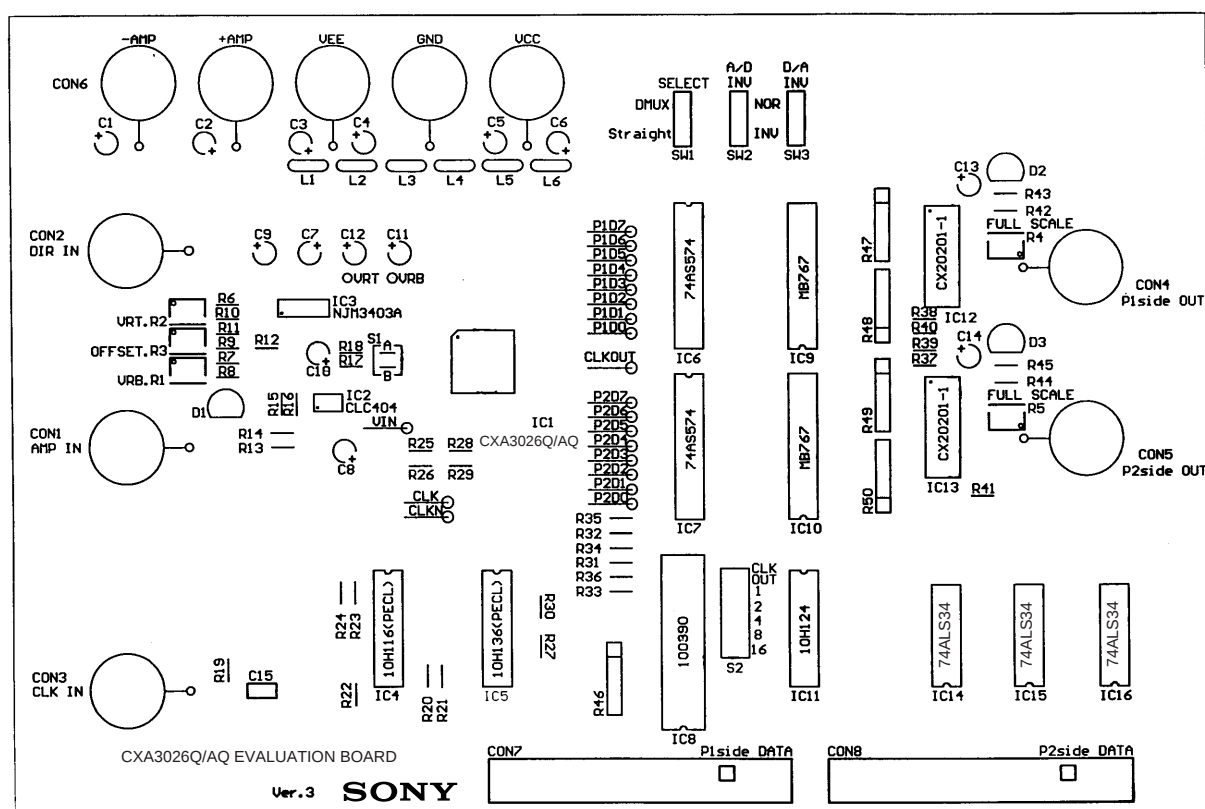

Component side silk diagram

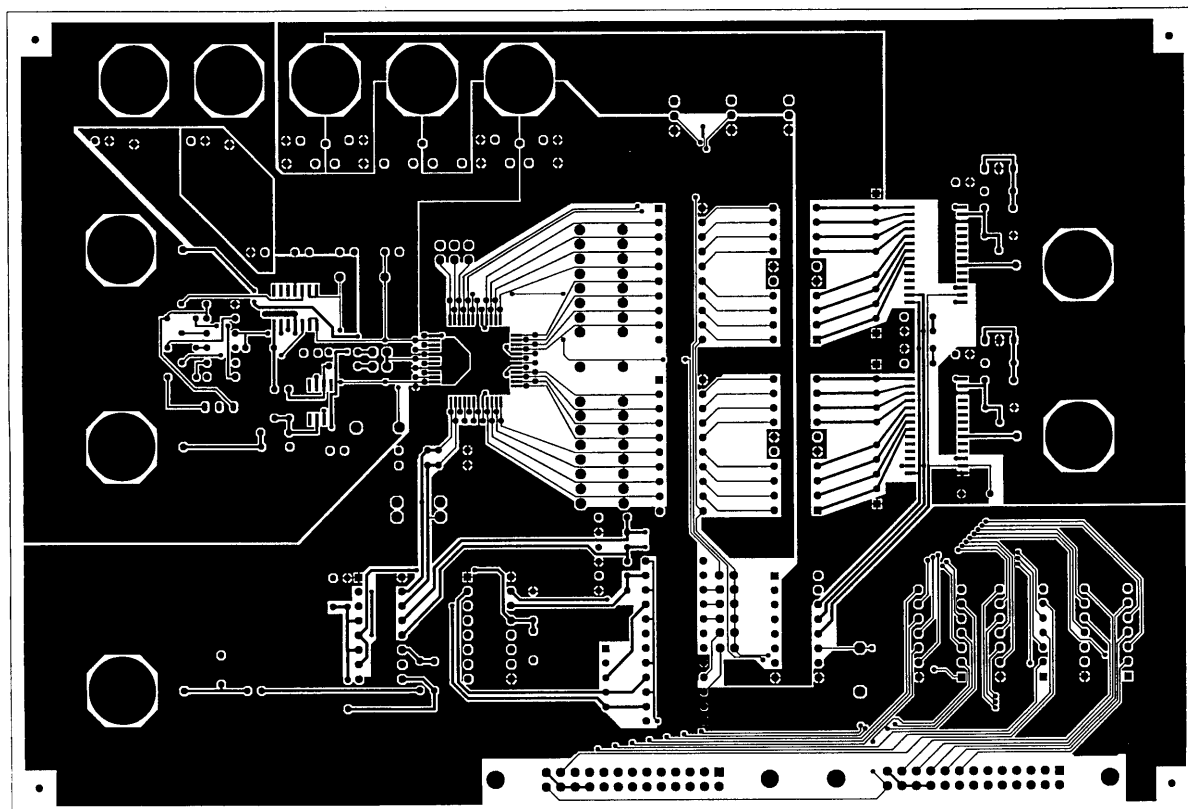

Component side pattern diagram

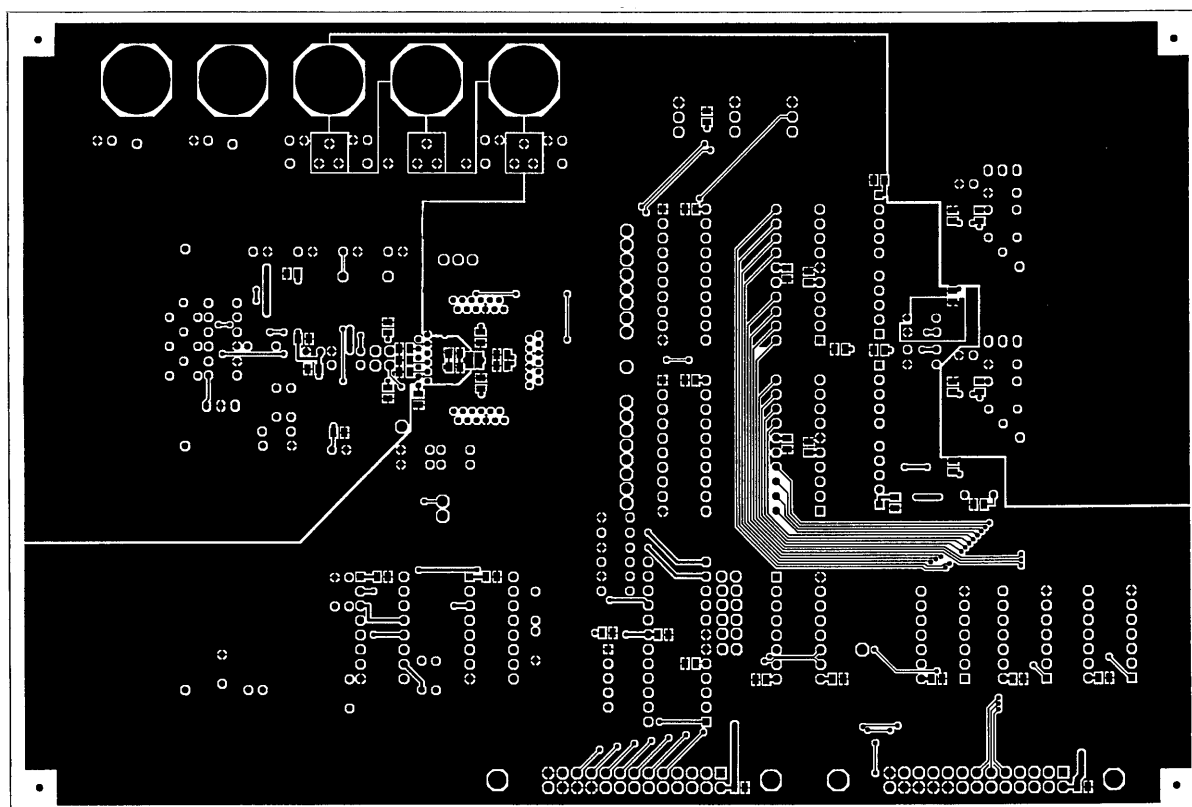


Solder side pattern diagram

## Package Outline

Unit: mm

## 48PIN QFP (PLASTIC)

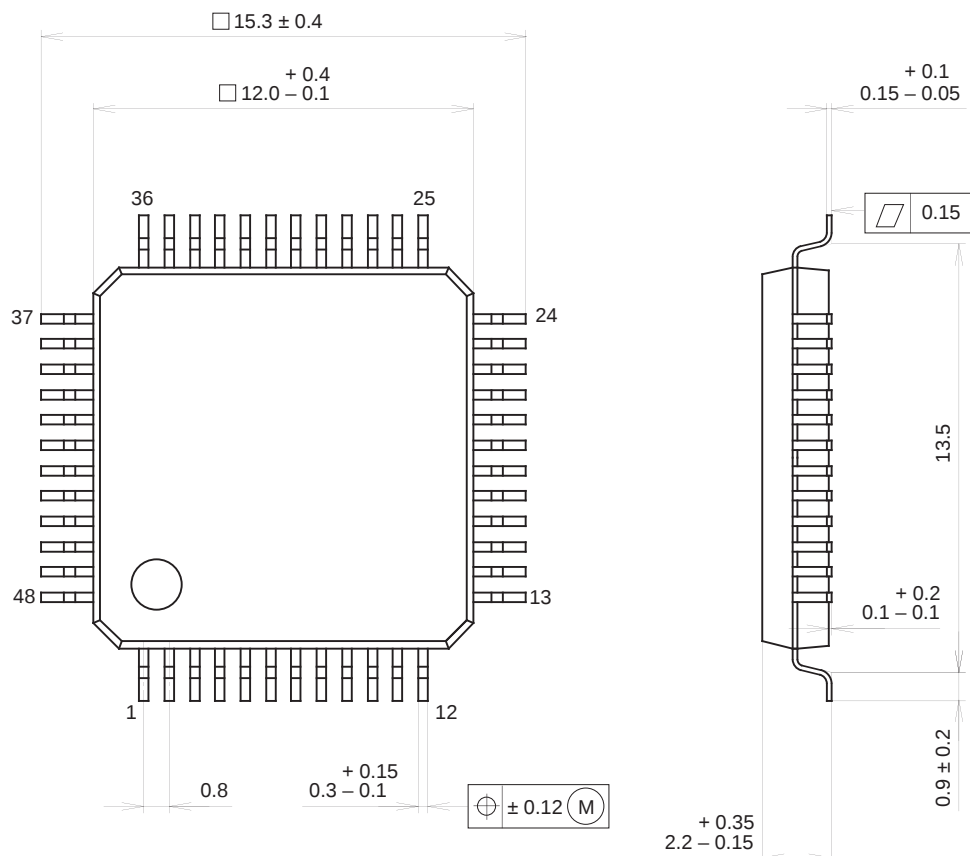

## PACKAGE STRUCTURE

|            |                  |
|------------|------------------|
| SONY CODE  | QFP-48P-L04      |
| EIAJ CODE  | *QFP048-P-1212-B |
| JEDEC CODE | _____            |

|                  |                               |
|------------------|-------------------------------|
| PACKAGE MATERIAL | EPOXY RESIN                   |
| LEAD TREATMENT   | SOLDER / PALLADIUM<br>PLATING |
| LEAD MATERIAL    | COPPER / 42 ALLOY             |
| PACKAGE WEIGHT   | 0.7g                          |

NOTE : PALLADIUM PLATING

This product uses S-PdPPF (Sony Spec.-Palladium Pre-Plated Lead Frame).