RF3806

GaAs HBT PRE-DRIVER AMPLIFIER

RoHS Compliant & Pb-Free Product
Package Style: AIN




Features

- 4W Output Power
- High Linearity
- 1500MHz to 2200MHz Operation
- 5V to 8V Supply with Adjustable Bias

Applications

- GaAs HBT Linear Amplifier
- Power Amplifier Stage for Commercial Wireless Infrastructure (DCS, PCS, UMTS)

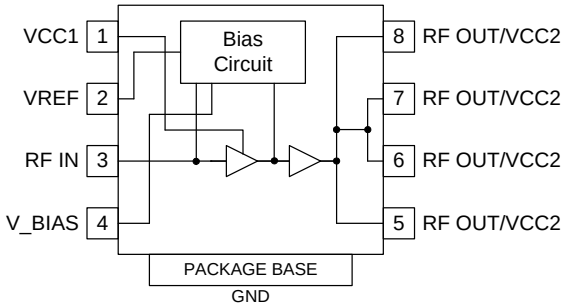

Functional Block Diagram

Product Description

The RF3806 is a GaAs power amplifier, specifically designed for linear applications. Using a highly reliable GaAs HBT fabrication process, this high-performance two-stage amplifier achieves high output power over a broad frequency range. An evaluation board is available to address UMTS2100 applications.

Ordering Information

RF3806	GaAs HBT Pre-Driver Amplifier
RF3806PCK-415	Fully Assembled Evaluation Board - UMTS2100

Optimum Technology Matching® Applied

☑ GaAs HBT	☐ SiGe BiCMOS	☐ GaAs pHEMT	☐ GaN HEMT
☐ GaAs MESFET	☐ Si BiCMOS	☐ Si CMOS	
☐ InGaP HBT	☐ SiGe HBT	☐ Si BJT	

RF MICRO DEVICES®, RFMD®, Optimum Technology Matching®, Enabling Wireless Connectivity™, PowerStar®, POLARIS™ TOTAL RADIO™ and UltimateBlue™ are trademarks of RFMD, LLC. BLUETOOTH is a trademark owned by Bluetooth SIG, Inc., U.S.A. and licensed for use by RFMD. All other trade names, trademarks and registered trademarks are the property of their respective owners. ©2006, RF Micro Devices, Inc.

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.

Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage (V_{CC} and V_{BIAS})	8	V
DC Supply Current	2870	mA
Maximum Input Power	23	dBm
Operating Ambient Temperature	+85	°C
Storage Temperature	+125	°C

Caution! ESD sensitive device.

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

RoHS status based on EUDirective2002/95/EC (at time of this document revision).


Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Overall - UMTS2100					
V_{CC}=8V					
Frequency	2110		2170	MHz	I_{REF}=60mA, V_{CC}=V_{BIAS}=V_{REF}=8V, Temp=+25°C
P1dB	35	36	37	dBm	Performance with impedance match as per UMTS evaluation board
Gain (S21)	17	18	19	dB	
Input Return Loss (S11)		-12		dB	
Output Return Loss (S22)		-6		dB	
Two-Tone Specification					
OIP3		47		dBm	23dBm/tone
Power Supply					
Power Supply Voltage		8		V	
Supply Current (I_{CC}+I_{BIAS})	660	730	800	mA	I_{CCQ}
Power Down Current			50	µA	V_{REF}=0V, V_{CC}=V_{BIAS}=8V
V_{CC}=6V					
Frequency	2110		2170	MHz	I_{REF}=60mA, V_{CC}=V_{BIAS}=V_{REF}=6V, Temp=+25°C
P1dB		34.5		dBm	Performance with impedance match as per UMTS evaluation board
Gain (S21)		18		dB	
Two-Tone Specification					
OIP3		46		dBm	21dBm/tone
Power Supply					
Power Supply Voltage		6		V	
Supply Current (I_{CC}+I_{BIAS})		718		mA	I_{CCQ}
V_{CC}=5V					
Frequency	2110		2170	MHz	I_{REF}=60mA, V_{CC}=V_{BIAS}=V_{REF}=5V, Temp=+25°C
P1dB		33		dBm	Performance with impedance match as per UMTS evaluation board
Gain (S21)		18.5		dB	
Two-Tone Specification					
OIP3		45		dBm	20dBm/tone

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Power Supply					
Power Supply Voltage		5		V	
Supply Current ($I_{CC}+I_{BIAS}$)		707		mA	I_{CCQ}
Overall - PCS1900					
V_{CC}=8V					
Frequency	1930		1990	MHz	I_{REF}=60mA, $V_{CC}=V_{BIAS}=V_{REF}$=8V, Temp=+25°C
P1dB		37		dBm	Performance with impedance match as per DCS/PHS/PCS low power linear application schematic
Gain (S21)		18		dB	
Input Return Loss (S11)		-14		dB	
Output Return Loss (S22)		-8		dB	
Two-Tone Specification					
OIP3		52		dBm	23dBm/tone
Power Supply					
Power Supply Voltage		8		V	
Supply Current ($I_{CC}+I_{BIAS}$)	660	730	800	mA	I_{CCQ}
Power Down Current			50	µA	V_{REF}=0V, $V_{CC}=V_{BIAS}$=8V
V_{CC}=6V					
Frequency	1930		1990	MHz	I_{REF}=60mA, $V_{CC}=V_{BIAS}=V_{REF}$=6V, Temp=+25°C
P1dB		35		dBm	Performance with impedance match as per DCS/PHS/PCS low power linear application schematic
Gain (S21)		18		dB	
Two-Tone Specification					
OIP3		49		dBm	21dBm/tone
Power Supply					
Power Supply Voltage		6		V	
Supply Current ($I_{CC}+I_{BIAS}$)		713		mA	I_{CCQ}
V_{CC}=5V					
Frequency	1930		1990	MHz	I_{REF}=60mA, $V_{CC}=V_{BIAS}=V_{REF}$=5V, Temp=+25°C
P1dB		33.5		dBm	Performance with impedance match as per DCS/PHS/PCS low power linear application schematic
Gain (S21)		18.5		dB	
Two-Tone Specification					
OIP3		49		dBm	20dBm/tone
Power Supply					
Power Supply Voltage		5		V	
Supply Current ($I_{CC}+I_{BIAS}$)		707		mA	I_{CCQ}


Pin	Function	Description	Interface Schematic
1	VCC1	For input stage.	
2	VREF	Control for active bias. See "Theory of Operation" section.	
3	RF IN	For input stage. Requires RF match and DC block.	
4	VBIAS	Supply for active bias.	
5	RF OUT/ VCC2	For output stage. Requires RF match, bias feed and DC block.	
6	RF OUT/ VCC2	See pin 5.	
7	RF OUT/ VCC2	See pin 5.	
8	RF OUT/ VCC2	See pin 5.	
Pkg Base	GND	Must be soldered to ground pad through as short a path as possible. This path also forms the thermal path for minimum T_J.	

Package Drawing

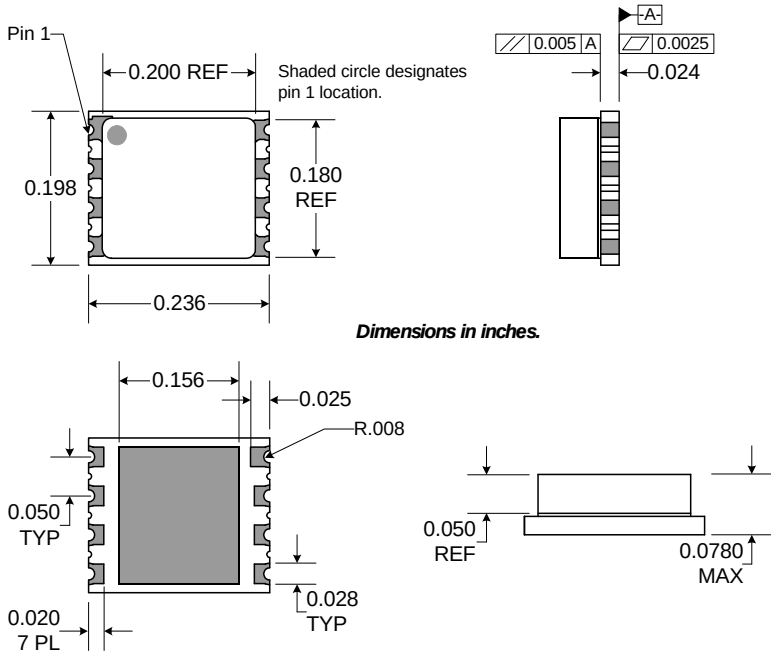

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.


Application Schematic - DCS/PHS/PCS 1800MHz to 2025MHz Low Power Linear Operation

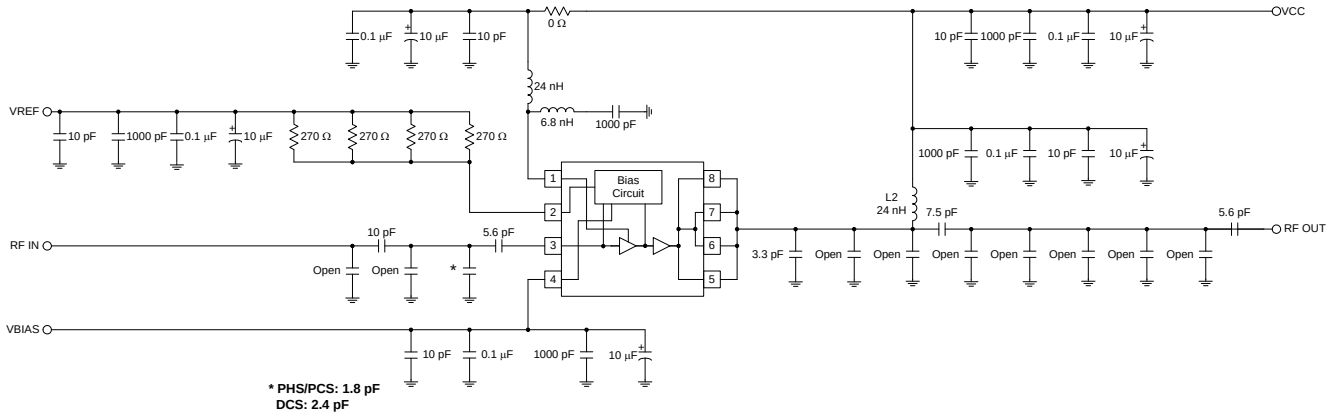

This schematic for low power linear operation:

21dBm < P_{OUT} < 27dBm, 5V ≤ V_{CC} ≤ 8V. Bias R seen above for 8V and 60mA I_{REF}. See biasing table for setting resistance at other supply voltages.


Application Schematic - DCS/PCS 1800MHz to 1990MHz High Power Operation

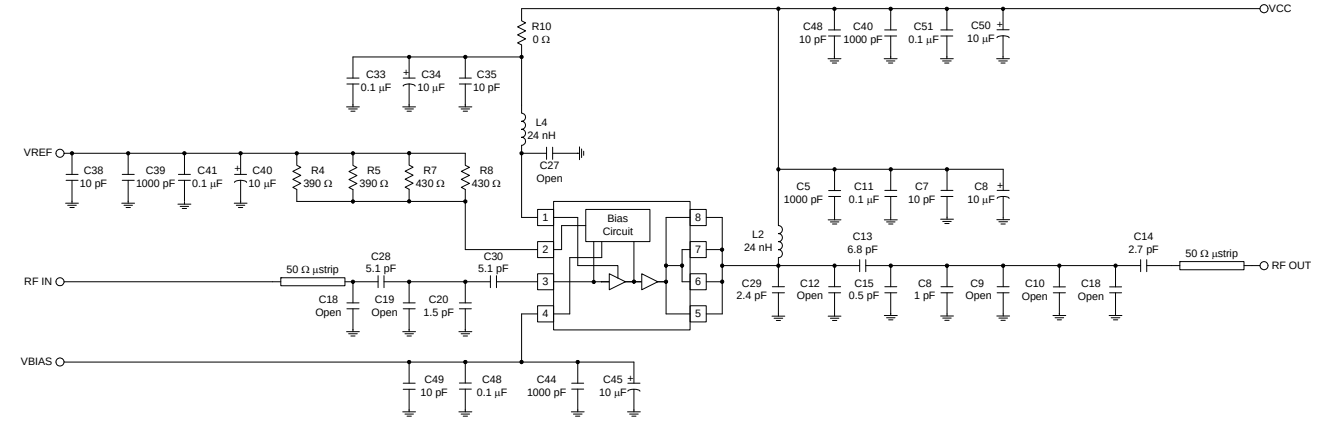

This schematic for high power operation:

P_{OUT} > 27dBm, 5V ≤ V_{CC} ≤ 8V. Bias R seen above for 8V and 41mA I_{REF}. See biasing table for setting resistance at other supply voltages.

Evaluation Board Schematic - UMTS2100

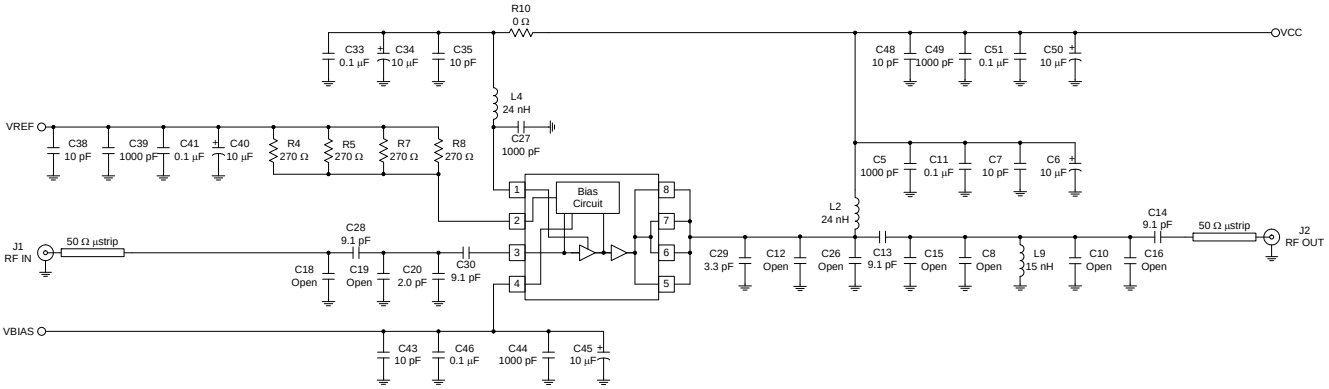

This eval board for low power linear operation: 21 dBm < P_{OUT} < 27 dBm, 5 V ≤ V_{CC} ≤ 8V. Bias R seen above for 8V and 60 mA I_{REF}. See biasing table for setting resistance at other supply voltages.

RF3806 Biasing Table

The resistor values shown below are for varied V_{CC}/I_{CQ} conditions. Biasing for higher quiescent current will give increased linearity. "R_Bias" = equivalent R in line with V_{REF} (see values on evaluation board schematic: R4, R5, R7, R8).


Max allowable I_{REF} = 60 mA.


V_{CC}	V_{REF}	V_{BIAS}	R_{BIAS} (at V_{REF})	I_{REF}	Typical I_{CQ}
Volt	Volt	Volt	Ohm	mA	mA
8	8	8	62	60	730
7	7	7	45	60	726
6	6	6	28.5	60	718
5	5	5	11.5	60	707
8	8	8	80.5	50	676
7	7	7	60	50	670
6	6	6	40	50	663
5	5	5	20	50	649
8	8	8	105	41	623
7	7	7	80.5	41	614
6	6	6	56	41	601
5	5	5	31.5	41	584


In I_{REF} = 60 mA case, calculated R_{BIAS} was rounded up to nearest 0.5Ω.
This to keep I_{REF} at or slightly below 60 mA max.

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.

Evaluation Board Layout
Board Size 2.0” x 2.0”
Board Thickness 0.020”, Board Material Rogers 4350

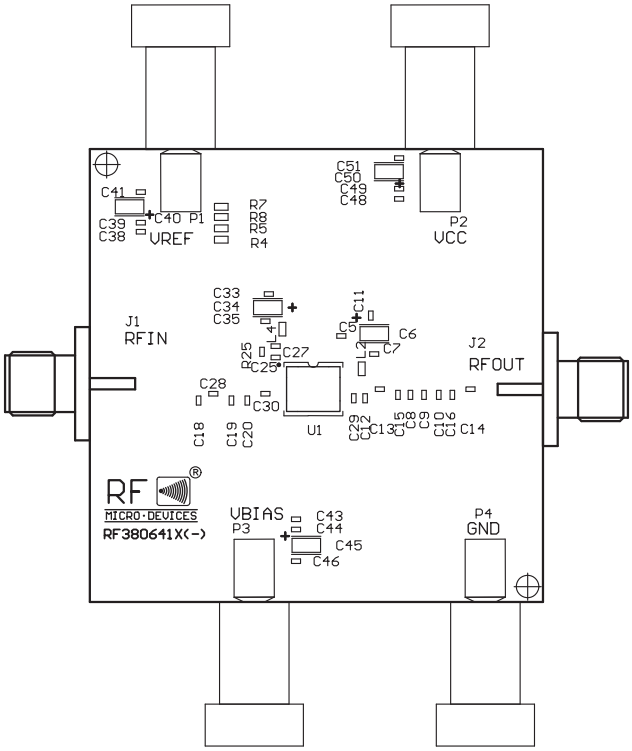

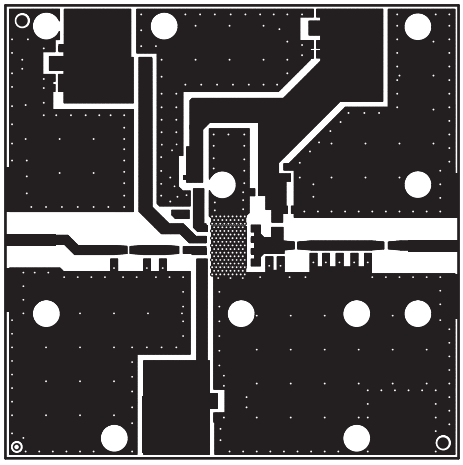

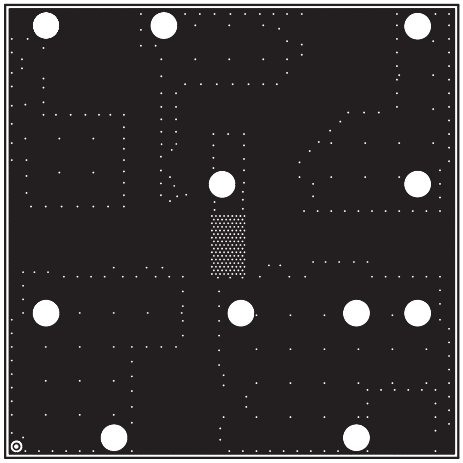

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.

Theory of Operation

General biasing considerations can be described using RF3806 UMTS evaluation board as a reference. In actual system, V_{CC}=V_{BIAS}=V_{REF} can be tied together when PA is to remain biased on at all times. For non-constant operation, V_{CC} is tied to V_{BIAS}, and V_{REF} used for turn-on preceding transmit. Table is provided in data sheet for adjusting I_{REF} to desired bias current for various supply voltage levels (more detailed discussion below).

RF3806 can be used in frequency bands ranging from 1500MHz to 2200MHz. Depending on specific application, the following parameters and their trade-offs can be considered: linearity, average output power, signal modulation/peak to average ratio (PAR), efficiency, dissipated power, junction temperature (Tj), and wear out MTTF. Looking at two distinct examples will demonstrate how the above mentioned parameters are taken into account. Note that much of the discussed performance can be found in the data sheet area showing graphs.

First, consider a UMTS pico cell base station transmitter (case 1). Here RF3806 fills the role of final PA, operating from 21dBm-26dBm P_{OUT}. V_{CC} can be run from 5V to 8V. Likewise, bias resistance on V_{REF} line can be set to obtain I_{REF} ranging from 41mA-60mA. The choice of voltage supply and bias is determined by required W-CDMA ACPR spec, desired P_{OUT}, and signal PAR. For instance, consider the following: P_{OUT}=26dBm, frequency=2110MHz-2170MHz, signal=W-CDMA test model I 64 DPCH, ACPR requirement over temperature=-45dBc at 5MHz offset. The operating condition here (see data sheet graph section) would be V_{CC}=8V and I_{REF}=60mA, using impedance match found on UMTS Evaluation Board. For a lower output power requirement, I_{REF} is kept at 60mA, and V_{CC} reduced to a level below 8V. Sufficient linearity can be obtained at lower P_{OUT}, while the decrease in dissipated power yields a lower junction temperature and enhanced MTTF. For thermal considerations, refer to graphs provided for thermal resistance, junction temperature, and MTTF (these three graphs based on RF3806 thermal scan and process reliability data).

For the second example (case 2), consider a higher power application, where P_{OUT}=34dBm and linearity requirement is substantially reduced from that seen in above example. For this application, we might run I_{REF}=41mA with V_{CC}=8V. RF3806 output load line would be set for maximum efficiency and compression point. The result is a transmit PA which obtains output power spec, while providing high enough efficiency to keep Tj within desired range. Running I_{REF}=41mA avoids unnecessary power dissipation, as higher I_{REF} is used only in lower power case for linearity enhancement. A DCS/PCS application schematic is provided in data sheet for higher power applications, along with corresponding information in section containing graphs. UMTS evaluation board can be converted to the application schematic, with minor changes to input, output, and interstage matches (interstage @V_{CC1} pin). Also, bias resistors at V_{REF} are scaled for lower I_{REF}=41mA. EDGE ACP plots are provided in the graph section. Note that the matching also covers transmit bands for 1850-1910 CDMA. As a result, this converted application board could also be considered for CDMA booster/repeater.

As mentioned above, junction temperature is an important consideration when operating at maximum V_{CC} (8V). The most demanding scenario, case 1 above, will be considered here as an illustration. In the data sheet graph section, refer to graphs of Tj vs P_{OUT}, R_{TH} vs P_{OUT}, and RF3806 wear out MTTF vs Tj. During thermal scan, RF3806 eval board is affixed to a large, temperature controlled stage, held at ambient. The device is etched open, such that thermal image of die can be taken. Reference temperature is measured at evaluation board to stage interface by thermocouple, placed through a thin groove such that it makes contact with underside eval board GND plane (directly beneath RF3806). Thermocouple measures "reference temperature", from which R_{TH_JREF} (junction to reference) is determined. Evaluation board thermal resistance, R_{TH_BOARD}, has been modeled at 1°C/W. Knowing these two values allows us to calculate junction to case thermal resistance of RF3806=R_{TH_JC}=R_{TH_JREF}-R_{TH_BOARD}=R_{TH_JREF}-1 (see graph). Thus, R_{TH_JC} is defined as thermal resistance from junction to GND slug of device.

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.

At P_{OUT}=26dBm, see that Tj=160°C for ambient (stage) temperature=85°C. At this condition, temperature of case (GND slug) is calculated:

$T_{CASE}=T_{REF}+P_{DISS}*(R_{TH_BOARD})$=94°C+(6.191W)*1°C/W=100.2°C. Note that T_{REF} was elevated to 94°C when stage was set at 85°C. Thus, thermal resistance results can be subject to where one defines "ambient".

Using MTTF curve, it is seen that MTTF=80 years for 160°C junction temperature. In a design where higher MTTF is desired, one option would be to run RF3806 at reduced V_{CC}. Viewing UMTS ACP curves in graph section of data sheet, V_{CC}=6V/25dBm shows equivalent linearity to V_{CC}=8V/26dBm. Reducing P_{OUT} specification to 25dBm will allow for higher MTTF while operating at V_{CC}=6V. A practical approximation to Tj at adjusted operating condition can be made. Assume T_{CASE} equal to 100.2°C, as with V_{CC}=8V and 26dBm out (conservative estimate). Dissipated power for 6V/25dBm/85°C is known from test data to be 4.385W. From data sheet graph, R_{TH_JC}=9.95°C/W. Tj is approximated to be:

Tj=100.2+4.385*9.95=144°C

MTTF curve shows >450 years for this Tj. As mentioned, the above analysis is not exact, but does give us a practical way to get an idea of where a condition will fall in terms of Tj and MTTF. Required data to do the calculation: data sheet curves and evaluation board test in temperature chamber (to determine dissipated power).


Note that projected Tj vs Pout curves are included with DCS/PCS data (1800MHz-1990MHz high power application schematic), to illustrate the same type of trade offs between operating at 6V and 8V. These curves are approximate, obtained with the following method (called out in above paragraph):

1. UMTS evaluation board was converted to matching seen on DCS/PCS application schematic (changes @ input/output/interstage/bias resistors at V_{REF}).
2. Evaluation board was run in oven at 85°C ambient.
3. Dissipated power was calculated at each data point. Using R_{TH_JREF} from data sheet curve, temperature delta to RF3806 junction (Tj) can be obtained. Tj was then plotted, and can be applied to MTTF vs Tj curve.


Finally, a description is included here for running two RF3806 in parallel with hybrid combiners. This approach enables design to achieve substantial linearity enhancement for a given P_{OUT}, while maintaining low die temperature. In this example, hybrid couplers (combiners) from Anaren (part number XC2100E-03) are used with 2 RF3806 UMTS evaluation boards. The bias condition is V_{CC}=6V, I_{REF}=60mA. ACP performance vs temperature is shown in graph section, which can be compared to that for single PA.

RFMD can be contacted to obtain RF3806 qualification report, which adheres to demanding infrastructure standards.


Small Signal Gain
UMTS Band (Data taken on UMTS Evaluation Board)

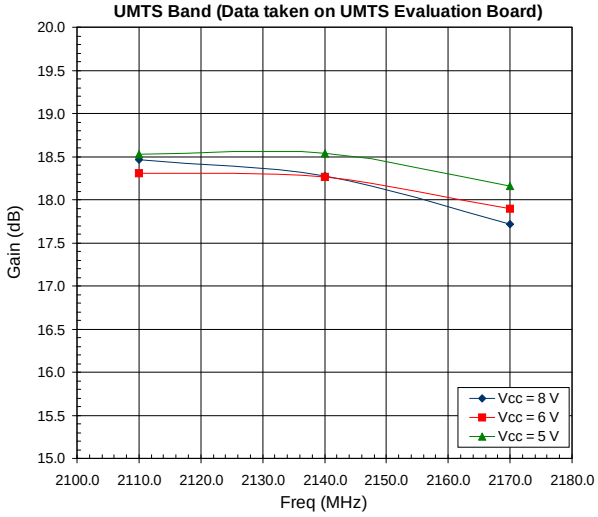


OIP3 versus P_{OUT} versus Frequency versus V_{CC}
UMTS Band (Data taken on UMTS Evaluation Board)

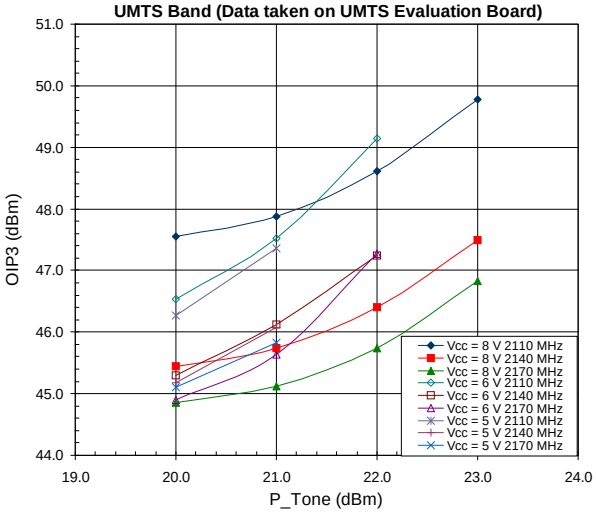


OIP3 versus Frequency versus V_{CC}, at 10dB Back-off from OP1dB, UMTS Band (Data taken on UMTS Evaluation Board)

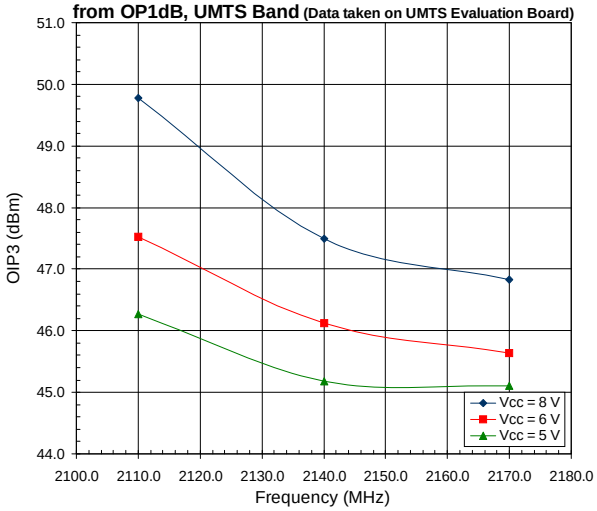


OP1dB versus V_{CC} versus Frequency
UMTS Band (Data taken on UMTS Evaluation Board)

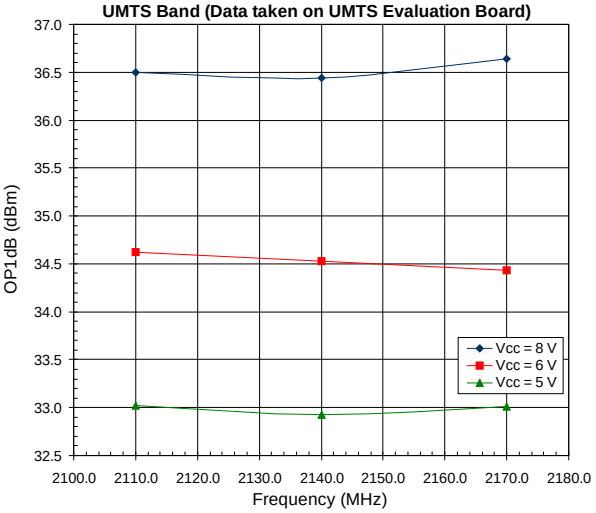

W-CDMA ACP versus P_{OUT} versus Temperature
Signal=W-CDMA Test Model I 64 DPCH PAR=10.3dB @ 0.01%
I_{REF}=60mA V_{CC}=8V (Data taken on UMTS Evaluation Board)

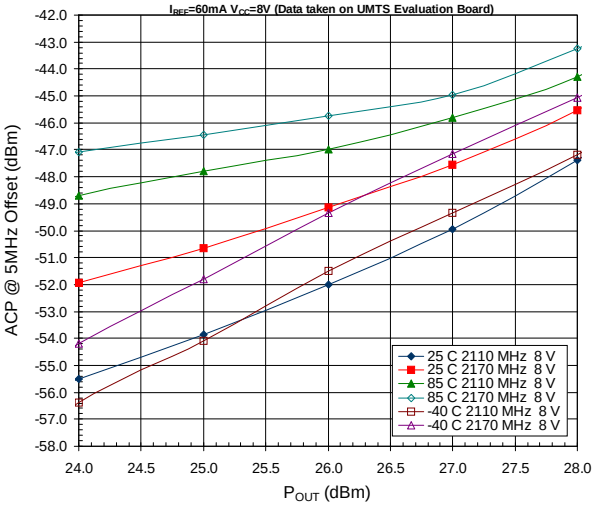


W-CDMA ACP versus P_{OUT} versus Temperature
Signal=W-CDMA Test Model I 64 DPCH PAR=10.3dB @ 0.01%
I_{REF}=60mA V_{CC}=6V (Data taken on UMTS Evaluation Board)

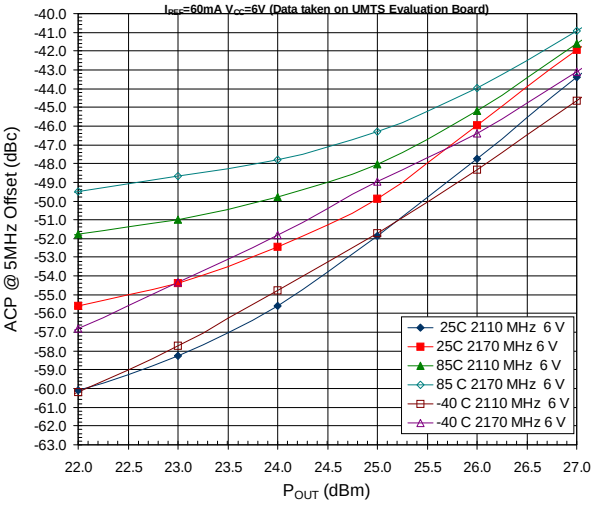


7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.


W-CDMA ACP versus P_{OUT} versus Temperature
Signal=W-CDMA Test Model I 64 DPCH PAR=10.3dB @ 0.01%
I_{REF}=60mA V_{CC}=5V (Data taken on UMTS Evaluation Board)

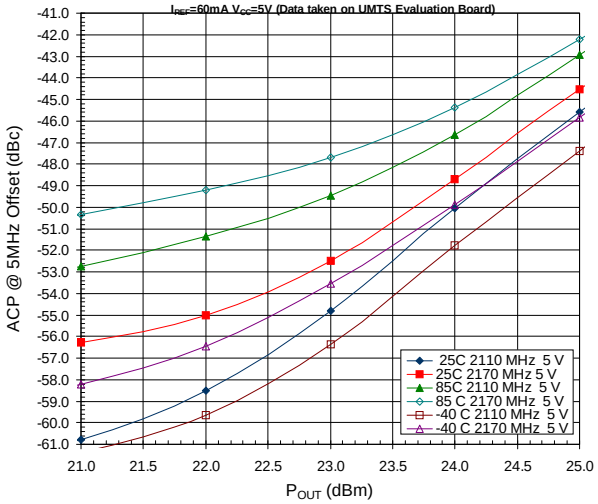


Small Signal Gain - PCS Band
(Data taken on Eval Board configured as per DCS/PHS/PCS Application Schematic for Low Power Linear Operation)

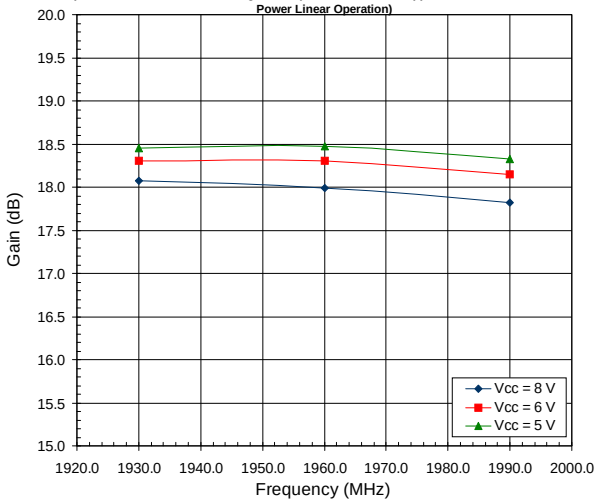


OIP3 versus P_{OUT} versus Freq versus V_{CC} - PCS Band
(Data taken on Eval Board configured as per DCS/PHS/PCS Application Schematic for Low Power Linear Operation)

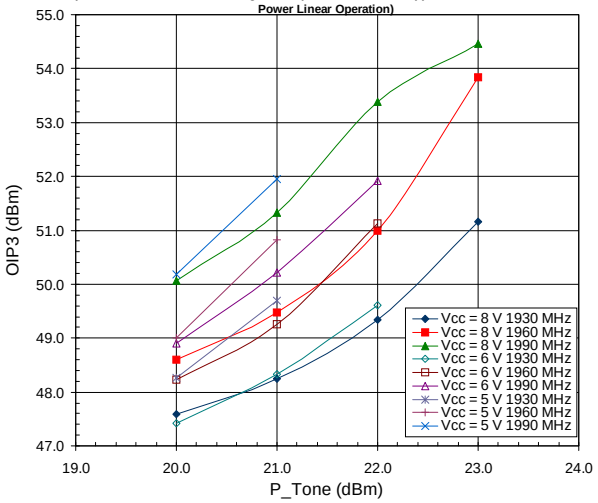


OIP3 versus Frequency versus V_{CC}, at 10dB Back-off from OP1dB PCS Band
(Data taken on Eval Board Configured as per DCS/PHS/PCS Application Schematic for Low Power Linear Operation.)

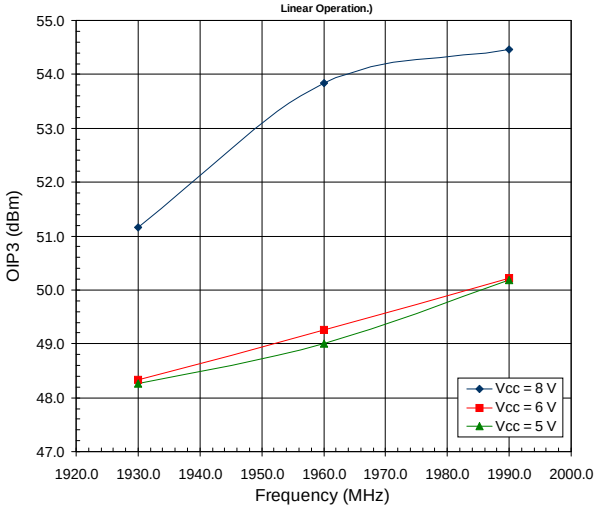


OP1dB versus V_{CC} versus Freq - PCS Band
(Data taken on Eval Board configured as per DCS/PHS/PCS Application Schematic for Low Power Linear Operation)

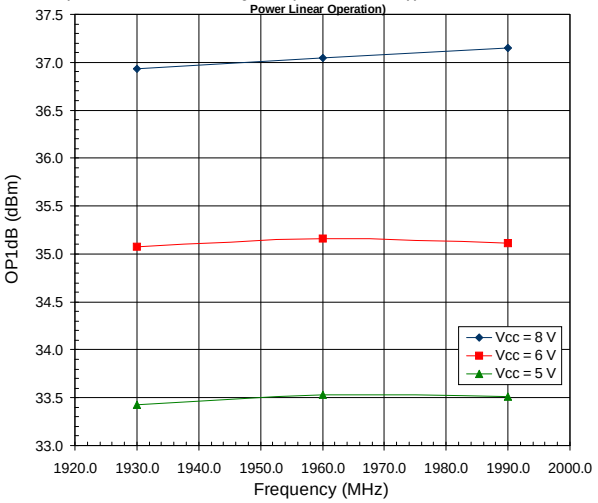


CDMA2K ACP versus P_{OUT} versus Temperature, Signal=CDMA2K 9 Channel SR1 PAR=8.5dB @ 0.01% I_{REF}=60mA V_{CC}=8V (Data taken on Eval Board configured as per DCS/PHS/PCS Application Schematic for low power linear operation)

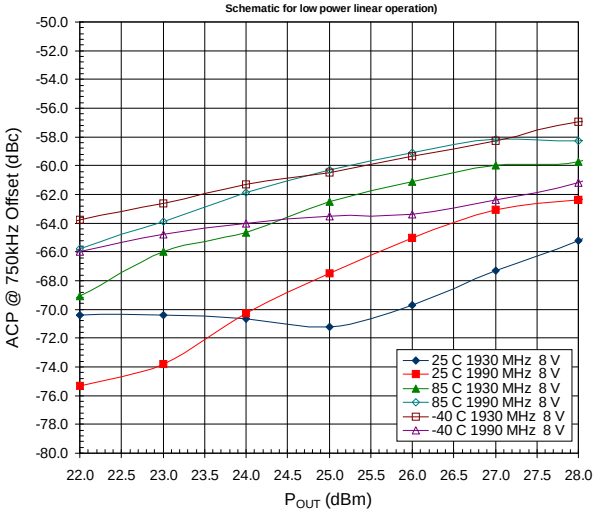

CDMA2K ACP versus P_{OUT} versus Temperature, Signal=CDMA2K 9 Channel SR1 PAR=8.5dB @ 0.01% IREF=60mA V_{CC}=6V (Data taken on Eval Board configured as per DCS/PHS/PCS Application Schematic for low power linear operation)

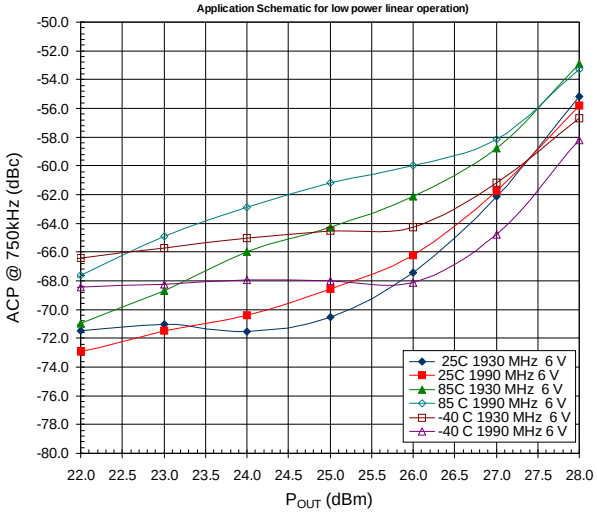


CDMA2K ACP versus P_{OUT} versus Temperature, Signal=CDMA2K 9 Channel SR1 PAR=8.5dB @ 0.01% I_{REF}=60mA V_{CC}=5V (Data taken on Eval Board configured as per DCS/PHS/PCS Application Schematic for low power linear operation)

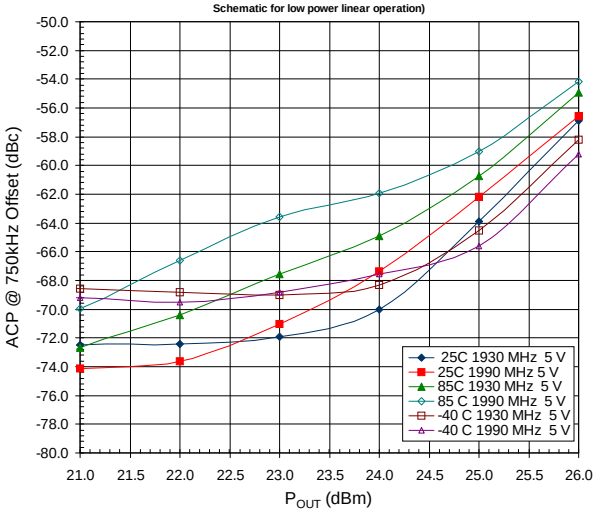


DCS/PCS EDGE ACP V_{CC}=8V I_{REF}=41mA

(See DCS/PCS High Power Application Schematic, 1800MHz to 1990MHz)

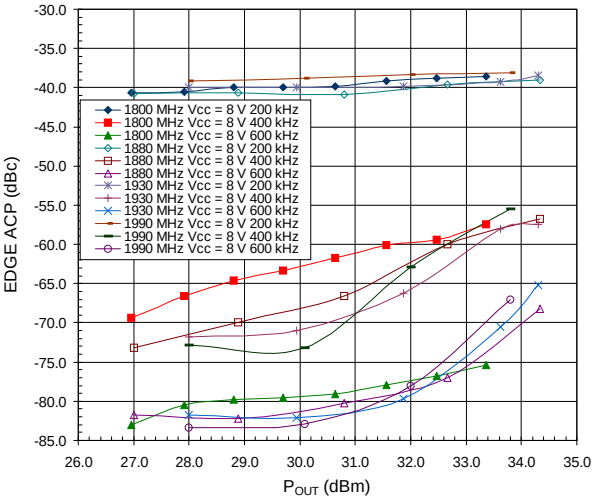


DCS/PCS EDGE ACP V_{CC}=6V I_{REF}=41mA

(See DCS/PCS High Power Application Schematic, 1800MHz to 1990MHz)

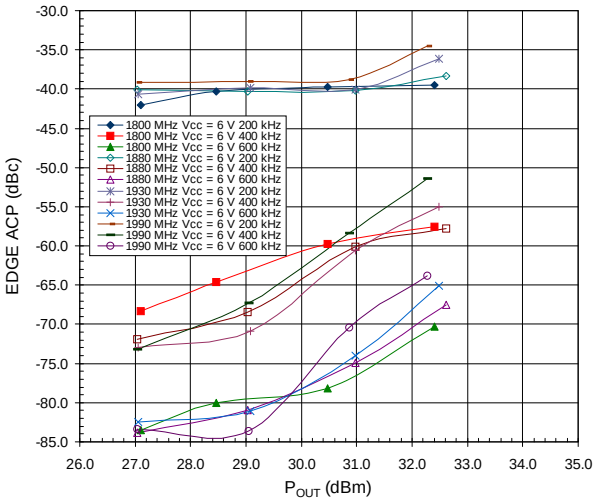


DCS/PCS OP1dB I_{REF}=41mA

(See DCS/PCS High Power Application Schematic, 1800MHz to 1990MHz)

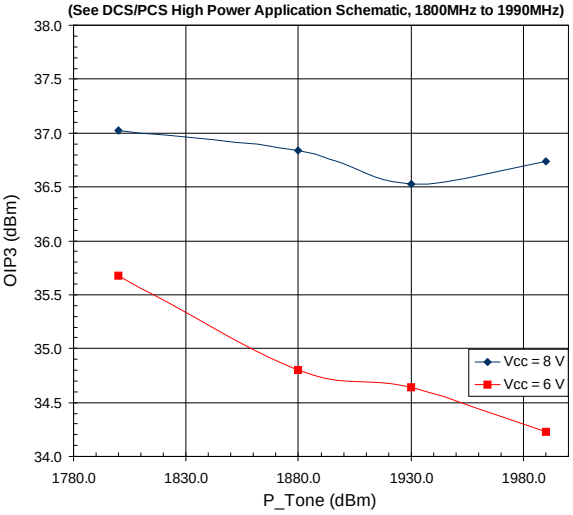


DCS/PCS Projected Junction Temperature at 85°C Ambient


(See Theory of Operation section, and DCS/PCS High Power Application Schematic, 1800MHz to 1990MHz) I_{REF}=41mA

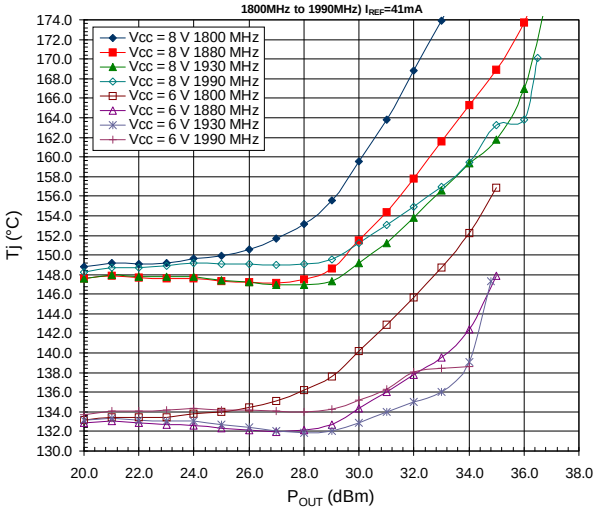


UMTS Evaluation Boards in Hybrid Coupler Configuration:
Test Signal=W-CDMA Test Model I, 64 DPCH V_{CC}=6V, I_{REF}=60mA

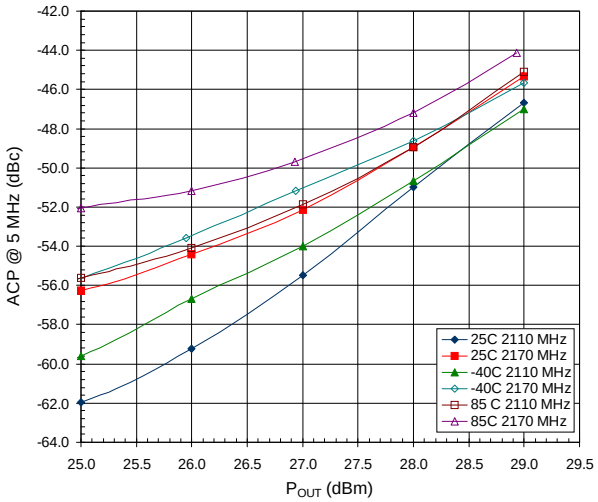


Wear Out MTTF versus Tj
(See Theory of Operation section)

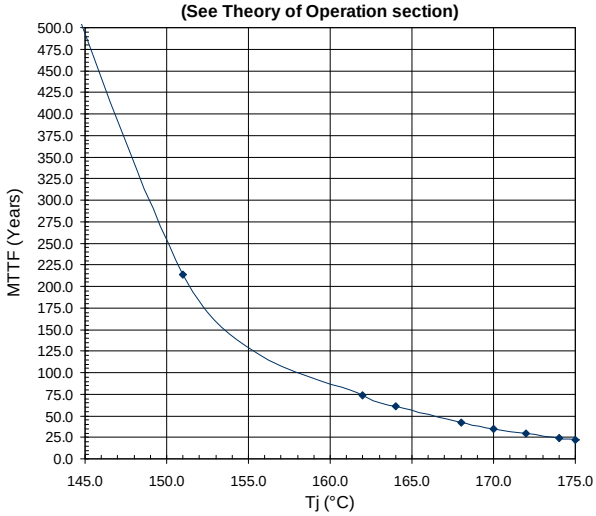


UMTS V_{CC}=8V and I_{REF}=60mA, Tj versus P_{OUT} @ 85°C Ambient
(See Theory of Operation section for details)

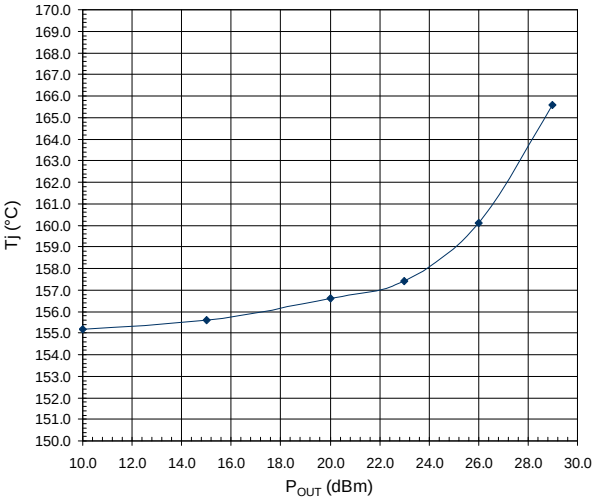

UMTS V_{CC}=8V and I_{REF}=60mA, Rth versus P_{OUT} @ 85°C Ambient
(See Theory of Operation section for details)

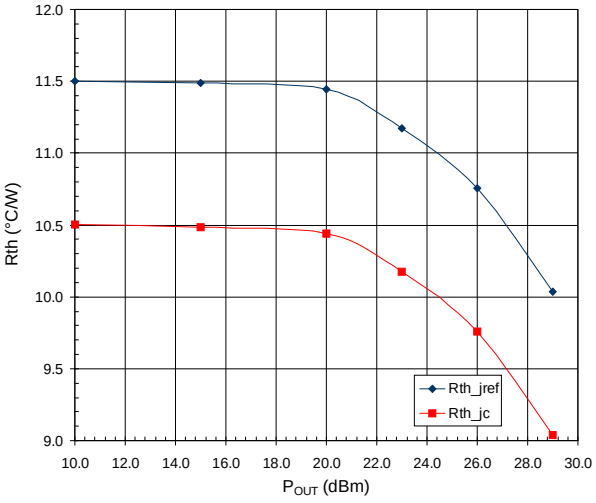


DCS/PCS High Power Application Schematic, Typical Response

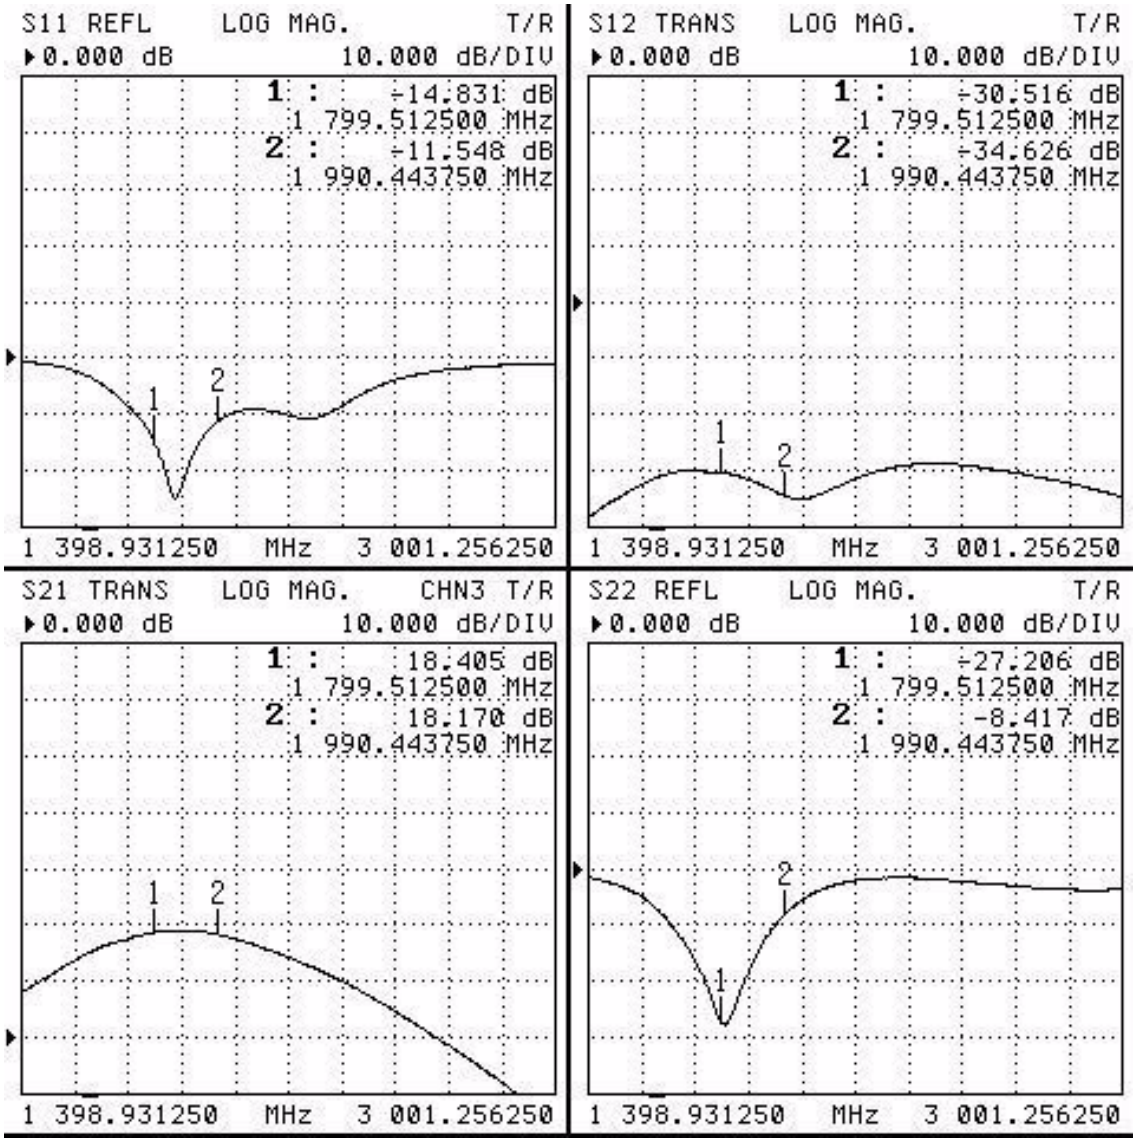


7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.

PCS/PHS/PCS Low Power Linear Application Schematic, Typical Response

(Input matched for PCS, see data sheet schematic)

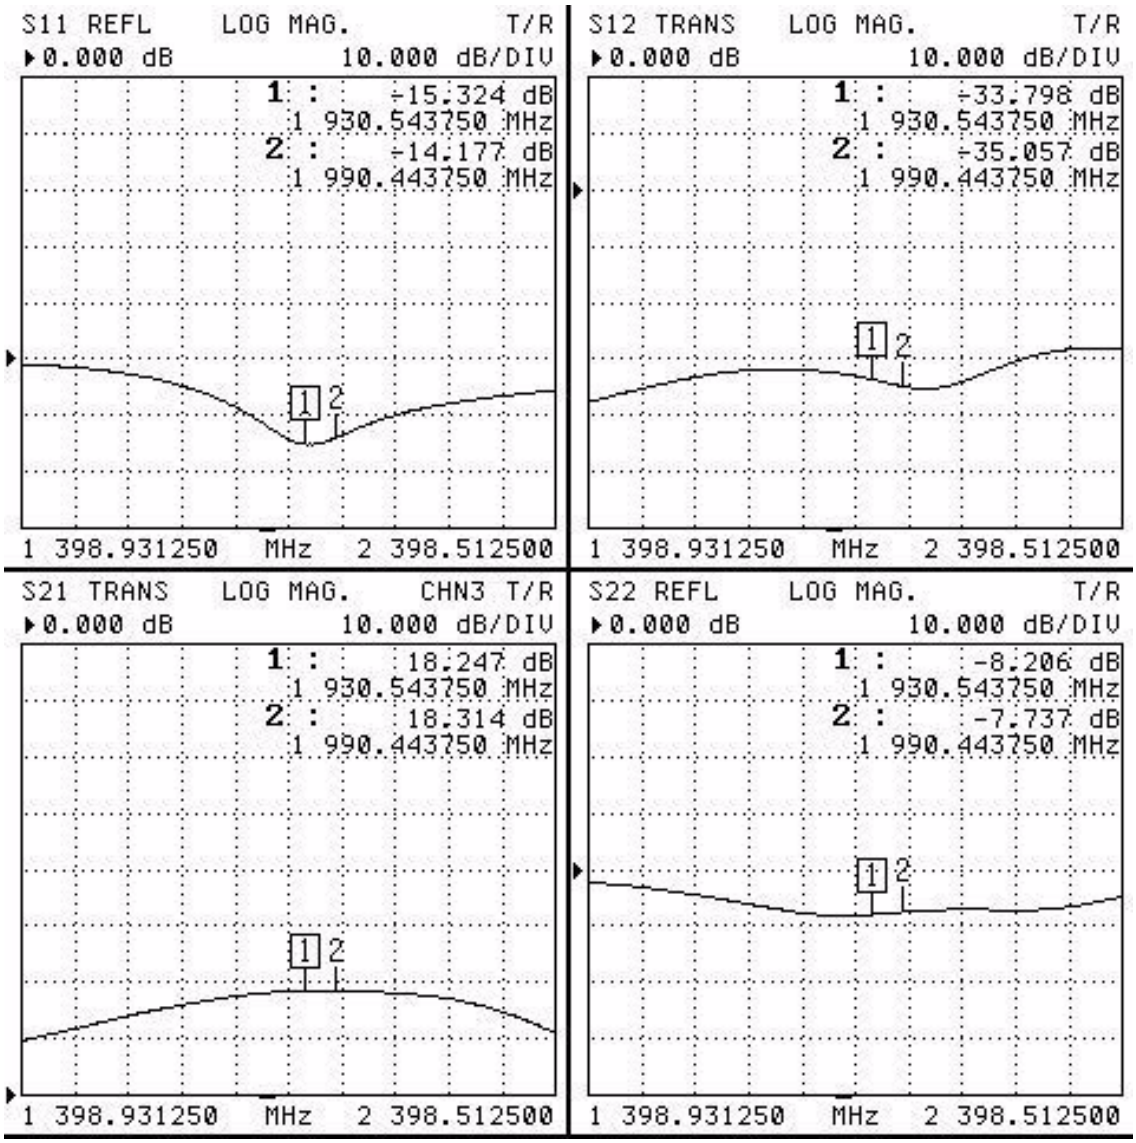


UMTS Evaluation Board Typical Response

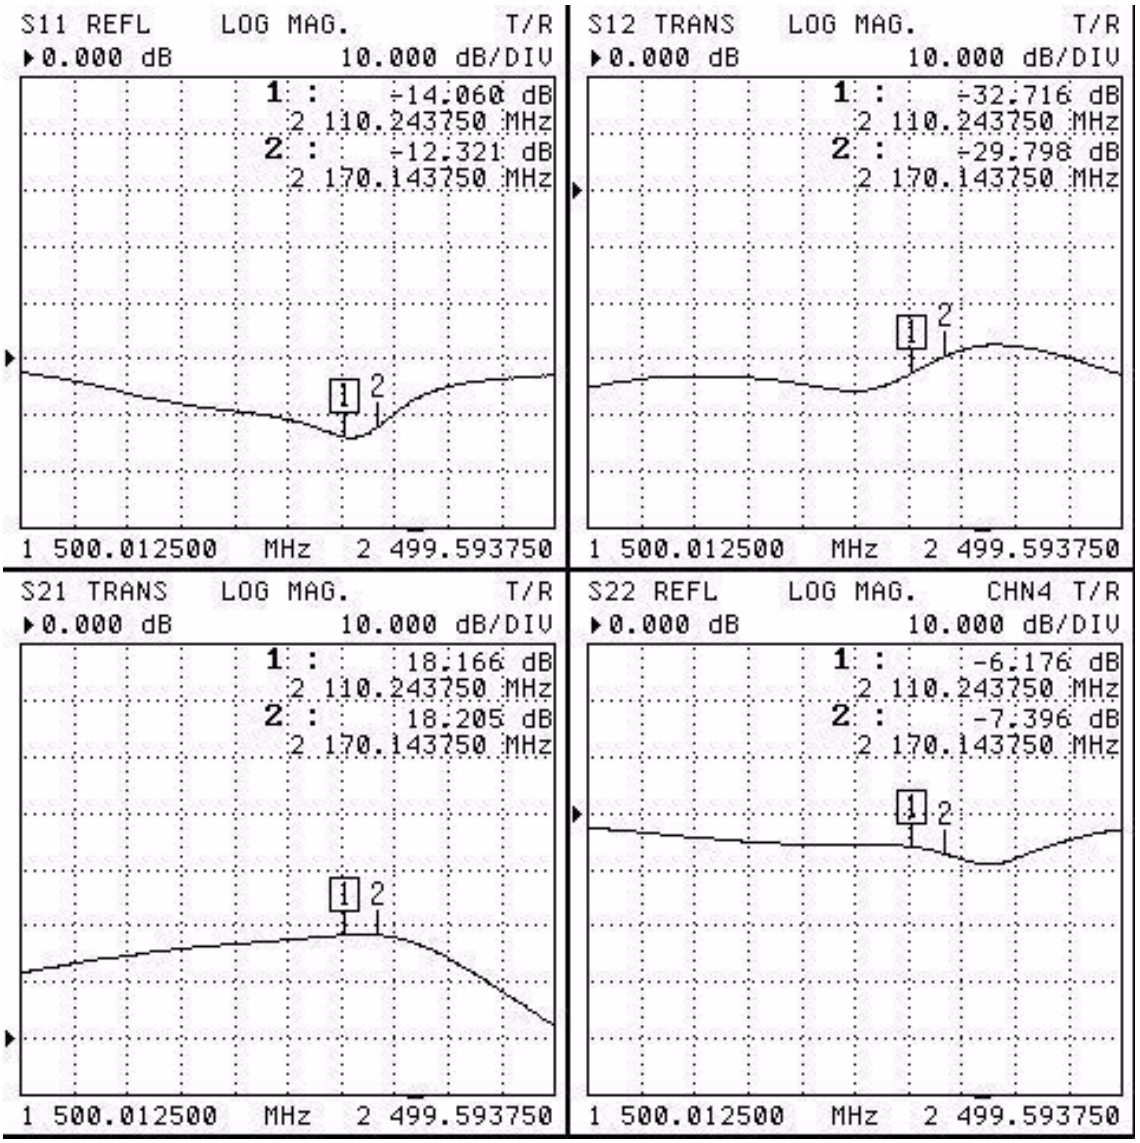

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.

UMTS Evaluation Boards in Hybrid Coupler Configuration, Typical Response

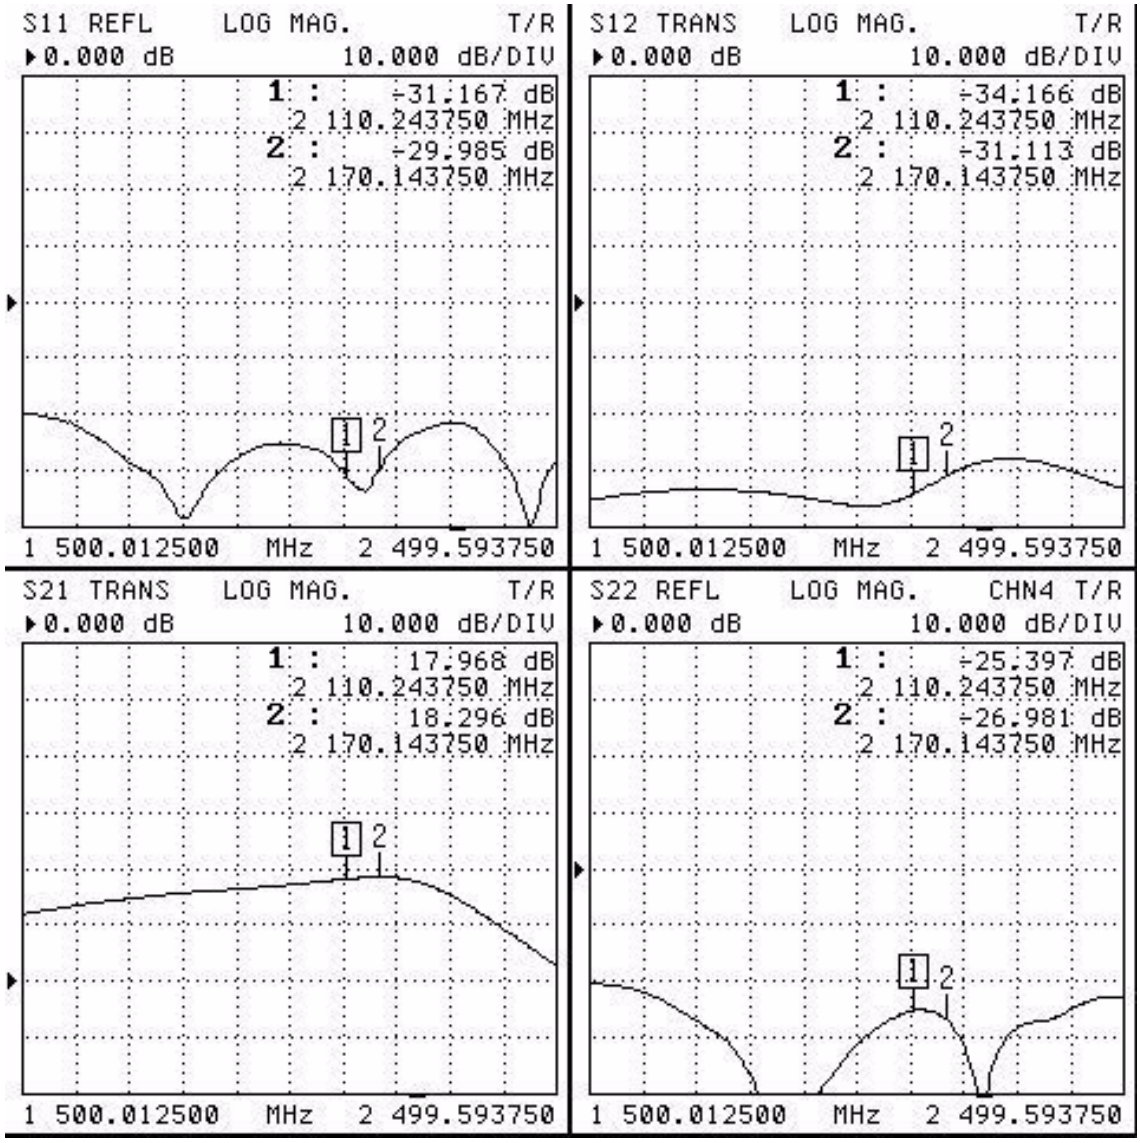

PCB Design Requirements

PCB Surface Finish

The PCB surface finish used for RFMD's qualification process is electroless nickel, immersion gold. Typical thickness is 3μinch to 8μinch gold over 180μinch nickel.


PCB Land Pattern Recommendation

PCB land patterns are based on IPC-SM-782 standards when possible. The pad pattern shown has been developed and tested for optimized assembly at RFMD; however, it may require some modifications to address company specific assembly processes. The PCB land pattern has been developed to accommodate lead and package tolerances.

PCB Metal Land Pattern

A = 1.14 x 0.71
B = 1.02 x 0.71 Typ.
C = 3.96 x 4.44

Dimensions in mm.

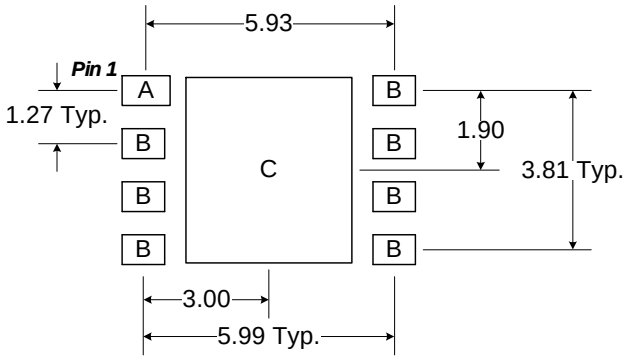


PCB Solder Mask Pattern

Liquid Photo-Imageable (LPI) solder mask is recommended. The solder mask footprint will match what is shown for the PCB metal land pattern with a 2mil to 3mil expansion to accommodate solder mask registration clearance around all pads. The center-grounding pad shall also have a solder mask clearance. Expansion of the pads to create solder mask clearance can be provided in the master data or requested from the PCB fabrication supplier.

A = 1.30 x 0.86
B = 1.17 x 0.86 Typ.
C = 4.11 x 4.60

Dimensions in mm.

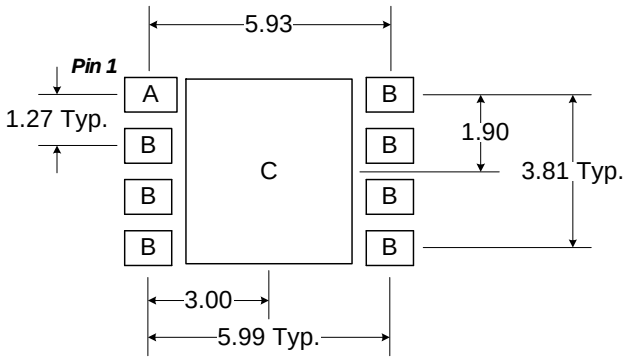

7628 Thorndike Road, Greensboro, NC 27409-9421 · For sales or technical support, contact RFMD at (+1) 336-678-5570 or sales-support@rfmd.com.