Video signal switcher
BA7605N

The BA7605N is a switching IC developed for use in VCRs. It has two two-channel analog multiplexers with a large dynamic range, and wide operating frequency range. The switch has sync-tip clamped inputs and is ideal for switching video signals.


●Applications

Video cassette recorders and televisions

●Features

1) Two 2-input / 1-output switches.
2) Sync-tip clamped inputs.
3) 5V power supply.
4) Low power consumption (42mW Typ.).
5) Excellent frequency characteristics (10MHz, 0dB Typ.).
6) Wide dynamic range (2.9V_{P-P} Typ.).
7) Fast switching speed (50ns Typ.).

●Block diagram

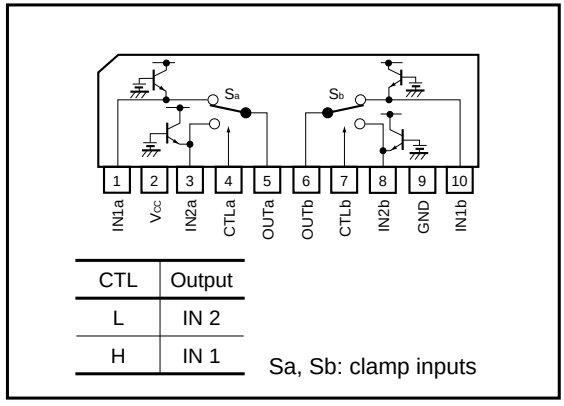

CTL	Output
L	IN 2
H	IN 1

Sa, Sb: clamp inputs


●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V_{CC}	9	V
Power dissipation	Pd	500*	mW
Operating temperature	Topr	– 40 ~ + 85	°C
Storage temperature	Tstg	– 55 ~ + 125	°C


* Reduced by 5.0mW for each increase in Ta of 1°C over 25°C.

●Equivalent circuits

Sa,Sb

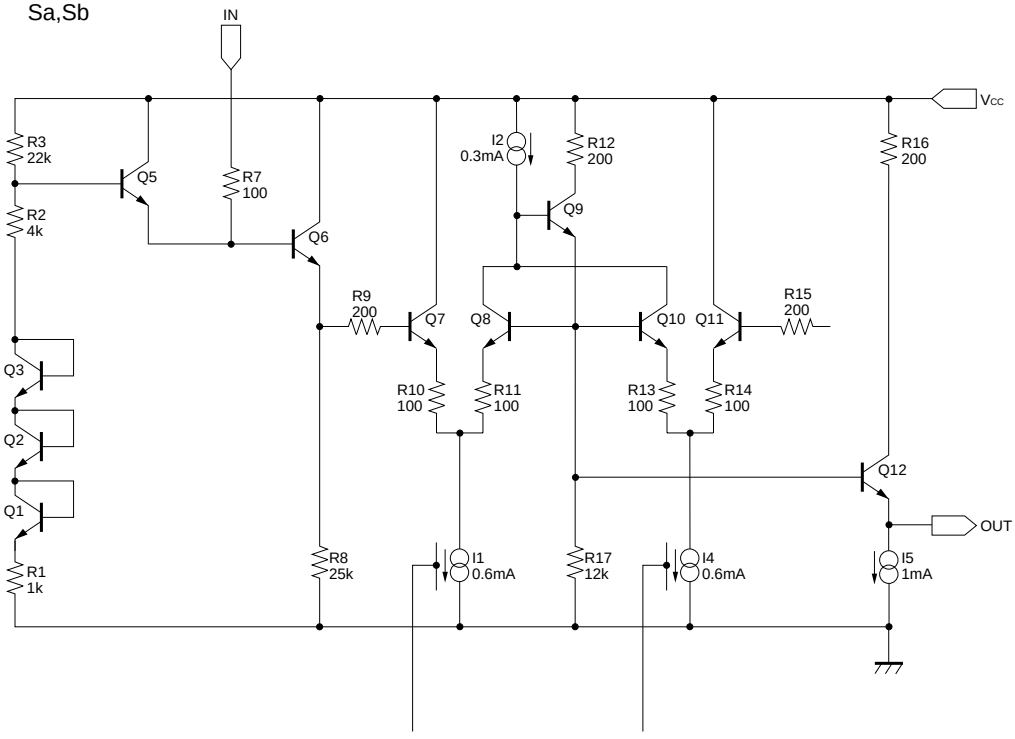

CTL

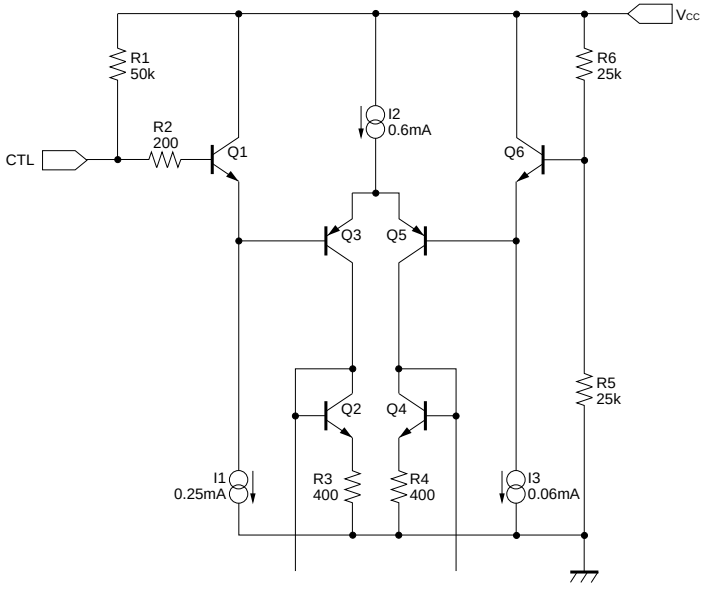

●Electrical characteristics (unless otherwise noted, Ta = 25°C and V_{CC} = 5V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Operating voltage	V_{CC}	4.5	5.0	5.5	V	—
Supply current	I_{CC}	—	8.4	10.0	mA	—
Maximum output level	V_{om}	2.6	2.9	—	V_{P-P}	f = 1kHz, THD = 0.5%
Voltage gain	G_V	– 0.5	0	0.5	dB	f = 1MHz, V_{IN} = 1V_{P-P}
Interchannel crosstalk	C_T	—	– 65	—	dB	f = 4.43MHz, V_{IN} = 1V_{P-P}
Frequency characteristics	G_f	– 3	0	1	dB	10MHz / 1MHz, V_{IN} = 1V_{P-P}
CTL pin switch level	V_{TH}	2.0	2.5	3.0	V	—

Note: Refer to the measurement circuit given in Fig. 1.

●Reference data

Pin DC voltages (reference values)

Units: Vdc

Pin No.	DC voltage	Pin No.	DC voltage
1	2.05	6	0.65
2	5.00	7	4.91
3	2.05	8	2.05
4	4.91	9	0
5	0.65	10	2.05

Electrical characteristics

Parameter	Min.	Typ.	Max.	Unit
Sync tip clamp level	0.49	0.65	0.80	Vdc
Input impedance (with clamp)	—	1.7M	—	Ω
Output impedance	—	30	—	Ω

The input coupling capacitor values should be 0.1μF to 1μF.

●Measurment circuit

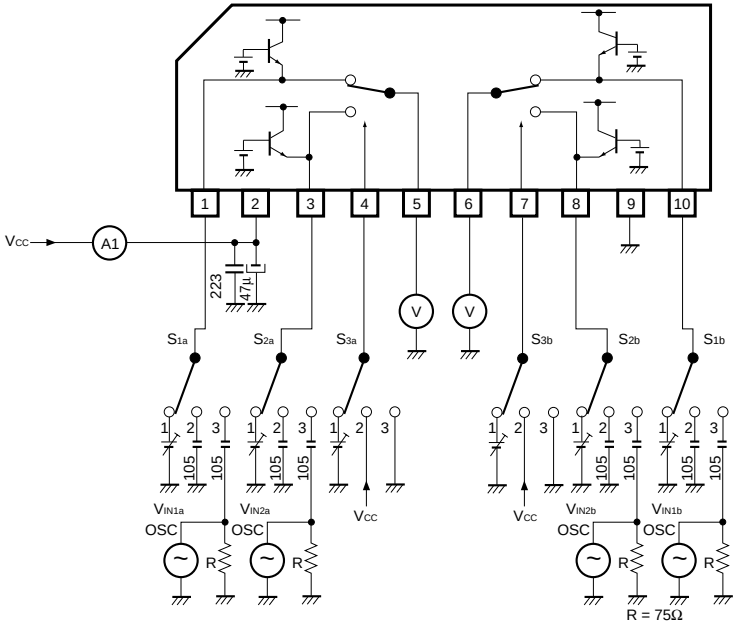


Fig.1

●Measurement conditions

Parameter		Symbol	Switch settings						Measurement method
			S_{1a}	S_{2a}	S_{3a}	S_{1b}	S_{2b}	S_{3b}	
Current dissipation		I_{CC}	2	2	2	2	2	2	Ammeter
Maximum output level	I_{N1a}	V_{om}	3	2	2	2	2	2	Note 1
	I_{N2a}	V_{om}	2	3	3	2	2	2	
	I_{N1b}	V_{om}	2	2	2	3	2	2	
	I_{N2b}	V_{om}	2	2	2	2	3	3	
Voltage gain	I_{N1a}	G_V	3	2	2	2	2	2	Note 2
	I_{N2a}	G_V	2	3	3	2	2	2	
	I_{N1b}	G_V	2	2	2	3	2	2	
	I_{N2b}	G_v	2	2	2	2	3	3	
Inter-channel crosstalk	I_{N1a}	C_T	2	3	2	2	2	2	Note 3
	I_{N2a}	C_T	3	2	3	2	2	2	
	I_{N1b}	C_T	2	2	2	2	3	2	
	I_{N2b}	C_T	2	2	2	3	2	3	
Frequency character-istic	I_{N1a}	G_f	3	2	2	2	2	2	Note 4
	I_{N2a}	G_f	2	3	3	2	2	2	
	I_{N1b}	G_f	2	2	2	3	2	2	
	I_{N2b}	G_f	2	2	2	2	3	3	
CTL pin switching level	CTLa	V_{TH}	3	2	1	2	2	2	Note 5
	CTLb	V_{TH}	2	2	2	3	2	1	

Note 1: Connect a distortion meter to the output, and input a f = 1kHz sine wave. Adjust the output level until the output distortion is 0.5%. This output voltage at this time is the maximum output level V_{om} (V_{P-P}).


Note 2: Input a $1V_{P-P}$, 1MHz sine wave. The voltage gain is given by $G_V = 20 \log (V_{OUT} / V_{IN})$.

Note 3: Input a $1V_{P-P}$, 4.43MHz sine wave. The interchannel crosstalk is given by $C_T = 20 \log (V_{OUT} / V_{IN})$.

Note 4: Input $1V_{P-P}$, 1MHz and 10MHz sine waves.
The frequency characteristic is given by $G_f = 20 \log (V_{OUT}$ (f = 10MHz) / V_{OUT} (f = 1MHz)).

Note 5: Input a $1V_{P-P}$, 1MHz sine wave. Reduce the CTL pin voltage from V_{CC}.
The CTL pin switching level (V_{TH}) is the CTL pin voltage at which the V_{OUT} level drops below $20mV_{P-P}$.

●External dimensions (Units: mm)

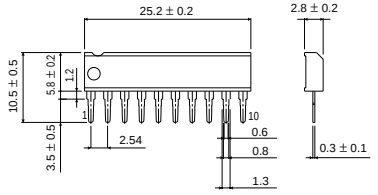

SIP10