
15 1500 01


Jack connectors





Jack chassis socket, 2.5 mm, 4 poles/stereo, with solder eyes, upright version, for back side mounting

State: New

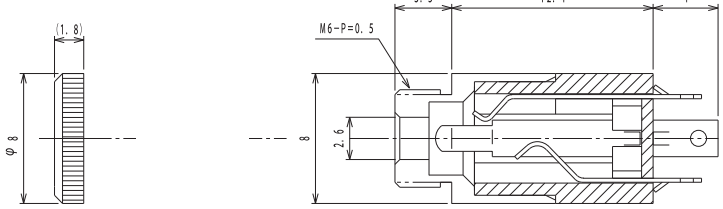

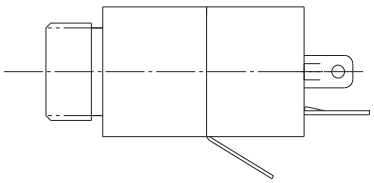





Environmental conditions

Temperature range	-20 °C/+50 °C

Materials

Insulating body	PBT GF, V-0 according to UL 94
Contact	Cu-alloy, nickel/gold-plated
Housing	CuZn, nickel-plated
Knurled nut	CuZn, nickel-plated

Mechanical data

Mating cycles	≥ 3000 [1]
Insertion force	4–40 N (initial value)
Withdrawal force	4–40 N (initial value)

[1] measured with a gauge plug

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 50 mΩ
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts
1530 02

Accessories
1597 01 1597 03

15 1500 01

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1500 01	4	100	200

Packaging:
in bulk in a cardboard box or a plastic bag