19-5021; Rev 1; 2/10

EVALUATION KIT AVAILABLE

1µA, 4-Bump UCSP/SOT23, Precision Current-Sense Amplifier

General Description

The MAX9634 high-side current-sense amplifier offers precision accuracy specifications of V_{OS} less than 250µV (max) and gain error less than 0.5% (max). Quiescent supply current is an ultra-low 1µA. The MAX9634 fits in a tiny, 1mm x 1mm UCSP™ package size or a 5-pin SOT23 package, making the part ideal for applications in notebook computers, cell phones, PDAs, and all battery-operated portable devices where accuracy, low quiescent current, and small size are critical.

The MAX9634 features an input common-mode voltage range from 1.6V to 28V. These current-sense amplifiers have a voltage output and are offered in four gain versions: 25V/V (MAX9634T), 50V/V (MAX9634F), 100V/V (MAX9634H), and 200V/V (MAX9634W).

The four gain selections offer flexibility in the choice of the external current-sense resistor. The very low 250µV (max) input offset voltage allows small 25mV to 50mV full-scale V_{SENSE} voltage for very low voltage drop at full-current measurement.

The MAX9634 is offered in tiny 4-bump UCSP (1mm x 1mm x 0.6mm footprint) and 5-pin SOT23 packages specified for operation over the -40°C to +85°C extended temperature range.

Applications

Cell Phones

PDAs

Power-Management Systems

Portable/Battery-Powered Systems

Notebook Computers

Features

- **Ultra-Low Supply Current of 1µA (max)**
- **Low 250µV (max) Input Offset Voltage**
- **Low < 0.5% (max) Gain Error**
- **Input Common Mode: +1.6V to +28V**
- **Voltage Output**
- **Four Gain Versions Available**
  - **25V/V (MAX9634T)**
  - **50V/V (MAX9634F)**
  - **100V/V (MAX9634H)**
  - **200V/V (MAX9634W)**
- **Tiny 1mm x 1mm x 0.6mm, 4-Bump UCSP or 5-Pin SOT23 Packages**

Ordering Information


PART	PIN-PACKAGE	GAIN (V/V)	TOP MARK
MAX9634TERS+	4 UCSP	25	+ABX
MAX9634FERS+	4 UCSP	50	+ABY
MAX9634HERS+	4 UCSP	100	+ABZ
MAX9634WERS+	4 UCSP	200	+ACA
MAX9634TEUK+	5 SOT23	25	+AFHG
MAX9634FEUK+	5 SOT23	50	+AFHH
MAX9634HEUK+	5 SOT23	100	+AFHI
MAX9634WEUK+	5 SOT23	200	+AFHJ

+Denotes a lead(Pb)-free/RoHS-compliant package.

Note: *All devices are specified over the -40°C to +85°C extended temperature range.*

UCSP is a trademark of Maxim Integrated Products, Inc.

Pin Configurations

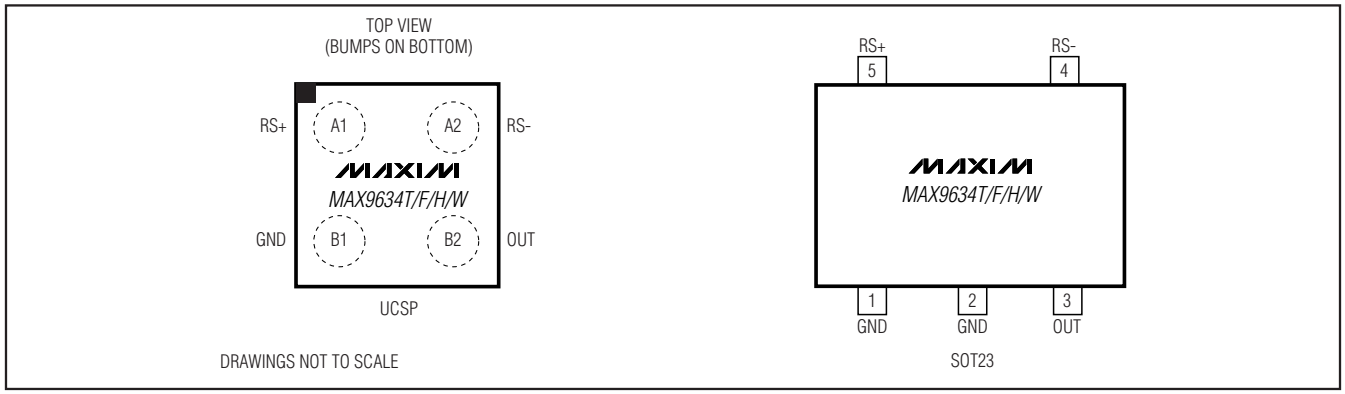

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

1µA, 4-Bump UCSP/SOT23, Precision Current-Sense Amplifier

ABSOLUTE MAXIMUM RATINGS

RS+, RS- to GND .....-0.3V to +30V
OUT to GND .....-0.3V to +6V
RS+ to RS- .....±30V
Short-Circuit Duration: OUT to GND .....Continuous
Continuous Input Current (any pin) .....±20mA
Continuous Power Dissipation (T_A = +70°C)
4-Bump UCSP (derate 3.0mW/°C above +70°C).....238mW
5-Pin SOT23 (derate 3.9mW/°C above +70°C).....312mW
Operating Temperature Range .....-40°C to +85°C
Junction Temperature.....+150°C
Storage Temperature Range .....-65°C to +150°C
Bump Temperature (soldering) Reflow.....+260°C
Lead Temperature (soldering, 10s) .....+300°C
Soldering Temperature (reflow) .....+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{RS+} = V_{RS-} = 3.6V, V_{SENSE} = (V_{RS+} - V_{RS-}) = 0V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Current (Note 2)	I_{CC}	V_{RS+} = 5V, T_A = +25°C			0.5	0.85	µA
		V_{RS+} = 5V, -40°C < T_A < +85°C				1.1	
		V_{RS+} = 28V, T_A = +25°C			1.1	1.8	
		V_{RS+} = 28V, -40°C < T_A < +85°C				2.5	
Common-Mode Input Range	V_{CM}	Guaranteed by CMRR, -40°C < T_A < +85°C		1.6		28	V
Common-Mode Rejection Ratio	CMRR	1.6V < V_{RS+} < 28V, -40°C < T_A < +85°C		94	130		dB
Input Offset Voltage (Note 3)	V_{OS}	MAX9634T/MAX9634F/MAX9634H	T_A = +25°C		100	250	µV
			-40°C < T_A < +85°C			300	
		MAX9634W	T_A = +25°C		100	250	
			-40°C < T_A < +85°C			425	
Gain	G	MAX9634T			25		V/V
		MAX9634F			50		
		MAX9634H			100		
		MAX9634W			200		
Gain Error (Note 4)	GE	MAX9634T/MAX9634F/MAX9634H	T_A = +25°C		±0.1	±0.5	%
			-40°C < T_A < +85°C			±0.6	
		MAX9634W	T_A = +25°C		±0.1	±0.7	
			-40°C < T_A < +85°C			±0.8	
Output Resistance (Note 5)	R_{OUT}	MAX9634T/MAX9634F/MAX9634H		7.0	10	13.2	kΩ
		MAX9634W		14.0	20	26.4	
OUT Low Voltage	V_{OL}	Gain = 25			1.5	7.5	mV
		Gain = 50			3	15	
		Gain = 100			6	30	
		Gain = 200			12	85	

ELECTRICAL CHARACTERISTICS (continued)

(V_{RS+} = V_{RS-} = 3.6V, V_{SENSE} = (V_{RS+} - V_{RS-}) = 0V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
OUT High Voltage	V_{OH}	V_{OH} = V_{RS-} - V_{OUT} (Note 6)		0.1	0.2	V
Small-Signal Bandwidth (Note 5)	BW	V_{SENSE} = 50mV, gain = 25		125		kHz
		V_{SENSE} = 50mV, gain = 50		60		
		V_{SENSE} = 50mV, gain = 100		30		
		V_{SENSE} = 50mV, gain = 200		15		
Output Settling Time	t_S	1% final value, V_{SENSE} = 50mV		100		µs
Power-Up Time	t_{ON}	1% final value, V_{SENSE} = 50mV		200		µs

Note 1: All devices are 100% production tested at T_A = +25°C. All temperature limits are guaranteed by design.

Note 2: V_{OUT} = 0. I_{CC} is the total current into RS+ plus RS- pins.

Note 3: V_{OS} is extrapolated from measurements for the gain-error test.

Note 4: Gain error is calculated by applying two values of V_{SENSE} and calculating the error of the slope vs. the ideal:
Gain = 25, V_{SENSE} is 20mV and 120mV.
Gain = 50, V_{SENSE} is 10mV and 60mV.
Gain = 100, V_{SENSE} is 5mV and 30mV.
Gain = 200, V_{SENSE} is 2.5mV and 15mV.


Note 5: The device is stable for any external capacitance value.

Note 6: V_{OH} is the voltage from V_{RS-} to V_{OUT} with V_{SENSE} = 3.6V/gain.


Typical Operating Characteristics

(V_{RS+} = V_{RS-} = 3.6V, T_A = +25°C, unless otherwise noted.)


INPUT OFFSET VOLTAGE HISTOGRAM

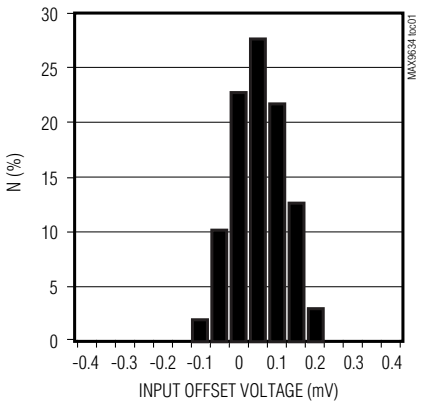

GAIN ERROR HISTOGRAM

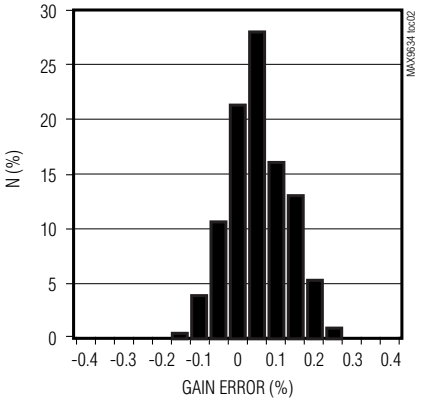

SUPPLY CURRENT vs. TEMPERATURE

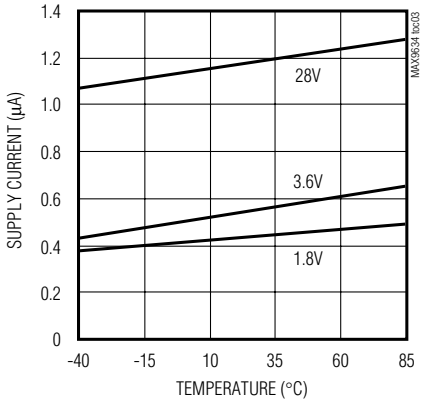


1µA, 4-Bump UCSP/SOT23, Precision Current-Sense Amplifier


Typical Operating Characteristics (continued)

(V_{RS+} = V_{RS-} = 3.6V, T_A = +25°C, unless otherwise noted.)


INPUT OFFSET vs. COMMON-MODE VOLTAGE

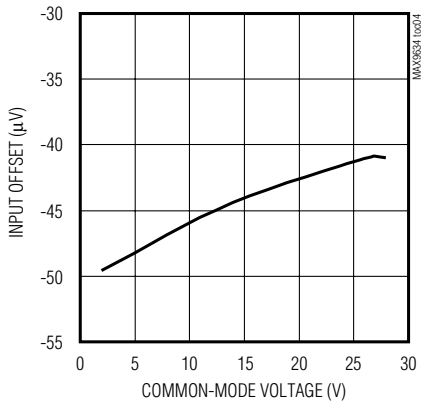


INPUT OFFSET vs. TEMPERATURE

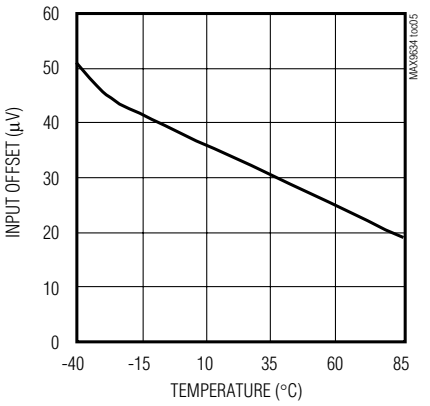


SUPPLY CURRENT vs. COMMON-MODE VOLTAGE

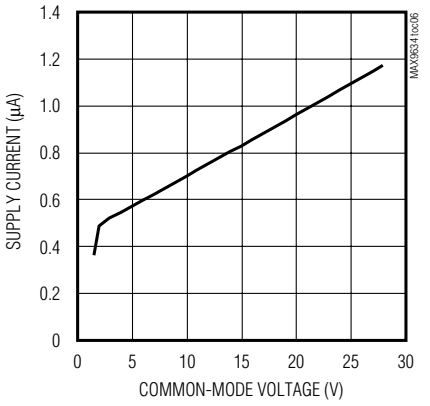


GAIN ERROR vs. COMMON-MODE VOLTAGE

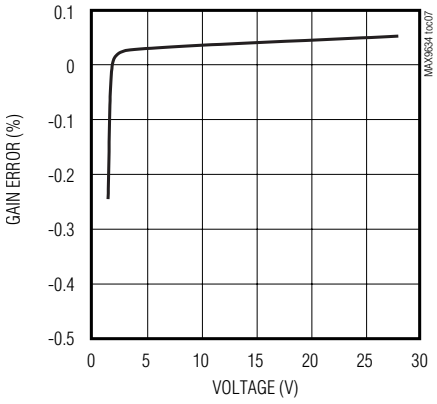


GAIN ERROR vs. TEMPERATURE

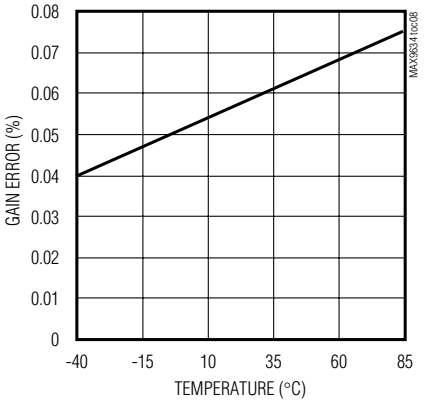


VOUT vs. VSENSE (SUPPLY = 3.6V)

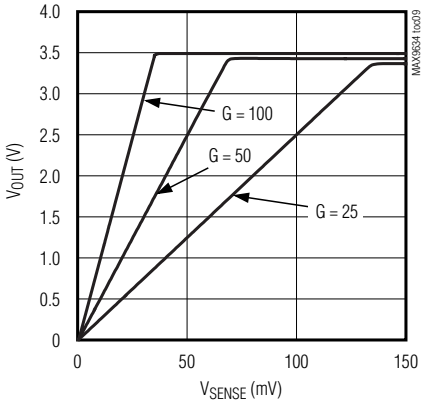


VOUT vs. VSENSE (SUPPLY = 1.6V)

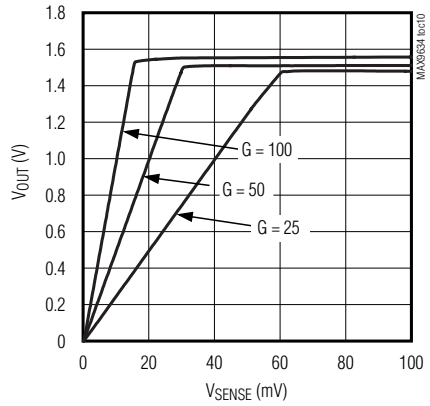

SMALL-SIGNAL GAIN vs. FREQUENCY

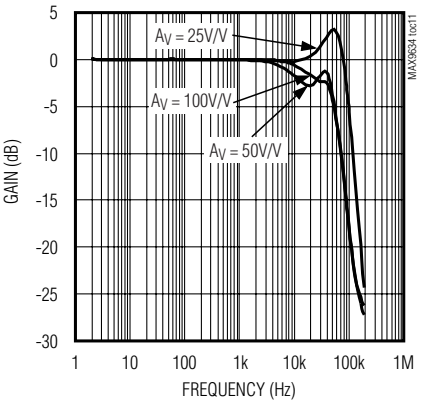


CMRR vs. FREQUENCY

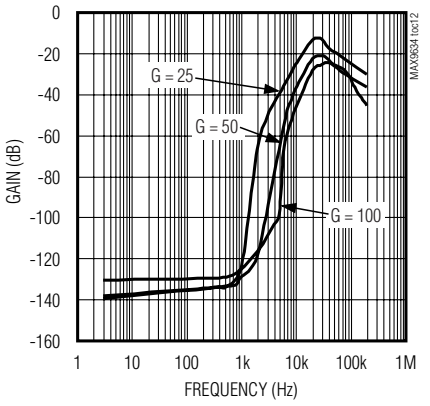


Typical Operating Characteristics (continued)

(V_{RS+} = V_{RS-} = 3.6V, T_A = +25°C, unless otherwise noted.)


SMALL-SIGNAL PULSE RESPONSE (GAIN = 100)

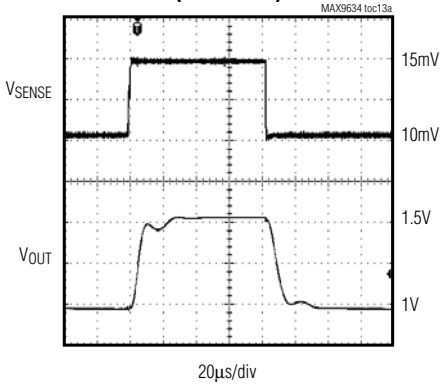


SMALL-SIGNAL PULSE RESPONSE (GAIN = 50)

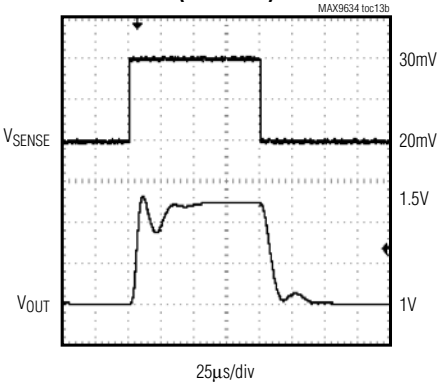


SMALL-SIGNAL PULSE RESPONSE (GAIN = 25)

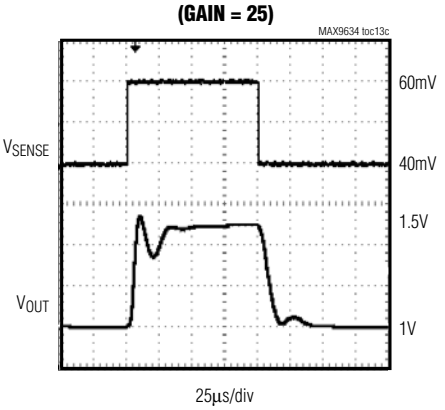


LARGE-SIGNAL PULSE RESPONSE (GAIN = 100)

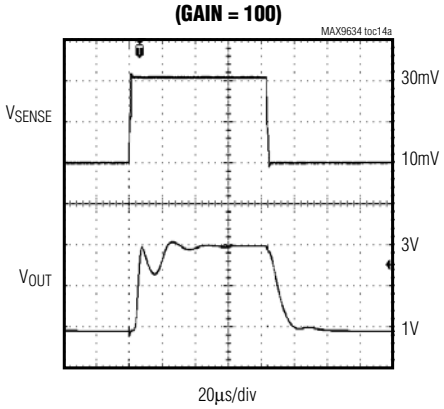

LARGE-SIGNAL PULSE RESPONSE (GAIN = 50)

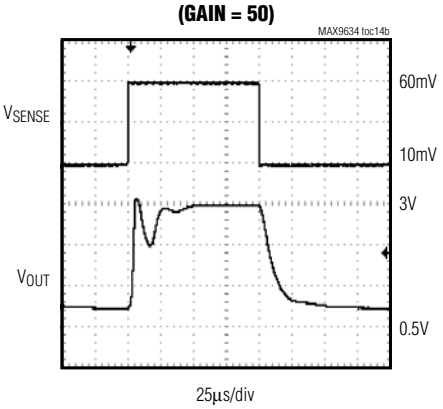

LARGE-SIGNAL PULSE RESPONSE (GAIN = 25)

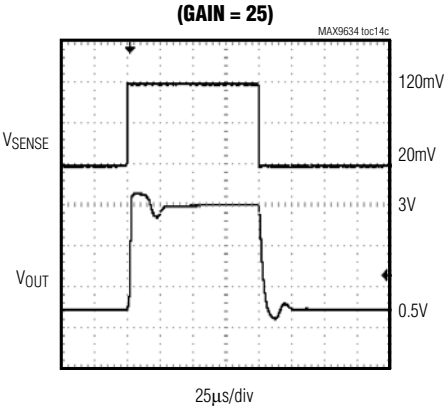


Pin Description

PIN		NAME	FUNCTION
UCSP	SOT23		
A1	5	RS+	External Sense Resistor Power-Side Connection
A2	4	RS-	External Sense Resistor Load-Side Connection
B1	1, 2	GND	Ground
B2	3	OUT	Output Voltage. V_{OUT} is proportional to V_{SENSE} = V_{RS+} - V_{RS-}.

1µA, 4-Bump UCSP/SOT23, Precision Current-Sense Amplifier

Typical Operating Circuit

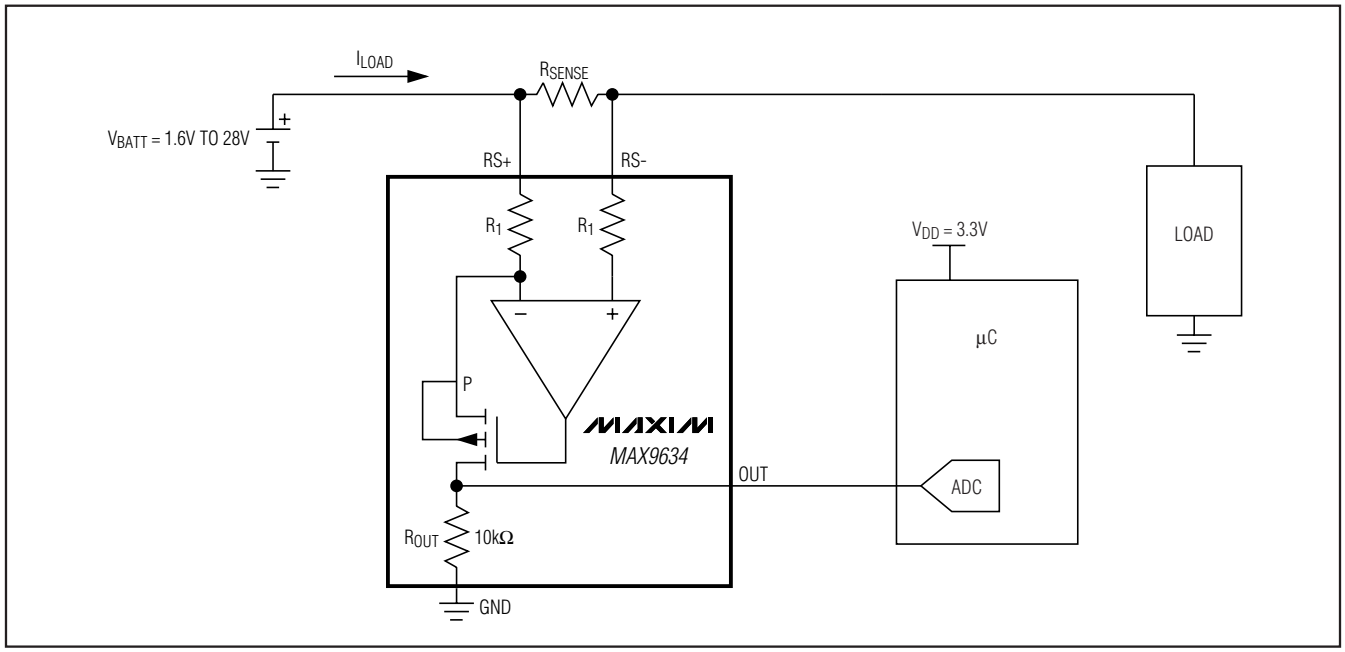

Detailed Description

The MAX9634 unidirectional high-side, current-sense amplifier features a 1.6V to 28V input common-mode range. This feature allows the monitoring of current out of a battery with a voltage as low as 1.6V. The MAX9634 monitors current through a current-sense resistor and amplifies the voltage across that resistor.

The MAX9634 is a unidirectional current-sense amplifier that has a well-established history. An op amp is used to force the current through an internal gain resistor at RS+, which has a value of R_1, such that its voltage drop equals the voltage drop across an external sense resistor, R_{SENSE}. There is an internal resistor at RS- with the same value as R_1 to minimize offset voltage. The current through R_1 is sourced by a high-voltage p-channel FET. Its source current is the same as its drain current, which flows through a second gain resistor, R_{OUT}. This produces an output voltage, V_{OUT}, whose magnitude is $I_{LOAD} \times R_{SENSE} \times R_{OUT}/R_1$. The gain accuracy is based on the matching of the two gain resistors R_1 and R_{OUT} (see Table 1). Total gain = 25V/V for the MAX9634T, 50V/V for the MAX9634F, 100V/V for the MAX9634H, and 200V/V for the MAX9634W. The output is protected from input overdrive by use of an output current-limiting circuit of 7mA (typical) and a 6V clamp protection circuit.

Table 1. Internal Gain-Setting Resistors (Typical Values)

GAIN (V/V)	R_1 (Ω)	R_{OUT} (kΩ)
200	100	20
100	100	10
50	200	10
25	400	10

Applications Information

Choosing the Sense Resistor

Choose R_{SENSE} based on the following criteria:

Voltage Loss

A high R_{SENSE} value causes the power-source voltage to drop due to IR loss. For minimal voltage loss, use the lowest R_{SENSE} value.

OUT Swing vs. V_{RS+} and V_{SENSE}

The MAX9634 is unique because the supply voltage is the input common-mode voltage (the average voltage at RS+ and RS-). There is no separate V_{CC} supply voltage pin. Therefore, the OUT voltage swing is limited by the minimum voltage at RS+.

$$V_{OUT}\ (max) = V_{RS+}\ (min) - V_{SENSE}\ (max) - V_{OH}$$

and:

$$R_{SENSE} = \frac{V_{OUT}\ (max)}{G \times I_{LOAD}\ (max)}$$

V_{SENSE} full scale should be less than V_{OUT}/GAIN at the minimum RS+ voltage. For best performance with a 3.6V supply voltage, select R_{SENSE} to provide approximately 120mV (gain of 25V/V), 60mV (gain of 50V/V), 30mV (gain of 100V/V), or 15mV (gain of 200V/V) of sense voltage for the full-scale current in each application. These can be increased by use of a higher minimum input voltage.

Accuracy

In the linear region ($V_{OUT} < V_{OUT}$ (max)), there are two components to accuracy: input offset voltage (V_{OS}) and gain error (GE). For the MAX9634, V_{OS} = 250µV (max) and gain error is 0.5% (max). Use the linear equation:

$$V_{OUT} = (gain \pm GE) \times V_{SENSE} \pm (gain \times V_{OS})$$

to calculate total error. A high R_{SENSE} value allows lower currents to be measured more accurately because offsets are less significant when the sense voltage is larger.

Efficiency and Power Dissipation

At high current levels, the I^2R losses in R_{SENSE} can be significant. Take this into consideration when choosing the resistor value and its power dissipation (wattage) rating. Also, the sense resistor's value might drift if it is allowed to heat up excessively. The precision V_{OS} of the MAX9634 allows the use of small sense resistors to reduce power dissipation and reduce hot spots.

Kelvin Connections

Because of the high currents that flow through R_{SENSE}, take care to eliminate parasitic trace resistance from causing errors in the sense voltage. Either use a four-terminal current-sense resistor or use Kelvin (force and sense) PCB layout techniques.

Optional Output Filter Capacitor

When designing a system that uses a sample-and-hold stage in the ADC, the sampling capacitor momentarily loads OUT and causes a drop in the output voltage. If sampling time is very short (less than a microsecond), consider using a ceramic capacitor across OUT and GND to hold V_{OUT} constant during sampling. This also decreases the small-signal bandwidth of the current-sense amplifier and reduces noise at OUT.

1µA, 4-Bump UCSP/SOT23, Precision Current-Sense Amplifier

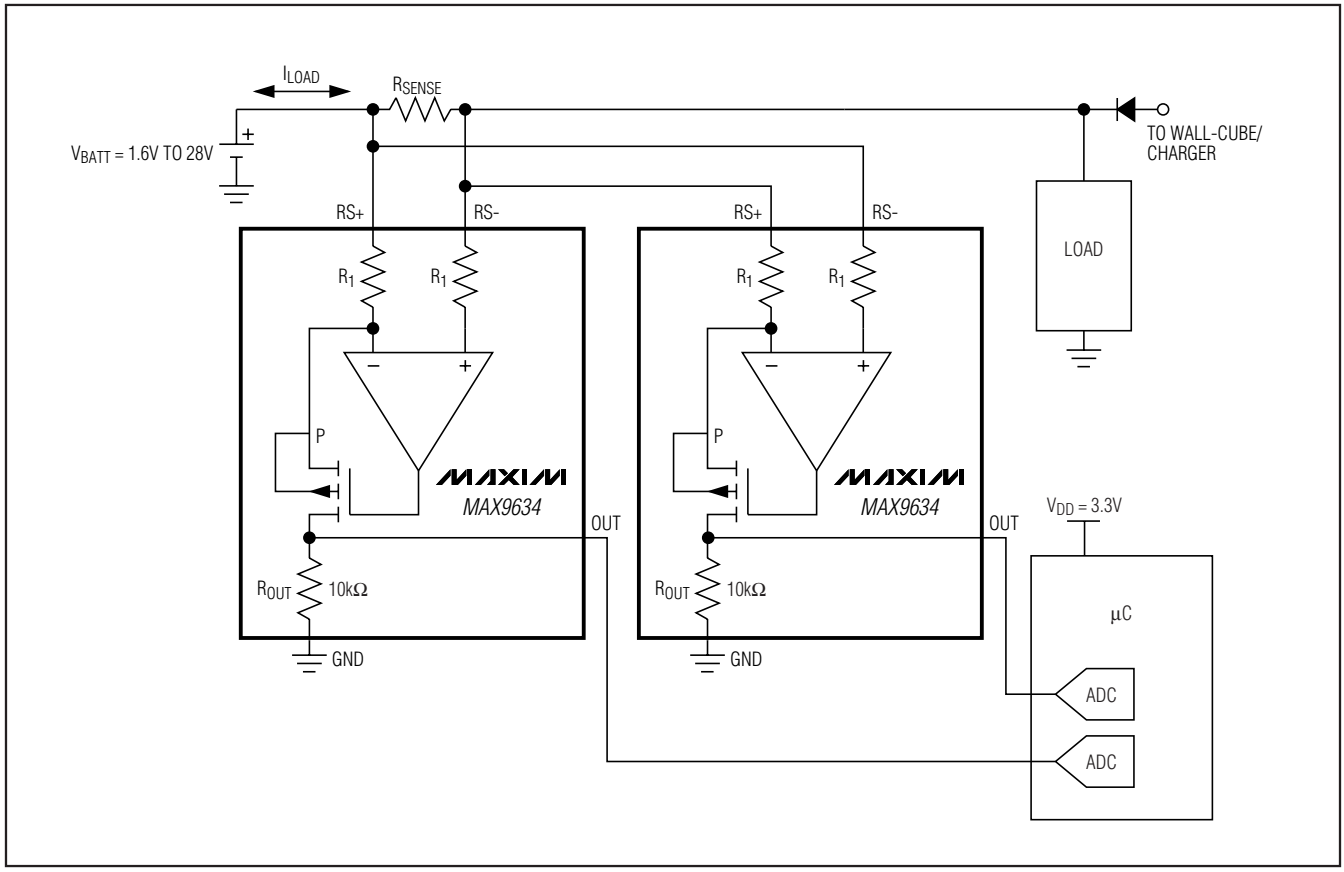


Figure 1. Bidirectional Application

Bidirectional Application

Battery-powered systems may require a precise bidirectional current-sense amplifier to accurately monitor the battery's charge and discharge currents. Measurements of the two separate outputs with respect to GND yields an accurate measure of the charge and discharge currents, respectively (Figure 1).

UCSP Applications Information

For the latest application details on UCSP construction, dimensions, tape carrier information, PCB techniques, bump-pad layout, and recommended reflow temperature profile, as well as the latest information on reliability testing results, refer to Application Note 1891: *Wafer-Level Packaging (WLP) and Its Applications*.

.

Chip Information

PROCESS: BiCMOS


1µA, 4-Bump UCSP/SOT23, Precision Current-Sense Amplifier

Package Information

For the latest package outline information and land patterns, go to **www.maxim-ic.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
2 x 2 UCSP	R41A1+1	21-0242
5 SOT23	U5-2	21-0057


2x2 UCSP.EPS




TOP VIEW

COMMON DIMENSIONS	
A	0.64±0.05
A1	0.24±0.03
b	ø0.31 REF
D1	0.50 BASIC
E1	0.50 BASIC
e	0.50 BASIC
SD	0.25 BASIC
SE	0.25 BASIC

PKG. CODE	VARIABLE DIMENSIONS		DEPOPULATED BUMPS
	E	D	
R41A1+1	1.00±0.05	1.00±0.05	NONE
R41B1+1	1.05±0.05	1.05±0.05	NONE
R41C1+1	1.10±0.05	1.10±0.05	NONE



BOTTOM VIEW



SIDE VIEW

NOTES:
1. Terminal pitch is defined by terminal center to center value.
2. Outer dimension (D & E) is defined by center lines between scribe lines.
3. All dimensions in millimeters.
4. Marking shown is for package orientation reference only.
5. Tolerance is ± 0.02mm unless specified otherwise.
6. All dimensions apply to PbFree (+) package codes only.

–DRAWING NOT TO SCALE–


MAXIM

TITLE: Package Outline, 4 bumps, 2x2 array, UCSP (R) pkg. 0.5mm pitch			
APPROVAL	DOCUMENT CONTROL NO. 21–0242	REV. A	1/1

1µA, 4-Bump UCSP/SOT23, Precision Current-Sense Amplifier

Package Information (continued)

For the latest package outline information and land patterns, go to **www.maxim-ic.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

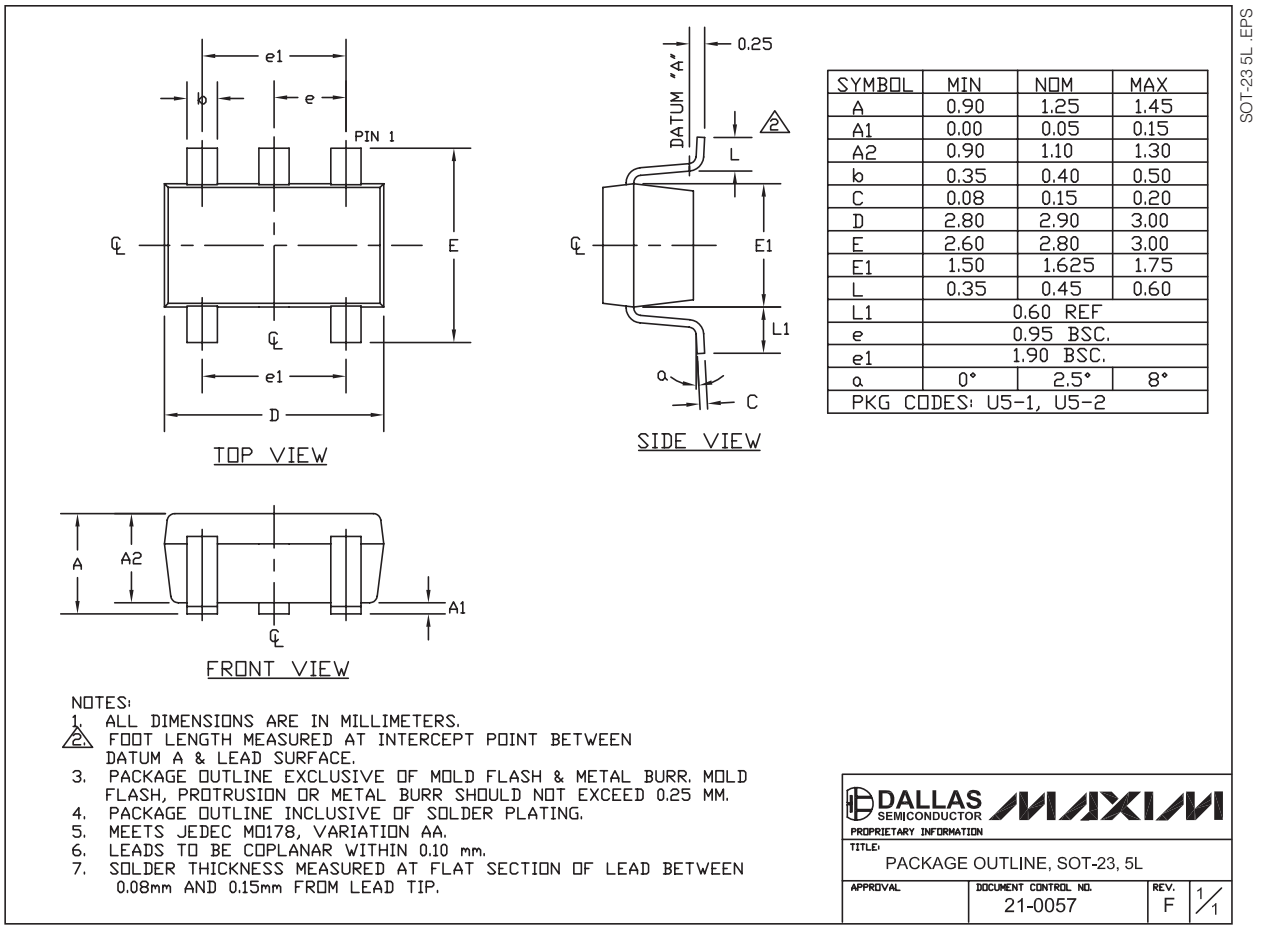

SYMBOL	MIN	NOM	MAX
A	0.90	1.25	1.45
A1	0.00	0.05	0.15
A2	0.90	1.10	1.30
b	0.35	0.40	0.50
C	0.08	0.15	0.20
D	2.80	2.90	3.00
E	2.60	2.80	3.00
E1	1.50	1.625	1.75
L	0.35	0.45	0.60
L1	0.60 REF		
e	0.95 BSC.		
e1	1.90 BSC.		
α	0°	2.5°	8°
PKG CODES: U5-1, U5-2			

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE.
3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR. MOLD FLASH, PROTRUSION OR METAL BURR SHOULD NOT EXCEED 0.25 MM.
4. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
5. MEETS JEDEC MO178, VARIATION AA.
6. LEADS TO BE COPLANAR WITHIN 0.10 mm.
7. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.

DALLAS SEMICONDUCTOR MAXIM
PROPRIETARY INFORMATION
TITLE: PACKAGE OUTLINE, SOT-23, 5L
APPROVAL | DOCUMENT CONTROL NO. 21-0057 | REV. F | 1/1

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	10/09	Initial release	—
1	2/10	Corrected gain error limits in *Electrical Characteristics* table	2

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2010 Maxim Integrated Products Maxim is a registered trademark of Maxim Integrated Products, Inc.