General Description

The ECV321 is a single supply, low power CMOS operational amplifier; these amplifiers offer bandwidth of 1MHz, rail-to-rail inputs and outputs, and single-supply operation from 1.8V to 5.5V. Typical low quiescent supply current of 55μA in one operational amplifier within one chip and very low input bias current of 10pA make the devices an ideal choice for low offset, low power consumption and high impedance applications such as smoke detectors, photodiode amplifiers, and other sensors.

The ECV321 is available in SOT23-5L and SOP-8L packages. The extended temperature range of -40 ℃ to +125 ℃ over all supply voltages offers additional design flexibility.

Features

- Single-Supply Operation from +1.8V ~ +5.5V
- Rail-to-Rail Input / Output
- Gain-Bandwidth Product: 1MHz (Typ.)
- Low Input Bias Current: 10pA (Typ.)
- Low Offset Voltage: 5mV (Max.)
- Quiescent Current: 55μA per Amplifier (Typ.)
- Operating Temperature: -40℃ ~ +125℃
- Available in SOT23-5L and SOP-8L Packages

Applications

- Portable Equipment
- Smoke Detector
- Medical Instrumentation
- Battery-Powered Instruments
- Mobile Communications
- Sensor Interface
- Handheld Test Equipment

Pin Assignments


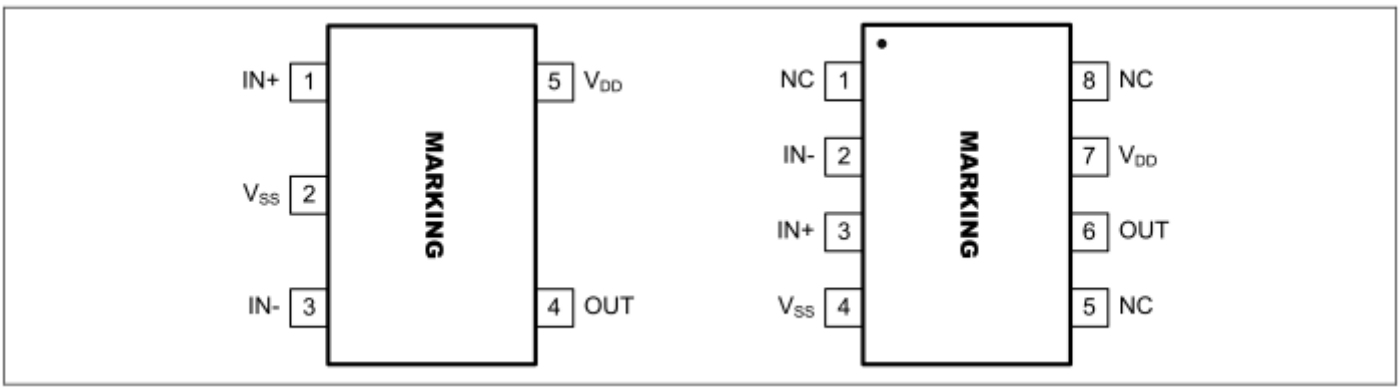


Figure 1. Pin Assignment Diagram (SOT23-5L and SOP-8L Package)

Ordering Information

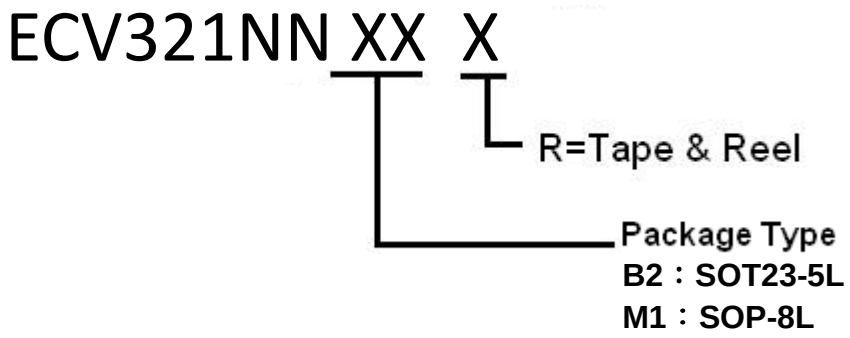

Part Number	Package	Marking	Marking Information
ECV321NNB2R	SOT23-5L	Y V321 W	Y: 2010 (1st half year) A; 2010 (2nd half year) B; 2011 (1st half year) C; 2011 (2nd half year) D; 2012 (1st half year) E; 2012 (2nd half year) F; ..... ; 2022 (2nd half year) Z W: Week 01 A; Week 02 B; ..... ; Week 26 Z; Week 27 A; Week 28 B; ..... ; Week 52 Z "-"：Tracking code
ECV321NNM1R	SOP-8L	ECV321 LLLLL YYWWT	1. LLLLL：Last five Number of Lot No 2. YY：Year Code 3. WW：Week Code 4. T：Internal Tracking Code

Application Information

Size

ECV321 series op amps are unity-gain stable and suitable for a wide range of general-purpose applications. The small footprints of the ECV321 series packages save space on printed circuit boards and enable the design of smaller electronic products.

Power Supply Bypassing and Board Layout

ECV321 series operates from a single 1.8V to 5.5V supply or dual ±0.9V to ±2.75V supplies. For best performance, a 0.1μF ceramic capacitor should be placed close to the V_{DD} pin in single supply operation. For dual supply operation, both V_{DD} and V_{SS} supplies should be bypassed to ground with separate 0.1μFceramic capacitors.

Low Supply Current

The low supply current (typical 55μA) of ECV321 series will help to maximize battery life. They are ideal for battery powered Systems

Operating Voltage

ECV321 series operate under wide input supply voltage (1.8V to 5.5V). In addition, all temperature specifications apply from -40℃ to +125℃. Most behavior remains unchanged throughout the full operating voltage range. These guarantees ensure operation throughout the single Li-Ion battery lifetime.

Rail-to-Rail Input

The input common-mode range of ECV321 series extends 100mV beyond the supply rails (V_{SS}-0.1V to V_{DD}+0.1V). This is achieved by using complementary input stage. For normal operation, inputs should be limited to this range.

Rail-to-Rail Output

Rail-to-Rail output swing provides maximum possible dynamic range at the output. This is particularly important when operating in low supply voltages. The output voltage of ECV321 series can typically swing to less than 10mV from supply rail in light resistive loads (>100kΩ), and 60mV of supply rail in moderate resistive loads (10kΩ).

Capacitive Load Tolerance

The ECV321 series can directly drive 250pF capacitive load in unity-gain without oscillation. Increasing the gain enhances the amplifier's ability to drive greater capacitive loads. In unity-gain configurations, the capacitive load drive can be improved by inserting an isolation resistor RISO in series with the capacitive load, as shown in Figure 2.

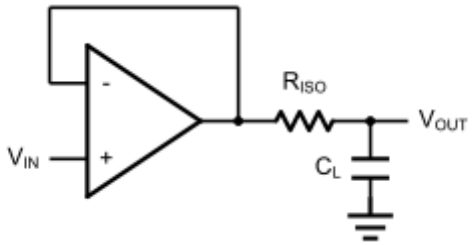


Figure 2. Indirectly Driving a Capacitive Load Using Isolation Resistor

The bigger the RISO resistor value, the more stable VOUT will be. However, if there is a resistive load R_L in parallel with the capacitive load, a voltage divider (proportional to RISO/R_L) is formed, this will result in a gain error.

The circuit in Figure 3 is an improvement to the one in Figure 2. RF provides the DC accuracy by feed-forward the VIN to RL. C_F and RISO serve to counteract the loss of phase margin by feeding the high frequency component of the output signal back to the amplifier's inverting input, thereby preserving the phase margin in the overall feedback loop. Capacitive drive can be increased by increasing the value of C_F. This in turn will slow down the pulse response.

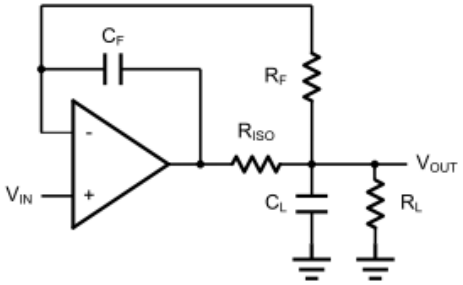


Figure 3. Indirectly Driving a Capacitive Load with DC Accuracy

Differential amplifier

The differential amplifier allows the subtraction of two input voltages or cancellation of a signal common the two inputs. It is useful as a computational amplifier in making a differential to single-end conversion or in rejecting a common mode signal. Figure 4. shown the differential amplifier using ECV321.

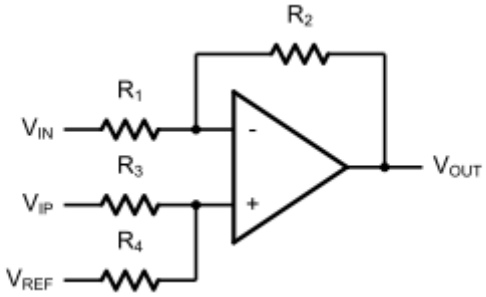


Figure 4. Differential Amplifier

$$V_{OUT} = \left(\frac{R1+R2}{R3+R4}\right)\frac{R4}{R1}V_{IN} - \frac{R2}{R1}V_{IP} + \left(\frac{R1+R2}{R3+R4}\right)\frac{R3}{R1}V_{REF}$$

If the resistor ratios are equal (i.e. $R_1=R_3$ and $R_2=R_4$), then

$$V_{OUT} = \frac{R_2}{R_1}(V_{IP} - V_{IN}) + V_{REF}$$

Instrumentation Amplifier

The input impedance of the previous differential amplifier is set by the resistors R1, R2, R3, and R4. To maintain the high input impedance, one can use a voltage follower in front of each input as shown in the following two instrumentation amplifiers.

Three-Op-Amp Instrumentation Amplifier

The triple ECV321 can be used to build a three-op-amp instrumentation amplifier as shown in Figure 5.

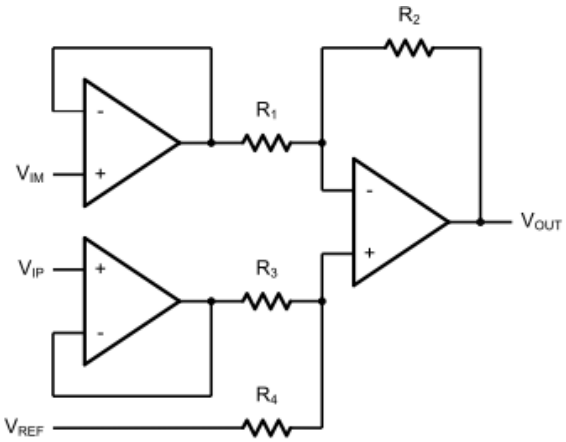


Figure 5. Three-Op-Amp Instrumentation Amplifier

The amplifier in Figure 5 is a high input impedance differential amplifier with gain of R_2/R_1. The two differential voltage followers assure the high input impedance of the amplifier.

$$Vo = (1 + \frac{R_4}{R_3})(V_{IP} - V_{IN})$$

Two-Op-Amp Instrumentation Amplifier

ECV321 can also be used to make a high input impedance two-op-amp instrumentation amplifier as shown in Figure 6.

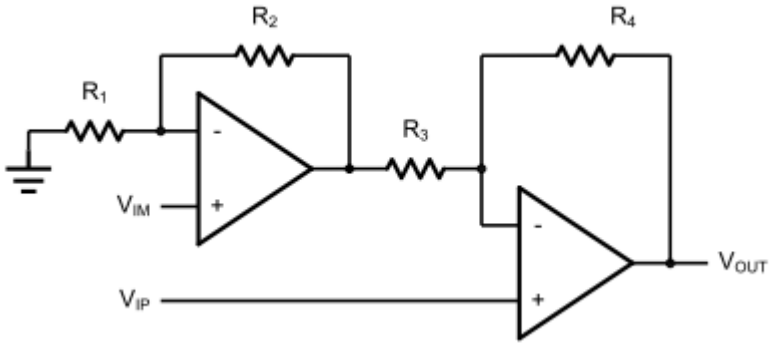


Figure 6. Two-Op-Amp Instrumentation Amplifier

Where $R_1=R_3$ and $R_2=R_4$. If all resistors are equal, then $Vo=2(V_{IP}-V_{IN})$

Single-Supply Inverting Amplifier

The inverting amplifier is shown in Figure 7. The capacitor C_1 is used to block the DC signal going into the AC signal source V_{IN}. The value of R_1 and C_1 set the cut-off frequency to $f_C=1/(2\pi R_1 C_1)$. The DC gain is defined by $V_{OUT}=-(R_2/R_1)V_{IN}$

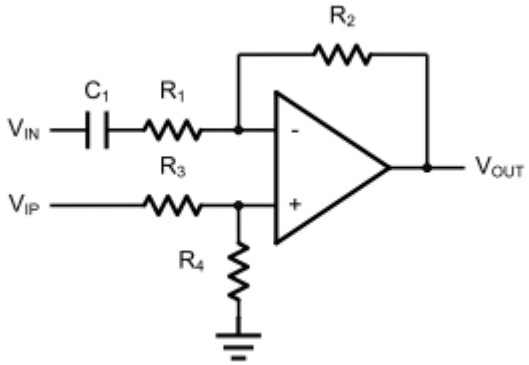


Figure 7. Single Supply Inverting Amplifier

Low Pass Active Filter

The low pass active filter is shown in Figure 8. The DC gain is defined by $-R_2/R_1$. The filter has a -20dB/decade roll-off after its corner frequency $f_C=1/(2\pi R_3 C_1)$.

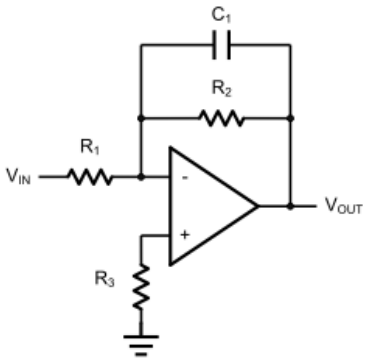


Figure 8. Low Pass Active Filter

Sallen-Key 2nd Order Active Low-Pass Filter

ECV321 can be used to form a 2nd order Sallen-Key active low-pass filter as shown in Figure 9. The transfer function from V_{IN} to V_{OUT} is given by

$$\frac{V_{OUT}}{V_{IN}}(S)=\frac{\frac{1}{C_1C_2R_1R_2}A_{LP}}{S^2+S(\frac{1}{C_1R_1}+\frac{1}{C_1R_2}+\frac{1}{C_2R_2}-\frac{A_{LP}}{C_2R_2})+\frac{1}{C_1C_2R_1R_2}}$$

Where the DC gain is defined by $A_{LP}=1+R_3/R_4$, and the corner frequency is given by

$$\omega C=\sqrt{\frac{1}{C_1C_2R_1R_2}}$$

The pole quality factor is given by

$$\frac{\omega C}{Q}=\frac{1}{C_1R_1}+\frac{1}{C_1R_2}+\frac{1}{C_2R_2}-\frac{A_{LP}}{C_2R_2}$$

Let $R_1=R_2=R$ and $C_1=C_2=C$, the corner frequency and the pole quality factor can be simplified as below

$$\omega_C=\frac{1}{CR}$$

And $Q=2-R_3/R_4$

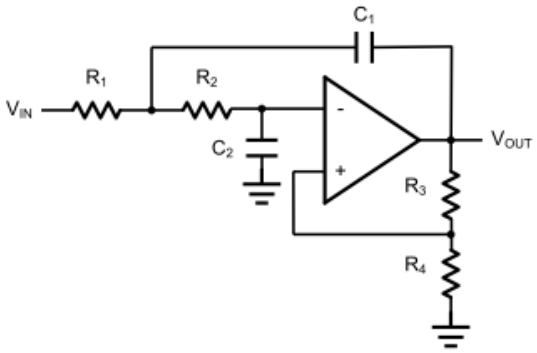


Figure 9. Sanllen-Key 2nd Order Active Low-Pass Filter

Sallen-Key 2nd Order high-Pass Active Filter

The 2nd order Sallen-key high-pass filter can be built by simply interchanging those frequency selective components R1, R2, C1,and C2 as shown in Figure 10.

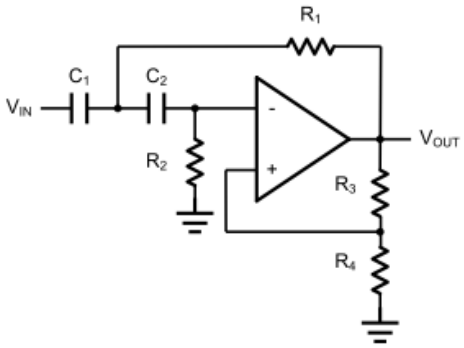


Figure 10. Sanllen-Key 2nd Order Active High-Pass Filter

$$\frac{V_{OUT}}{V_{IN}}(S)=\frac{S^2 A_{HP}}{S^2+S\left(\frac{1}{C_1R_1}+\frac{1}{C_2R_2}+\frac{1-A_{HP}}{C_1R_1}\right)+\frac{1}{C_1C_2R_1R_2}}$$

Where $A_{HP}=1+R_3/R_4$

Electrical Characteristics

Absolute Maximum Ratings

Condition	Min	Max
Power Supply Voltage (V_{DD} to Vss)	-0.5V	+7V
Analog Input Voltage (IN+ or IN-)	Vss-0.5V	V_{DD}+0.5V
PDB Input Voltage	Vss-0.5V	+7V
Operating Temperature Range	-40℃	+125℃
Junction Temperature	+150℃	
Storage Temperature Range	-65℃	+150℃
Lead Temperature (soldering, 10sec)	+300℃	
Package Thermal Resistance (T_A=+25℃)		
SOT23-5L, θ_{JA}	190℃	
SOP-8L, θ_{JA}	130℃	

Note: Stress greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Electrical Characteristics

(V_{DD} = +5V, Vss = 0V, V_{CM} = 0V, V_{OUT} = V_{DD}/2, R_L=100K tied to V_{DD}/2, SHDNB = V_{DD}, T_A = -40℃ to +125℃, unless otherwise noted. Typical values are at T_A =+25℃.) (Notes 1)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Supply-Voltage Range	V_{DD}	Guaranteed by the PSRR test	1.8	-	5.5	V
Quiescent Supply Current (per Amplifier)	I_Q	V_{DD} = 5V	-	55	80	μA
Input Offset Voltage	V_{OS}		-	0.5	±5	mV
Input Offset Voltage Tempco	$\Delta V_{OS}/\Delta T$		-	2	-	μV/℃
Input Bias Current	I_B	(Note 2)	-	10	-	pA
Input Offset Current	I_{OS}	(Note 2)	-	10	-	pA
Input Common-Mode Voltage Range	V_{CM}		-0.1	-	V_{DD}+0.1	V
Common-Mode Rejection Ratio	CMRR	V_{DD}=5.5 Vss-0.1V≦V_{CM}≦V_{DD}+0.1V	60	75	-	dB
		Vss≦V_{CM}≦5V	65	80	-	dB
Power-Supply Rejection Ratio	PSRR	V_{DD} = +1.8V to +5.5V	75	90	-	dB
Open-Loop Voltage Gain	A_V	V_{DD}=5V, R_L=100kΩ , 0.05V≦V_O≦4.95V	90	100	-	dB
		V_{DD}=5V, R_L=5kΩ , 0.05V≦V_O≦4.95V	65	75	-	dB
Output Voltage Swing	V_{OUT}	|V_{IN+}-V_{IN-}|≧10mV V_{DD}-V_{OH}	-	6	-	mV
		R_L = 100kΩ to V_{DD}/2 V_{OL}-Vss	-	6	-	mV
		|V_{IN+}-V_{IN-}|≧10mV V_{DD}-V_{OH}	-	60	-	mV
		R_L = 5kΩ to V_{DD}/2 V_{OL}-Vss	-	60	-	mV
Output Short-Circuit Current	I_{SC}	Sinking or Sourcing	-	±20	-	mA
Gain Bandwidth Product	GBW	A_V = +1V/V	-	1	-	MHz
Slew Rate	SR	A_V = +1V/V	-	0.6	-	V/μs
Settling Time	ts	To 0.1%, V_{OUT} = 2V step A_V = +1V/V	-	5	-	μs
Over Load Recovery Time		V_{INX} Gain=Vs	-	2	-	μs
Input Voltage Noise Density	e_n	f = 1kHz	-	50	-	nV/√Hz
		f = 10kHz	-	20	-	nV/√Hz

Note 1: All devices are 100% production tested at T_A = +25℃; all specifications over the automotive temperature range is guaranteed by design, not production tested.


Note 2: Parameter is guaranteed by design.

Typical characteristics

At T_A=+25℃, R_L=100 kΩ connected to V_S/2 and V_{OUT}= V_S/2, unless otherwise noted.

Small Signal Step Response


G=+1V/V,R_L=100kΩ,C_L=100pF

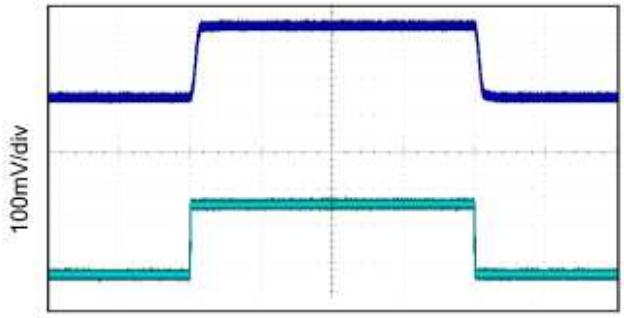

2μs/div


Large Signal Step Response

G=+1V/V,R_L=100kΩ,C_L=100pF

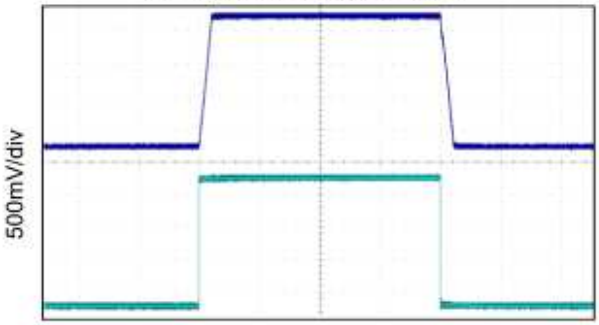

10μs/div


Overload Recovery Time

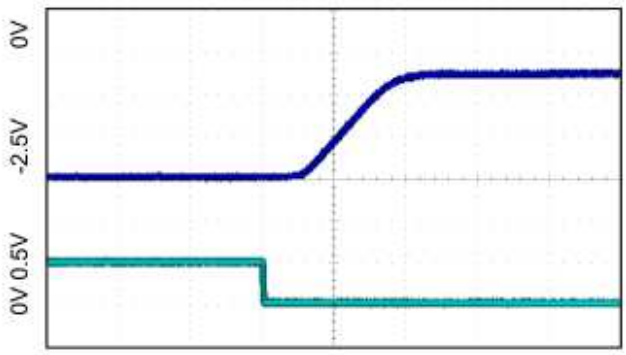

2μs/div

Large Signal Step Response


G=-1V/V,R_L=100 kΩ,C_L=100pF

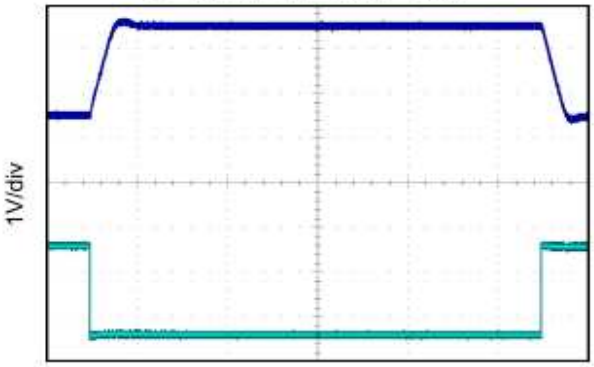

10μs/div

Input Voltage noise Spectral Density VS. Frequency


Noise Gain=+10,V_n=26(nV/√HZ)@10kHz

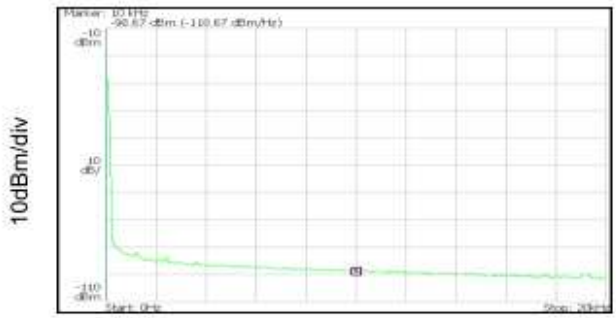

2kHz/div

Input Voltage noise Spectral Density VS. Frequency


Noise Gain=+10,V_n=51(nV/√HZ)@1kHz

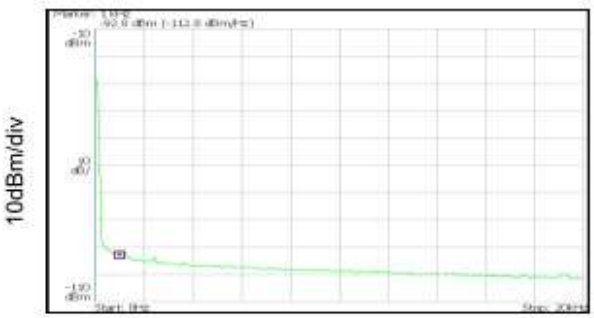

2kHz/div


At T_A=+25℃, R_L=100 kΩ connected to V_S/2 and V_{OUT}= V_S/2, unless otherwise noted.

Output Voltage Swing vs. Output Current

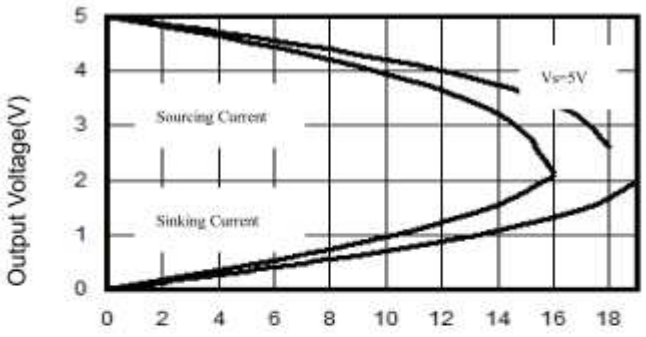


Output Current(mA)

Output Voltage Swing vs. Output Current

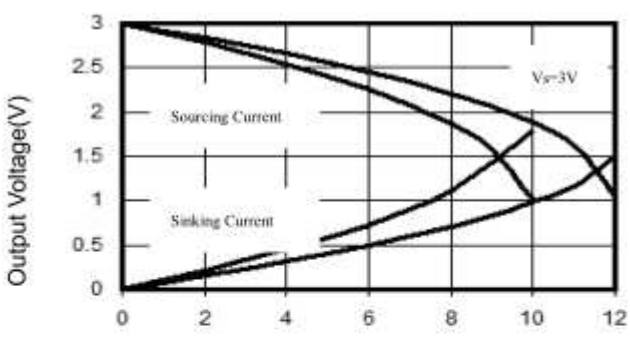


Output Current(mA)

Quiescent and Short-Circuit Current Vs. Supply Voltage

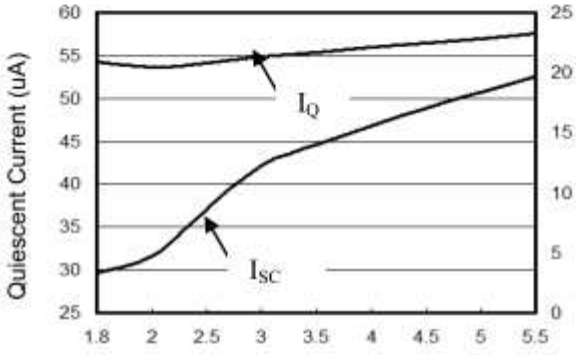


Supply Voltage (V)

Small Signal Overshoot vs. Load Capacitance

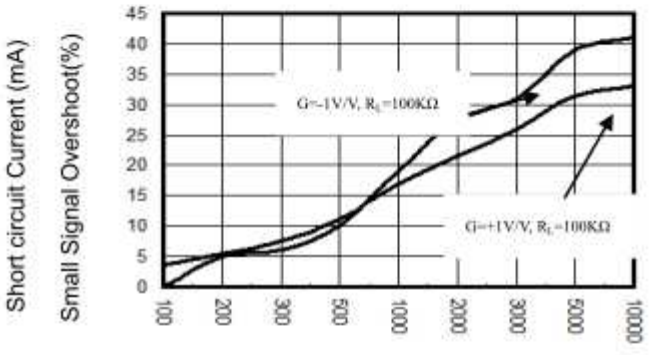


Load Capacitance(pF)

Open-Loop Gain And Phase VS. Frequency

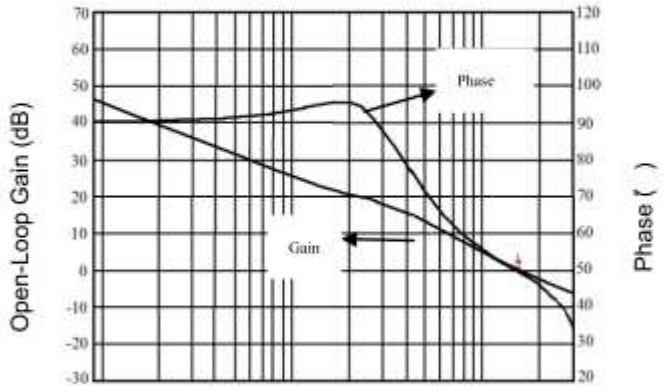

Frequency (Hz)


Supply Current vs. Temmperature

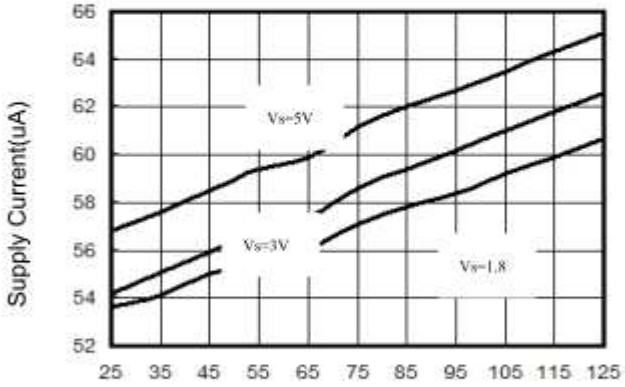

Temperature(°C)

Package Information


SOT23-5L

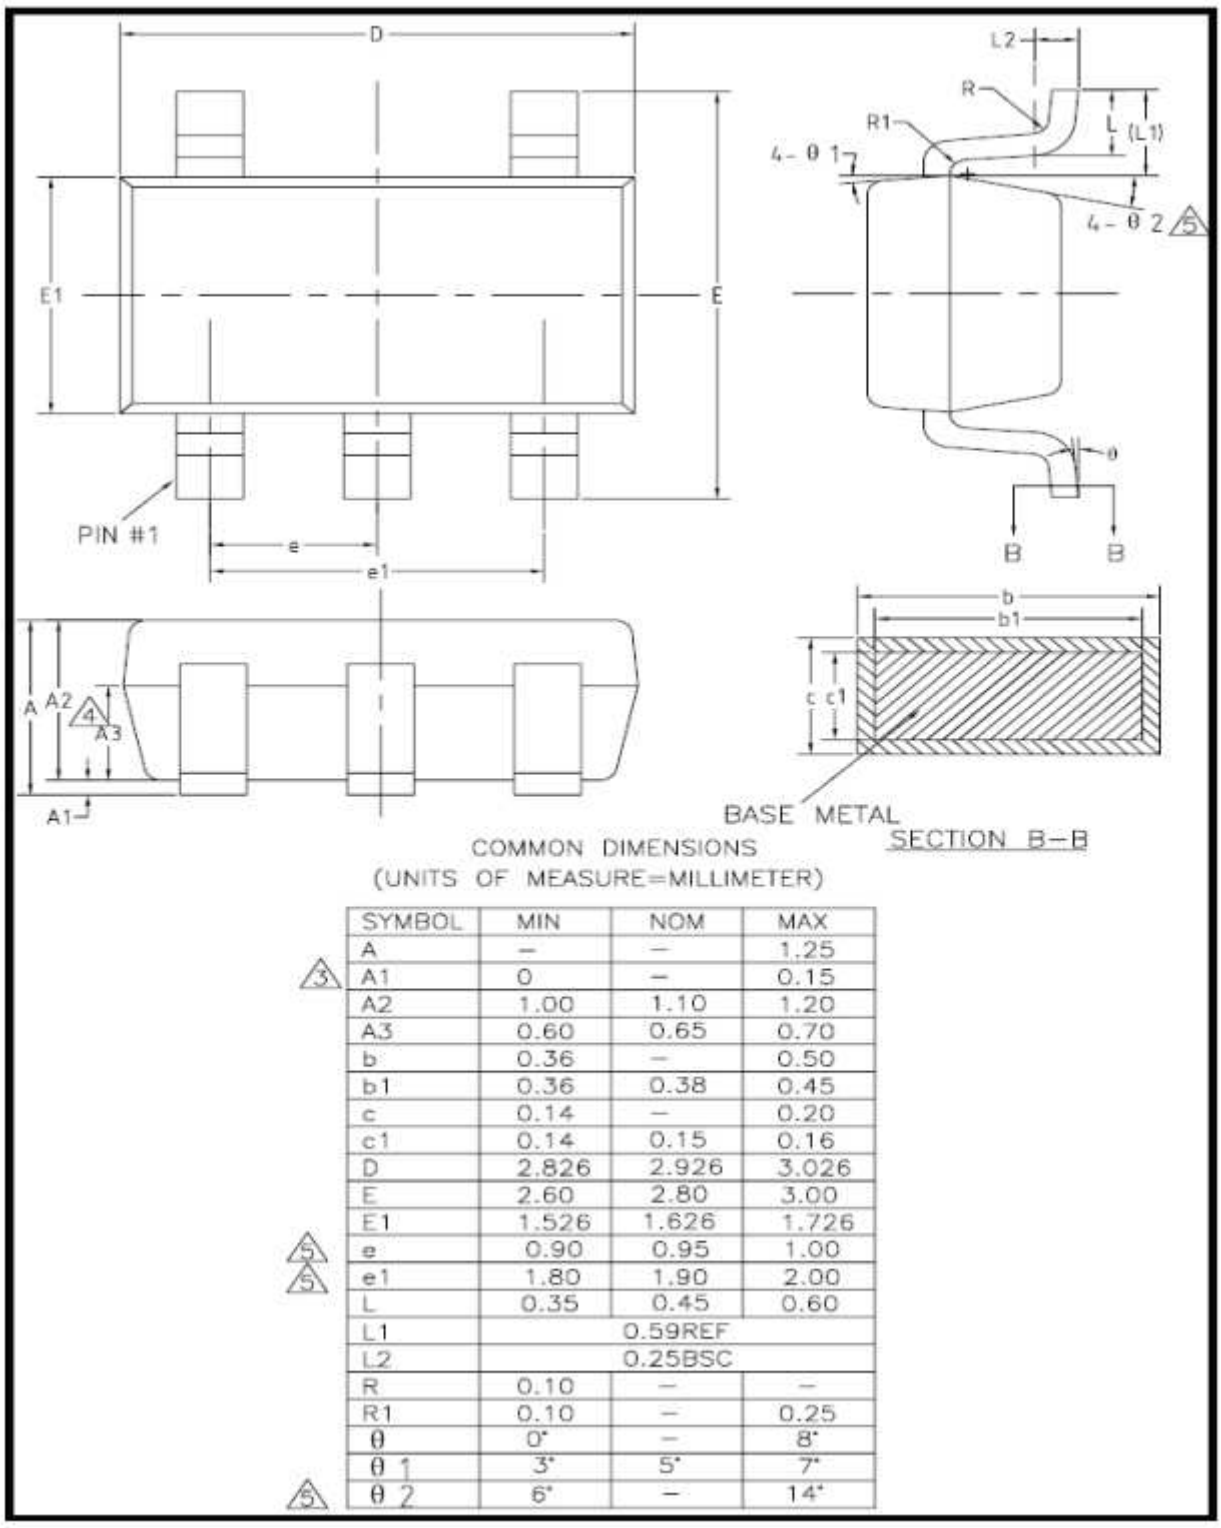

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	–	–	1.25
3 A1	0	–	0.15
A2	1.00	1.10	1.20
A3	0.60	0.65	0.70
b	0.36	–	0.50
b1	0.36	0.38	0.45
c	0.14	–	0.20
c1	0.14	0.15	0.16
D	2.826	2.926	3.026
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
5 e	0.90	0.95	1.00
5 e1	1.80	1.90	2.00
L	0.35	0.45	0.60
L1		0.59REF	
L2		0.25BSC	
R	0.10	–	–
R1	0.10	–	0.25
θ	0°	–	8°
θ 1	3°	5°	7°
5 θ 2	6°	–	14°

SOP-8L

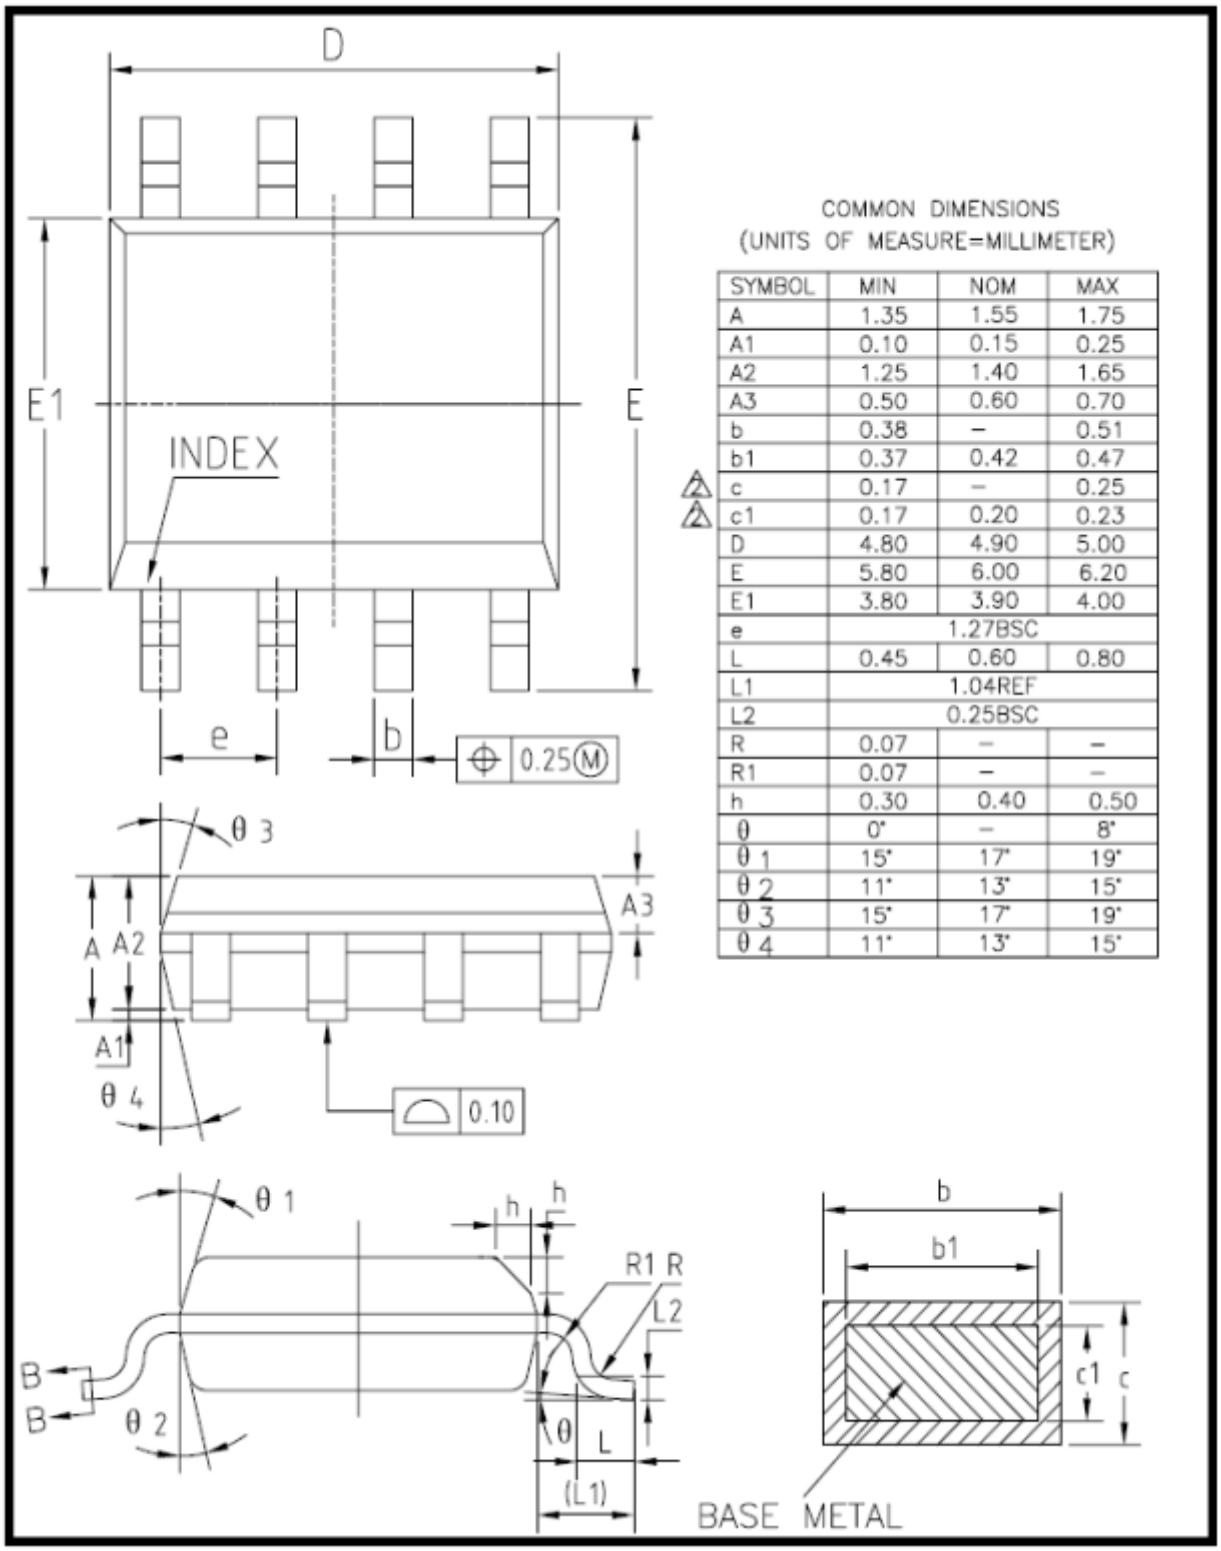

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	1.35	1.55	1.75
A1	0.10	0.15	0.25
A2	1.25	1.40	1.65
A3	0.50	0.60	0.70
b	0.38	–	0.51
b1	0.37	0.42	0.47
c	0.17	–	0.25
c1	0.17	0.20	0.23
D	4.80	4.90	5.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e		1.27BSC	
L	0.45	0.60	0.80
L1		1.04REF	
L2		0.25BSC	
R	0.07	–	–
R1	0.07	–	–
h	0.30	0.40	0.50
θ	0°	–	8°
θ 1	15°	17°	19°
θ 2	11°	13°	15°
θ 3	15°	17°	19°
θ 4	11°	13°	15°