R1QBA4436RBG / R1QBA4418RBG
R1QEA4436RBG / R1QEA4418RBG

R10DS0189EJ0011
Preliminary
Rev. 0.11b
2012.06.05

144-Mbit DDRII+ SRAM
2-word Burst

Description

The R1Q#A4436 is a 4,194,304-word by 36-bit and the R1Q#A4418 is a 8,388,608-word by 18-bit synchronous double data rate static RAM fabricated with advanced CMOS technology using full CMOS six-transistor memory cell. It integrates unique synchronous peripheral circuitry and a burst counter. All input registers are controlled by an input clock pair (K and /K) and are latched on the positive edge of K and /K. These products are suitable for applications which require synchronous operation, high speed, low voltage, high density and wide bit configuration. These products are packaged in 165-pin plastic FBGA package.

= B: Latency =2.5, w/o ODT
= E: Latency =2.5, w/ ODT

Features

- Power Supply
  - 1.8 V for core (V_{DD}), 1.4 V to V_{DD} for I/O (V_{DDQ})
- Clock
  - Fast clock cycle time for high bandwidth
  - Two input clocks (K and /K) for precise DDR timing at clock rising edges only
  - Two output echo clocks (CQ and /CQ) simplify data capture in high-speed systems
  - Clock-stop capability with µs restart
- I/O
  - Common data input/output bus
  - Pipelined double data rate operation
  - HSTL I/O
  - User programmable output impedance
  - DLL/PLL circuitry for wide output data valid window and future frequency scaling
  - Data valid pin (QVLD) to indicate valid data on the output
- Function
  - Two-tick burst for low DDR transaction size
  - Internally self-timed write control
  - Simple control logic for easy depth expansion
  - JTAG 1149.1 compatible test access port
- Package
  - 165 FBGA package (15 x 17 x 1.4 mm)

Notes: 1. QDR RAMs and Quad Data Rate RAMs comprise a new family of products developed by Cypress Semiconductor, IDT, Samsung, and Renesas Electronics Corp. (QDR Co-Development Team)
2. The specifications of this device are subject to change without notice. Please contact your nearest Renesas Electronics Sales Office regarding specifications.
3. Refer to "http://www.renesas.com/products/memory/fast_sram/qdr_sram/index.jsp" for the latest and detailed information.
4. Descriptions about x9 parts in this datasheet are just for reference.

Part Number Definition

Column No.	0	1	2	3	4	5	6	7	8	9	10	11	-	12	13	14	15	16
Example	R	1	Q	2	A	4	4	1	8	R	B	G	-	4	0	R	B	0
	The above part number is just example for 144M QDRII B2 x18 250MHz, 15x17mm PKG, Pb-free part.																	

No.	-	Comments
0-1	R1	Renesas Memory Prefix
2-3	Q2	QDR II B2[*1] (L15)[*2]
	Q3	QDR II B4 (L15)
	Q4	DDR II B2 (L15)
	Q5	DDR II B4 (L15)
	Q6	DDR II B2 SIO[*3] (L15)
	QA	QDR II+ B4 L25[*2]
	QB	DDR II+ B2 L25
	QC	DDR II+ B4 L25
	QD	QDR II+ B4 L25 w/ODT[*4]
	QE	DDR II+ B2 L25 w/ODT
	QF	DDR II+ B4 L25 w/ODT
	QG	QDR II+ B4 L20
	QH	DDR II+ B2 L20
	QJ	DDR II+ B4 L20
	QK	QDR II+ B4 L20 w/ODT
	QL	DDR II+ B2 L20 w/ODT
	QM	DDR II+ B4 L20 w/ODT
	QN	QDR II+ B2 L20
	QP	QDR II+ B2 L20 w/ODT
	-	-

No.	-	Comments
4	A	Vdd = 1.8 V
5-6	36	Density = 36Mb
	72	Density = 72Mb
	44	Density = 144Mb
	88	Density = 288Mb
7-8	09	Data width = 9bit
	18	Data width = 18bit
	36	Data width = 36bit
9	R	1st Generation
	A	2nd Generation
	B	3rd Generation
	C	4th Generation
	D	5th Generation
	E	6th Generation
	F	7th Generation
10-11	BG	PKG= BGA 15x17 mm
	BA	PKG= BGA 13x15 mm
	BB	
-	-	-

No.	-	Comments
12-13	60	Frequency = 167MHz
	50	Frequency = 200MHz
	40	Frequency = 250MHz
	36	Frequency = 275MHz
	33	Frequency = 300MHz
	30	Frequency = 333MHz
	27	Frequency = 375MHz
	25	Frequency = 400MHz
	22	Frequency = 450MHz
	20	Frequency = 500MHz
	19	Frequency = 533MHz
	18	Frequency = 550MHz
14	R	Commercial temp. Ta range = 0℃～70℃
	I	Industrial temp. Ta range = -40℃～85℃
15	A	Pb and Tray
	B	Pb-free and Tray
	T	Pb and Tape&Reel
	S	Pb-free and Tape&Reel
16	0~9, A~Z or None	Renesas internal use
-	-	-

Note1: [*1] B=Burst length (B2: Burst length=2, B4: Burst length=4)
[*2] L=Read Latency (L15: Read Latency = 1.5 cycle, L20: 2.0 cycle, L25: 2.5 cycle)
[*3] SIO=Separate I/O
[*4] ODT=On die termination

Note2: Package Marking Name
Pb parts: Marking Name = Part Number(0-14)
Pb-free parts: Marking Name = Part Number(0-14) + "PB-F"
(Example) R1QAA4436RBG-20R ----- Pb parts
R1QAA4436RBG-20R PB-F ----- Pb-free parts

Note3: Pb : RoHS Compliance Level = 5/6
Pb-free: RoHS Compliance Level = 6/6

Note4: R1Q*A series support both "Commercial" and "Industrial" temperatures by "Industrial" temperature parts.

144M QDR/DDR SRAM Lineup

- Renesas plans to support the parts listed below.

No	Product Type	Burst Length	Latency (Cycle)	ODT	Organi-zation	Frequency (max) (MHz)	533	500	450	400	375	333	300	250	200	Status
						Cycle Time (min) (ns)	1.875	2.00	2.22	2.50	2.66	3.00	3.30	4.00	5.00	
						Part Number ↓ yy →	-19	-20	-22	-25	-27	-30	-33	-40	-50	
2	QDRII	B2	1.5	No	x18	R1Q 2 A44 18 RBG-yy								-40	-50	Under Development
3					x36	R1Q 2 A44 36 RBG-yy										
5		B4			x18	R1Q 3 A44 18 RBG-yy							-33	-40		
6					x36	R1Q 3 A44 36 RBG-yy										
8	DDRII	B2			x18	R1Q 4 A44 18 RBG-yy							-33	-40		
9					x36	R1Q 4 A44 36 RBG-yy										
11		B4			x18	R1Q 5 A44 18 RBG-yy							-33	-40		-
12					x36	R1Q 5 A44 36 RBG-yy										
14	DDRII SIO	B2			x18	R1Q 6 A44 18 RBG-yy							-33	-40		
15					x36	R1Q 6 A44 36 RBG-yy										
20	QDRII+	B4	2.5	No	x18	R1Q A A44 18 RBG-yy	-19	-20	-22							Under Development
21					x36	R1Q A A44 36 RBG-yy										
23	DDRII+	B2			x18	R1Q B A44 18 RBG-yy	-19	-20	-22							
24					x36	R1Q B A44 36 RBG-yy										
26		B4			x18	R1Q C A44 18 RBG-yy	-19	-20	-22							-
27					x36	R1Q C A44 36 RBG-yy										
32	QDRII+	B4	2.5	Yes	x18	R1Q D A44 18 RBG-yy	-19	-20	-22							Under Development
33					x36	R1Q D A44 36 RBG-yy										
35	DDRII+	B2			x18	R1Q E A44 18 RBG-yy	-19	-20	-22							
36					x36	R1Q E A44 36 RBG-yy										
38		B4			x18	R1Q F A44 18 RBG-yy	-19	-20	-22							-
39					x36	R1Q F A44 36 RBG-yy										
41	QDRII+	B2	2.0	No	x18	R1Q N A44 18 RBG-yy							-33			Under Development
42					x36	R1Q N A44 36 RBG-yy										
44		B4			x18	R1Q G A44 18 RBG-yy				-25						
45					x36	R1Q G A44 36 RBG-yy										
47	DDRII+	B2			x18	R1Q H A44 18 RBG-yy				-25						
48					x36	R1Q H A44 36 RBG-yy										
50		B4			x18	R1Q J A44 18 RBG-yy				-25						-
51					x36	R1Q J A44 36 RBG-yy										
53	QDRII+	B2	2.0	Yes	x18	R1Q P A44 18 RBG-yy							-33			Under Development
54					x36	R1Q P A44 36 RBG-yy										
56		B4			x18	R1Q K A44 18 RBG-yy				-25						
57					x36	R1Q K A44 36 RBG-yy										
59	DDRII+	B2			x18	R1Q L A44 18 RBG-yy				-25						
60					x36	R1Q L A44 36 RBG-yy										
62		B4			x18	R1Q M A44 18 RBG-yy				-25						-
63					x36	R1Q M A44 36 RBG-yy										

- : No Plan

Notes:
1. "yy" represents the speed bin. "R1QAA4436RBG-20" can operate at 500 MHz(max) of frequency, for example.
2. The part which is not listed above is not supported, as of the day when this datasheet was issued, in spite of the existence of the part number or datasheet.

Pin Arrangement

R1Q4A4436 (Top) / R1QB(H)A4436 (Mid) / R1QE(L)A4436 (Bottom)

	1	2	3	4	5	6	7	8	9	10	11
A	/CQ	SA	SA	R-/W	/BW2	/K	/BW1	/LD	SA	SA	CQ
B	NC	DQ27	DQ18	SA	/BW3	K	/BW0	SA	NC	NC	DQ8
C	NC	NC	DQ28	V_{SS}	SA	SA0 NC NC	SA	V_{SS}	NC	DQ17	DQ7
D	NC	DQ29	DQ19	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	NC	NC	DQ16
E	NC	NC	DQ20	V_{DDQ}	V_{SS}	V_{SS}	V_{SS}	V_{DDQ}	NC	DQ15	DQ6
F	NC	DQ30	DQ21	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	NC	DQ5
G	NC	DQ31	DQ22	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	NC	DQ14
H	/DOFF	V_{REF}	V_{DDQ}	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	V_{DDQ}	V_{REF}	ZQ
J	NC	NC	DQ32	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	DQ13	DQ4
K	NC	NC	DQ23	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	DQ12	DQ3
L	NC	DQ33	DQ24	V_{DDQ}	V_{SS}	V_{SS}	V_{SS}	V_{DDQ}	NC	NC	DQ2
M	NC	NC	DQ34	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	NC	DQ11	DQ1
N	NC	DQ35	DQ25	V_{SS}	SA	SA	SA	V_{SS}	NC	NC	DQ10
P	NC	NC	DQ26	SA	SA	C QVLD QVLD	SA	SA	NC	DQ9	DQ0
R	TDO	TCK	SA	SA	SA	/C NC ODT	SA	SA	SA	TMS	TDI

(Top View)

Top ←R1Q4A4436
Mid ←R1QB(H)A4436
Bottom ←R1QE(L)A4436

Notes: 1. Address expansion order for future higher density SRAMs: 10A → 2A → 7A → 5B.
2. NC pins can be left floating or connected to 0V ~ V_{DDQ}.

R1Q4A4418 (Top) / R1QB(H)A4418 (Mid) / R1QE(L)A4418 (Bottom)

	1	2	3	4	5	6	7	8	9	10	11
A	/CQ	SA	SA	R-/W	/BW1	/K	SA	/LD	SA	SA	CQ
B	NC	DQ9	NC	SA	NC	K	/BW0	SA	NC	NC	DQ8
C	NC	NC	NC	V_{SS}	SA	SA0 NC NC	SA	V_{SS}	NC	DQ7	NC
D	NC	NC	DQ10	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	NC	NC	NC
E	NC	NC	DQ11	V_{DDQ}	V_{SS}	V_{SS}	V_{SS}	V_{DDQ}	NC	NC	DQ6
F	NC	DQ12	NC	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	NC	DQ5
G	NC	NC	DQ13	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	NC	NC
H	/DOFF	V_{REF}	V_{DDQ}	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	V_{DDQ}	V_{REF}	ZQ
J	NC	NC	NC	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	DQ4	NC
K	NC	NC	DQ14	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	NC	DQ3
L	NC	DQ15	NC	V_{DDQ}	V_{SS}	V_{SS}	V_{SS}	V_{DDQ}	NC	NC	DQ2
M	NC	NC	NC	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	NC	DQ1	NC
N	NC	NC	DQ16	V_{SS}	SA	SA	SA	V_{SS}	NC	NC	NC
P	NC	NC	DQ17	SA	SA	C QVLD QVLD	SA	SA	NC	NC	DQ0
R	TDO	TCK	SA	SA	SA	/C NC ODT	SA	SA	SA	TMS	TDI

(Top View)

Notes: 1. Address expansion order for future higher density SRAMs: 10A → 2A → 7A → 5B.
2. NC pins can be left floating or connected to 0V ~ V_{DDQ}.

Pin Arrangement

Just Reference

R1Q4A4409 (Top) / R1QB(H)A4409 (Mid) / R1QE(L)A4409 (Bottom)

	1	2	3	4	5	6	7	8	9	10	11
A	/CQ	SA	SA	R-/W	NC	/K	SA	/LD	SA	SA	CQ
B	NC	NC	NC	SA	NC	K	/BW	SA	NC	NC	DQ4
C	NC	NC	NC	V_{SS}	SA	SA	SA	V_{SS}	NC	NC	NC
D	NC	NC	NC	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	NC	NC	NC
E	NC	NC	DQ5	V_{DDQ}	V_{SS}	V_{SS}	V_{SS}	V_{DDQ}	NC	NC	DQ3
F	NC	NC	NC	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	NC	NC
G	NC	NC	DQ6	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	NC	NC
H	/DOFF	V_{REF}	V_{DDQ}	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	V_{DDQ}	V_{REF}	ZQ
J	NC	NC	NC	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	DQ2	NC
K	NC	NC	NC	V_{DDQ}	V_{DD}	V_{SS}	V_{DD}	V_{DDQ}	NC	NC	NC
L	NC	DQ7	NC	V_{DDQ}	V_{SS}	V_{SS}	V_{SS}	V_{DDQ}	NC	NC	DQ1
M	NC	NC	NC	V_{SS}	V_{SS}	V_{SS}	V_{SS}	V_{SS}	NC	NC	NC
N	NC	NC	NC	V_{SS}	SA	SA	SA	V_{SS}	NC	NC	NC
P	NC	NC	DQ8	SA	SA	C QVLD QVLD	SA	SA	NC	NC	DQ0
R	TDO	TCK	SA	SA	SA	/C NC ODT	SA	SA	SA	TMS	TDI

(Top View)

Notes: 1. Address expansion order for future higher density SRAMs: 10A → 2A → 7A → 5B.

2. NC pins can be left floating or connected to 0V ~ V_{DDQ}.

3. Note that 6C is not SA0 and 7C is not SA1 in x9 product. Thus ×9 product does not permit random start address on the two least significant address bits. SA0, SA1 = 0 at the start of each address.

Pin Descriptions


Name	I/O type	Descriptions	Notes
SA_x	Input	Synchronous address inputs: These inputs are registered and must meet the setup and hold times around the rising edge of K. All transactions operate on a burst-of-four words (two clock periods of bus activity). SA0 and SA1 are used as the lowest two address bits for burst READ and burst WRITE operations permitting a random burst start address on ×18 and ×36 of DDR II (not II+) devices. These inputs are ignored when device is deselected or once burst operation is in progress.	
/LD	Input	Synchronous load: This input is brought low when a bus cycle sequence is to be defined. This definition includes address and READ / WRITE direction. All transactions operate on a burst-of-four data (two clock periods of bus activity).	
R-/W	Input	Synchronous read / write Input: When /LD is low, this input designates the access type (READ when R-/W is high, WRITE when R-/W is low) for the loaded address. R-/W must meet the setup and hold times around the rising edge of K.	
$/BW_x$	Input	Synchronous byte writes: When low, these inputs cause their respective byte to be registered and written during WRITE cycles. These signals are sampled on the same edge as the corresponding data and must meet setup and hold times around the rising edges of K and /K for each of the two rising edges comprising the WRITE cycle. See Byte Write Truth Table for signal to data relationship.	
K, /K	Input	Input clock: This input clock pair registers address and control inputs on the rising edge of K, and registers data on the rising edge of K and the rising edge of /K. /K is ideally 180 degrees out of phase with K. All synchronous inputs must meet setup and hold times around the clock rising edges. These balls cannot remain V_{REF} level.	
C, /C **(II only)**	Input	Output clock: This clock pair provides a user-controlled means of tuning device output data. The rising edge of /C is used as the output timing reference for the first and third output data. The rising edge of C is used as the output timing reference for second and fourth output data. Ideally, /C is 180 degrees out of phase with C. C and /C may be tied high to force the use of K and /K as the output reference clocks instead of having to provide C and /C clocks. If tied high, C and /C must remain high and not to be toggled during device operation. These balls cannot remain V_{REF} level.	1
/DOFF	Input	DLL/PLL disable: When low, this input causes the DLL/PLL to be bypassed for stable, low frequency operation.	
TMS TDI	Input	IEEE1149.1 test inputs: 1.8 V I/O levels. These balls may be left not connected if the JTAG function is not used in the circuit.	
TCK	Input	IEEE1149.1 clock input: 1.8 V I/O levels. This ball must be tied to V_{SS} if the JTAG function is not used in the circuit.	

Notes:
1. R1Q2, R1Q3, R1Q4, R1Q5, R1Q6 series have C and /C pins. R1QA, R1QB, R1QC, R1QD, R1QE, R1QF, R1QG, R1QH, R1QJ, R1QK, R1QL, R1QM, R1QN, R1QP series do not have C, /C pins. In the series, K and /K are used as the output reference clocks instead of C and /C. Therefore, hereafter, C and /C represent K and /K in this document.

Name	I/O type	Descriptions	Notes
ZQ	Input	Output impedance matching input: This input is used to tune the device outputs to the system data bus impedance. DQ and CQ output impedance are set to 0.2 × RQ, where RQ is a resistor from this ball to ground. This ball can be connected directly to V_{DDQ}, which enables the minimum impedance mode. This ball cannot be connected directly to V_{SS} or left unconnected. In ODT (On Die Termination) enable devices, the ODT termination values tracks the value of RQ. The ODT range is selected by ODT control input.	
ODT **(II+ only)**	Input	ODT control: **When low**; [Option 1] Low range mode is selected. The impedance range is between 52 Ω and 105 Ω (Thevenin equivalent), which follows 0.3 × RQ for 175 Ω ≤ RQ ≤ 350 Ω. [Option 2] ODT is disabled. **When high**; High range mode is selected. The impedance range is between 105 Ω and 150 Ω (Thevenin equivalent), which follows 0.6 × RQ for 175 Ω ≤ RQ ≤ 250 Ω. **When floating**; [Option 1] High range mode is selected. [Option 2] ODT is disabled.	1
DQ_0 to DQ_n	Input / output	Synchronous data I/Os: Input data must meet setup and hold times around the rising edges of K and /K. Output data is synchronized to the respective C and /C, or to the respective K and /K if C and /C are tied high. The ×9 device uses DQ0~DQ8. DQ9~DQ35 should be treated as NC pin. The ×18 device uses DQ0~DQ17. DQ18~DQ35 should be treated as NC pin. The ×36 device uses DQ0~DQ35.	
CQ, /CQ	Output	Synchronous echo clock outputs: The edges of these outputs are tightly matched to the synchronous data outputs and can be used as a data valid indication. These signals run freely and do not stop when DQ tri-states.	
TDO	Output	IEEE 1149.1 test output: 1.8 V I/O level.	
QVLD **(II+ only)**	Output	Valid output indicator: The Q Valid indicates valid output data. QVLD is edge aligned with CQ and /CQ.	
V_{DD}	Supply	Power supply: 1.8 V nominal. See DC Characteristics and Operating Conditions for range.	2
V_{DDQ}	Supply	Power supply: Isolated output buffer supply. Nominally 1.5 V. See DC Characteristics and Operating Conditions for range.	2
V_{SS}	Supply	Power supply: Ground.	2
V_{REF}	—	HSTL input reference voltage: Nominally V_{DDQ}/2, but may be adjusted to improve system noise margin. Provides a reference voltage for the HSTL input buffers.	
NC	—	No connect: These pins can be left floating or connected to 0V ~ V_{DDQ}.	

Notes:
1. Renesas status: Option 1 = Available, Option 2 = Possible.
2. All power supply and ground balls must be connected for proper operation of the device.

Block Diagram (R1QxA4436 / R1QxA4418 series, x=4)

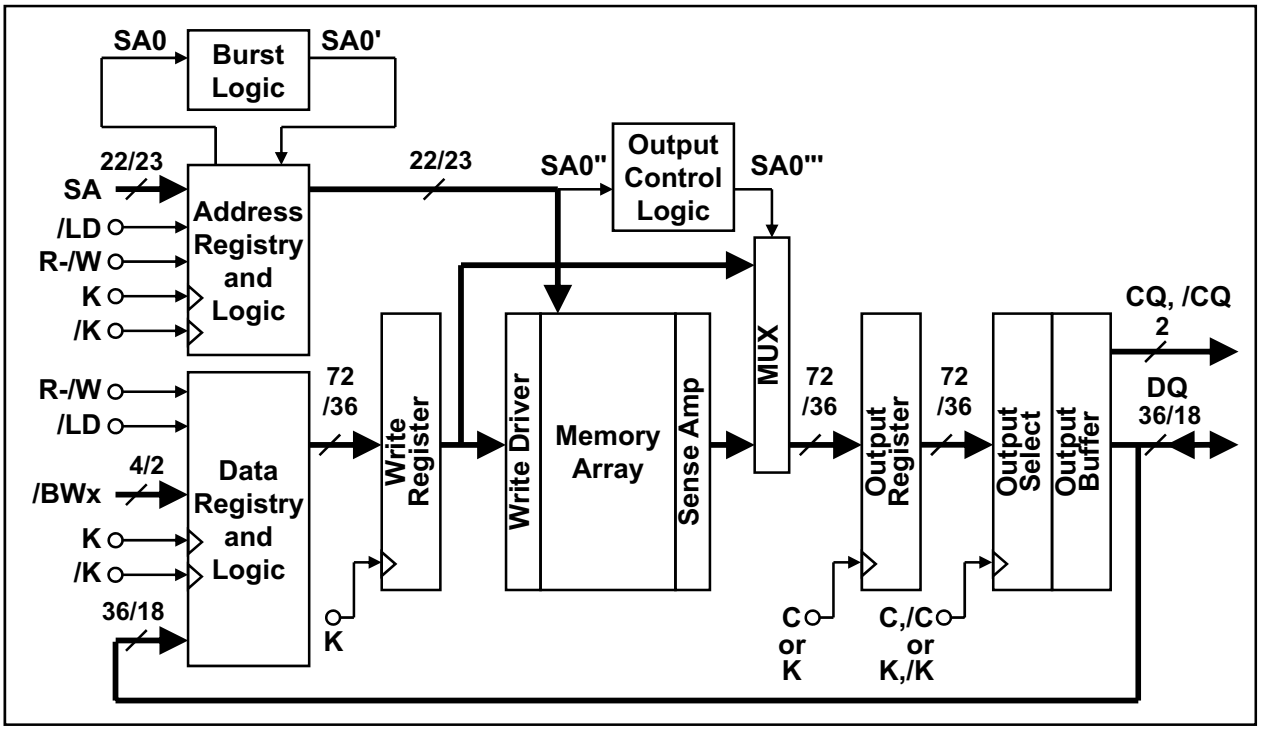


Notes

1. C and /C pins do not exist in II+ series parts.

Block Diagram

(R1QxA4436 / R1QxA4418 / R1QyA4409 series, x=B,E,H,L, y=4,B,E,H,L)

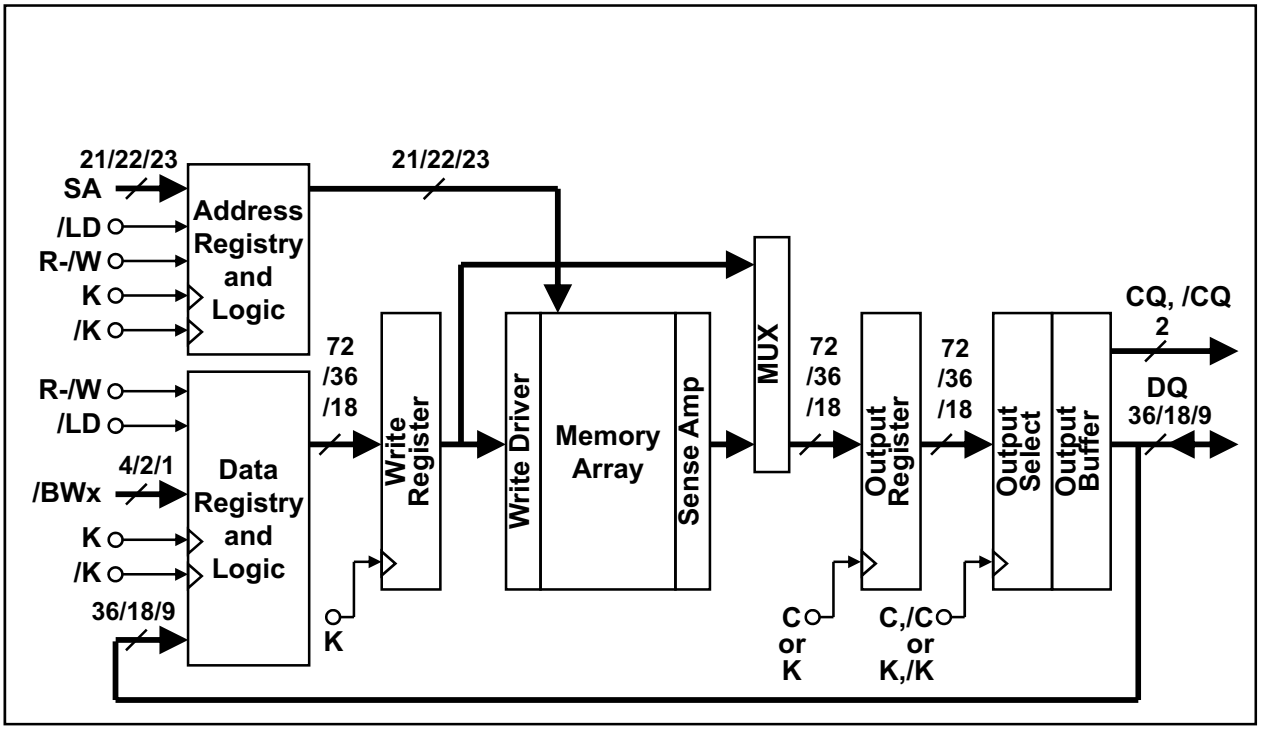

Notes


1. C and /C pins do not exist in II+ series parts.

General Description


Power-up and Initialization Sequence

- V_{DD} must be stable before K, /K clocks are applied.
- Recommended voltage application sequence : $V_{SS} \rightarrow V_{DD} \rightarrow V_{DDQ}$ & $V_{REF} \rightarrow V_{IN}$. (0 V to V_{DD}, V_{DDQ} < 200 ms)
- Apply V_{REF} after V_{DDQ} or at the same time as V_{DDQ}.
- Then execute either one of the following three sequences.

1. Single Clock Mode (C and /C tied high)
   - Drive /DOFF high (/DOFF can be tied high from the start).
   - Then provide stable clocks (K, /K) for at least 20 us.

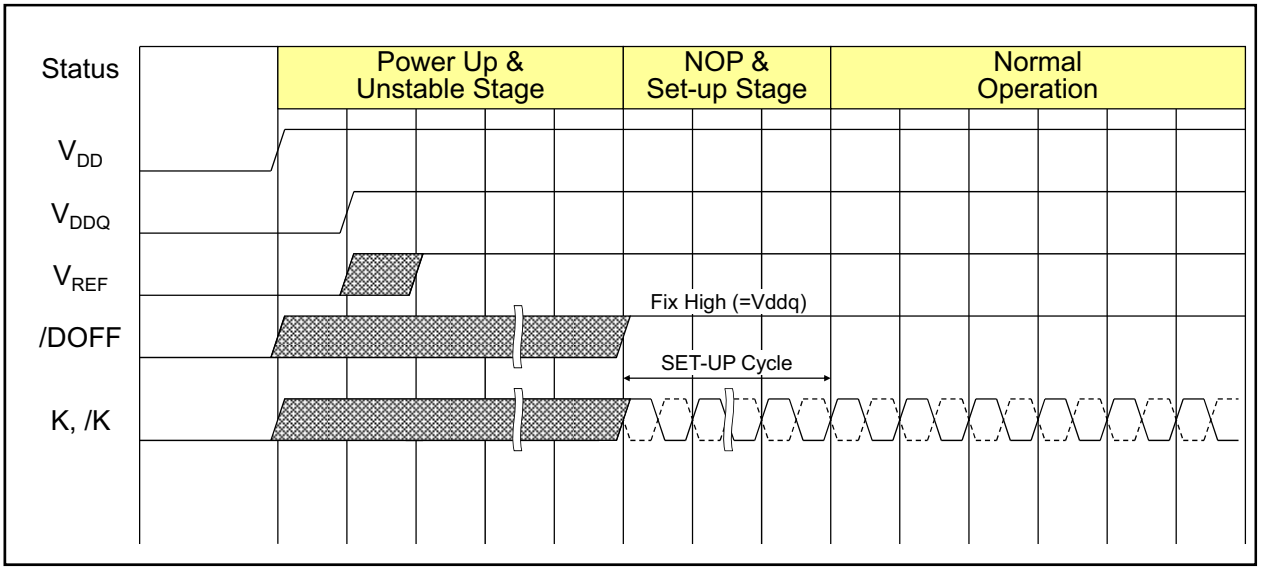

2. Double Clock Mode (C and /C control outputs) (II series only)
   - Drive /DOFF high (/DOFF can be tied high from the start)
   - Then provide stable clocks (K, /K , C, /C) for at least 20 us.

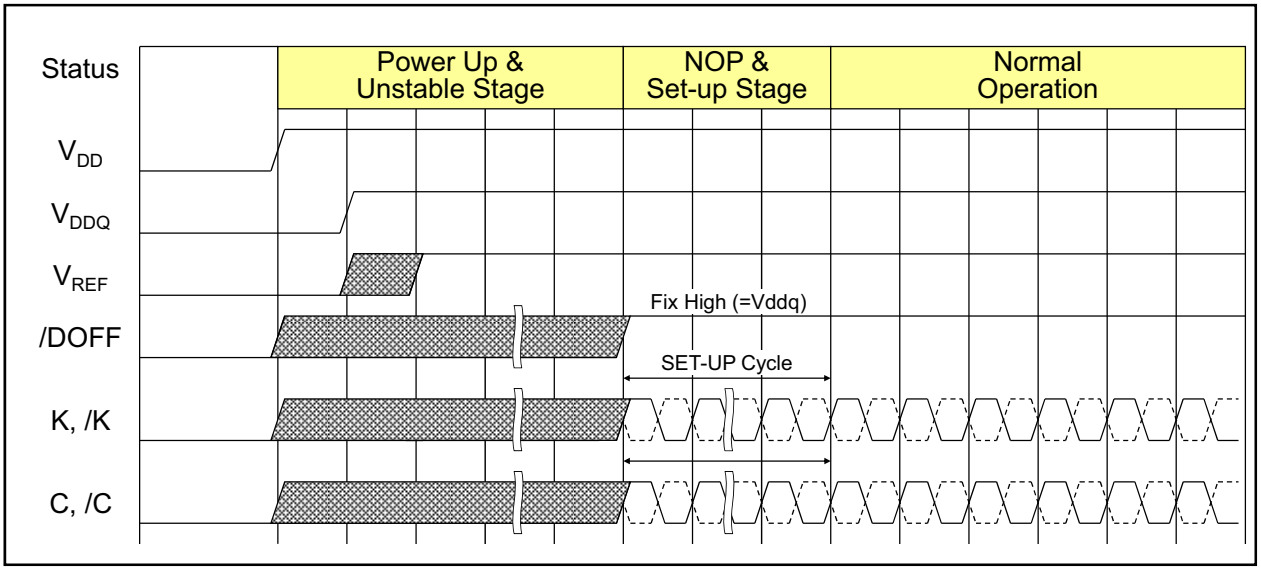

3. DLL/PLL Off Mode (/DOFF tied low)
   - In the "NOP and setup stage", provide stable clocks (K, /K) for at least 20 us.

DLL/PLL Constraints

1. DLL/PLL uses K clock as its synchronizing input. The input should have low phase jitter which is specified as tKC var.

2. The lower end of the frequency at which the DLL/PLL can operate is 120 MHz.
(Please refer to AC Characteristics table for detail.)

3. When the operating frequency is changed or /DOFF level is changed, setup cycles are required again.

Programmable Output Impedance

1. Output buffer impedance can be programmed by terminating the ZQ ball to V_{SS} through a precision resistor (RQ). The value of RQ is five times the output impedance desired. The allowable range of RQ to guarantee impedance matching with a tolerance of 15% is 250 Ω typical. The total external capacitance of ZQ ball must be less than 7.5 pF.

QVLD (Valid data indicator)

(R1QA, R1QB, R1QC, R1QD, R1QE, R1QF, R1QG, R1QH, R1QJ, R1QK, R1QL, R1QM R1QN, R1QP series)

1. QVLD is provided on the QDR-II+ and DDR-II+ to simplify data capture on high speed systems. The Q Valid indicates valid output data. QVLD is activated half cycle before the read data for the receiver to be ready for capturing the data. QVLD is inactivated half cycle before the read finish for the receiver to stop capturing the data. QVLD is edge aligned with CQ and /CQ.

ODT (On Die Termination)

(R1QD, R1QE, R1QF, R1QK, R1QL, R1QM, R1QP series)

1. To reduce reflection which produces noise and lowers signal quality, the signals should be terminated, especially at high frequency. Renesas offers ODT on the input signals to QDR-II+ and DDR-II+ family of devices. (See the ODT pin table)
2. In ODT enable devices, the ODT termination values tracks the value of RQ. The ODT range is selected by ODT control input. (See the ODT range table)
3. In DDR-II+ devices having common I/O bus, ODT is automatically enabled when the device inputs data and disabled when the device outputs data.
4. There is no difference in AC timing characteristics between the SRAMs with ODT and SRAMs without ODT.
5. There is no increase in the I_{DD} of SRAMs with ODT, however, there is an increase in the I_{DDQ} (current consumption from the I/O voltage supply) with ODT.


ODT range

ODT control pin	Thevenin equivalent resistance (R_{THEV})		Unit	Notes
	Option 1	Option 2	-	6
Low	0.3 × RQ	(ODT disable)	Ω	1, 4
High	0.6 × RQ	0.6 × RQ	Ω	2, 5
Floating	0.6 × RQ	(ODT disable)	Ω	3

Notes:

1. Allowable range of RQ for Option 1 to guarantee impedance matching a tolerance of ± 20 % is 175 Ω ≤ RQ ≤ 350 Ω.
2. Allowable range of RQ to guarantee impedance matching a tolerance of ± 20 % is 175 Ω ≤ RQ ≤ 250 Ω.
3. Allowable range of RQ for Option 1 to guarantee impedance matching a tolerance of ± 20 % is 175 Ω ≤ RQ ≤ 250 Ω.
4. At option 1, ODT control pin is connected to V_{DDQ} through 3.5 kΩ. Therefore it is recommended to connect it to V_{SS} through less than 100 Ω to make it low.
5. At option 2, ODT control pin is connected to V_{SS} through 3.5 kΩ. Therefore it is recommended to connect it to V_{DDQ} through less than 100 Ω to make it high.
6. Renesas status: Option 1 = Available, Option 2 = Possible. If you need devices with option 2, please contact Renesas sales office.

Thevenin termination

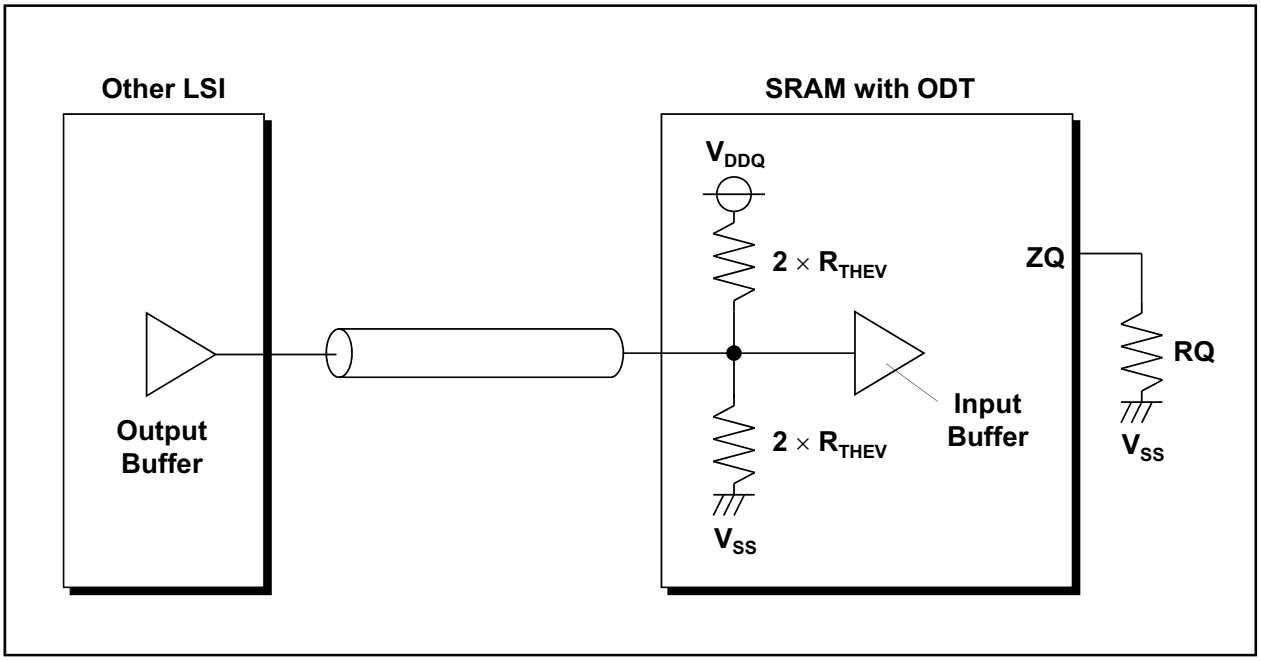


ODT pin (R1QD, R1QE, R1QF, R1QK, R1QL, R1QM, R1QP series)


Pin name	ODT On/Off timing			Notes
	Option 1	Option 2		
		ODT pin = High	ODT pin = Low or Floating	
D_0 ~ D_n in separate I/O devices	Always On		Always Off	1
DQ_0 ~ DQ_n in common I/O devices	Off: First Read Command + Read Latency - 0.5 cycle On: Last Read Command + Read Latency + BL/2 cycle + 0.5 cycle (See below timing chart)		Always Off	2
/BW_x	Always On		Always Off	
K, /K	Always On		Always Off	

Notes:
1. Separate I/O devices are R1QD, R1QK, R1QP series.
2. Common I/O devices are R1QE, R1QF, R1QL, R1QM series.
3. Renesas status: Option 1 = Available, Option 2 = Possible. If you need devices with option 2, please contact Renesas sales office.


ODT on/off Timing Chart for R1QE series (DDR II+, Burst Length=2, Read Latency=2.5 cycle)

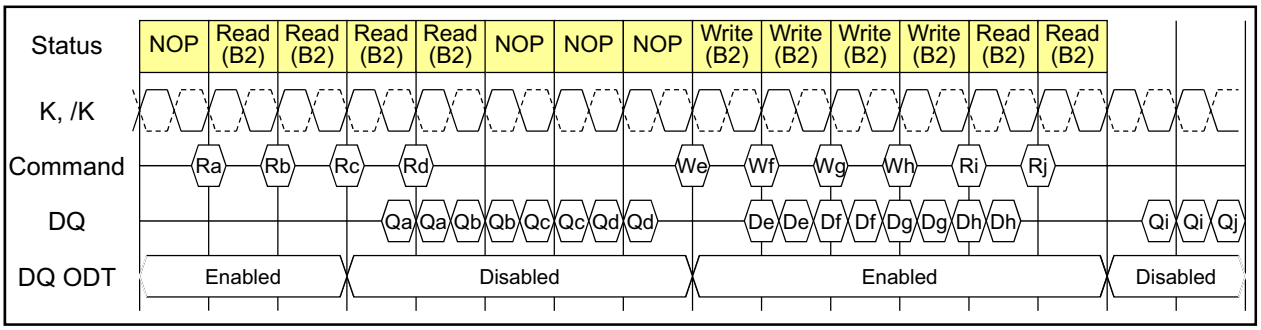


ODT on/off Timing Chart for R1QF series (DDR II+, Burst Length=4, Read Latency=2.5 cycle)

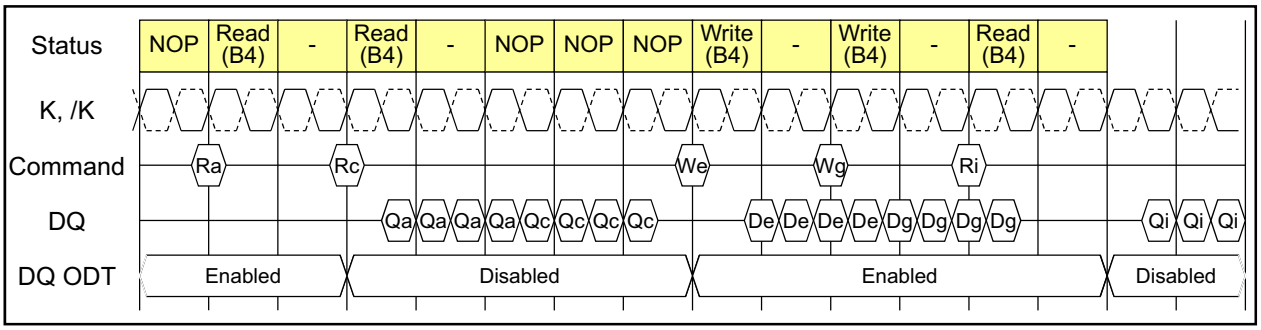

ODT on/off Timing Chart for R1QL series (DDR II+, Burst Length=2, Read Latency=2.0 cycle)

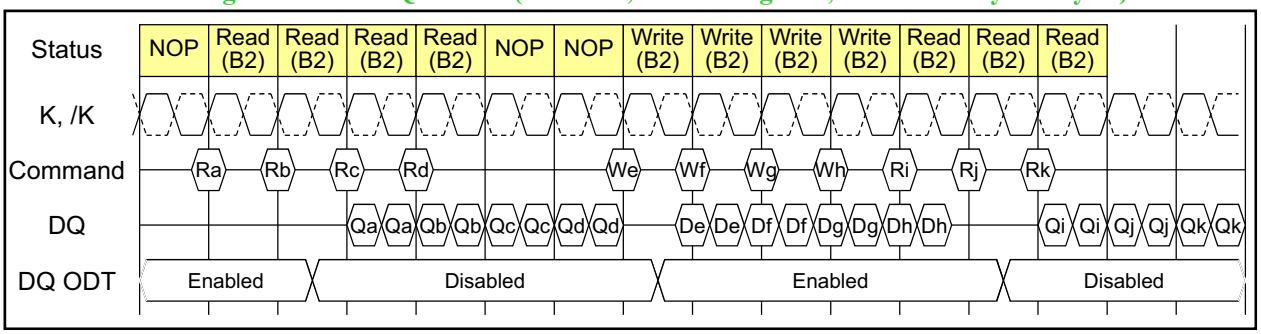

ODT on/off Timing Chart for R1QM series (DDR II+, Burst Length=4, Read Latency=2.0 cycle)

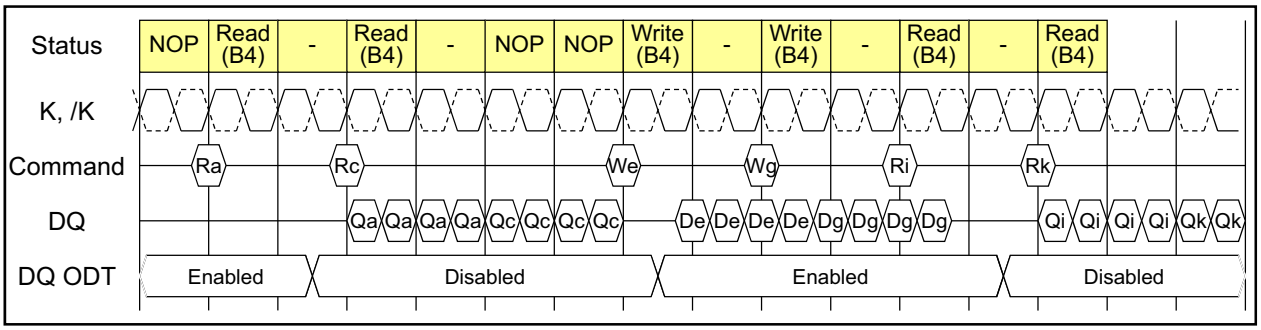

Notes

1. ODT on/off switching timings are edge aligned with CQ or /CQ.

K Truth Table

Operation	K	/LD	R-/W	DQ			
Write Cycle: Load address, input write data on consecutive K and /K rising edges	↑	L	L	Data in			
				Input data		D(A1)	D(A2)
				Input clock		K(t+1)↑	/K(t+1)↑
Read Cycle: Load address, output read data on consecutive C and /C rising edges	↑	L	H	Data out			
				Output data		Q(A1)	Q(A2)
				Input clock for Q	RL[*8]=1.5	/C(t+1)↑	C(t+2)↑
					RL=2.0	C(t+2)↑	/C(t+2)↑
					RL=2.5	/C(t+2)↑	C(t+3)↑
NOP (No operation)	↑	H	×	High-Z			
Standby (Clock stopped)	Stopped	×	×	Previous state			

Notes:
1. H: high level, L: low level, ×: don't care, ↑: rising edge.
2. Data inputs are registered at K and /K rising edges. Data outputs are delivered at C and /C rising edges, except if C and /C are high, then data outputs are delivered at K and /K rising edges.
3. /LD and R-/W must meet setup/hold times around the rising edges (low to high) of K and are registered at the rising edge of K.
4. This device contains circuitry that will ensure the outputs will be in high-Z during power-up.
5. Refer to state diagram and timing diagrams for clarification.
6. When clocks are stopped, the following cases are recommended; the case of K = low, /K = high, C = low and /C = high, or the case of K = high, /K = low, C = high and /C = low. This condition is not essential, but permits most rapid restart by overcoming transmission line charging symmetrically.
7. A1 refers to the address input during a WRITE or READ cycle. A2 refers to the next internal burst address in accordance with the linear burst sequence.
8. RL = Read Latency (unit = cycle).

Burst Sequence

Linear Burst Sequence Table (R1Q4Aww36 / R1Q4Aww18 series)

	SA0	SA0	Notes
External address	0	1	
1st internal burst address	1	0	

Byte Write Truth Table (x 36)

Operation	K	/K	/BW0	/BW1	/BW2	/BW3
Write D0 to D35	↑	-	L	L	L	L
	-	↑	L	L	L	L
Write D0 to D8	↑	-	L	H	H	H
	-	↑	L	H	H	H
Write D9 to D17	↑	-	H	L	H	H
	-	↑	H	L	H	H
Write D18 to D26	↑	-	H	H	L	H
	-	↑	H	H	L	H
Write D27 to D35	↑	-	H	H	H	L
	-	↑	H	H	H	L
Write nothing	↑	-	H	H	H	H
	-	↑	H	H	H	H

Notes:
1. H: high level, L: low level, ↑: rising edge.
2. Assumes a WRITE cycle was initiated. /BWx can be altered for any portion of the BURST WRITE operation provided that the setup and hold requirements are satisfied.

Byte Write Truth Table (x 18)

Operation	K	/K	/BW0	/BW1
Write D0 to D17	↑	-	L	L
	-	↑	L	L
Write D0 to D8	↑	-	L	H
	-	↑	L	H
Write D9 to D17	↑	-	H	L
	-	↑	H	L
Write nothing	↑	-	H	H
	-	↑	H	H

Notes:
1. H: high level, L: low level, ↑: rising edge.
2. Assumes a WRITE cycle was initiated. /BWx can be altered for any portion of the BURST WRITE operation provided that the setup and hold requirements are satisfied.


Byte Write Truth Table (x 9)

Just Reference except R1Q2A**09 series

Operation	K	/K	/BW
Write D0 to D8	↑	-	L
	-	↑	L
Write nothing	↑	-	H
	-	↑	H

Notes:
1. H: high level, L: low level, ↑: rising edge.
2. Assumes a WRITE cycle was initiated. /BWx can be altered for any portion of the BURST WRITE operation provided that the setup and hold requirements are satisfied.

Bus Cycle State Diagram

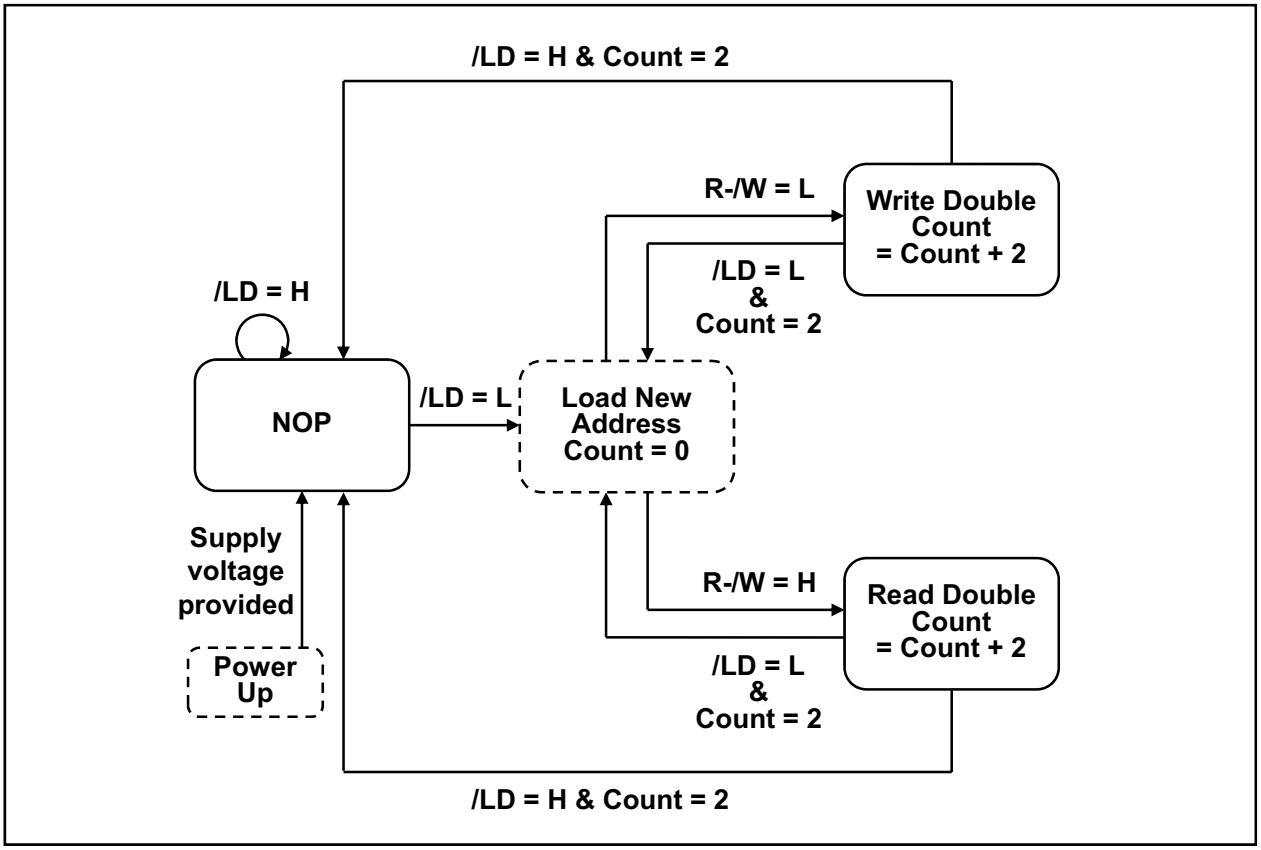

Notes:

1. SA0 is internally advanced in accordance with the burst order table. Bus cycle is terminated at the end of this sequence (burst count = 2).
2. State machine control timing sequence is controlled by K.

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit	Notes
Input voltage on any ball	V_{IN}	–0.5 to V_{DD} + 0.5 (2.5 V max.)	V	1, 4
Input/output voltage	$V_{I/O}$	–0.5 to V_{DDQ} + 0.5 (2.5 V max.)	V	1, 4
Core supply voltage	V_{DD}	–0.5 to 2.5	V	1, 4
Output supply voltage	V_{DDQ}	–0.5 to V_{DD}	V	1, 4
Junction temperature	Tj	+125 (max)	°C	5
Storage temperature	T_{STG}	–55 to +125	°C	

Notes:

1. All voltage is referenced to V_{SS}.
2. Permanent device damage may occur if Absolute Maximum Ratings are exceeded. Functional operation should be restricted the Operation Conditions. Exposure to higher than recommended voltages for extended periods of time could affect device reliability.
3. These CMOS memory circuits have been designed to meet the DC and AC specifications shown in the tables after thermal equilibrium has been established.
4. The following supply voltage application sequence is recommended: V_{SS}, V_{DD}, V_{DDQ}, V_{REF} then V_{IN}. Remember, according to the Absolute Maximum Ratings table, V_{DDQ} is not to exceed 2.5 V, whatever the instantaneous value of V_{DDQ}.
5. Some method of cooling or airflow should be considered in the system. (Especially for high frequency or ODT parts)

Recommended DC Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Power supply voltage -- core	V_{DD}	1.7	1.8	1.9	V	1
Power supply voltage -- I/O	V_{DDQ}	1.4	1.5	V_{DD}	V	1, 2
Input reference voltage -- I/O	V_{REF}	0.68	0.75	0.95	V	3
Input high voltage	$V_{IH\ (DC)}$	V_{REF} + 0.1	—	V_{DDQ} + 0.3	V	1, 4, 5
Input low voltage	$V_{IL\ (DC)}$	–0.3	—	V_{REF} – 0.1	V	1, 4, 5

Notes:

1. At power-up, V_{DD} and V_{DDQ} are assumed to be a linear ramp from 0V to V_{DD}(min.) or V_{DDQ}(min.) within 200ms. During this time $V_{DDQ} < V_{DD}$ and $V_{IH} < V_{DDQ}$.
   During normal operation, V_{DDQ} must not exceed V_{DD}.
2. Please pay attention to Tj not to exceed the temperature shown in the absolute maximum ratings table due to current from V_{DDQ}.
3. Peak to peak AC component superimposed on V_{REF} may not exceed 5% of V_{REF}.
4. These are DC test criteria. The AC V_{IH} / V_{IL} levels are defined separately to measure timing parameters.
5. Overshoot: $V_{IH\ (AC)} \leq V_{DDQ}$ + 0.5 V for $t \leq t_{KHKH}/2$
   Undershoot: $V_{IL\ (AC)} \geq$ –0.5 V for $t \leq t_{KHKH}/2$
   During normal operation, $V_{IH(DC)}$ must not exceed V_{DDQ} and $V_{IL(DC)}$ must not be lower than V_{SS}.

DC Characteristics

(Ta = 0 ~ +70°C @ R1Q*A*****BG-**R** series, Ta = -40 ~ +85°C @ R1Q*A*****BG-**I** series)
(V_{DD} = 1.8V ±0.1V, V_{DDQ} = 1.5V, V_{REF} = 0.75V)

Operating Supply Current (Write / Read)

Symbol = I_{DD}. Unit = mA. See Notes 1, 2 and 3 in the page after next.

No	Product Type	Burst Length	Latency (Cycle)	ODT	Organi-zation	Frequency (max) (MHz)	533	500	450	400	375	333	300	250	200
						Cycle Time (min) (ns)	1.875	2.00	2.22	2.50	2.66	3.00	3.30	4.00	5.00
						Part Number ↓ yy →	-19	-20	-22	-25	-27	-30	-33	-40	-50
2	QDRII	B2	1.5	No	x18	R1Q 2 A44 18 RBG- yy								TBD	TBD
3					x36	R1Q 2 A44 36 RBG- yy								TBD	TBD
5		B4			x18	R1Q 3 A44 18 RBG- yy							TBD	TBD	
6					x36	R1Q 3 A44 36 RBG- yy							TBD	TBD	
8	DDRII	B2			x18	R1Q 4 A44 18 RBG- yy							TBD	TBD	
9					x36	R1Q 4 A44 36 RBG- yy							TBD	TBD	
11		B4			x18	R1Q 5 A44 18 RBG- yy							TBD	TBD	
12					x36	R1Q 5 A44 36 RBG- yy							TBD	TBD	
14	DDRII SIO	B2			x18	R1Q 6 A44 18 RBG- yy							TBD	TBD	
15					x36	R1Q 6 A44 36 RBG- yy							TBD	TBD	
20	QDRII+	B4	2.5	No	x18	R1Q A A44 18 RBG- yy	TBD	TBD	TBD						
21					x36	R1Q A A44 36 RBG- yy	TBD	TBD	TBD						
23	DDRII+	B2			x18	R1Q B A44 18 RBG- yy	TBD	TBD	TBD						
24					x36	R1Q B A44 36 RBG- yy	TBD	TBD	TBD						
26		B4			x18	R1Q C A44 18 RBG- yy	TBD	TBD	TBD						
27					x36	R1Q C A44 36 RBG- yy	TBD	TBD	TBD						
32	QDRII+	B4	2.5	Yes	x18	R1Q D A44 18 RBG- yy	TBD	TBD	TBD						
33					x36	R1Q D A44 36 RBG- yy	TBD	TBD	TBD						
35	DDRII+	B2			x18	R1Q E A44 18 RBG- yy	TBD	TBD	TBD						
36					x36	R1Q E A44 36 RBG- yy	TBD	TBD	TBD						
38		B4			x18	R1Q F A44 18 RBG- yy	TBD	TBD	TBD						
39					x36	R1Q F A44 36 RBG- yy	TBD	TBD	TBD						
41	QDRII+	B2	2.0	No	x18	R1Q N A44 18 RBG- yy							TBD		
42					x36	R1Q N A44 36 RBG- yy							TBD		
44		B4			x18	R1Q G A44 18 RBG- yy				TBD					
45					x36	R1Q G A44 36 RBG- yy				TBD					
47	DDRII+	B2			x18	R1Q H A44 18 RBG- yy				TBD					
48					x36	R1Q H A44 36 RBG- yy				TBD					
50		B4			x18	R1Q J A44 18 RBG- yy				TBD					
51					x36	R1Q J A44 36 RBG- yy				TBD					
53	QDRII+	B2	2.0	Yes	x18	R1Q P A44 18 RBG- yy							TBD		
54					x36	R1Q P A44 36 RBG- yy							TBD		
56		B4			x18	R1Q K A44 18 RBG- yy				TBD					
57					x36	R1Q K A44 36 RBG- yy				TBD					
59	DDRII+	B2			x18	R1Q L A44 18 RBG- yy				TBD					
60					x36	R1Q L A44 36 RBG- yy				TBD					
62		B4			x18	R1Q M A44 18 RBG- yy				TBD					
63					x36	R1Q M A44 36 RBG- yy				TBD					

Notes:
1. "yy" represents the speed bin. "R1QAA4436RBG-20" can operate at 500 MHz(max) of frequency, for example.

Standby Supply Current (NOP)

Symbol = I_{SB1}. Unit = mA. See Notes 2, 4 and 5 in the next page.

No	Product Type	Burst Length	Latency (Cycle)	ODT	Organi-zation	Frequency (max) (MHz)	533	500	450	400	375	333	300	250	200
						Cycle Time (min) (ns)	1.875	2.00	2.22	2.50	2.66	3.00	3.30	4.00	5.00
						Part Number ↓ yy →	-19	-20	-22	-25	-27	-30	-33	-40	-50
2	QDRII	B2	1.5	No	x18	R1Q 2 A44 18 RBG- yy								TBD	TBD
3					x36	R1Q 2 A44 36 RBG- yy								TBD	TBD
5		B4			x18	R1Q 3 A44 18 RBG- yy							TBD	TBD	
6					x36	R1Q 3 A44 36 RBG- yy							TBD	TBD	
8	DDRII	B2			x18	R1Q 4 A44 18 RBG- yy							TBD	TBD	
9					x36	R1Q 4 A44 36 RBG- yy							TBD	TBD	
11		B4			x18	R1Q 5 A44 18 RBG- yy							TBD	TBD	
12					x36	R1Q 5 A44 36 RBG- yy							TBD	TBD	
14	DDRII SIO	B2			x18	R1Q 6 A44 18 RBG- yy							TBD	TBD	
15					x36	R1Q 6 A44 36 RBG- yy							TBD	TBD	
20	QDRII+	B4	2.5	No	x18	R1Q A A44 18 RBG- yy	TBD	TBD	TBD						
21					x36	R1Q A A44 36 RBG- yy	TBD	TBD	TBD						
23	DDRII+	B2			x18	R1Q B A44 18 RBG- yy	TBD	TBD	TBD						
24					x36	R1Q B A44 36 RBG- yy	TBD	TBD	TBD						
26		B4			x18	R1Q C A44 18 RBG- yy	TBD	TBD	TBD						
27					x36	R1Q C A44 36 RBG- yy	TBD	TBD	TBD						
32	QDRII+	B4	2.5	Yes	x18	R1Q D A44 18 RBG- yy	TBD	TBD	TBD						
33					x36	R1Q D A44 36 RBG- yy	TBD	TBD	TBD						
35	DDRII+	B2			x18	R1Q E A44 18 RBG- yy	TBD	TBD	TBD						
36					x36	R1Q E A44 36 RBG- yy	TBD	TBD	TBD						
38		B4			x18	R1Q F A44 18 RBG- yy	TBD	TBD	TBD						
39					x36	R1Q F A44 36 RBG- yy	TBD	TBD	TBD						
41	QDRII+	B2	2.0	No	x18	R1Q N A44 18 RBG- yy							TBD		
42					x36	R1Q N A44 36 RBG- yy							TBD		
44		B4			x18	R1Q G A44 18 RBG- yy				TBD					
45					x36	R1Q G A44 36 RBG- yy				TBD					
47	DDRII+	B2			x18	R1Q H A44 18 RBG- yy				TBD					
48					x36	R1Q H A44 36 RBG- yy				TBD					
50		B4			x18	R1Q J A44 18 RBG- yy				TBD					
51					x36	R1Q J A44 36 RBG- yy				TBD					
53	QDRII+	B2	2.0	Yes	x18	R1Q P A44 18 RBG- yy							TBD		
54					x36	R1Q P A44 36 RBG- yy							TBD		
56		B4			x18	R1Q K A44 18 RBG- yy				TBD					
57					x36	R1Q K A44 36 RBG- yy				TBD					
59	DDRII+	B2			x18	R1Q L A44 18 RBG- yy				TBD					
60					x36	R1Q L A44 36 RBG- yy				TBD					
62		B4			x18	R1Q M A44 18 RBG- yy				TBD					
63					x36	R1Q M A44 36 RBG- yy				TBD					

Notes:
1. "yy" represents the speed bin. "R1QAA4436RBG-20" can operate at 500 MHz(max) of frequency, for example.

Leakage Currents & Output Voltage

Parameter	Symbol	Min	Max	Unit	Test condition	Notes
Input leakage current	I_{LI}	–2	2	µA		10
Output leakage current	I_{LO}	–5	5	µA		11
Output high voltage	V_{OH} (Low)	V_{DDQ} – 0.2	V_{DDQ}	V	$\|I_{OH}\| \le 0.1$ mA	8, 9
	V_{OH}	$V_{DDQ}/2$ – 0.12	$V_{DDQ}/2$ + 0.12	V	Note 6	8, 9
Output low voltage	V_{OL} (Low)	V_{SS}	0.2	V	$I_{OL} \le 0.1$ mA	8, 9
	V_{OL}	$V_{DDQ}/2$ – 0.12	$V_{DDQ}/2$ + 0.12	V	Note 7	8, 9

Notes:

1. All inputs (except ZQ, V_{REF}) are held at either V_{IH} or V_{IL}.
2. I_{OUT} = 0 mA. V_{DD} = V_{DD} max, t_{KHKH} = t_{KHKH} min.
3. Operating supply currents (I_{DD}) are measured at 100% bus utilization. I_{DD} of QDR family is current of device with 100% write and 100% read cycle. I_{DD} of DDR family is current of device with 100% write cycle (if I_{DD}(Write) > I_{DD}(Read)) or 100% read cycle (if I_{DD}(Write) < I_{DD}(Read)).
4. All address / data inputs are static at either $V_{IN} > V_{IH}$ or $V_{IN} < V_{IL}$.
5. Reference value. (Condition = NOP currents are valid when entering NOP after all pending READ and WRITE cycles are completed.)
6. Outputs are impedance-controlled. $|I_{OH}| = (V_{DDQ}/2)/(RQ/5)$ for values of 175 Ω ≤ RQ ≤ 350 Ω.
7. Outputs are impedance-controlled. $I_{OL} = (V_{DDQ}/2)/(RQ/5)$ for values of 175 Ω ≤ RQ ≤ 350 Ω.
8. AC load current is higher than the shown DC values. AC I/O curves are available upon request.
9. HSTL outputs meet JEDEC HSTL Class I and Class II standards.
10. $0 \le V_{IN} \le V_{DDQ}$ for all input balls (except V_{REF}, ZQ, TCK, TMS, TDI ball).
    If R1QD, R1QE, R1QF, R1QK, R1QL, R1QM, R1QP series, balls with ODT do not follow this spec.
11. $0 \le V_{OUT} \le V_{DDQ}$ (except TDO ball), output disabled.

Thermal Resistance

Parameter	Symbol	Airflow	Typ	Unit	Test condition	Notes
Junction to Ambient	θ_{JA}	1 m/s	9.7	°C/W	EIA/JEDEC JESD51	1
Junction to Case	θ_{JC}	-	4.4			

Notes:

1. These parameters are calculated under the condition. These are reference values.
2. $Tj = Ta + \theta_{JA} \times Pd$
   $Tj = Tc + \theta_{JC} \times Pd$
   where
   Tj : junction temperature when the device has achieved a steady-state after application of Pd (°C)
   Ta : ambient temperature (°C)
   Tc : temperature of external surface of the package or case (°C)
   θ_{JA} : thermal resistance from junction-to-ambient (°C/W)
   θ_{JC} : thermal resistance from junction-to-case (package) (°C/W)
   Pd : power dissipation that produced change in junction temperature (W) (cf.JESD51-2A)

Capacitance

(Ta = +25°C, Frequency = 1.0MHz, V_{DD} = 1.8V, V_{DDQ} = 1.5V)


Parameter	Symbol	Min	Typ	Max	Unit	Test condition	Notes
Input capacitance (SA, /R, /W, /BW, D(separate))	C_{IN}	—	4	5	pF	V_{IN} = 0 V	1, 2
Clock input capacitance (K, /K, C, /C)	C_{CLK}	—	4	5	pF	V_{CLK} = 0 V	1, 2
Output capacitance (Q(separate), DQ(common), CQ, /CQ)	$C_{I/O}$	—	5	6	pF	$V_{I/O}$ = 0 V	1, 2

Notes:


1. These parameters are sampled and not 100% tested.
2. Except JTAG (TCK, TMS, TDI, TDO) pins.

AC Test Conditions


Input waveform (Rise/fall time ≤ 0.3 ns)

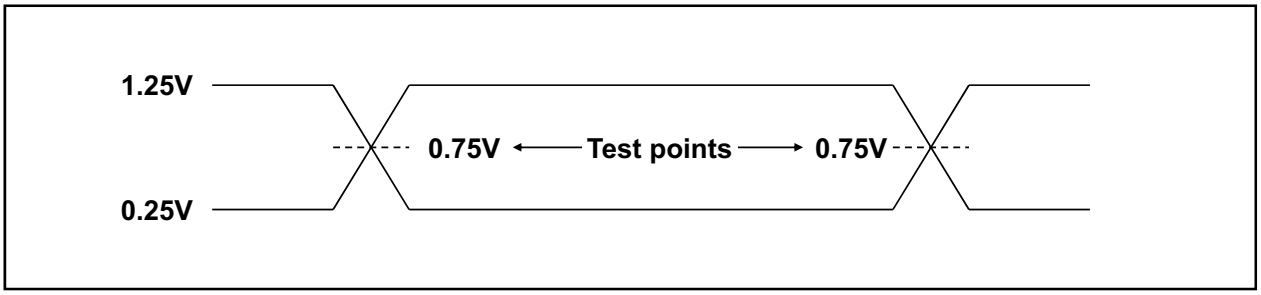

Output waveform

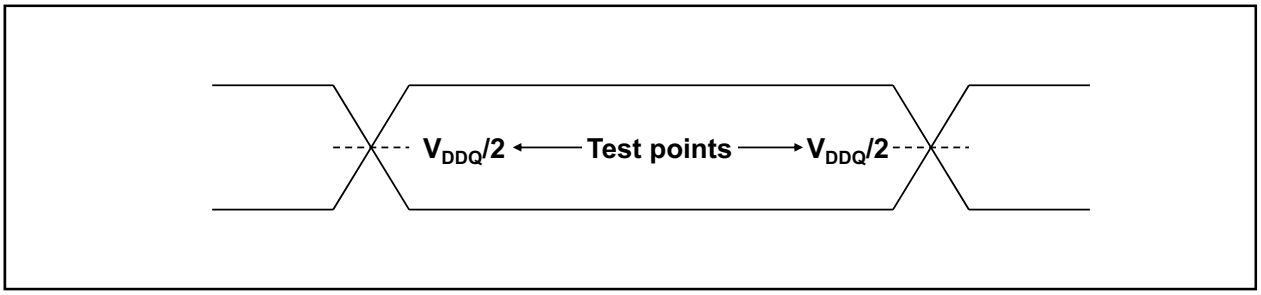

Output load conditions

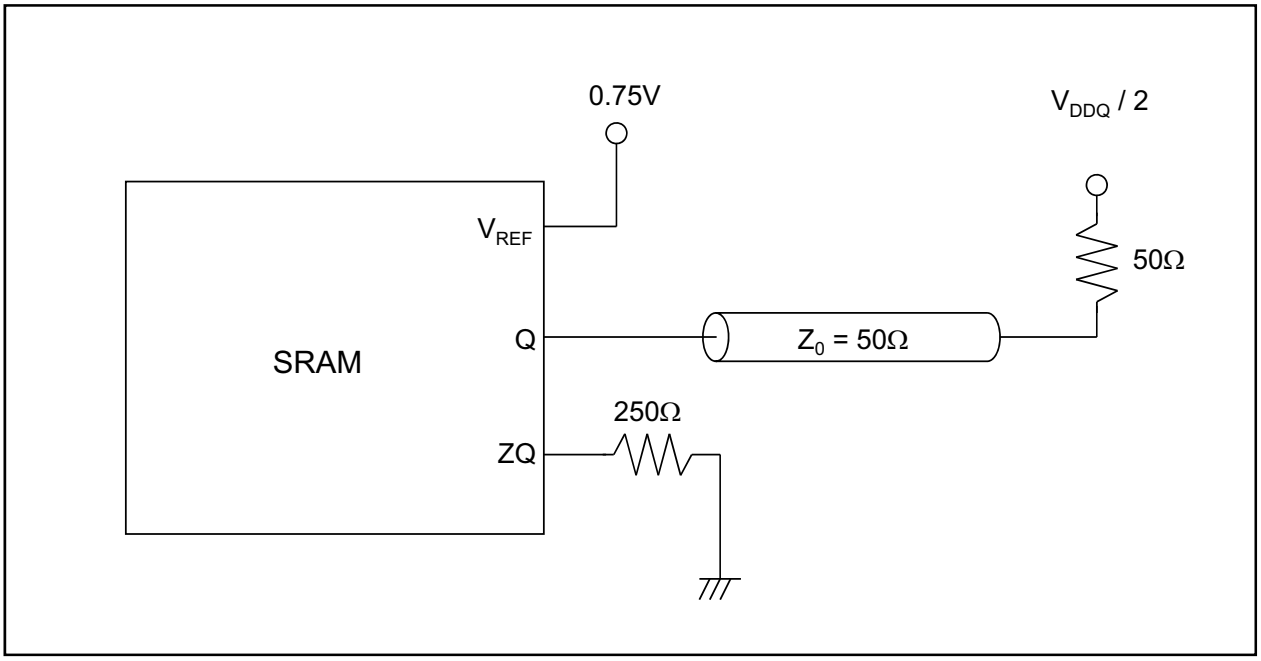

AC Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Input high voltage	$V_{IH\ (AC)}$	V_{REF} + 0.2	—	—	V	1, 2, 3, 4
Input low voltage	$V_{IL\ (AC)}$	—	—	V_{REF} – 0.2	V	1, 2, 3, 4

Notes:

1. All voltages referenced to V_{SS} (GND).
   During normal operation, V_{DDQ} must not exceed V_{DD}.
2. These conditions are for AC functions only, not for AC parameter test.
3. Overshoot: $V_{IH\ (AC)} \leq V_{DDQ}$ + 0.5 V for $t \leq t_{KHKH}/2$
   Undershoot: $V_{IL\ (AC)} \geq -0.5$ V for $t \leq t_{KHKH}/2$
   Control input signals may not have pulse widths less than t_{KHKL} (min) or operate at cycle rates less than t_{KHKH} (min).
4. To maintain a valid level, the transitioning edge of the input must:
   a. Sustain a constant slew rate from the current AC level through the target AC level, $V_{IL\ (AC)}$ or $V_{IH\ (AC)}$.
   b. Reach at least the target AC level.
   c. After the AC target level is reached, continue to maintain at least the target DC level, $V_{IL\ (DC)}$ or $V_{IH\ (DC)}$.

AC Characteristics (Read Latency = 2.5 cycle)

(Ta = 0 ~ +70°C @ R1Q*A*****BG-****R**** series)
(Ta = -40 ~ +85°C @ R1Q*A*****BG-****I**** series)
(V_{DD} = 1.8V ±0.1V, V_{DDQ} = 1.5V, V_{REF} = 0.75V)

Parameter	Symbol	-19		-20		-22		-25		-27		-30		Unit	Notes
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Clock															
Average clock cycle time (K, /K)	t_{KHKH}	1.875	4.00	2.00	4.00	2.22	4.00	2.50	4.00	2.66	4.00	3.00	4.00	ns	
Clock high time (K, /K)	t_{KHKL}	0.40	—	0.40	—	0.40	—	0.40	—	0.40	—	0.40	—	Cy-cle	
Clock low time (K, /K)	t_{KLKH}	0.40	—	0.40	—	0.40	—	0.40	—	0.40	—	0.40	—	Cy-cle	
Clock to /clock (K to /K)	$t_{KH/KH}$	0.425	—	0.425	—	0.425	—	0.425	—	0.425	—	0.425	—	Cy-cle	
/Clock to clock (/K to K)	$t_{/KHKH}$	0.425	—	0.425	—	0.425	—	0.425	—	0.425	—	0.425	—	Cy-cle	
—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
DLL/PLL Timing															
Clock phase jitter (K, /K)	t_{KC} var	—	0.15	—	0.15	—	0.15	—	0.20	—	0.20	—	0.20	ns	3
Lock time (K)	t_{KC} lock	20	—	20	—	20	—	20	—	20	—	20	—	us	2
K static to DLL/PLL reset	t_{KC} reset	30	—	30	—	30	—	30	—	30	—	30	—	ns	7
Output Times															
K, /K high to output valid	t_{CHQV}	—	0.45	—	0.45	—	0.45	—	0.45	—	0.45	—	0.45	ns	
K, /K high to output hold	t_{CHQX}	–0.45	—	–0.45	—	–0.45	—	–0.45	—	–0.45	—	–0.45	—	ns	
K, /K high to echo clock valid	t_{CHCQV}	—	0.45	—	0.45	—	0.45	—	0.45	—	0.45	—	0.45	ns	
K, /K high to echo clock hold	t_{CHCQX}	–0.45	—	–0.45	—	–0.45	—	–0.45	—	–0.45	—	–0.45	—	ns	
CQ, /CQ high to output valid	t_{CQHQV}	—	0.15	—	0.15	—	0.15	—	0.20	—	0.20	—	0.20	ns	4, 7
CQ, /CQ high to output hold	t_{CQHQX}	–0.15	—	–0.15	—	–0.15	—	–0.20	—	–0.20	—	–0.20	—	ns	4, 7
K, /K high to output high-Z	t_{CHQZ}	—	0.45	—	0.45	—	0.45	—	0.45	—	0.45	—	0.45	ns	5, 6
K, /K high to output low-Z	t_{CHQX1}	–0.45	—	–0.45	—	–0.45	—	–0.45	—	–0.45	—	–0.45	—	ns	5
CQ high to QVLD valid	t_{QVLD}	–0.15	0.15	–0.15	0.15	–0.15	0.15	–0.20	0.20	–0.20	0.20	–0.20	0.20	ns	7

Parameter	Symbol	-19		-20		-22		-25		-27		-30		Unit	Notes
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
Setup Times															
Address valid to K rising edge	t_{AVKH} (QDRII+ B2)	—	—	—	—	—	—	—	—	—	—	—	—	ns	1, 8
	t_{AVKH} (QDRII+ B4 & DDRII+)	0.30	—	0.33	—	0.40	—	0.40	—	0.40	—	0.40	—		
Control inputs valid to K rising edge	t_{IVKH} (QDRII+ B2)	—	—	—	—	—	—	—	—	—	—	—	—	ns	1, 8
	t_{IVKH} (QDRII+ B4 & DDRII+)	0.30	—	0.33	—	0.40	—	0.40	—	0.40	—	0.40	—		
Data-in valid to K, /K rising edge	t_{DVKH}	0.20	—	0.22	—	0.25	—	0.28	—	0.28	—	0.28	—	ns	1, 9
Hold Times															
K rising edge to address hold	t_{KHAX} (QDRII+ B2)	—	—	—	—	—	—	—	—	—	—	—	—	ns	1, 8
	t_{KHAX} (QDRII+ B4 & DDRII+)	0.30	—	0.33	—	0.40	—	0.40	—	0.40	—	0.40	—		
K rising edge to control inputs hold	t_{KHIX} (QDRII+ B2)	—	—	—	—	—	—	—	—	—	—	—	—	ns	1, 8
	t_{KHIX} (QDRII+ B4 & DDRII+)	0.30	—	0.33	—	0.40	—	0.40	—	0.40	—	0.40	—		
K, /K rising edge to data-in hold	t_{KHDX}	0.20	—	0.22	—	0.25	—	0.28	—	0.28	—	0.28	—	ns	1, 9


Notes:

1. This is a synchronous device. All addresses, data and control lines must meet the specified setup and hold times for all latching clock edges.
2. V_{DD} and V_{DDQ} slew rate must be less than 0.1 V DC per 50 ns for DLL/PLL lock retention. DLL/PLL lock time begins once V_{DD} , V_{DDQ} and input clock are stable.
   It is recommended that the device is kept inactive during these cycles.
3. Clock phase jitter is the variance from clock rising edge to the next expected clock rising edge.
4. Echo clock is very tightly controlled to data valid / data hold. By design, there is a ±0.1 ns variation from echo clock to data. The datasheet parameters reflect tester guardbands and test setup variations.
5. Transitions are measured ±100 mV from steady-state voltage.
6. At any given voltage and temperature t_{CHQZ} is less than t_{CHQX1} and t_{CHQV}.
7. These parameters are sampled.
8. t_{AVKH}, t_{IVKH}, t_{KHAX}, t_{KHIX} spec is determined by the actual frequency regardless of Part Number (Marking Name). The following is the spec for the actual frequency.
   0.30 ns for ≤533MHz & >500MHz
   0.33 ns for ≤500MHz & >450MHz
   0.40 ns for ≤450MHz & ≥250MHz
9. t_{DVKH}, t_{KHDX} spec is determined by the actual frequency regardless of Part Number (Marking Name). The following is the spec for the actual frequency.
   0.20 ns for ≤533MHz & >500MHz
   0.22 ns for ≤500MHz & >450MHz
   0.25 ns for ≤450MHz & >400MHz
   0.28 ns for ≤400MHz & ≥250MHz

Remarks:

1. Test conditions as specified with the output loading as shown in AC Test Conditions unless otherwise noted.
2. Control input signals may not be operated with pulse widths less than t_{KHKL} (min).
3. V_{DDQ} is +1.5 V DC. V_{REF} is +0.75 V DC.
4. Control signals are /R, /W (QDR series), /LD, R-/W (DDR series), /BW, /BW0, /BW1, /BW2 and /BW3. Setup and hold times of /BWx signals must be the same as those of Data-in signals.

Timing Waveforms (DDRII+, B2, Read Latency = 2.5 cycle)

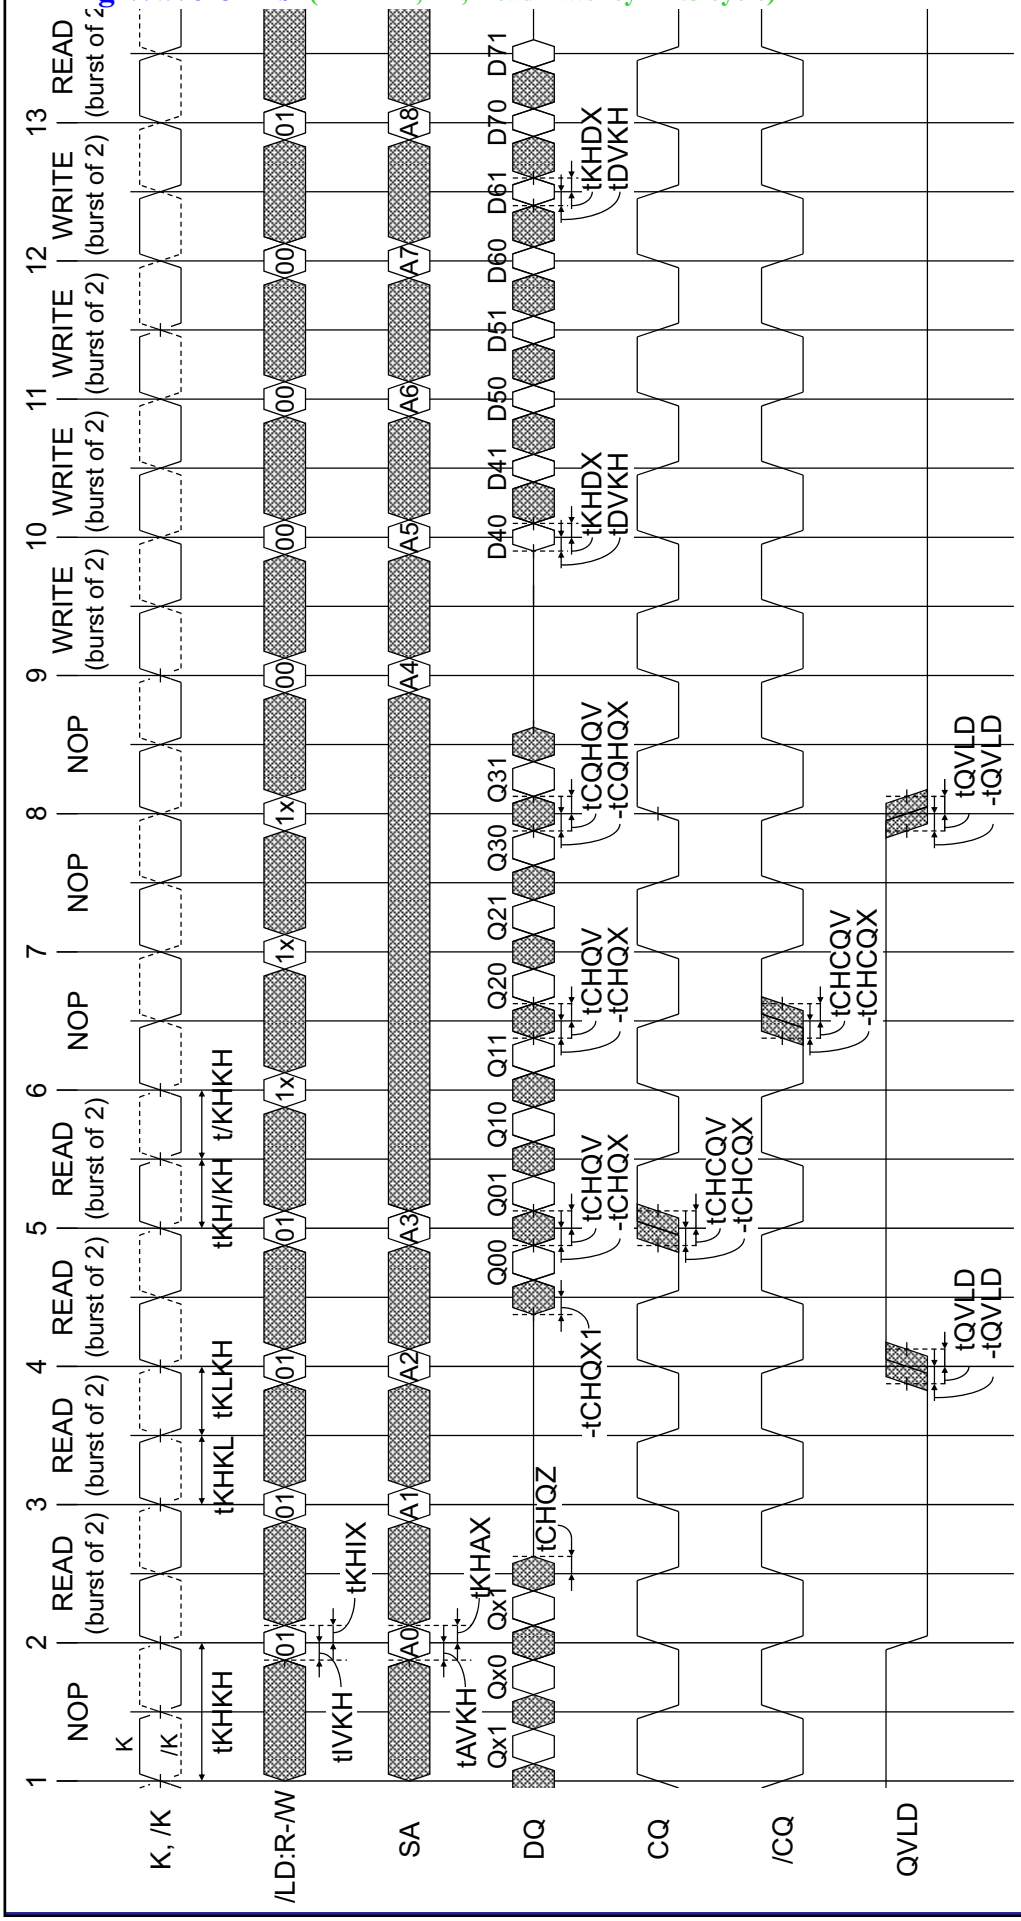

Notes:
1. Q00 refers to output from address A0. Q01 refers to output from the next internal burst address following A0, etc.
2. Outputs are disabled (high-Z) N clock cycle after the last read cycle. Here, N = Read Latency + Burst Length × 0.5.
3. In this example, if address A8 = A7, then data Q80 = D70, Q81 = D71, etc. Write data is forwarded immediately as read results.
4. To control read and write operations, /BW signals must operate at the same timing as Data-in signals.
5. The third NOP cycle is not necessary for correct device operation; however, at high clock frequencies it may be required to prevent bus contention.

JTAG Specification

These products support a limited set of JTAG functions as in IEEE standard 1149.1.

Disabling the Test Access Port

It is possible to use this device without utilizing the TAP. To disable the TAP controller without interfering with normal operation of the device, TCK must be tied to V_{SS} to preclude mid level inputs.
TDI and TMS are internally pulled up and may be unconnected, or may be connected to VDD through a pull up resistor.
TDO should be left unconnected.

Test Access Port (TAP) Pins

Symbol I/O	Pin assignments	Description	Notes
TCK	2R	Test clock input. All inputs are captured on the rising edge of TCK and all outputs propagate from the falling edge of TCK.	
TMS	10R	Test mode select. This is the command input for the TAP controller state machine.	
TDI	11R	Test data input. This is the input side of the serial registers placed between TDI and TDO. The register placed between TDI and TDO is determined by the state of the TAP controller state machine and the instruction that is currently loaded in the TAP instruction.	
TDO	1R	Test data output. Output changes in response to the falling edge of TCK. This is the output side of the serial registers placed between TDI and TDO.	

Notes:

The device does not have TRST (TAP reset). The Test-Logic Reset state is entered while TMS is held high for five rising edges of TCK. The TAP controller state is also reset on SRAM POWER-UP.

TAP DC Operating Characteristics

(Ta = 0 ~ +70°C @ R1Q*A*****BG-**R** series)
(Ta = -40 ~ +85°C @ R1Q*A*****BG-**I** series)
(V_{DD} = 1.8V ±0.1V)


Parameter	Symbol	Min	Typ	Max	Unit	Notes
Input high voltage	V_{IH}	+1.3	—	V_{DD} + 0.3	V	
Input low voltage	V_{IL}	–0.3	—	+0.5	V	
Input leakage current	I_{LI}	–5.0	—	+5.0	µA	0 V ≤ V_{IN} ≤ V_{DD}
Output leakage current	I_{LO}	–5.0	—	+5.0	µA	0 V ≤ V_{IN} ≤ V_{DD}, output disabled
Output low voltage	V_{OL1}	—	—	0.2	V	I_{OLC} = 100 µA
	V_{OL2}	—	—	0.4	V	I_{OLT} = 2 mA
Output high voltage	V_{OH1}	1.6	—	—	V	$\|I_{OHC}\|$ = 100 µA
	V_{OH2}	1.4	—	—	V	$\|I_{OHT}\|$ = 2 mA

Notes:
1. All voltages referenced to V_{SS} (GND).
2. At power-up, V_{DD} and V_{DDQ} are assumed to be a linear ramp from 0V to V_{DD}(min.) or V_{DDQ}(min.) within 200ms. During this time V_{DDQ} < V_{DD} and V_{IH} < V_{DDQ}.
   During normal operation, V_{DDQ} must not exceed V_{DD}.


TAP AC Test Conditions

Parameter	Symbol	Conditions	Unit	Notes
Input timing measurement reference levels	V_{REF}	0.9	V	
Input pulse levels	V_{IL}, V_{IH}	0 to 1.8	V	
Input rise/fall time	tr, tf	≤ 1.0	ns	
Output timing measurement reference levels		0.9	V	
Test load termination supply voltage (V_{TT})		0.9	V	
Output load		See figures		


Input waveform

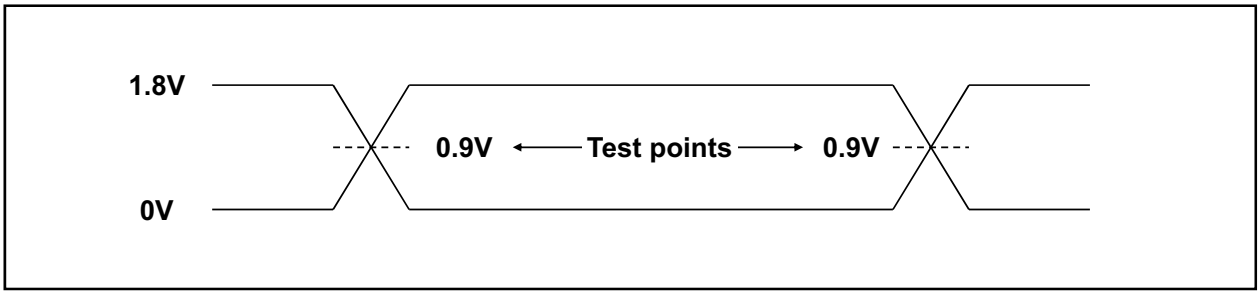

Output waveform

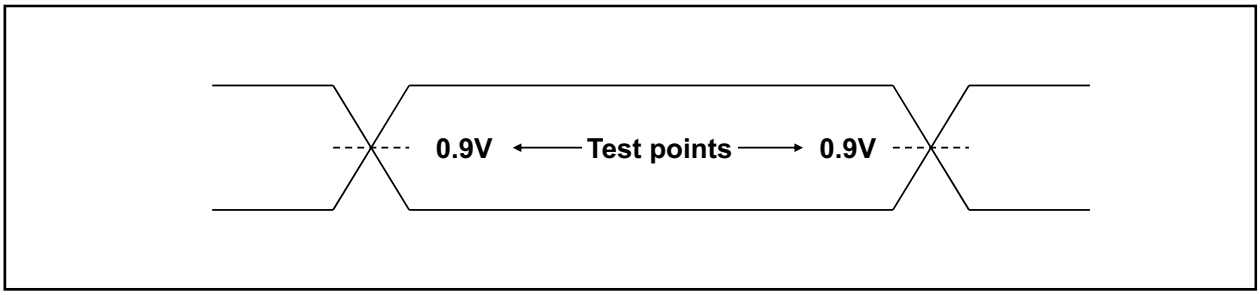

Output load condition

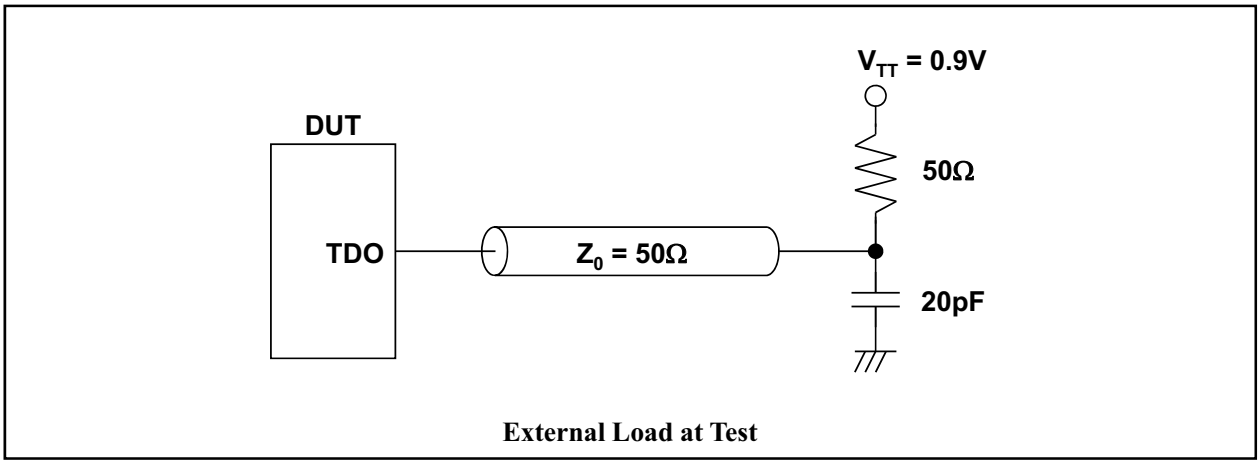

External Load at Test


TAP AC Operating Characteristics

(Ta = 0 ~ +70°C @ R1Q*A*****BG-**R** series)
(Ta = -40 ~ +85°C @ R1Q*A*****BG-**I** series)
(V_{DD} = 1.8V ±0.1V)

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Test clock (TCK) cycle time	t_{THTH}	50	—	—	ns	
TCK high pulse width	t_{THTL}	20	—	—	ns	
TCK low pulse width	t_{TLTH}	20	—	—	ns	
Test mode select (TMS) setup	t_{MVTH}	5	—	—	ns	
TMS hold	t_{THMX}	5	—	—	ns	
Capture setup	t_{CS}	5	—	—	ns	1
Capture hold	t_{CH}	5	—	—	ns	1
TDI valid to TCK high	t_{DVTH}	5	—	—	ns	
TCK high to TDI invalid	t_{THDX}	5	—	—	ns	
TCK low to TDO unknown	t_{TLQX}	0	—	—	ns	
TCK low to TDO valid	t_{TLQV}	—	—	10	ns	

Notes:
1. t_{CS} + t_{CH} defines the minimum pause in RAM I/O pad transitions to assure pad data capture.

TAP Controller Timing Diagram

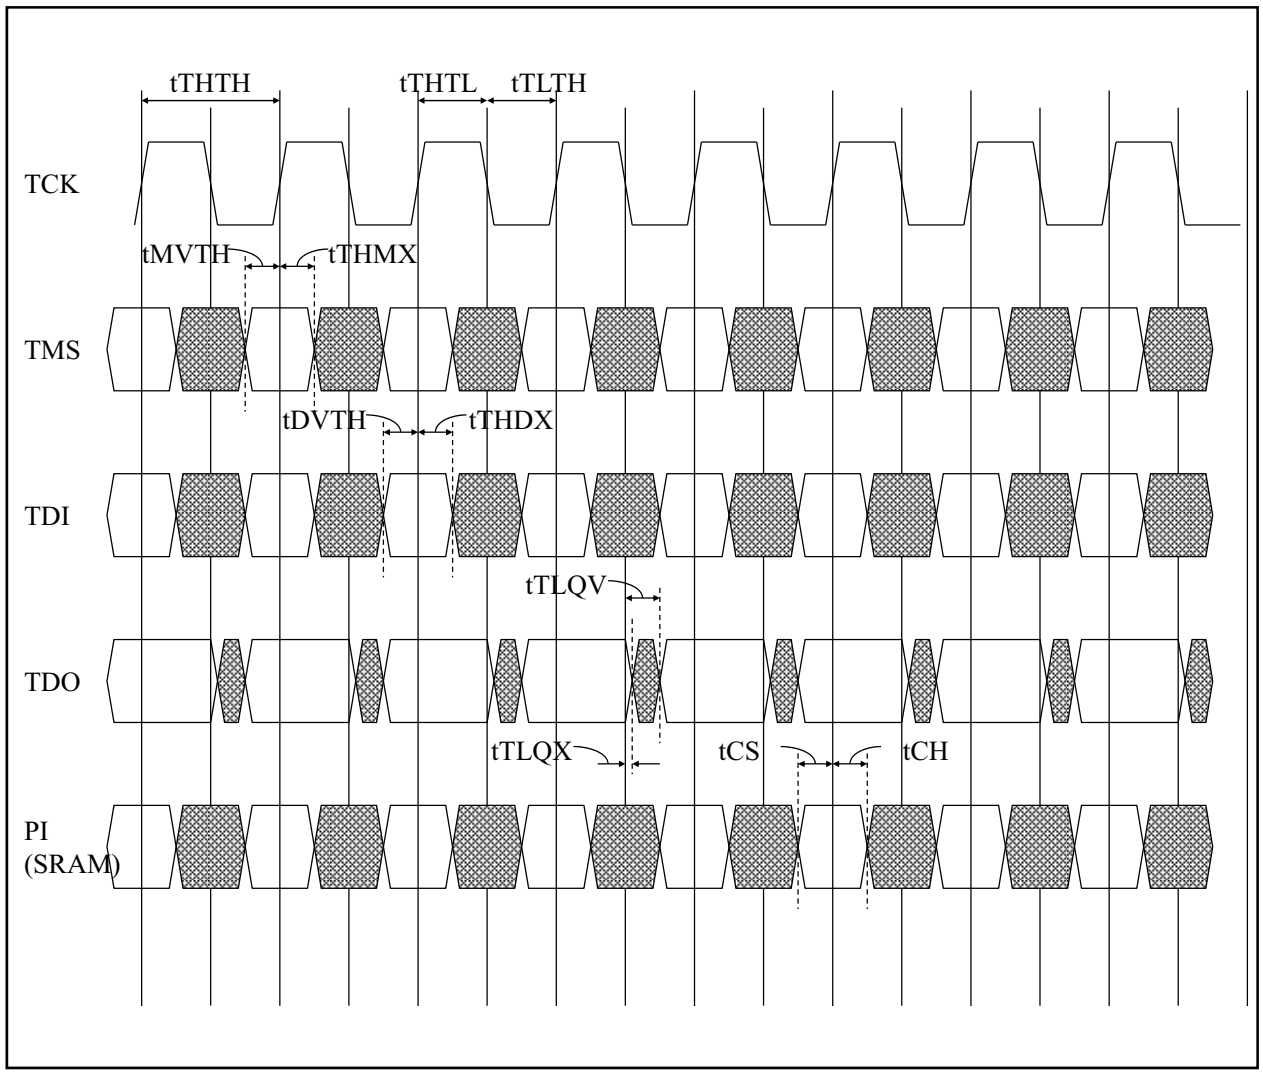

Test Access Port Registers

Register name	Length	Symbol	Notes
Instruction register	3 bits	IR [2:0]	
Bypass register	1 bit	BP	
ID register	32 bits	ID [31:0]	
Boundary scan register	109 bits	BS [109:1]	

TAP Controller Instruction Set

IR2	IR1	IR0	Instruction	Description	Notes
0	0	0	EXTEST	The EXTEST instruction allows circuitry external to the component package to be tested. Boundary scan register cells at output balls are used to apply test vectors, while those at input balls capture test results. Typically, the first test vector to be applied using the EXTEST instruction will be shifted into the boundary scan register using the PRELOAD instruction. Thus, during the Update-IR state of EXTEST, the output driver is turned on and the PRELOAD data is driven onto the output balls.	1, 2, 3, 5
0	0	1	IDCODE	The IDCODE instruction causes the ID ROM to be loaded into the ID register when the controller is in capture-DR mode and places the ID register between the TDI and TDO balls in shift-DR mode. The IDCODE instruction is the default instruction loaded in at power up and any time the controller is placed in the Test-Logic-Reset state.	
0	1	0	SAMPLE-Z	If the SAMPLE-Z instruction is loaded in the instruction register, all RAM outputs are forced to an inactive drive state (high-Z), moving the TAP controller into the capture-DR state loads the data in the RAMs input into the boundary scan register, and the boundary scan register is connected between TDI and TDO when the TAP controller is moved to the shift-DR state.	3, 4, 5
0	1	1	RESERVED	The RESERVED instructions are not implemented but are reserved for future use. Do not use these instructions.	
1	0	0	SAMPLE (/PRELOAD)	When the SAMPLE instruction is loaded in the instruction register, moving the TAP controller into the capture-DR state loads the data in the RAMs input and I/O buffers into the boundary scan register. Because the RAM clock(s) are independent from the TAP clock (TCK) it is possible for the TAP to attempt to capture the I/O ring contents while the input buffers are in transition (i.e., in a metastable state). Although allowing the TAP to SAMPLE metastable input will not harm the device, repeatable results cannot be expected. Moving the controller to shift-DR state then places the boundary scan register between the TDI and TDO balls.	3, 5
1	0	1	RESERVED	-	
1	1	0	RESERVED	-	
1	1	1	BYPASS	The BYPASS instruction is loaded in the instruction register when the bypass register is placed between TDI and TDO. This occurs when the TAP controller is moved to the shift-DR state. This allows the board level scan path to be shortened to facilitate testing of other devices in the scan path.	

Notes:

1. Data in output register is not guaranteed if EXTEST instruction is loaded.
2. After performing EXTEST, power-up conditions are required in order to return part to normal operation.
3. RAM input signals must be stabilized for long enough to meet the TAPs input data capture setup plus hold time (t_{CS} plus t_{CH}). The RAMs clock inputs need not be paused for any other TAP operation except capturing the I/O ring contents into the boundary scan register.
4. Clock recovery initialization cycles are required after boundary scan.
5. For R1QD, R1QE, R1QF, R1QK, R1QL, R1QM, R1QP series, ODT is disabled in EXTEST, SAMPLE-Z or SAMPLE mode.

Boundary Scan Order

Bit #	Ball ID	Signal names		
		x9	x18	x36
1	6R	/C or NC or ODT	/C or NC or ODT	/C or NC or ODT
2	6P	C or QVLD	C or QVLD	C or QVLD
3	6N	SA	SA	SA
4	7P	SA	SA	SA
5	7N	SA	SA	SA
6	7R	SA	SA	SA
7	8R	SA	SA	SA
8	8P	SA	SA	SA
9	9R	SA	SA	SA
10	11P	DQ0	DQ0	DQ0
11	10P	NC	NC	DQ9
12	10N	NC	NC	NC
13	9P	NC	NC	NC
14	10M	NC	DQ1	DQ11
15	11N	NC	NC	DQ10
16	9M	NC	NC	NC
17	9N	NC	NC	NC
18	11L	DQ1	DQ2	DQ2
19	11M	NC	NC	DQ1
20	9L	NC	NC	NC
21	10L	NC	NC	NC
22	11K	NC	DQ3	DQ3
23	10K	NC	NC	DQ12
24	9J	NC	NC	NC
25	9K	NC	NC	NC
26	10J	DQ2	DQ4	DQ13
27	11J	NC	NC	DQ4
28	11H	ZQ	ZQ	ZQ
29	10G	NC	NC	NC
30	9G	NC	NC	NC
31	11F	NC	DQ5	DQ5
32	11G	NC	NC	DQ14
33	9F	NC	NC	NC
34	10F	NC	NC	NC
35	11E	DQ3	DQ6	DQ6

Bit #	Ball ID	Signal names		
		x9	x18	x36
36	10E	NC	NC	DQ15
37	10D	NC	NC	NC
38	9E	NC	NC	NC
39	10C	NC	DQ7	DQ17
40	11D	NC	NC	DQ16
41	9C	NC	NC	NC
42	9D	NC	NC	NC
43	11B	DQ4	DQ8	DQ8
44	11C	NC	NC	DQ7
45	9B	NC	NC	NC
46	10B	NC	NC	NC
47	11A	CQ	CQ	CQ
48	10A	SA	SA	SA
49	9A	SA	SA	SA
50	8B	SA	SA	SA
51	7C	SA	SA	SA
52	6C	SA	SA0 or NC	SA0 or NC
53	8A	/LD	/LD	/LD
54	7A	SA	SA	/BW1
55	7B	/BW	/BW0	/BW0
56	6B	K	K	K
57	6A	/K	/K	/K
58	5B	NC	NC	/BW3
59	5A	NC	/BW1	/BW2
60	4A	R-/W	R-/W	R-/W
61	5C	SA	SA	SA
62	4B	SA	SA	SA
63	3A	SA	SA	SA
64	2A	SA	SA	SA
65	1A	/CQ	/CQ	/CQ
66	2B	NC	DQ9	DQ27
67	3B	NC	NC	DQ18
68	1C	NC	NC	NC
69	1B	NC	NC	NC
70	3D	NC	DQ10	DQ19

Boundary Scan Order

Bit #	Ball ID	Signal names		
		x9	x18	x36
71	3C	NC	NC	DQ28
72	1D	NC	NC	NC
73	2C	NC	NC	NC
74	3E	DQ5	DQ11	DQ20
75	2D	NC	NC	DQ29
76	2E	NC	NC	NC
77	1E	NC	NC	NC
78	2F	NC	DQ12	DQ30
79	3F	NC	NC	DQ21
80	1G	NC	NC	NC
81	1F	NC	NC	NC
82	3G	DQ6	DQ13	DQ22
83	2G	NC	NC	DQ31
84	1H	/DOFF	/DOFF	/DOFF
85	1J	NC	NC	NC
86	2J	NC	NC	NC
87	3K	NC	DQ14	DQ23
88	3J	NC	NC	DQ32
89	2K	NC	NC	NC
90	1K	NC	NC	NC

Bit #	Ball ID	Signal names		
		x9	x18	x36
91	2L	DQ7	DQ15	DQ33
92	3L	NC	NC	DQ24
93	1M	NC	NC	NC
94	1L	NC	NC	NC
95	3N	NC	DQ16	DQ25
96	3M	NC	NC	DQ34
97	1N	NC	NC	NC
98	2M	NC	NC	NC
99	3P	DQ8	DQ17	DQ26
100	2N	NC	NC	DQ35
101	2P	NC	NC	NC
102	1P	NC	NC	NC
103	3R	SA	SA	SA
104	4R	SA	SA	SA
105	4P	SA	SA	SA
106	5P	SA	SA	SA
107	5N	SA	SA	SA
108	5R	SA	SA	SA
109	—	INTER-NAL	INTER-NAL	INTER-NAL
—	—	—	—	—

Notes:

In boundary scan mode,

1. Clock balls (K, /K, C, /C) are referenced to each other and must be at opposite logic levels for reliable operation.
2. CQ and /CQ data are synchronized to the respective C and /C (except EXTEST, SAMPLE-Z).
3. If C and /C tied high, CQ is generated with respect to K and /CQ is generated with respect to /K (except EXTEST, SAMPLE-Z).

ID Register

-	Revision number (31 :29)			Type number (28 : 12)															Start bit (0) → Vendor JEDEC code (11 : 1)										↓
#	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Symbol	R	R	R	0	C	M	M	M	A	W	W	0	1	Q	Q	Q	B	O	S	0	0	1	0	0	0	1	0	0	0	1	1	1

R	R	R	
0	0	0	Revison 0
0	0	1	Revison 1
0	1	0	Revison 2
0	1	1	Revison 3
:			:

Q	
0	II (QDR-II, DDR-II)
1	II+ (QDR-II+, DDR-II+)

Q	
0	DDR
1	QDR

C	
0	36M&72M w/o ODT, 144M,288M
1	36M&72M w/ ODT

Q	
0	Latency=1.5 (@II), Latency=2.0 (@II+)
1	Latency=2.5 (@II+)

M	M	M	
0	1	0	Density = 36Mb
0	1	1	Density = 72Mb
1	0	1	Density = 144Mb
1	1	0	Density = 288Mb

B	
0	Burst Length = 2 word burst
1	Burst Length = 4 word burst


O	
0	without ODT
1	with ODT

A	
0	144M&288M w/o ODT, 36M,72M
1	144M&288M w/ ODT

S	
0	Common I/O
1	Separate I/O

W	W	
0	0	x9
1	0	x18
1	1	x36

TAP Controller State Diagram

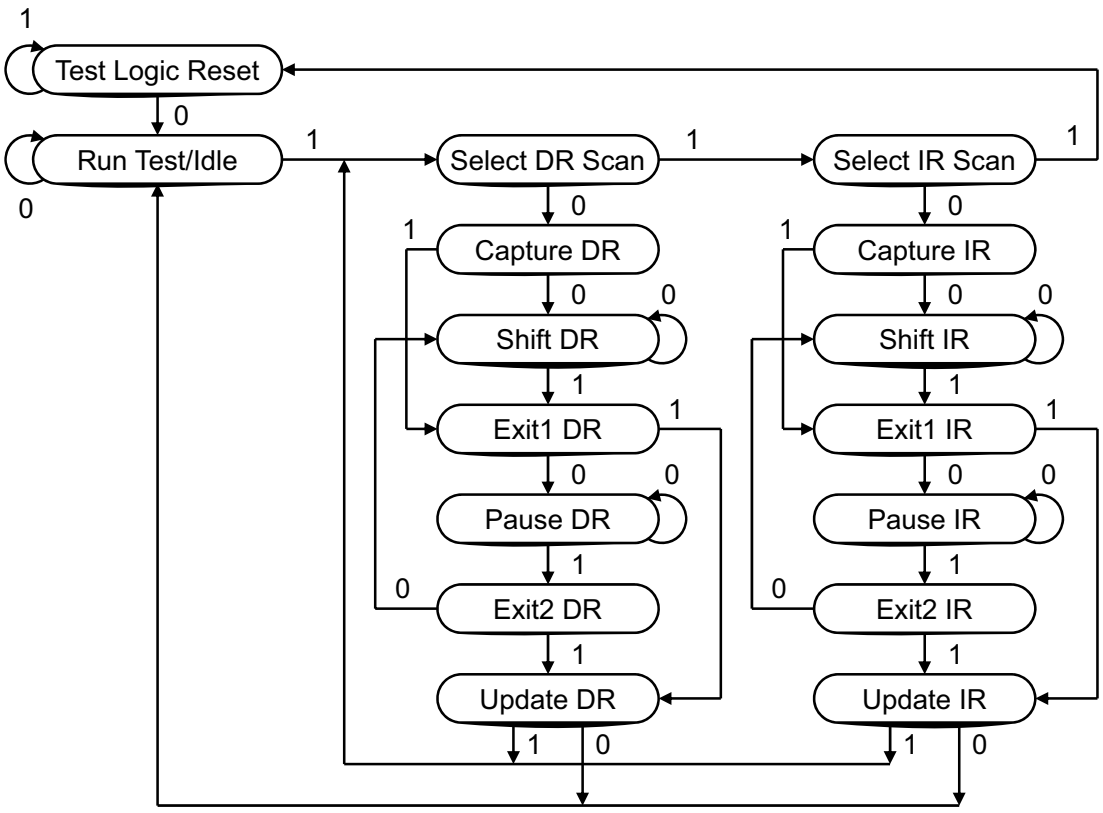

Notes:


The value adjacent to each state transition in this figure represents the signal present at TMS at the time of a rising edge at TCK.

No matter what the original state of the controller, it will enter Test-Logic-Reset when TMS is held high for at least five rising edges of TCK.

Package Dimensions and Marking Information

Both Pb parts and Pb-free parts are available.


JEITA Package Code	Renesas Code	Previous Code	Mass (typ.)
P-LBGA165-15x17-1.00	PLBG0165FD-A	165FHE	0.6 g

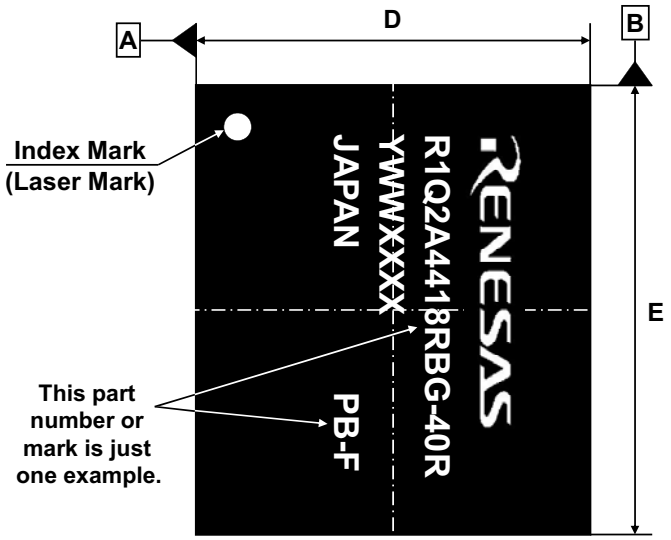


Top View

Marking Information

1st row : Vender name (RENESAS)
2nd row: Part number
3rd row : Y : Year code
WW : Week code
XXXX : Renesas internal use
4th row : Country name (JAPAN)
+ "None" --- Pb parts
+ "PB-F" --- Pb-free parts

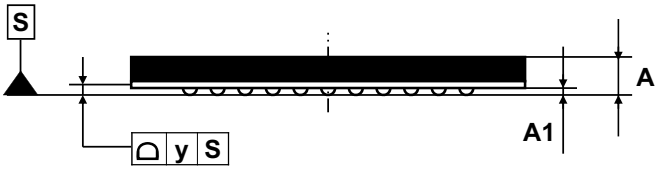

Side View

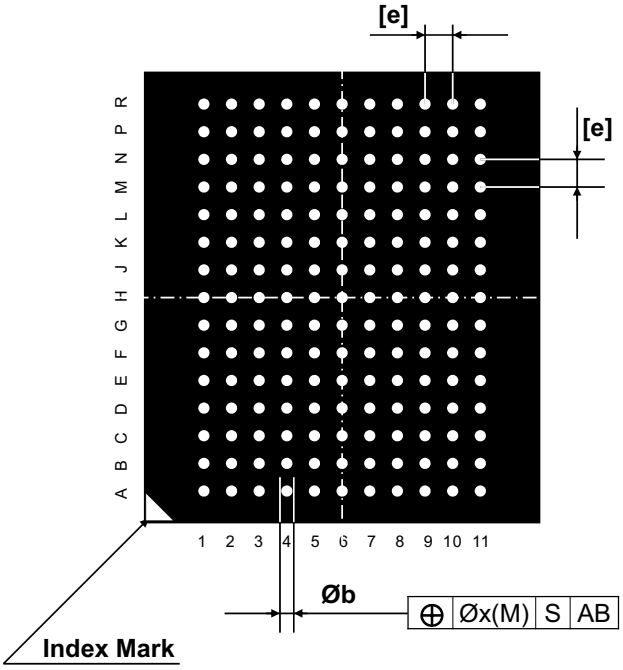

Bottom View

Reference Symbol	Dimension in mm		
	Min	Nom	Max
D	14.9	15.0	15.1
E	16.9	17.0	17.1
A	-	-	1.4
A1	0.31	0.36	0.41
[e]	-	1.0	-
b	0.45	0.5	0.6
x	-	-	0.2
y	-	-	0.15

Revision History (1)

Rev.	Date	#	Comment
Rev. 0.10c	'11.09.14	1	Initial issue. (New Version)
Rev. 0.11a	'12.04.09	1	Updated "Thermal Resistance"
Rev. 0.11b	'12.06.05	1	Updated URL for Renesas QDR SRAM Homepage.

Renesas Electronics Corporation

Headquarters: Nippon Bldg., 2-6-2, Ote-machi, Chiyoda-ku, Tokyo 100-0004, Japan

NOTES:

1. This document is provided for reference purposes only so that Renesas customers may select the appropriate Renesas products for their use. Renesas neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of Renesas or any third party with respect to the information in this document.
2. Renesas shall have no liability for damages or infringement of any intellectual property or other rights arising out of the use of any information in this document, including, but not limited to, product data, diagrams, charts, programs, algorithms, and application circuit examples.
3. You should not use the products or the technology described in this document for the purpose of military applications such as the development of weapons of mass destruction or for the purpose of any other military use. When exporting the products or technology described herein, you should follow the applicable export control laws and regulations, and procedures required by such laws and regulations.
4. All information included in this document such as product data, diagrams, charts, programs, algorithms, and application circuit examples, is current as of the date this document is issued. Such information, however,is subject to change without any prior notice. Before purchasing or using any Renesas products listed in this document, please confirm the latest product information with a Renesas sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas such as that disclosed through our website. (http://www.renesas.com)
5. Renesas has used reasonable care in compiling the information included in this document, but Renesas assumes no liability whatsoever for any damages incurred as a result of errors or omissions in the information included in this document.
6. When using or otherwise relying on the information in this document, you should evaluate the information in light of the total system before deciding about the applicability of such information to the intended application. Renesas makes no representations, warranties or guaranties regarding the suitability of its products for any particular application and specifically disclaims any liability arising out of the application and use of the information in this document or Renesas products.
7. The products described in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). The products are not designed, manufactured, tested or warranted for applications or otherwise in systems the failure or malfunction of which may cause a direct threat to human life or create a risk of human injury or which require especially high quality and reliability such as safety systems, or equipment or systems for transportation and traffic, healthcare, combustion control, aerospace and aeronautics, nuclear power, or undersea communication transmission. Unintended usage of the products shall be made at the customer's own risk. Renesas shall have no liability for damages arising out of the uses set forth above.
8. Notwithstanding the preceding paragraph, you should not use Renesas products for the purposes listed below:
   (1) artificial life support devices or systems
   (2) surgical implantations
   (3) healthcare intervention (e.g., excision, administration of medication, etc.)
   (4) any other purposes that pose a direct threat to human life
   Renesas shall have no liability for damages arising out of the uses set forth in the above and purchasers who elect to use Renesas products in any of the foregoing applications shall indemnify and hold harmless Renesas Electronics Corp., its affiliated companies and their officers, directors, and employees against any and all damages arising out of such applications.
9. You should use the products described herein within the range specified by Renesas, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas shall have no liability for malfunctions or damages arising out of the use of Renesas products beyond such specified ranges.
10. Although Renesas endeavors to improve the quality and reliability of its products, IC products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other applicable measures. Among others, since the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
11. In case Renesas products listed in this document are detached from the products to which the Renesas products are attached or affixed, the risk of accident such as swallowing by infants and small children is very high. You should implement safety measures so that Renesas products may not be easily detached from your products. Renesas shall have no liability for damages arising out of such detachment.
12. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written approval from Renesas.
13. Please contact a Renesas sales office if you have any questions regarding the information contained in this document, Renesas semiconductor products, or if you have any other inquiries.

Renesas Sales Offices

http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics America Inc.
2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited
1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada
Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.
7F, No. 363 Fu Shing North Road Taipei, Taiwan, R.O.C.
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
1 harbourFront Avenue, #06-10, keppel Bay Tower, Singapore 098632
Tel: +65-6213-0200, Fax: +65-6278-8001

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.
11F., Samik Lavied' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141

© 2012 Renesas Electronics Corporation. All rights reserved.