XC9110/XC9111 Series

ETR0406 004

PFM Controlled Step-Up DC/DC Converter / Controller ICs

■GENERAL DESCRIPTION

The XC9110/9111 series is a group of PFM controlled step-up DC/DC converter/controller ICs designed to generate low supply voltage by the combination of PFM control and CMOS structure. The series is ideal for applications where a longer battery life is needed such as in portable communication equipment. With a built-in 2.5Ω N-channel driver transistor, the XC9110A/C/E and XC9111A/C/E types provide a step-up operation by using only a coil, a capacitor, and a diode connected externally.
The XC9110/9111B, D and F versions can be used with an external transistor for applications requiring larger currents.

Output voltage is internally programmable in a range from 1.5V to 7.0V in increments of 100mV (accuracy:±2.5%).

Maximum oscillation frequency is set to 100kHz for XC9110/9111 series. (At light loads, it is set to 180kHz for the XC9111 series.) Options include products equipped with a CE pin (C and D versions) that allows the IC to be shut down thereby reducing supply current and with separated VDD/VOUT pins (E and F versions) to separate the power supply block and the output voltage detect block. With the XC9110 series, maximum duty cycle is set to 75% (VDD=3.3V) making it suitable for use with large current operations. The XC9111 series automatically switches duty ratio between 56% & 75% (VDD=3.3V) when it senses changes in load to drop output ripple voltage and can support both large and small currents. The external transistor types (B/D/F types) can be provided for applications, which require larger currents.

■APPLICATIONS


- ●Mobile phones
- ●Various palm top equipment
- ●Cameras, VCRs
- ●Various portable equipment

■FEATURES

Operating (Input) Voltage Range : 0.9V ~ 10.0V
Output Voltage Range : 1.5V~7.0V (100mV increments, accuracy ±2.5%)
Maximum Oscillation Frequency : 100kHz (accuracy ±15%) 180kHz (for the XC9111 series, duty ratio: 56% at light loads)
Built-in Switching N-ch Transistor : A/C/E type ON Resistance 2.5Ω (VDD=3.0V)
External Transistor Types : B/D/F type
Lx Limit Voltage : E type: more than VDD=2.0V
: A/C type: more than VOUT=2.0V
Low Supply Current : 2.0μA (When operating, VOUT=3V)
Small Package : SOT-23 & SOT89 (for XC9111 series), SOT-25, USP-6C


■TYPICAL APPLICATION CIRCUIT

●C type circuit

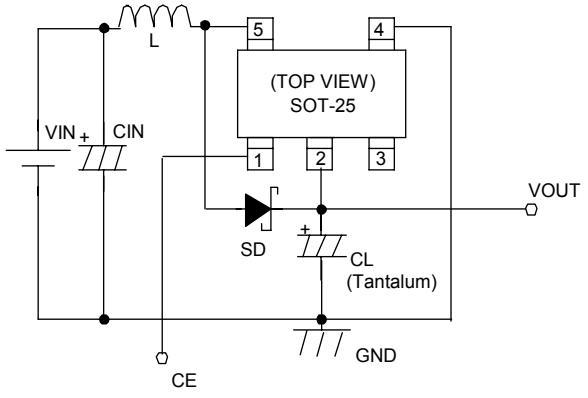


■TYPICAL PERFORMANCE CHARACTERISTICS


XC9111E331MR
L=100μH(CR54), CL47μF(Tantalum)
SD: XB01SB04A2BR

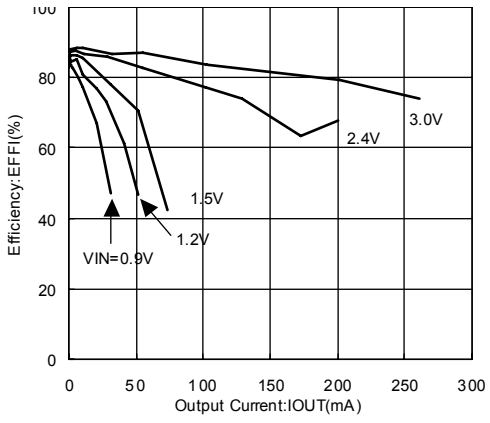


■PIN CONFIGURATION




SOT-23 (TOP VIEW)



SOT-25 (TOP VIEW)



SOT-89 (TOP VIEW)



USP-6C (BOTTOM VIEW)

*The dissipation pad for the USP-6C package should be solder-plated in recommended mount pattern and metal masking so as to enhance mounting strength and heat release. If the pad needs to be connected to other pins, it should be connected to the pin No.1.

■PIN ASSIGNMENT

●XC9111A/B


PIN NUMBER				PIN NAME	FUNCTIONS
SOT-23		SOT-89			
A	B	A	B		
1	1	1	1	VSS	: Ground
3	3	2	2	VOUT	: Output Voltage Montior, Internal Power Supply
2	-	3	-	LX	: Switch
-	2	-	3	EXT	: External Switching transistor drive <N-ch transistor drive)

●XC9110//9111C/D/E/F

PIN NUMBER								PIN NAME	FUNCTIONS
SOT-25				USP-6C					
C	D	E	F	C	D	E	F		
-	-	2	2	-	-	1	1	VDD	Internal Power Supply
4	4	4	4	6	6	6	6	VSS	Ground
-	5	-	5	-	4	-	4	EXT	External switching transistor drive <Connect to the gate pin of N-ch Power MOSFET>
5	-	5	-	4	-	4	-	Lx	Switch
1	1	-	-	3	3	-	-	CE	Chip Enable <Connect to the VOUT pin when Active and the VSS pin when stand-by>
2	2	1	1	1	1	3	3	VOUT	Output voltage monitor
3	3	3	3	2,5	2,5	2,5	2,5	NC	No connection

■PRODUCT CLASSIFICATION

●Selection Guide

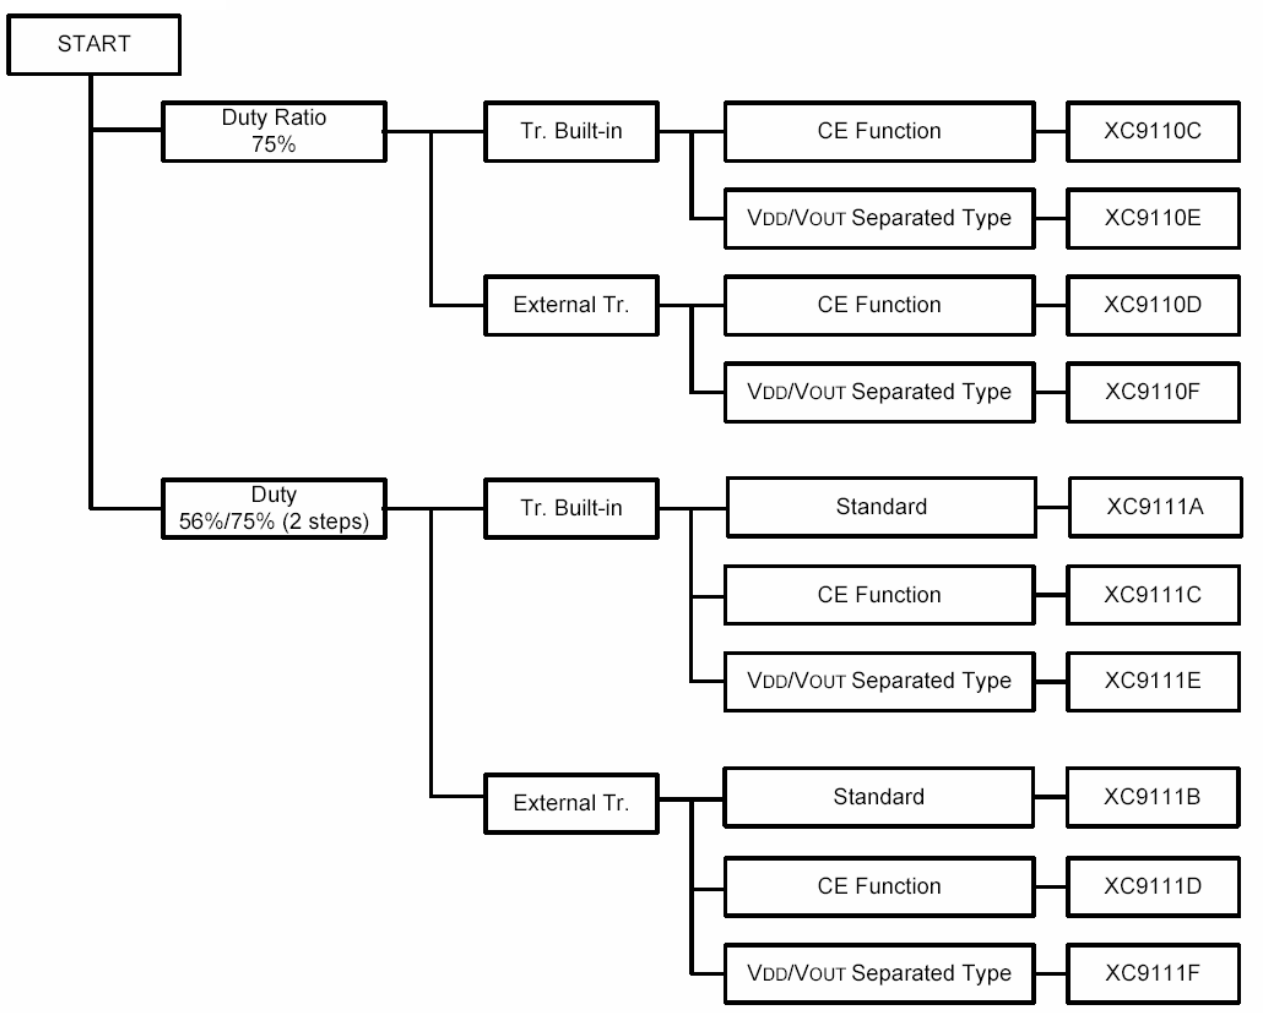


●Ordering Information

XC9110①②③④⑤⑥ : PFM control, 75% duty
XC9111①②③④⑤⑥ : PFM control, 56% / 75% duty variable

DESIGNATOR	DESCRIPTION	SYMBOL	DESCRIPTION	
①	CE Function	A	: VDD / VOUT common type (for XC9111series)	Built-in Transistor
		B	: VDD / VOUT common type (for XC9111series)	External Transistor
		C	: CE pin (5 pin)	Built-in Transistor
		D	: CE pin (5 pin)	External Transistor
		E	: VDD / VOUT separated type (5 pin)	Built-in Transistor
		F	: VDD / VOUT separated type (5 pin)	External Transistor
②③	Output Voltage	15 ~ 70	: ex. 3.5V output → ②= 3, ③= 5	
④	Maximum Oscillation Frequency	1	: 100kHz	
⑤	Package	M	: SOT-23 (for A and B types) Semi-Custom	
			: SOT-25 (for C, D, F types)	
		P	: SOT-89 (for A and B types) Semi-Custom	
		E	: USP-6C (for C, D, F types)	
⑥	Device Orientation	R	: Embossed tape, standard feed	
		L	: Embossed tape, reverse feed	


■BLOCK DIAGRAMS

●XC9111 A and B series

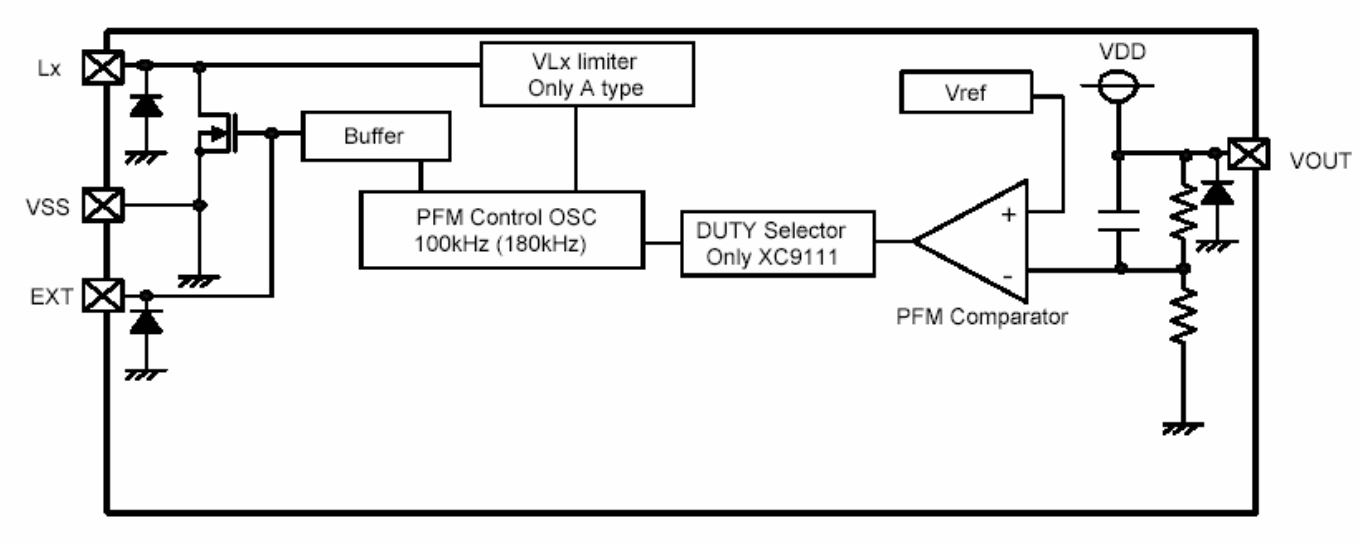

Note: The XC9110 series, Tr. Built-in type, uses the Lx pin and the XC9111 series, external Tr. Type, uses the EXT pin.
The duty ratio of the XC9111 series automatically varies between 56% (oscillation frequency 180kHz) and 75% (oscillation frequency (FOSC) 100kHz). The V_{Lx} limit function only applies to the XC9110/9111 A types.
* The duty ratio depends on power supply. Please refer to the electrical characteristics on duty against output voltage you use.


●XC9110 / 9111 C and D series

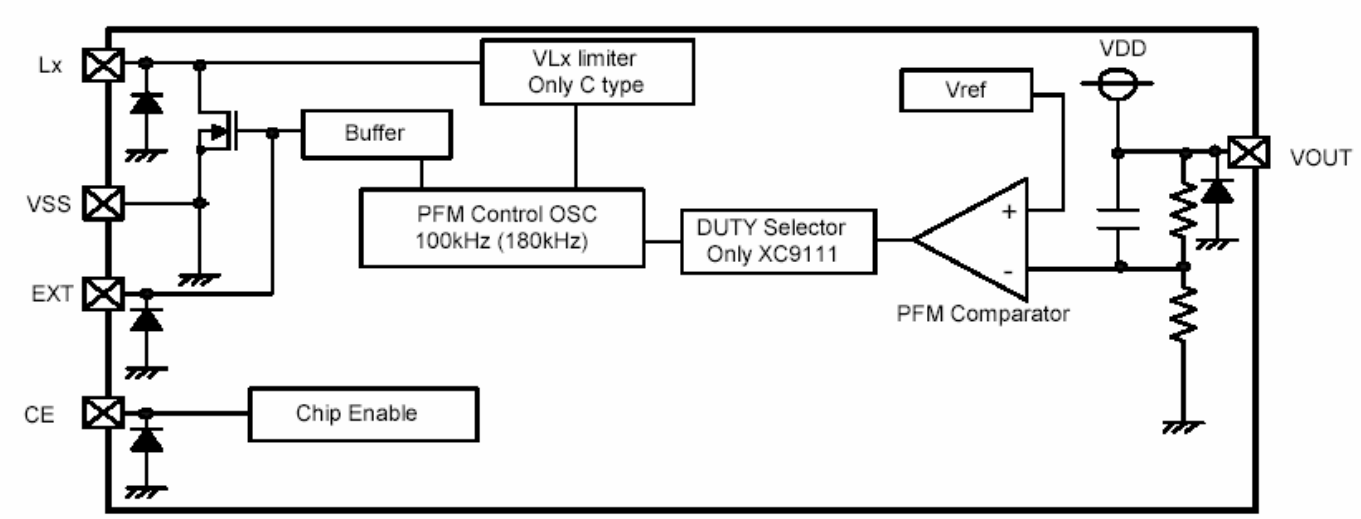

Note: The XC9110 series, Tr. Built-in type, uses the Lx pin and the XC9111 series, external Tr. Type, uses the EXT pin.
The XC9110 series' duty ratio is 75% and oscillation frequency (FOSC) is 100kHz. The duty ratio of the XC9111 series automatically varies between 56% (oscillation frequency 180kHz) and 75% (oscillation frequency (FOSC) 100kHz). The V_{Lx} limit function only applies to the XC9110/9111 C versions.
* The duty ratio depends on power supply. Please refer to the electrical characteristics on duty against output voltage you use.

■BLOCK DIAGRAMS

●XC9111 E and F series

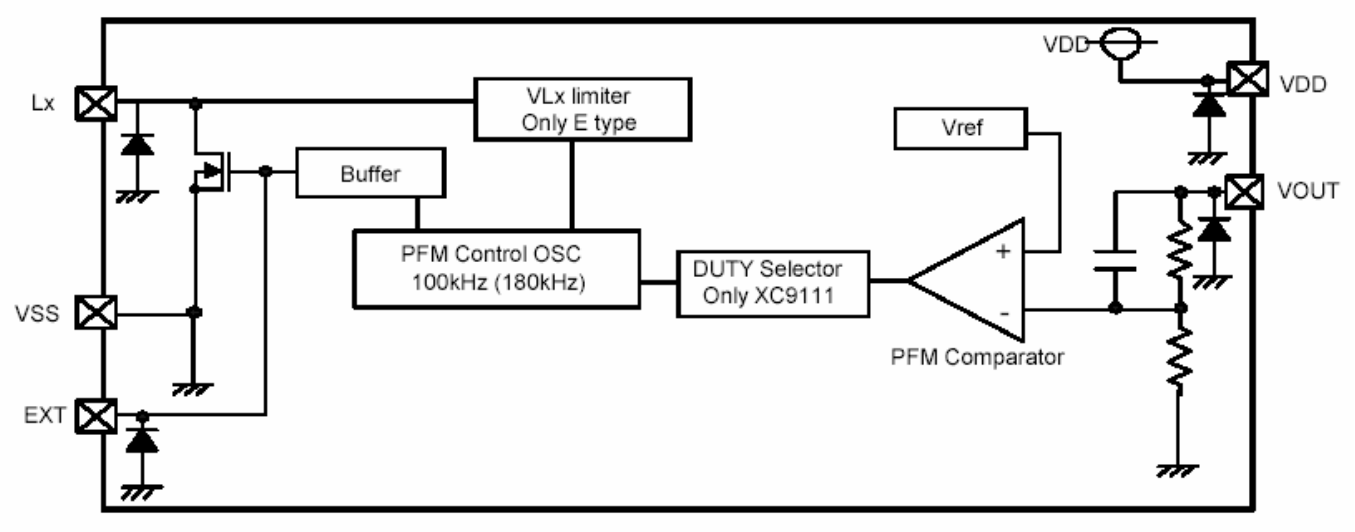

Note: The XC9110 series, Tr. Built-in type, uses the Lx pin and the XC9111 series, external Tr. Type, uses the EXT pin.
The XC9110 / 9111 series E and F series have the V_{DD} pin. The XC9110 series' duty ratio is 75% and oscillation frequency (FOSC) is 100kHz. The duty ratio of the XC9111 series automatically varies between 56% (oscillation frequency 180kHz) and 75% (oscillation frequency (FOSC) 100kHz).
The V_{Lx} limit function only applies to the XC9110/9111 C versions.
* The duty ratio depends on power supply.
Please refer to the electrical characteristics on duty against output voltage you use.

■ ABSOLUTE MAXIMUM RATINGS

Ta = 25℃

PARAMETER		SYMBOL	RATINGS	UNITS
V_{OUT} Input Voltage		V_{OUT}	– 0.3 ~ 12.0	V
Lx Pin Voltage		V_{Lx}	– 0.3 ~ 12.0	V
Lx Pin Current		I_{Lx}	400	mA
EXT Pin Voltage		V_{EXT}	V_{SS} – 0.3 ~ V_{OUT}+0.3	V
EXT Pin Current		I_{EXT}	±100	mA
CE Input Voltage		V_{CE}	– 0.3 ~ 12.0	V
V_{DD} Input Voltage		V_{DD}	– 0.3 ~ 12.0	V
Power Dissipation	SOT-23, 25	Pd	250	mW
	SOT-89		500	
	USP-6C		100	
Operating Temperature Range		Topr	– 40 ~ + 85	℃
Storage Temperature Range		Tstg	– 55 ~ +125	℃

* Define as V_{SS} with a standard of all the voltage.

■ELECTRICAL CHARACTERISTICS

XC9111Axx1MR

Ta = 25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT	CIRCUIT
Output Voltage	V_{OUT}	Connected to external components	×0.975	V_{OUT}	×1.025	V	①
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta V_{OUT} \cdot \Delta topr}$	Connected to external components - 40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Maximum Input Voltage	V_{IN}		10	-	-	V	①
Operating Start Voltage	V_{ST1}	I_{OUT}=1mA, Connected to external components	-	0.8	0.9	V	①
Oscillation Start Voltage	V_{ST2}	Applied 0.8V to V_{OUT}, Vpull=1.0V	-	-	0.8	V	②
Operating Hold Voltage	V_{HLD}	I_{OUT}=1mA, Connected to external components	0.7	-	-	V	①
Input Current at No Load	I_{IN}	I_{OUT}=0mA (*1)	-	E1-1(*)	E1-2(*)	μA	①
Supply Current 1 (*2)	I_{DD1}	Applied (output voltage×0.95) to V_{OUT}	-	E2-1(*)	E2-2(*)	μA	②
Supply Current 2	I_{DD2}	Applied (output voltage+0.5) to V_{OUT}	-	E3-1(*)	E3-2(*)	μA	②
Lx Switch ON Resistance	RSWON	Same as I_{DD1}, VLx=0.4V (*3)	-	E4-1(*)	E4-2(*)	Ω	②
Lx Leak Current	I_{LxL}	Same as I_{DD2}, VLx=7V	-	-	1	μA	③
Duty Ratio	DTY	Same as I_{DD1}, measure Lx waveform	E7-1(*)	E7-2(*)	E7-3(*)	%	②
Duty Ratio 2	DTY2	I_{OUT}=1mA, measure Lx ON time. Connect to external components	48	56	64	%	①
Maximum Oscillation Frequency	MAXFOSC	Same as I_{DD1}	85	100	115	kHz	②
Maximum Oscillation Frequency 2	MAXFOSC2	Same as I_{DD1}	153	180	207	kHz	②
Lx Limit Voltage (*4)	V_{LxLMT}	Same as I_{DD1}, VLx when max. oscillation frequency is more than double	0.7	-	1.1	V	②
Efficiency (*5)	EFFI	Connect to external components	-	E8(*)	-	%	①

Test condition : Unless otherwise specified, V_{IN}=V_{OUT}×0.6, I_{OUT}=<C1(*)>, Vpull=5.0V

NOTE:

*1: TOREX SBD, XB01SB04A2BR is used, reverse current IR < 1μA (when reverse voltage V_R = 10V is applied), in case of using selected parts.

*2: Supply Current 1 is the value when the IC is constantly switching. In actual operation, the oscillator periodically switches, resulting in lower power consumption. Please refer to Input Current (I_{IN}) under no load condition for the actual current, which is supplied from the input power supply (V_{IN}).

*3: Lx switch ON resistance can be calculated by (V_{Lx} x Rp) / (Vpull - V_{Lx}). * Change Vpull so that V_{Lx} will become 0.4V.

*4: The Lx limit voltage function becomes stable when V_{OUT} is over 2.0V.

*5: EFFI={[output voltage]×(output current)} / [(input voltage)×(input current)]×100

*6: Please be aware of the absolute maximum ratings of the external components.

(*): Please refer to the charts.

■ELECTRICAL CHARACTERISTICS (Continued)

XC9111Bxx1MR

Ta = 25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT	CIRCUIT
Output Voltage	V_{OUT}	Connected to external components	×0.975	V_{OUT}	×1.025	V	⑥
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta V_{OUT} \cdot \Delta topr}$	Connected to external components - 40℃≦Topr≦85℃	-	±100	-	ppm/℃	⑥
Maximum Input Voltage	V_{IN}		10	-	-	V	–
Operating Start Voltage	V_{ST1}	I_{OUT}=1mA, Connected to external components	-	0.8	0.9	V	⑥
Oscillation Start Voltage	V_{ST2}	Applied 0.8V to V_{OUT}	-	-	0.8	V	⑦
Operation Hold Voltage	V_{HLD}	I_{OUT}=1mA, Connected to external components	0.7	-	-	V	⑥
Supply Current 1 (*1)	I_{DD1}	Applied (output voltage × 0.95) to V_{OUT}	-	E2-1(*)	E2-2(*)	μA	⑦
Supply Current 2	I_{DD2}	Applied (output voltage+0.5) to V_{OUT}	-	E3-1(*)	E3-2(*)	μA	⑦
EXT 'H' ON Resistance	R_{EXTH}	Same as I_{DD1}, V_{EXT}=V_{OUT}-0.4V (*2)	-	E5-1(*)	E5-2(*)	Ω	②
EXT 'L' ON Resistance	R_{EXTL}	Same as I_{DD1}, V_{EXT}=0.4V (*3)	-	E6-1(*)	E6-2(*)	Ω	②
Duty Ratio	DTY	Same as I_{DD1}, measure Lx waveform	E7-1(*)	E7-2(*)	E7-3(*)	%	⑦
Duty Ratio 2	DTY2	I_{OUT}=1mA, measure Lx ON time. Connect to external components	48	56	64	%	⑥
Maximum Oscillation Frequency	MAXFOSC	Same as I_{DD1}	85	100	115	kHz	⑦
Maximum Oscillation Frequency 2	MAXFOSC2	Same as I_{DD1}	153	180	207	kHz	⑦
Efficiency (*4)	EFFI	Connect to external components	-	E9(*)	-	%	⑥

Test condition : Unless otherwise specified, V_{IN}=V_{OUT} × 0.6, I_{OUT}=<C1(*)>

NOTE:

*1: Supply Current 1 is the value when the IC is constantly switching. In actual operation, the oscillator periodically switches, resulting in lower power consumption.

*2: EXT 'H' ON resistance can be calculated by (0.4 x Rp) / (V_{EXT} – Vpull). * Change Vpull so that V_{EXT} will become V_{OUT}-0.4V.

*3: EXT 'L' ON resistance can be calculated by (V_{EXT} x Rp) / (Vpull- V_{EXT}). * Change Vpull so that V_{EXT} will become 0.4V.

*4: EFFI={[output voltage] × (output current)} ／ [(input voltage) × (input current)] × 100

*5: Please be aware of the absolute maximum ratings of the external components.

(*): Please refer to the charts.

■ELECTRICAL CHARACTERISTICS (Continued)

XC9110Cxx1MR, XC9111Cxx1MR Ta = 25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT	CIRCUIT
Output Voltage	V_{OUT}	Connect to external components	×0.975	V_{OUT}	×1.025	V	①
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle V_{OUT} \cdot \triangle topr}$	Connect to external components -40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Maximum Input Voltage	V_{IN}		10	-	-	V	①
Operation Start Voltage	V_{ST1}	I_{OUT}=1mA, connect to external components	-	0.8	0.9	V	①
Oscillation Start Voltage	V_{ST2}	Applied 0.8V to V_{OUT}, Vpull=1.0V	-	-	0.8	V	②
Operation Hold Voltage	V_{HLD}	I_{OUT}=1mA, connect to external components	0.7	-	-	V	①
Input Current	I_{IN}	I_{OUT}=0mA (*1)	-	E1-1(*)	E1-2(*)	μA	①
Supply Current 1 (*2)	I_{DD1}	Applied (output voltage×0.95) to V_{OUT}	-	E2-1(*)	E2-2(*)	μA	②
Supply Current 2	I_{DD2}	Applied (output voltage+0.5V) to V_{OUT}	-	E3-1(*)	E3-2(*)	μA	②
Lx Switch ON Resistance	R_{SWON}	Same as I_{DD1}, V_{Lx}=0.4V (*3)	-	E4-1(*)	E4-2(*)	Ω	②
Lx Leak Current	I_{LxL}	Same as I_{DD2}, V_{Lx}=7V	-	-	1	μA	③
Duty Ratio	DTY	Same as I_{DD1}, measure Lx waveform	E7-1(*)	E7-2(*)	E7-3(*)	%	②
Duty Ratio 2	DTY2	I_{OUT}=1mA, measure Lx ON time (XC9111 only) Connect to external components	48	56	64	%	①
Maximum Oscillation Frequency	MAXFOSC	Same as I_{DD1}	85	100	115	kHz	②
Maximum Oscillation Frequency 2	MAXFOSC2	Same as I_{DD1} (XC9111 only)	153	180	207	kHz	②
Stand-by Current	ISTB	Same as I_{DD1}, V_{CE}=0V	-	-	0.50	μA	④
CE "High" Voltage	V_{CEH}	Same as I_{DD1}, determine Lx oscillation	0.75	-	-	V	④
CE "Low" Voltage	V_{CEL}	Same as I_{DD1}, determine Lx shut-down	-	-	0.20	V	④
CE "High" Current	I_{CEH}	Same as I_{DD1}, V_{CE}=V_{OUT}×0.95	-	-	0.25	μA	⑤
CE "Low" Current	I_{CEL}	Same as I_{DD1}, V_{CE}=0V	-	-	-0.25	μA	⑤
Lx Limit Voltage (*4)	V_{LxLMT}	Same as I_{DD1}, when max. oscillation frequency is more than double.	0.7	-	1.1	V	②
Efficiency (*5)	EFFI	Connect to external components	-	E8(*)	-	%	①

Test condition : Unless otherwise specified, connect CE to V_{OUT}, V_{IN}=V_{OUT}×0.6, I_{OUT}=<C1(*)>, Vpull=5.0V

NOTE:

*1: TOREX SD, XB01SB04A2BR is used, reverse current IR < 1μA (when reverse voltage V_R = 10V is applied), in case of using selected parts.

*2: Supply Current 1 is the value when the IC is constantly switching. In actual operation, the oscillator periodically switches, resulting in lower power consumption. Please refer to Input Current (I_{IN}) under no load condition for the actual current, which is supplied from the input power supply (V_{IN}).

*3: Lx switch ON resistance can be calculated by (V_{Lx} x Rp) / (Vpull - V_{Lx}). * Change Vpull so that V_{Lx} will become 0.4V.

*4: The Lx. limit voltage function becomes stable when V_{OUT} of the XC9110/9111 series is over 2.0V.

*5: EFFI={[output voltage]×(output current)} / [(input voltage)×(input current)]×100

*6: Please be aware of the absolute maximum ratings of the external components.

(*): Please refer to the charts.

■ELECTRICAL CHARACTERISTICS (Continued)

XC9110Dxx1MR, XC9111Dxx1MR

Ta = 25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT	CIRCUIT
Output Voltage	V_{OUT}	Connect to external components	×0.975	V_{OUT}	×1.025	V	⑥
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle V_{OUT} \cdot \triangle topr}$	Connect to external components -40℃≦Topr≦85℃	-	±100	-	ppm/℃	⑥
Maximum Input Voltage	V_{IN}		10	-	-	V	-
Operation Start Voltage	V_{ST1}	I_{OUT}=1mA, connect to external components	-	0.8	0.9	V	⑥
Oscillation Start Voltage	V_{ST2}	Applied 0.8V to V_{OUT}	-	-	0.8	V	⑦
Operation Hold Voltage	V_{HLD}	I_{OUT}=1mA, connect to external components	0.7	-	-	V	⑥
Supply Current 1 (*1)	I_{DD1}	Applied (output voltage×0.95) to V_{OUT}	-	E2-1(*)	E2-2(*)	μA	⑦
Supply Current 2	I_{DD2}	Applied (output voltage+0.5V) to V_{OUT}	-	E3-1(*)	E3-2(*)	μA	⑦
EXT H ON Resistance	R_{EXTH}	Same as I_{DD1}, V_{EXT}=V_{OUT}-0.4(*2)	-	E5-1(*)	E5-2(*)	Ω	②
EXT L ON Resistance	R_{EXTL}	Same as I_{DD1}, V_{EXT}=0.4V(*3)	-	E6-1(*)	E6-2(*)	Ω	②
Duty Ratio	DTY	Same as I_{DD1}, measure Lx waveform	E7-1(*)	E7-2(*)	E7-3(*)	%	⑦
Duty Ratio 2	DTY2	I_{OUT}=1mA, measure Lx ON time (XC9111 only) Connect to external components	48	56	64	%	⑥
Maximum Oscillation	MAXFOSC	Same as I_{DD1}	85	100	115	kHz	⑦
Maximum Oscillation	MAXFOSC	Same as I_{DD1} (XC9111 only)	153	180	207	kHz	⑦
Standby Current	ISTB	Same as I_{DD1}, V_{CE}=0V	-	-	0.50	μA	⑤
CE "High" Voltage	V_{CEH}	Same as I_{DD1}, determine Lx oscillation	0.75	-	-	V	⑧
CE "Low" Voltage	V_{CEL}	Same as I_{DD1}, determine Lx shut-down	-	-	0.20	V	⑧
CE "High" Current	I_{CEH}	Same as I_{DD1}, V_{CE}=V_{OUT}×0.95	-	-	0.25	μA	⑤
CE "Low" Current	I_{CEL}	Same as I_{DD1}, V_{CE}=0V	-	-	-0.25	μA	⑤
Efficiency (*4)	EFFI	Connect to external components	-	E8(*)	-	%	⑥

Test condition : Unless otherwise specified, connect CE to V_{OUT}, V_{IN}=V_{OUT}×0.6, I_{OUT}=<C1(*)>

NOTE:

*1: "Supply Current 1" is the value when the IC is constantly switching. In actual operation, the oscillator periodically switches, resulting in lower power consumption.

*2: EXT H ON resistance can be calculated by (0.4 x Rp) / (V_{EXT} - Vpull). * Change Vpull so that V_{EXT} will become V_{OUT}-0.4V.

*3: EXT L ON resistance can be calculated by (V_{EXT} x Rp) / (Vpull - V_{EXT}). * Change Vpull so that V_{EXT} will become 0.4V.

*4: EFFI={[output voltage]×(output current)} / [(input voltage)×(input current)]×100

*5: Please be aware of the absolute maximum ratings of the external components.

(*): Please refer to the charts.

■ELECTRICAL CHARACTERISTICS (Continued)

XC9110Exx1MR, XC9111Exx1MR

Ta = 25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT	CIRCUIT
Output Voltage	V_{OUT}	Connect to external components	×0.975	V_{OUT}	×1.025	V	①
Output Voltage Temperature Characteristics	$\frac{\triangle V_{OUT}}{\triangle V_{OUT} \cdot \triangle topr}$	Connect to external components - 40℃≦Topr≦85℃	-	±100	-	ppm/℃	①
Maximum Input Voltage	V_{IN}		10	-	-	V	-
Operation Start Voltage	V_{ST1}	I_{OUT}=1mA, connect to external components	-	0.8	0.9	V	①
Oscillation Start Voltage	V_{ST2}	Applied 0.8V to V_{OUT}, Vpull=1.0V	-	-	0.8	V	②
Operation Hold Voltage	V_{HLD}	I_{OUT}=1mA, connect to external components	0.7	-	-	V	①
Input Current	I_{IN}	I_{OUT}=0mA (*1)	-	E1-1(*)	E1-2(*)	μA	①
Supply Current 1 (*2)	I_{DD1}	Applied (output voltage×0.95) to V_{OUT}	-	E2-1(*)	E2-2(*)	μA	②
Supply Current 2	I_{DD2}	Applied (output voltage+0.5V) to V_{OUT}	-	E3-1(*)	E3-2(*)	μA	②
Lx Switch ON Resistance	R_{SWON}	Same as I_{DD1}, V_{Lx}=0.4V (*3)	-	E4-1(*)	E4-2(*)	Ω	②
Lx Leak Current	I_{LxL}	Same as I_{DD2}, V_{Lx}=7V	-	-	1	μA	③
Duty Ratio	DTY	Same as I_{DD1}, measure Lx waveform	E7-1(*)	E7-2(*)	E7-3(*)	%	②
Duty Ratio 2	DTY2	I_{OUT}=1mA, measure Lx ON time (XC9111 only) Connect to external components	48	56	64	%	①
Maximum Oscillation	MAXFOSC	Same as I_{DD1}	85	100	115	kHz	②
Maximum Oscillation	MAXFOSC2	Same as I_{DD1} (XC9111 only)	153	180	207	kHz	②
Lx Limit Voltage (*4)	V_{LxLMT}	Same as I_{DD1}, VLx when max. oscillation frequency is more than double.	0.7	-	1.1	V	②
Efficiency (*5)	EFFI	Connect to external components	-	E8(*)	-	%	①

Test condition : Unless otherwise specified, connect V_{DD} to V_{OUT}, V_{IN}=V_{OUT}×0.6, I_{OUT}=<C1(*)>, Vpull=5.0V

NOTE:

*1: TOREX SD, XB01SB04A2BR is used; reverse current IR < 1μA (when reverse voltage V_R = 10V is applied), in case of using selected parts.

*2: "Supply Current 1" is the value when the IC is constantly switching. In actual operation, the oscillator periodically switches, resulting in lower power consumption. Please refer to Input Current (I_{IN}) under no load condition for the actual current, which is supplied from the input power supply (V_{IN}).

*3: Lx switch ON resistance can be calculated by (V_{Lx} x Rp) / (Vpull - V_{Lx}). * Change Vpull so that V_{Lx} will become 0.4V.

*4: The Lx limit voltage function becomes stable when V_{OUT} of the XC9110/9111 series is over 2.0V.

*5: EFFI={[output voltage]×(output current)} / [(input voltage)×(input current)]×100

*6: When using V_{DD} and V_{OUT} separately, please set the voltage range of V_{DD} from 1.5V to 10V.
The IC operates from V_{DD}=0.8V, but output voltage and oscillation frequency will be stable when V_{DD}=1.5V or more.

*7: Please be aware of the absolute maximum ratings of the external components.

(*): Please refer to the charts.

■ELECTRICAL CHARACTERISTICS (Continued)

XC9110Fxx1MR, XC9111Fxx1MR

Ta = 25℃

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT	CIRCUIT
Output Voltage	V_{OUT}	Connect to external components	×0.975	V_{OUT}	×1.025	V	⑥
Output Voltage Temperature Characteristics	$\triangle V_{OUT}$ $\triangle V_{OUT} \cdot \triangle$ topr	Connect to external components - 40℃≦Topr≦85℃	-	±100	-	ppm/℃	⑥
Maximum Input Voltage	V_{IN}		10	-	-	V	-
Operation Start Voltage	V_{ST1}	I_{OUT}=1mA, connect to external components	-	0.8	0.9	V	⑥
Oscillation Start Voltage	V_{ST2}	Applied 0.8V to V_{OUT}	-	-	0.8	V	⑦
Operation Hold Voltage	V_{HLD}	I_{OUT}=1mA, connect to external components	0.7	-	-	V	⑥
Supply Current 1 (*1)	I_{DD1}	Applied (output voltage×0.95) to V_{OUT}	-	E2-1(*)	E2-2(*)	μA	⑦
Supply Current 2	I_{DD2}	Applied (output voltage+0.5V) to V_{OUT}	-	E3-1(*)	E3-2(*)	μA	⑦
EXT H ON Resistance	R_{EXTH}	Same as I_{DD1}, V_{EXT}=V_{OUT}=-0.4V (*2)	-	E5-1(*)	E5-2(*)	Ω	②
EXT L ON Resistance	R_{EXTL}	Same as I_{DD1}, V_{EXT}=0.4V (*3)	-	E6-1(*)	E6-2(*)	Ω	②
Duty Ratio	DTY	Same as I_{DD1}, measure Lx waveform	E7-1(*)	E7-2(*)	E7-3(*)	%	⑦
Duty Ratio 2	DTY2	I_{OUT}=1mA, measure Lx ON time (XC9111 only) Connect to external	48	56	64	%	⑥
Maximum Oscillation	MAXFOSC	Same as I_{DD1}	85	100	115	kHz	⑦
Maximum Oscillation	MAXFOSC	Same as I_{DD1} (XC9111 only)	153	180	207	kHz	⑦
Efficiency (*4)	EFFI	Connect to external components	-	E9(*)	-	%	⑥

Test condition : Unless otherwise specified, connect V_{DD} to V_{OUT}, V_{IN}=V_{OUT}×0.6, I_{OUT}=<C1(*)>

NOTE:

*1: "Supply Current 1" is the value when the IC is constantly switching. In actual operation, the oscillator periodically switches, resulting in lower power consumption.

*2: EXT H ON resistance can be calculated by (0.4 x Rp) / (V_{EXT} - Vpull). * Change Vpull so that V_{EXT} will become V_{OUT}-0.4V.

*3: EXT L ON resistance can be calculated by (V_{EXT} x Rp) / (Vpull - V_{EXT}). * Change Vpull so that V_{EXT} will become 0.4V.

*4: EFFI={[output voltage]×(output current)} / [(input voltage)×(input current)]×100

*5: When using V_{DD} and V_{OUT} separately, please set the voltage range of V_{DD} from 1.5V to 10V.
The IC operates from V_{DD}=0.8V, but output voltage and oscillation frequency will be stable when V_{DD}=1.5V or more.

*6: Please be aware of the absolute maximum ratings of the external components.

(*): Please refer to the charts.

■ELECTRICAL CHARACTERSTICS (Continued)

● I_{DD2}, R_{EXTH}, R_{EXTL}, DTY Chart

SYMBOL	E2-1	E2-2	E1-1	E1-2	E3-1	E3-2	E4-1	E4-2	E5-1	E5-2	E6-1	E6-2
PARAMETER	Supply Current 1		Input Current (No Load)		Supply Current 2		Lx Switch ON Resistance		EXT H ON Resistance		EXT L ON Resistance	
UNIT	(μA)		(μA)		(μA)		(Ω)		(Ω)		(Ω)	
SETTING VOLTAGE	I_{DD1}		I_{IN}		I_{DD2}		R_{SWON}		R_{EXTH}		R_{EXTL}	
	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	TYP.	MAX.
1.5	7.7	15.1	4.3	8.6	1.9	3.5	4.2	6.3	160	240	67	101
1.6	8.0	15.6										
1.7	8.3	16.2										
1.8	8.6	16.8										
1.9	8.9	17.5					3.5	5.3	108	162	52	78
2.0	9.3	18.2				3.9						
2.1	9.7	18.9	4.4	8.8	2.0	4.0	3.2	4.8	91	137	45	68
2.2	10.1	19.7										
2.3	10.5	20.6										
2.4	11.0	21.5	4.5	9.1		4.1						
2.5	11.5	22.5										
2.6	12.0	23.5					2.8	4.2	70	105	38	57
2.7	12.5	24.5	4.6	9.3	2.1	4.2						
2.8	13.1	25.6										
2.9	13.7	26.8										
3.0	14.3	28.0										
3.1	15.0	29.3	4.7	9.5		4.3						
3.2	15.7	30.6					2.5	3.8	59	89	33	50
3.3	16.4	31.9										
3.4	17.1	33.3	4.8	9.7	2.2	4.4						
3.5	17.8	34.8										
3.6	18.6	36.3										
3.7	19.4	37.9	5.0	10.0		4.5						
3.8	20.3	39.5										
3.9	21.1	41.1										
4.0	22.0	42.8										
4.1	22.9	44.5	5.1	10.2	2.3	4.6						
4.2	23.8	46.3										
4.3	24.8	48.2										
4.4	25.7	50.0	5.2	10.4		4.7						
4.5	26.7	52.0										
4.6	27.7	53.9										
4.7	28.8	56.0	5.3	10.6	2.4	4.8						
4.8	29.8	58.0										
4.9	30.9	60.1										
5.0	31.7	63.4										
5.1	32.3	64.7	5.4	10.8		4.9						
5.2	32.9	65.9										
5.3	33.5	67.1					2.1	3.2	40	60	24	36
5.4	34.1	68.3	5.5	11.1	2.5	5.0						
5.5	34.7	69.5										
5.6	35.3	70.7										
5.7	36.0	72.0	5.6	11.3		5.1						
5.8	36.5	73.1										
5.9	37.1	74.3										
6.0	37.7	75.5										
6.1	38.4	76.8	5.7	11.5	2.6	5.2						
6.2	38.9	77.9										
6.3	39.5	79.1										
6.4	40.2	80.4	5.8	11.7		5.3						
6.5	40.8	81.6										
6.6	41.3	82.7										
6.7	42.0	84.0	6.0	12.0	2.7	5.4						
6.8	42.6	85.2										
6.9	43.2	86.4										
7.0	43.7	87.5										


■ELECTRICAL CHARACTERSTICS (Continued)

● IOUT, DTY, EFFI Chart

SYMBOL	C1	E7-1	E7-2	E7-3	E8		E9	
PARAMETER	OUTPUT CURRENT	DUTY RATIO			EFFICIENCY			
					XC9110	XC9111	XC9110	XC9111
UNIT	(mA)	(%)			(%)			
SETTING VOLTAGE	IOUT	DTY			EFFI			
		MIN.	TYP.	MAX.	TYP.			
1.5	7.5	70	75	80	60	75	60	75
1.6	8.0							
1.7	8.5							
1.8	9.0							
1.9	9.5							
2.0	10.0				65	79	61	75
2.1	10.5							
2.2	11.0							
2.3	11.5							
2.4	12.0							
2.5	12.5							
2.6	13.0							
2.7	13.5							
2.8	14.0							
2.9	14.5							
3.0	30.0				77	82	77	82
3.1	31.0							
3.2	32.0							
3.3	33.0							
3.4	34.0							
3.5	35.0							
3.6	36.0							
3.7	37.0							
3.8	38.0							
3.9	39.0							
4.0	40.0				80	86	80	83
4.1	41.0							
4.2	42.0							
4.3	43.0							
4.4	44.0							
4.5	45.0							
4.6	46.0							
4.7	47.0							
4.8	48.0							
4.9	49.0							
5.0	50.0				82	88	82	85
5.1	51.0							
5.2	52.0	68	73	78				
5.3	53.0							
5.4	54.0							
5.5	55.0							
5.6	56.0							
5.7	57.0							
5.8	58.0							
5.9	59.0							
6.0	60.0							
6.1	61.0							
6.2	62.0							
6.3	63.0							
6.4	64.0							
6.5	65.0							
6.6	66.0							
6.7	67.0							
6.8	68.0							
6.9	69.0							
7.0	70.0							


■TYPICAL APPLICATION CIRCUITS

●A type circuit

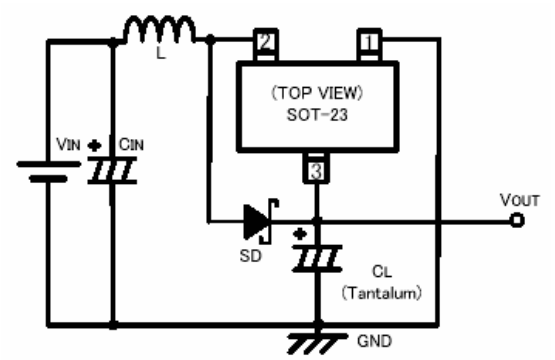


L: 100μH (Coil, CR54, SUMIDA)
SD: XB01SB04A2BR (Schottky type, TOREX)
CL: 16V, 47μF (Tantalum)
CIN: 16V, 47μF (Tantalum)

●B type circuit

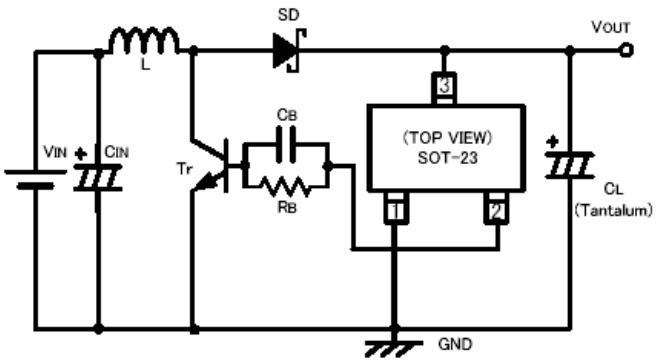


L: 47μH (Coil, CR54, SUMIDA)
SD: XB01SB04A2BR (Schottky type, TOREX)
CL: 16V, 47μF (Tantalum)
CIN: 16V, 47μF (Tantalum)
RB: 500Ω
CB: 2200pF
Tr: 2SD1628

●C type circuit

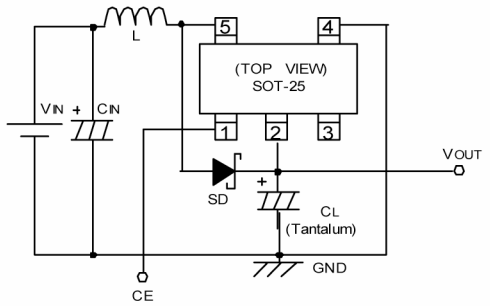


L:	100μH	(Coil, CR54,SUMIDA)
SD:	XB01SB04A2BR	(Schottky type, TOREX)
CL:	16V, 47μF	(Tantalum)
CIN:	16V, 47μF	(Tantalum)

●D type circuit

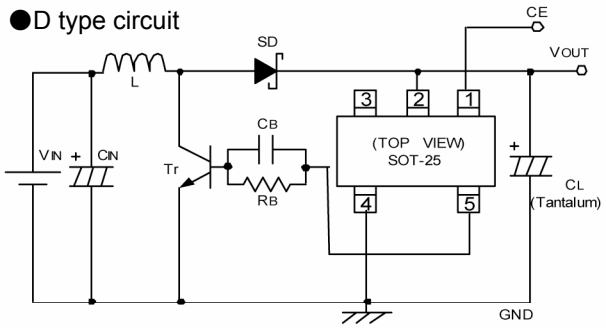


L:	47μH	(Coil, CR54,SUMIDA)
SD:	XB01SB04A2BR	(Schottky type, TOREX)
CL:	16V, 47μF	(Tantalum)
CIN:	16V, 47μF	(Tantalum)
RB:	500Ω	
CB:	2200pF	
Tr:	2SD1628	(SANYO)

●E type circuit

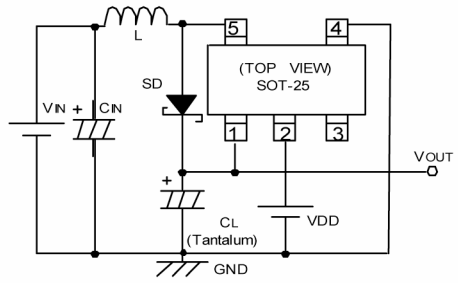

L:	100μH	(Coil, CR54,SUMIDA)
SD:	XB01SB04A2BR	(Schottky type, TOREX)
CL:	16V, 47μF	(Tantalum)
CIN:	16V, 47μF	(Tantalum)

●F type circuit

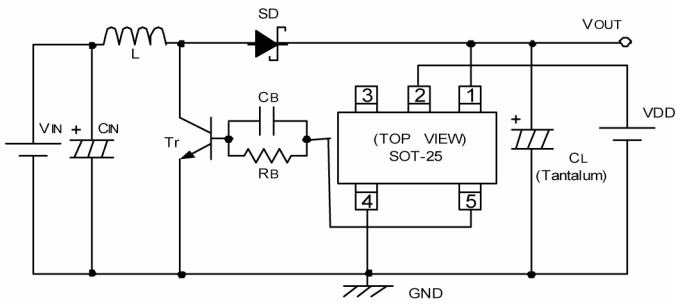

L:	47μH	(Coil, CR54,SUMIDA)
SD:	XB01SB04A2BR	(Schottky type, TOREX)
CL:	16V, 47μF	(Tantalum)
CIN:	16V, 47μF	(Tantalum)
RB:	1kΩ	
CB:	3300pF	
Tr:	2SD1628	(SANYO)

■OPERATIONAL EXPLANATION

The XC9110/9111 series are PFM controlled step-up DC/DC converter (A, C and E types) / controller ICs (B, D and F types), which contain voltage reference source, PFM comparator, duty selector, PFM controlled OSC, VLx Limiter, driver transistor and so on. With the XC9110 series, maximum duty ratio is set to 75% (maximum oscillation frequency=MAXFOSC: 100kHz) making it suitable for use with large current operations. The XC9111 series automatically switches duty ratio between 56% (MAXFOSC: 180kHz) and 75% (MAXFOSC: 100kHz) when it senses changes in load and can support both large and small currents.

<Reference Voltage Source (Vref) >

The reference voltage source provides the reference voltage to ensure stable output voltage of the DC/DC converter.

< PFM Comparator >

The PFM comparator compares the feedback voltage divided by the internal split resistors with the internal reference voltage. When the feedback voltage is higher than the reference voltage, PFM controlled OSC will be stopped. When the feedback voltage is lower than the reference voltage, the PFM controlled OSC will be operated so that the output voltage will be stable by sending a signal to the buffer drive circuit and controlling the internal or external driver transistor.

< Duty Selector >

With the XC9111 series, the duty selector automatically switches duty ratio between 56% and 75% when it senses changes in load and can support both large and small currents.

< PFM Controlled Oscillator >

The PFM controlled OSC determines maximum oscillation frequency. The circuit generates the oscillation frequency of 100kHz at 75% duty and 180kHz at 56%.

< V_{Lx} Limiter>

The V_{Lx} circuit of the XC9110/9111 A, C and D types detects in-rush current and overcurrent, which flows from the V_{OUT} pin to the Lx pin during short-circuit. In overcurrent, the driver transistor will be OFF. When the overcurrent state is eliminated, the IC resumes its normal operation.

<Chip Enable Function>

The chip enable function of the XC9110/9111 C and D types enables the IC to be in shut down mode when a low level signal is input to the CE pin. During the shut down mode, the current consumption will be reduced to 0.5 μA (MAX.).

<Separated V_{DD}/V_{OUT}>

With the separated V_{DD} pin, the XC9110/9111 E and F types can be operated in both low and high voltage.

■EXTERNAL COMPONENTS

Tr.: *Using a MOSFET
XP151A13A0MR (N-ch Power MOSFET, TOREX)
Note : V_{GS} breakdown voltage of this Transistor is 8V so please be careful with the power supply voltage.
If the power supply voltage is over 6V, Please use the XP151A12A2MR with a V_{GS} breakdown voltage of 12V.

* Using a NPN Transistor
2SD1628 (SANYO)
R_B: 500Ω (Adjust in accordance with load and Tr's hFE.)
C_B: 2200pF (Ceramic)
$C_B \leqq 1 / (2TT \times R_B \times FOSC \times 0.7)$

●R_B value example (when using NPN Transistor)

V_{OUT} (V)	I_{OUT} (mA)	V_{IN} (V)	R_B (Ω)	V_{OUT} (V)	I_{OUT} (mA)	V_{IN} (V)	R_B (Ω)
1.8	10	1.2	4.5	3.3	5	1.2	6.5
1.8	10	1.5	6.0	3.3	5	1.5	6.5
1.8	30	1.2	2.0	3.3	10	1.2	5.0
1.8	30	1.5	2.0	3.3	10	1.5	4.5
1.8	50	1.2	1.2	3.3	30	1.2	3.5
1.8	50	1.5	1.5	3.3	30	1.5	3.5

* Tr.: 2SD1628


SD: XP01SB04A2BR (TOREX)
MA2Q735 (MATSUSHITA)
C_L: 16V, 47μF (Tantalum type, KYOCERA TAJ)
C_{IN}: 16V, 47μF (Tantalum type, KYOCERA TAJ)
16V, 220μF (Electrolytic Capacitor)
L: <XC9110/9111A, C and E series (Transistor built-in)>
100μH (CR54,SUMIDA)
100μH (CDRH6D28,SUMIDA)
<XC9110/9111B, D and F series(Transistor external)>
22μH, 47μH (CR54, SUMIDA)

■NOTES ON USE


1. Please do not exceed the value of stated absolute maximum ratings.
2. The DC/DC converter / controller IC's performance is greatly influenced by not only the ICs' characteristics, but also by those of the external components. Care must be taken when selecting the external components.
3. The Lx limit voltage function becomes stable when V_{OUT} of the XC9110/9111C series is over 2.0V and the V_{DD} of the XC9110/9111E series is over 2.0V.
4. Make sure that the PCB GND traces are as thick as possible, as variations in ground potential caused by high ground currents at the time of switching may result in instability of the IC.
5. Please mount each external component as close to the IC as possible and use thick, short connecting traces to reduce the circuit impedance.

■TEST CIRCUITS


Circuit ①

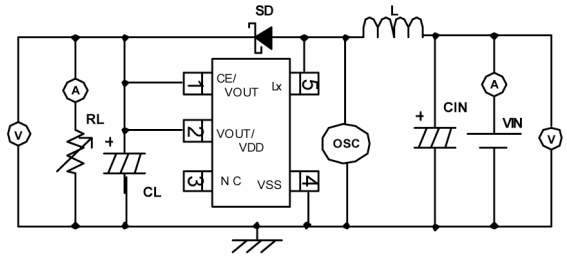


Circuit ⑤




Circuit ②

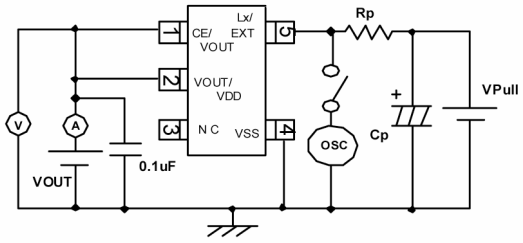


Circuit ⑥

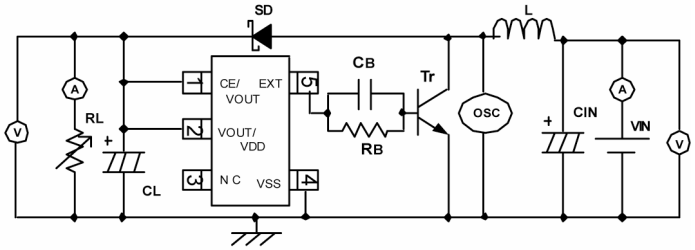


Circuit ③

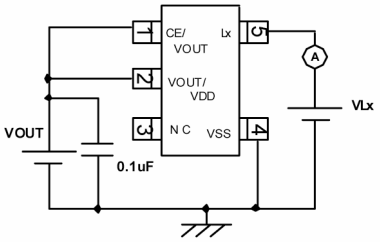


Circuit ⑦

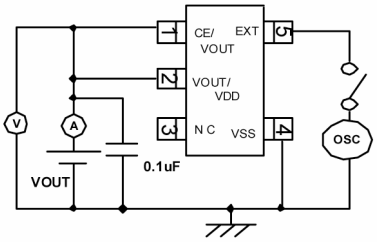

Circuit ④

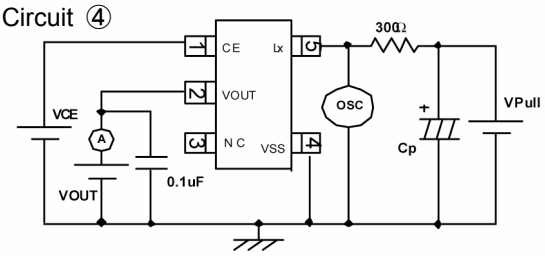

Circuit ⑧

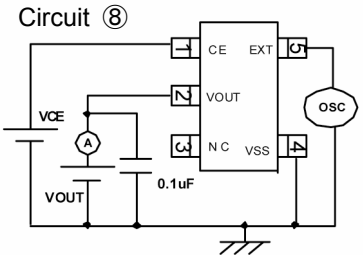

<External Components>

Circuit ①

CIN: 47μF, 16V	(Tantalum)
L: CR54, 100μH	(SUMIDA)
SD: XB01SB04A2BR	(Schottky, TOREX)
CL: 47μF, 16V	(Tantalum)

Circuit②

Rp: 300Ω	
Rp: 10Ω	(For Lx ON Resistance and measuring Lx Limit Current)
Rp: 200Ω	(For measuring EXT ON Resistance)
Cp: 100μF	(OS-CON, SANYO)

Circuit ④

Cp: 100μF	(OS-CON, SANYO)

Circuit ⑥


CIN: 47μF, 16V	(Tantalum)
L: CR54, 100μH	(SUMIDA)
Tr: 2SD1628	(SANYO)
CB: 2200pF	
RB: 500Ω	
SD: XB01SB04A2BR	(Schottky, TOREX)
CL: 47μF, 16V	(Tantalum)

■TYPICAL PERFORMANCE CHARACTERISTICS


(1) Output Voltage vs. Output Current

*Topr = 25°C


XC9111E181MR

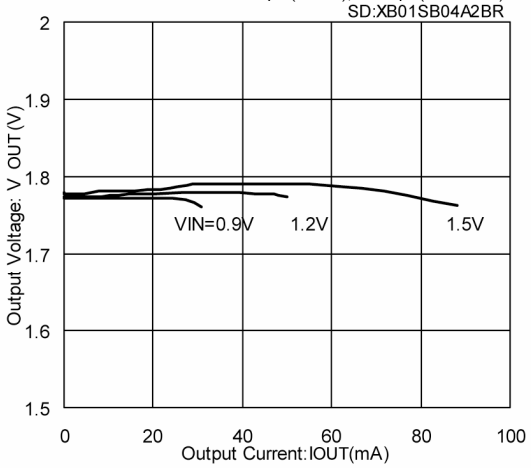


XC9110E181MR

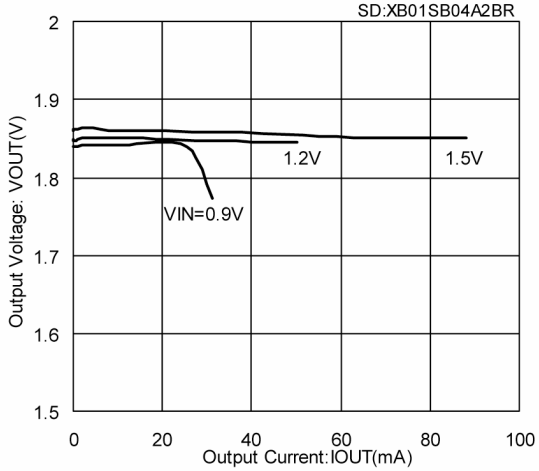


XC9111E331MR

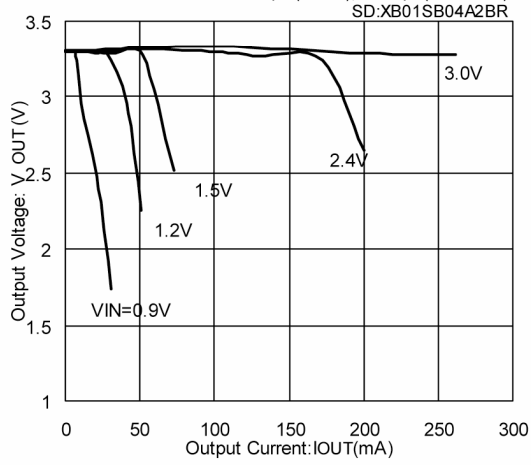


XC9110E331MR

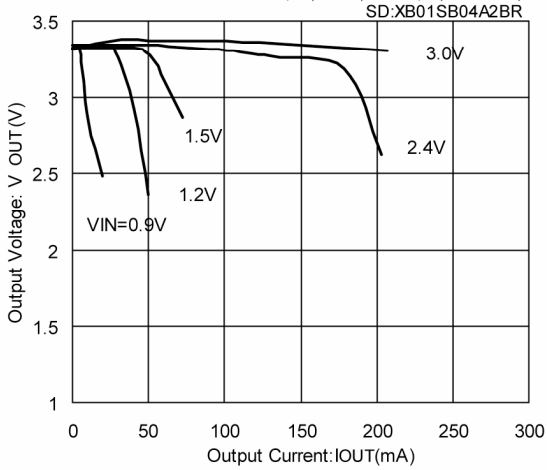

XC9111E501MR

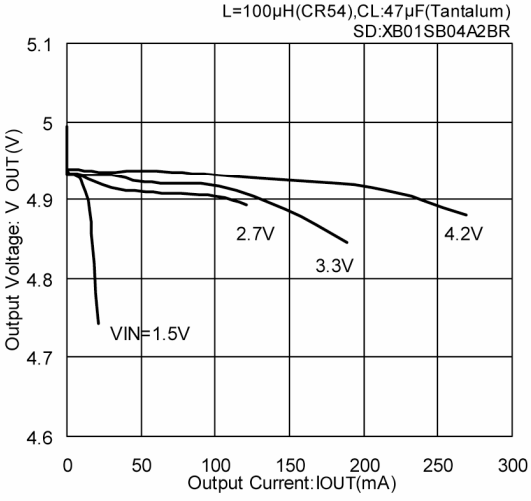

XC9110E501MR

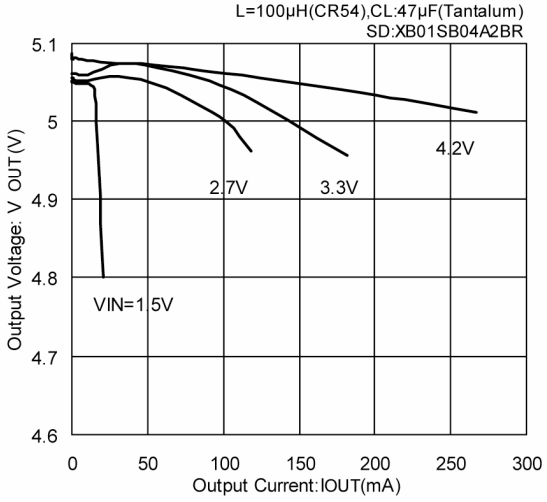


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(1) Output Voltage vs. Output Current (Continued)

*Topr = 25°C


XC9111F181MR

L=22μH(CR54),CL:47μF(Tantalum)
SD:XB01SB04A2BR,Tr:XP151A13A0M

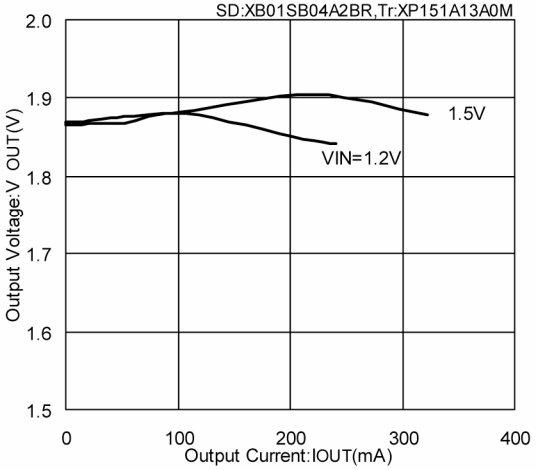


XC9111F331MR

L=22μH(CR54),CL:47μF(Tantalum)
SD:XB01SB04A2BR,Tr:XP151A13A0M

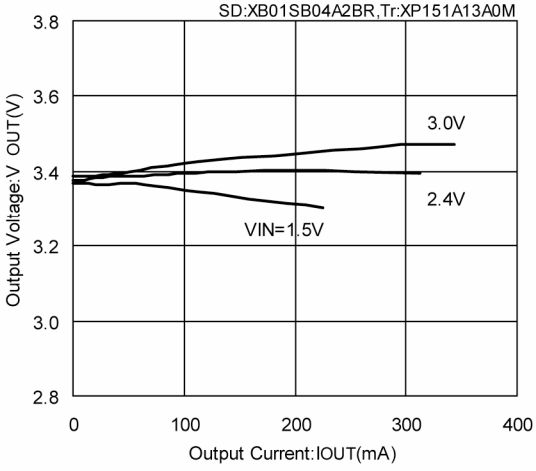


XC9111F501MR

L=22μH(CR54),CL:47μF(Tantalum)
SD:XB01SB04A2BR,Tr:XP151A12A2M

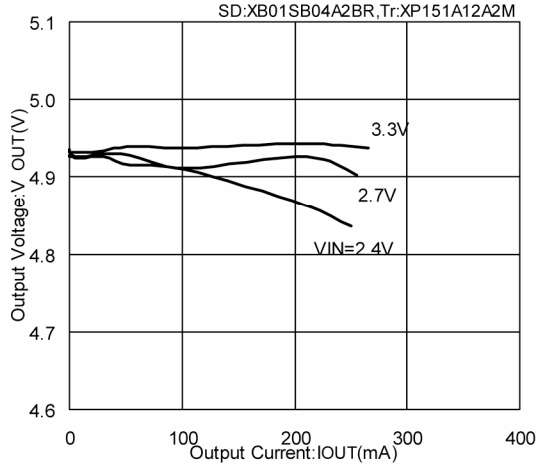

XC9111F181MR


L=22μH(CR54),CL:47μF(Tantalum),CB:2200pF
SD:XB01SB04A2BR,Tr:2SD1628,RB:100Ω

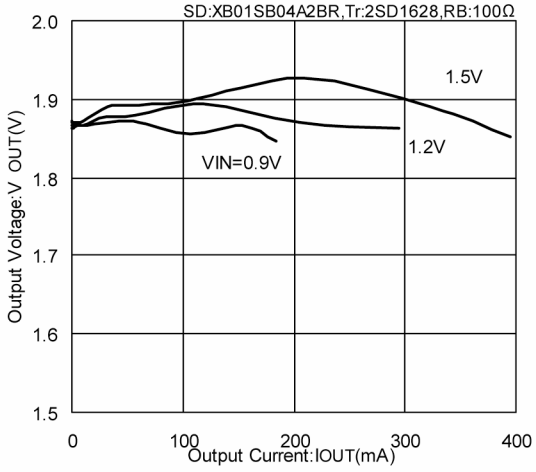



■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(2) Efficiency vs. Output Current


*Topr = 25℃

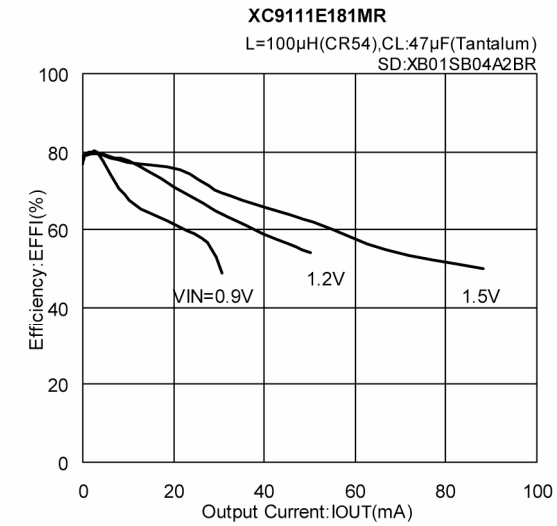


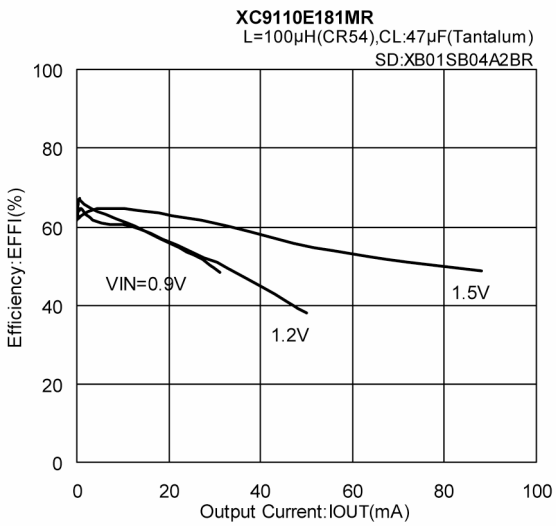

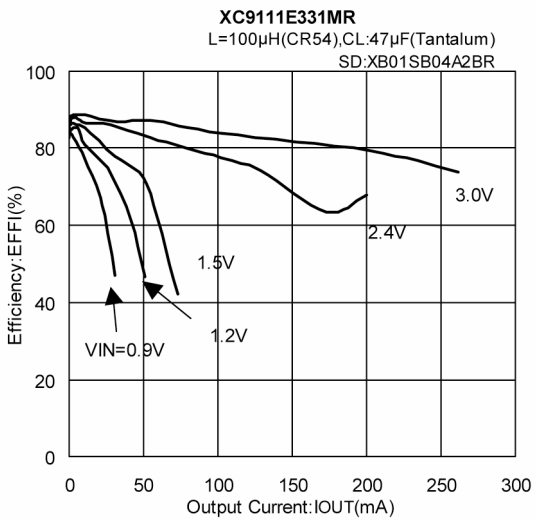

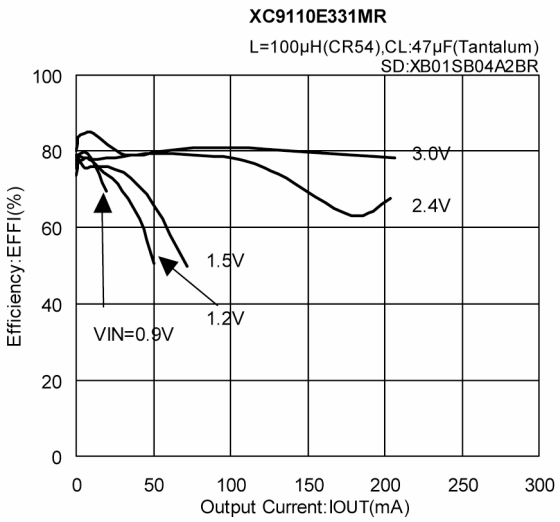

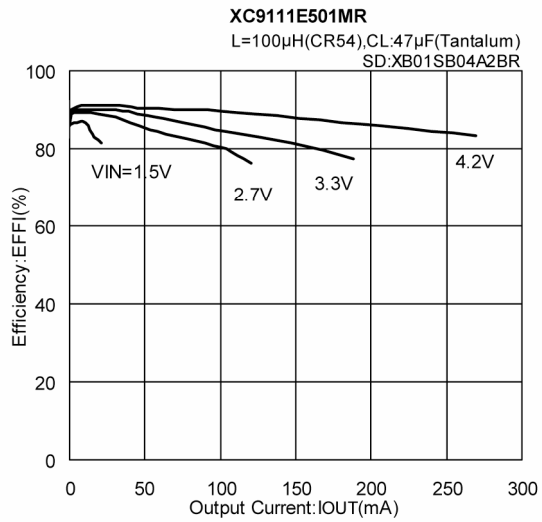


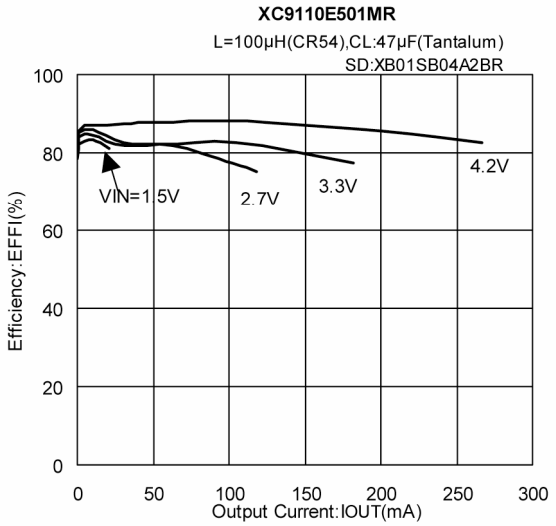



■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(2) Efficiency vs. Output Current (Continued)

*Topr = 25℃

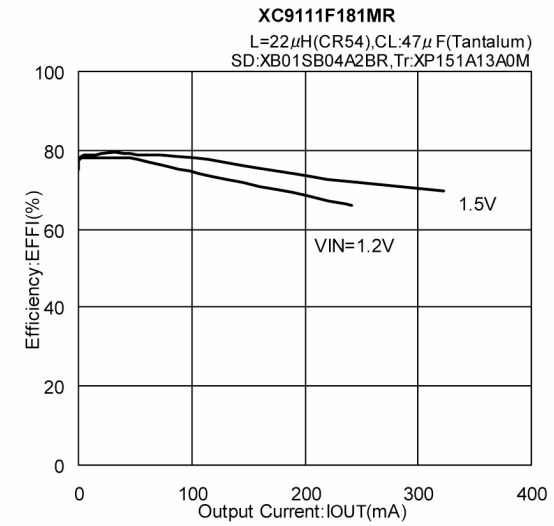

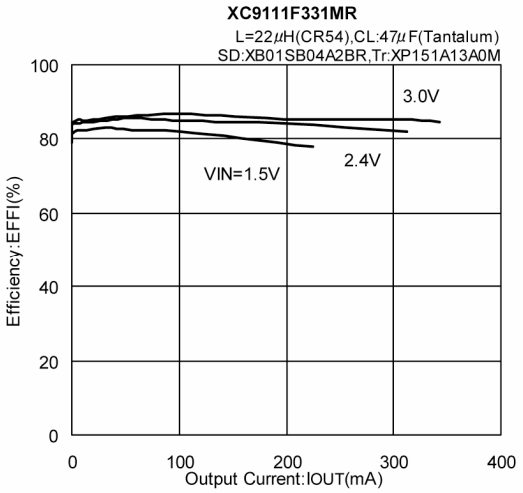

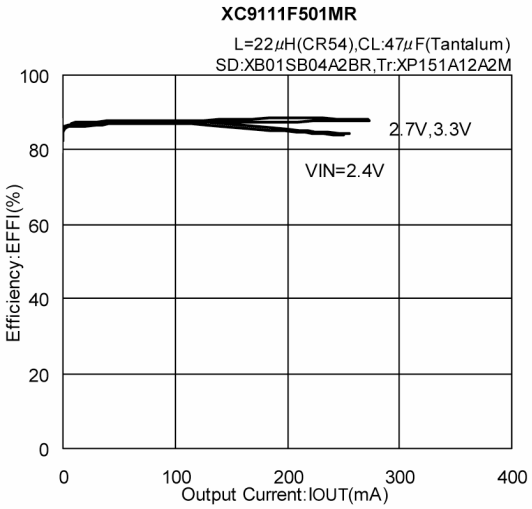

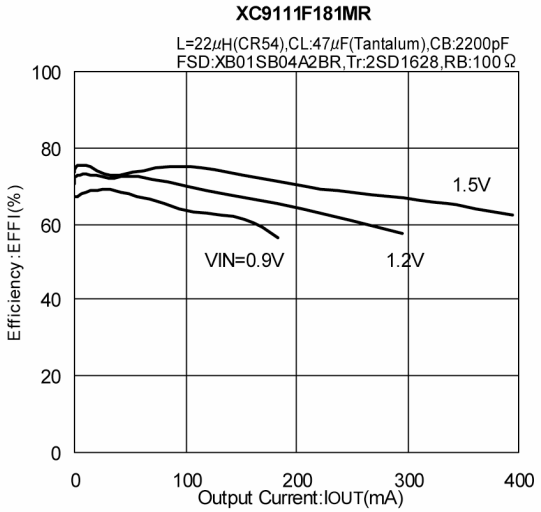


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(3) Ripple Voltage vs. Output Current

*Topr = 25℃


XC9111E181MR

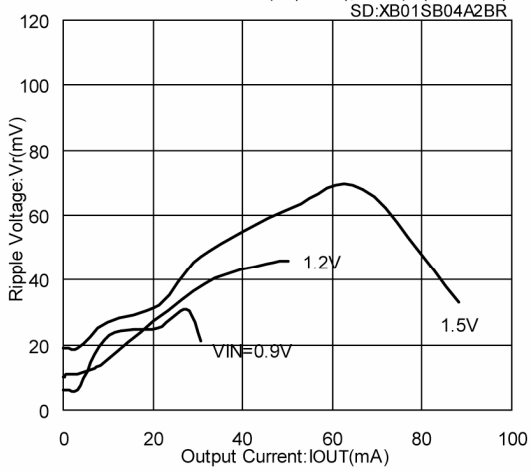


XC9110E181MR

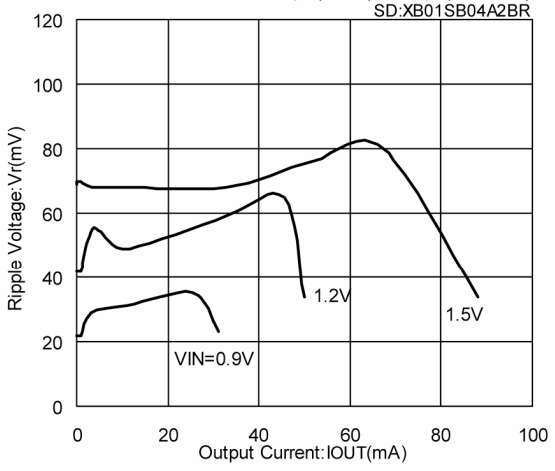


XC9111E331MR

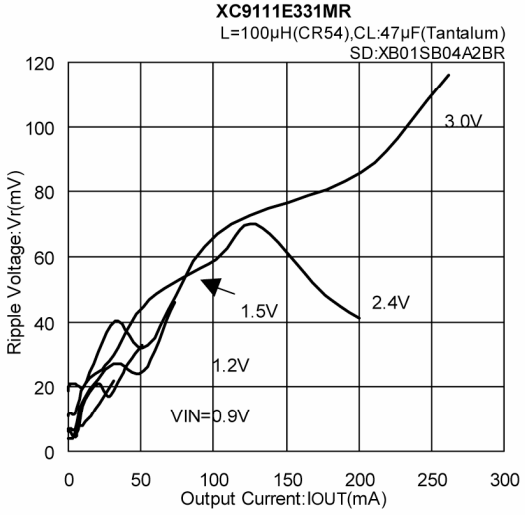


XC9110E331MR

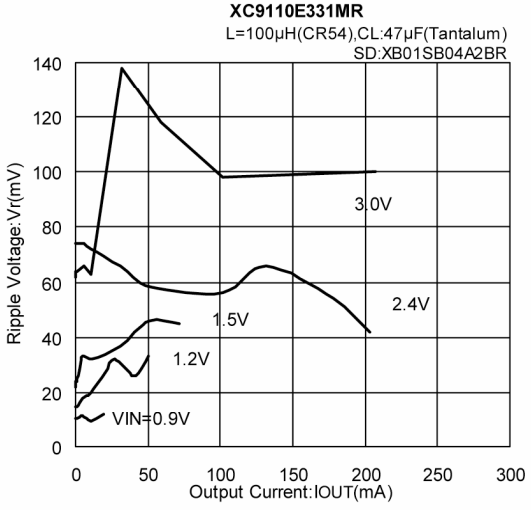

XC9111E501MR

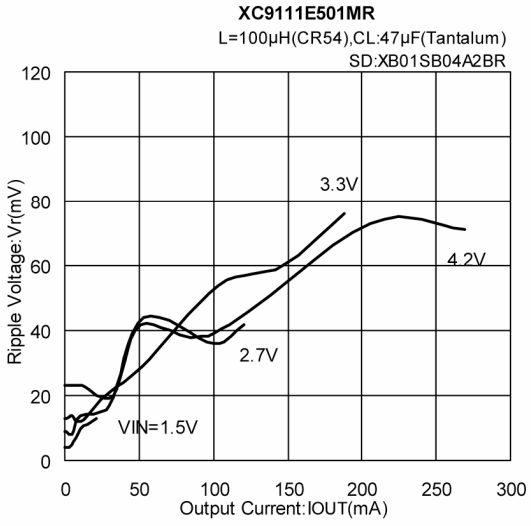


XC9110E501MR

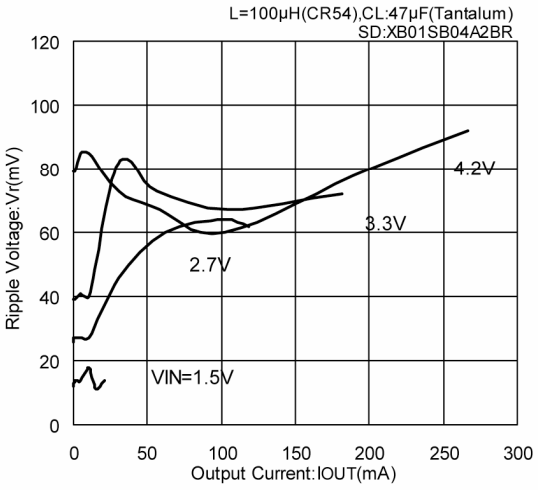



■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(3) Ripple Voltage vs. Output Current (Continued)

*Topr = 25℃

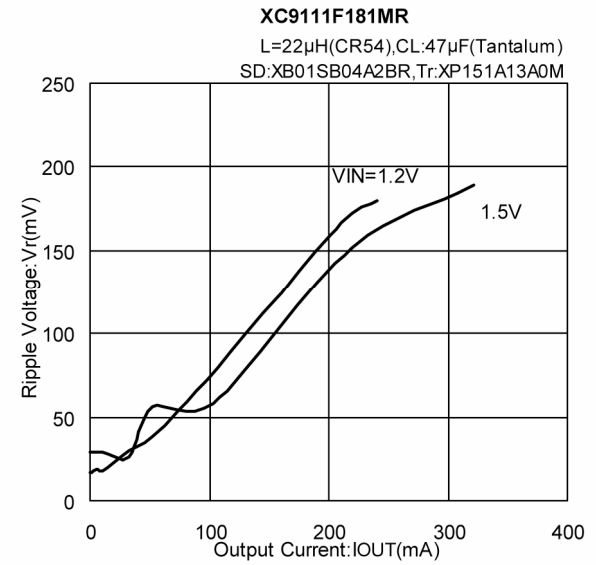

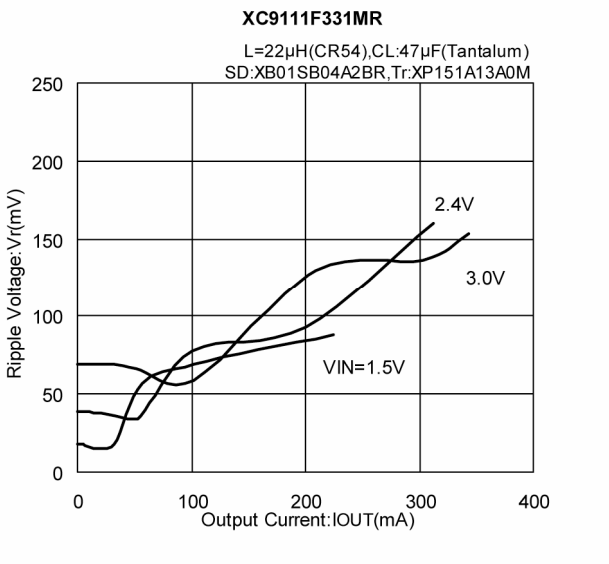

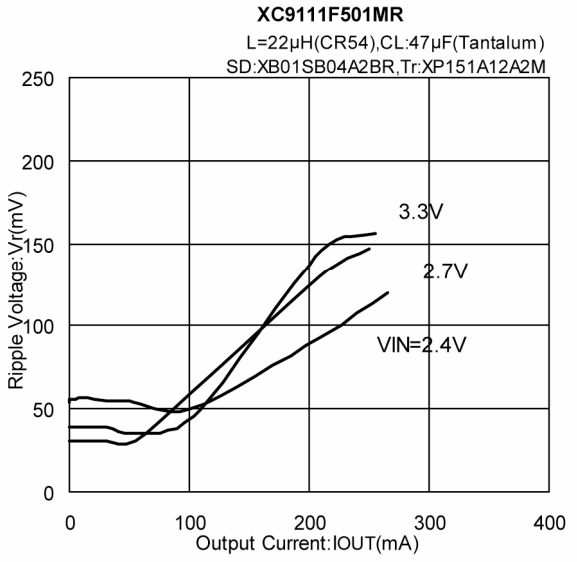


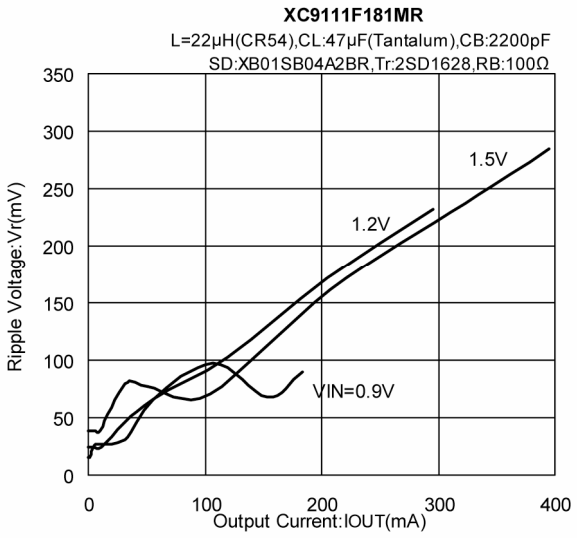


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

*Topr = 25℃


(4) Supply Current 1 vs. Output Voltage

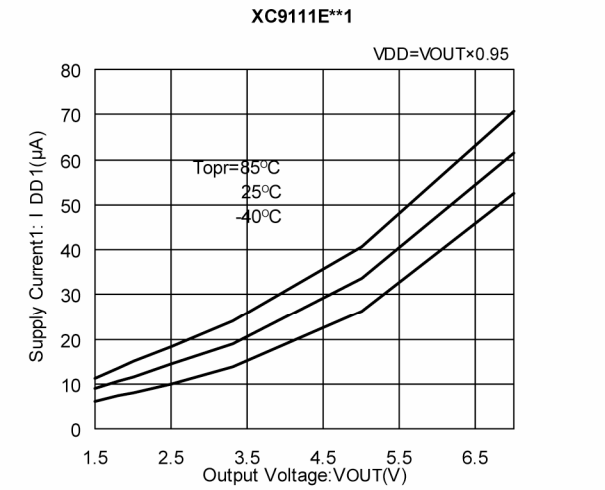


(5) Supply Current 2 vs. Output Voltage

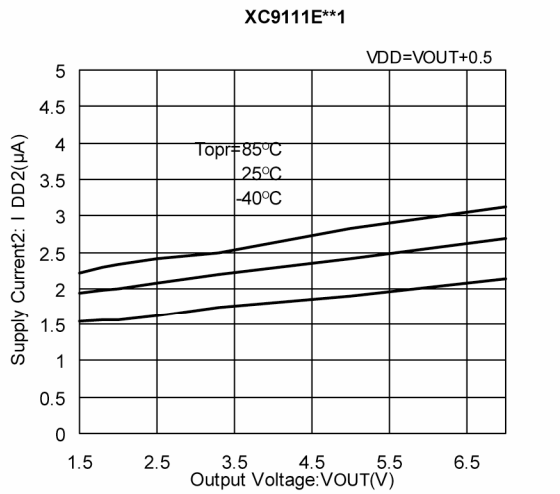


(6) Stand-by Current vs. Output Voltage

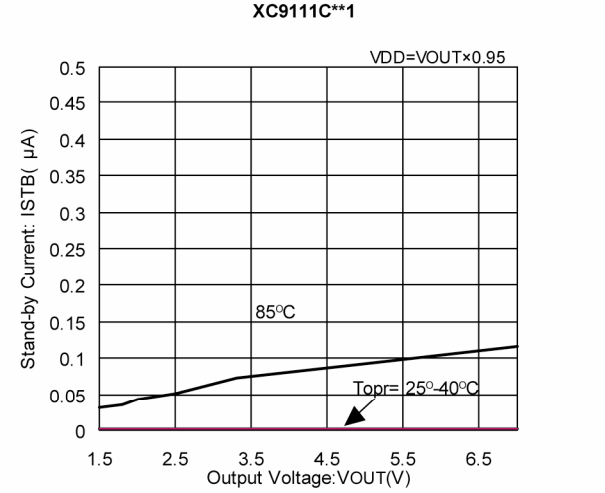


(7) No Load Input Current vs. Output Voltage

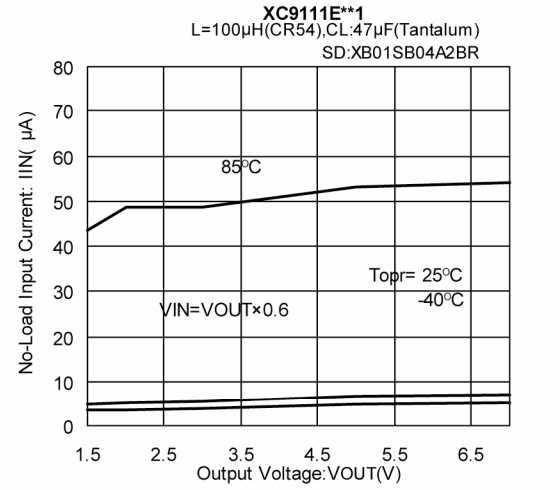

(8) Lx Limit Voltage vs. Output Voltage

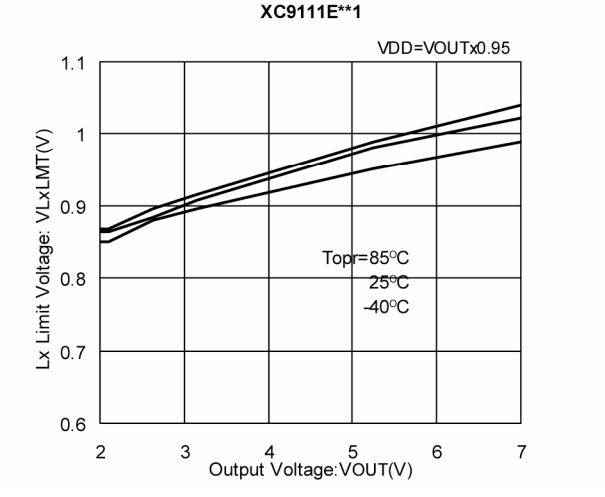


(9) Lx Switch-ON Resistance vs. Output Voltage

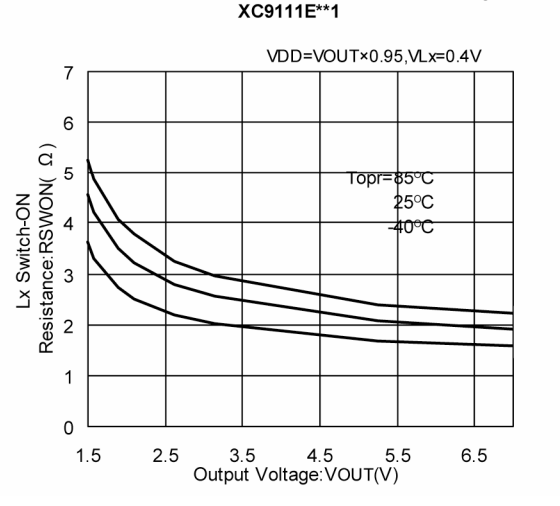


* The reason for the increase in the "no load input current" figure at Ta=85℃ in the performance characteristics is because of an increase in the reverse current of the Schottky diode and not because of abnormalities of the IC itself.

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued) *Topr = 25℃


(10) EXT H ON Resistance vs. Output Voltage

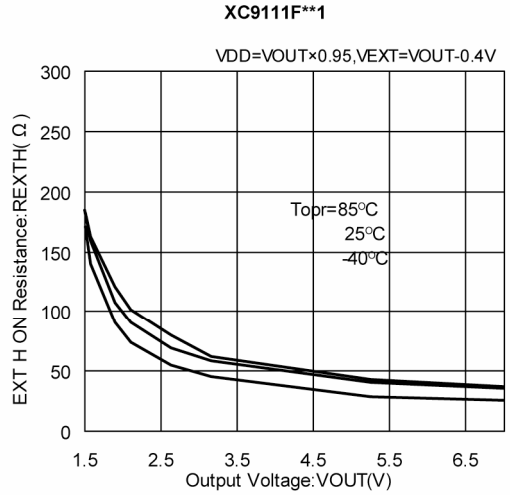


(11) EXT L ON Resistance vs. Output Voltage

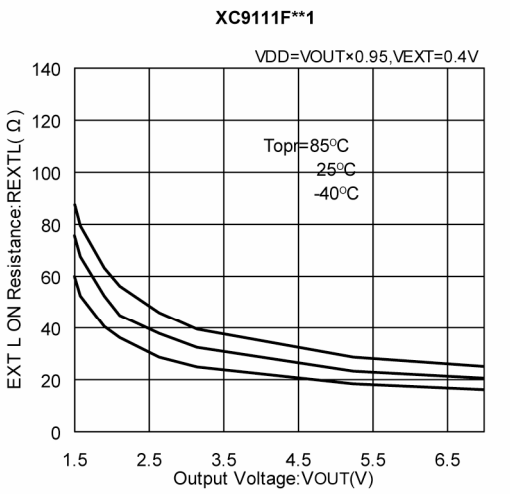


(12) Maximum Oscillation Frequency 1. vs. Output Voltage

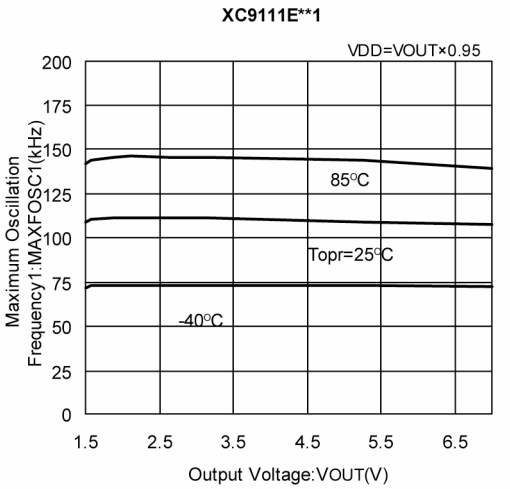


(13) Maximum Oscillation Frequency 2 vs. Output Voltage

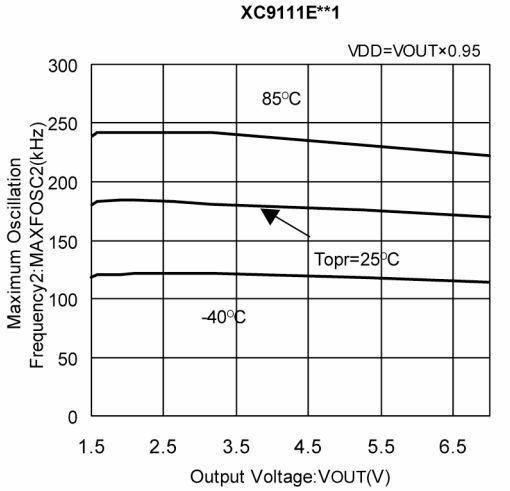

(14) Duty Ratio 1 vs. Output Voltage

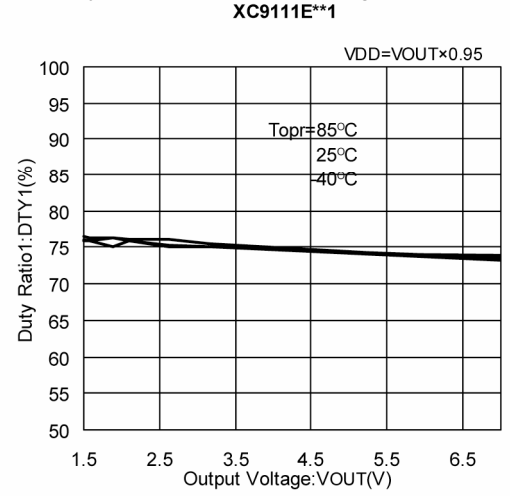


(15) Duty Ratio 2 vs. Output Voltage

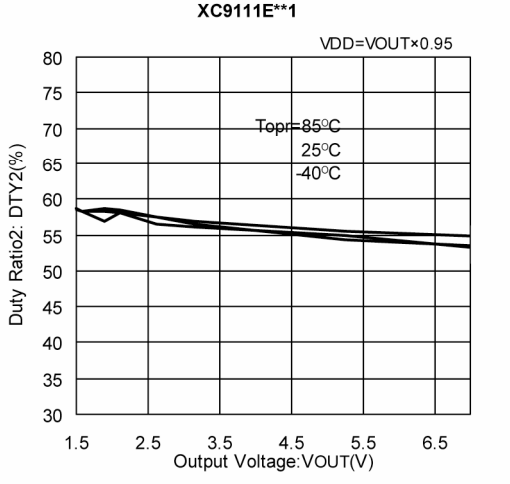


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

*Topr = 25°C


(16) Output Voltage vs. Ambient Temperature

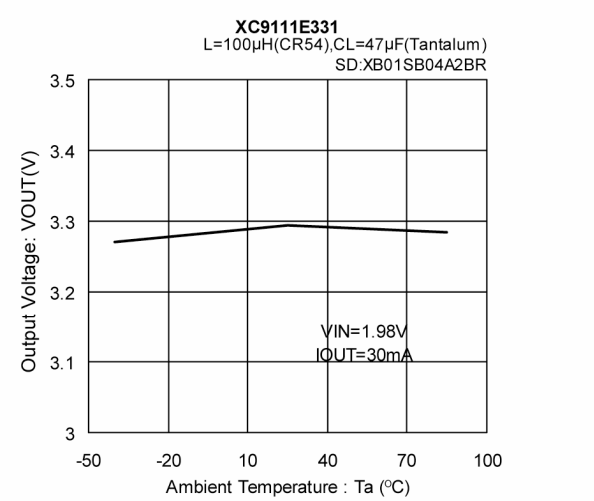


(17) CE “H”, “L” Voltage vs. Output Voltage

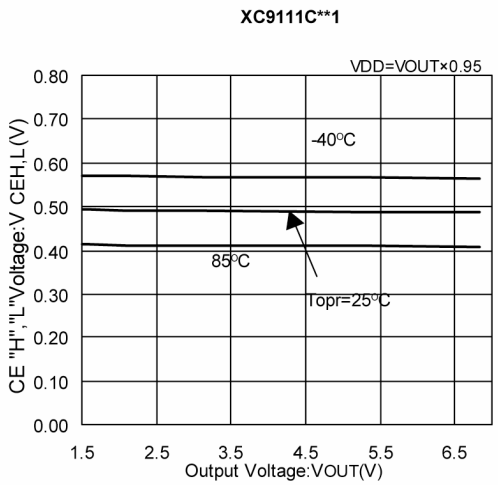


(18) Operation Start Voltage vs. Ambient Temperature

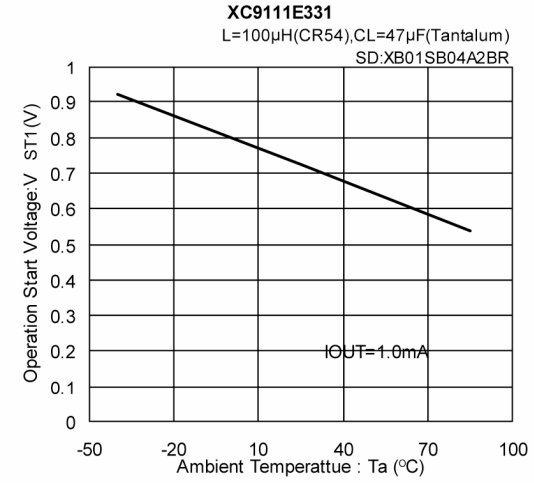

(19) Oscillation Start Voltage vs. Ambient Temperature

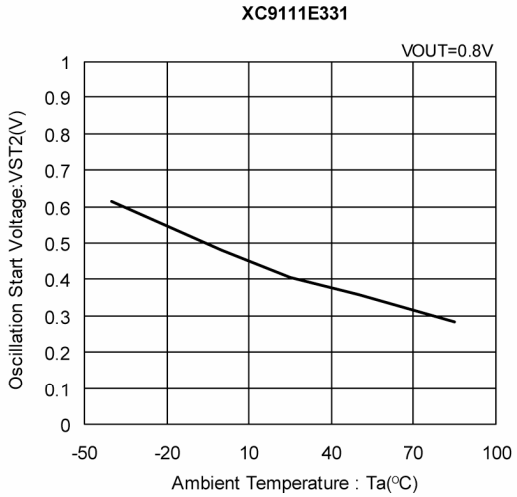

(20) Operation Hold Voltage vs. Ambient Temperature

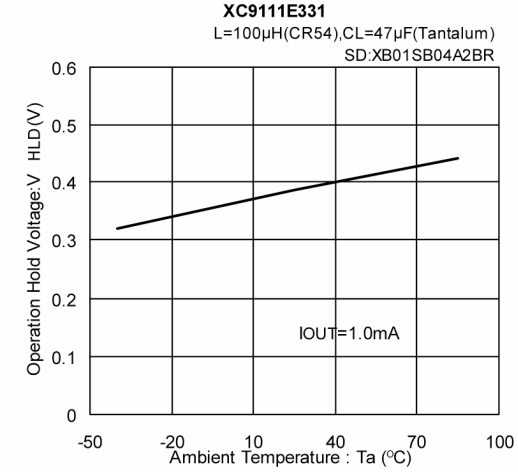


■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(21) Load Transient Response


*Topr = 25℃

XC9111E331
VIN=2.4V, VDD=VOUT, IOUT=0.1mA ⇔ 50mA

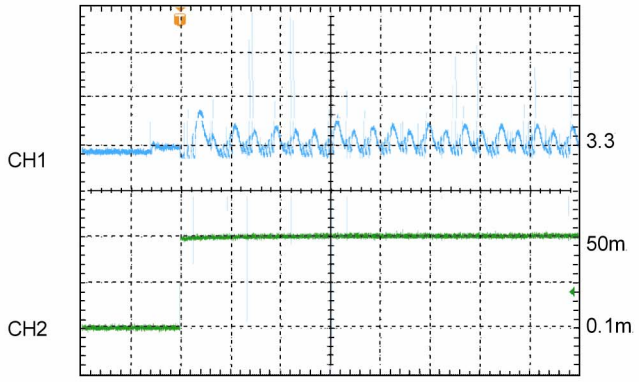


100µsec/div
CH1:VOUT AC-COUPLED,50mV/div
CH2:IOUT,25mA/div

XC9111E331
VIN=2.4V,VDD=VOUT,IOUT=0.1mA↔50mA

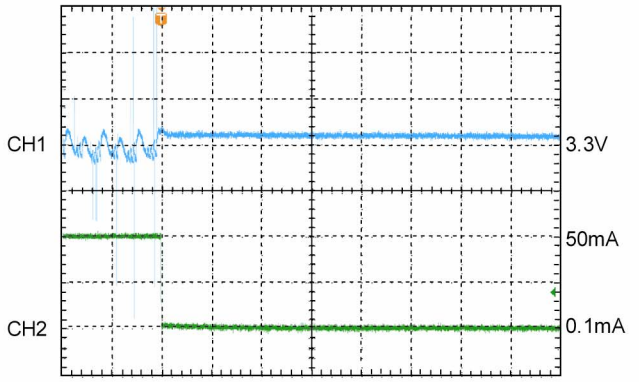


100µsec/div
CH1:VOUT AC-COUPLED,50mV/div
CH2:IOUT,25mA/div

XC9111E331
VIN=2.4V,VDD=VOUT,IOUT=1mA↔100mA

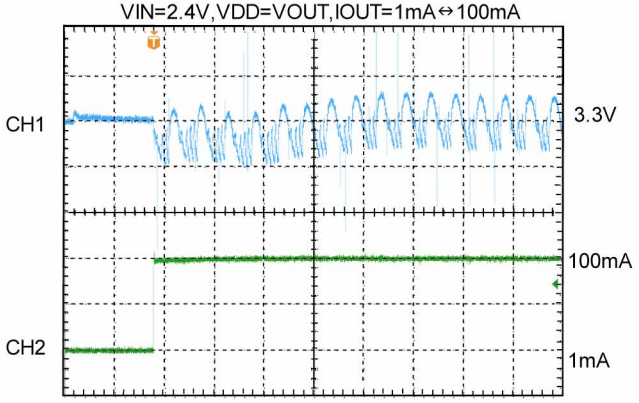


100µsec/div
CH1:VOUT AC-COUPLED,50mV/div
CH2:IOUT,50mA/div

XC9111E331
VIN=2.4V,VDD=VOUT,IOUT=1mA↔100mA

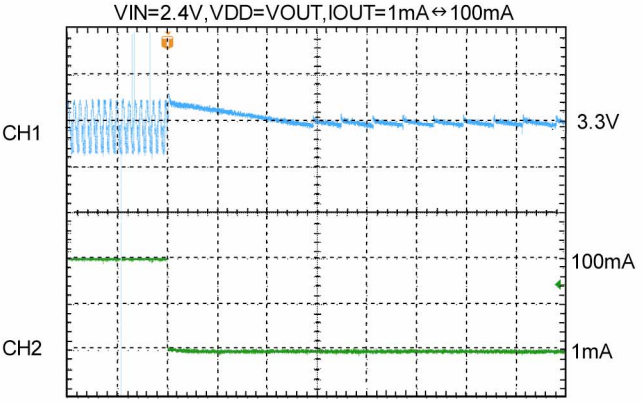


400µsec/div
CH1:VOUT AC-COUPLED,50mV/div
CH2:IOUT,50mA/div

XC9111E181
VIN=1.5V,VDD=VOUT,IOUT=0.1mA↔50mA

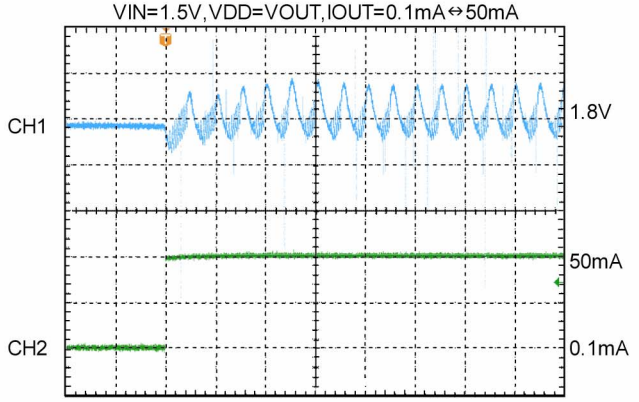

200µsec/div
CH1:VOUT AC-COUPLED,50mV/div
CH2:IOUT,25mA/div

XC9111E181
VIN=1.5V,VDD=VOUT,IOUT=0.1mA↔50mA

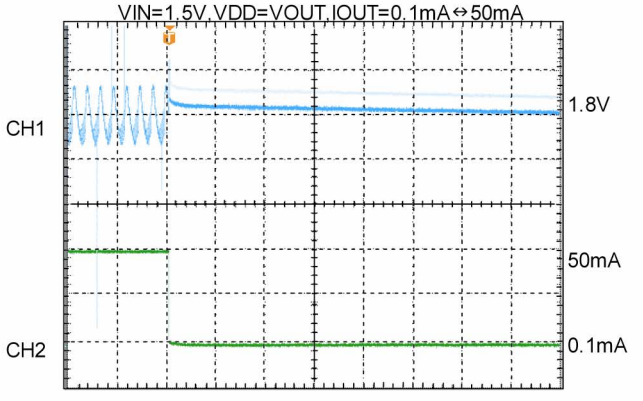


400µsec/div
CH1:VOUT AC-COUPLED,50mV/div
CH2:IOUT,25mA/div

■TYPICAL PERFORMANCE CHARACTERISTICS (Continued)

(22) Input Transient Response


*Topr = 25°C

XC9111E181
VIN=0V↔1.5V,VDD=VOUT,IOUT=10mA

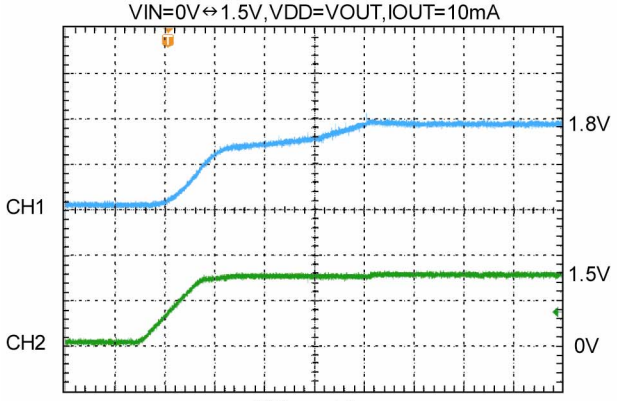


200µsec/div
CH1:VOUT,1.0V/div
CH2:VIN,1.0V/div

XC9111E501
VIN=0V↔3.3V,VDD=VOUT,IOUT=50mA

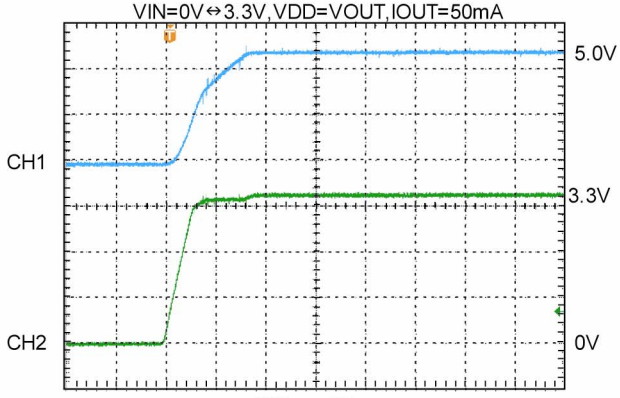


400µsec/div
CH1:VOUT,2.0V/div
CH2:VIN,1.0V/div

XC9111E331
VIN=0V↔1.5V,VDD=VOUT,IOUT=20mA

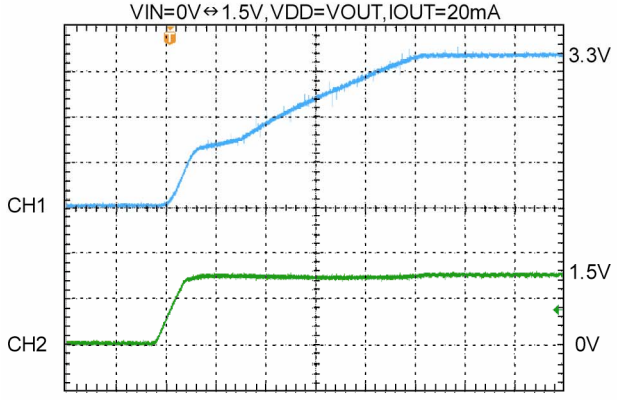

400µsec/div
CH1:VOUT,1.0V/div
CH2:VIN,1.0V/div


XC9111E331
VIN=0V↔2.4V,VDD=VOUT,IOUT=50mA

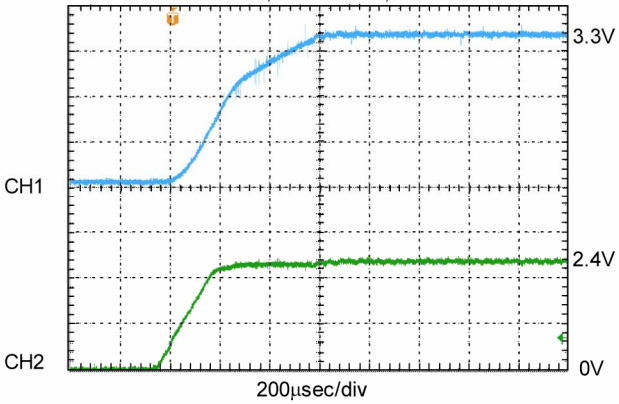


200µsec/div
CH1:VOUT,1.0V/div
CH2:VIN,1.0V/div

■PACKAGING INFORMATION


●SOT-23

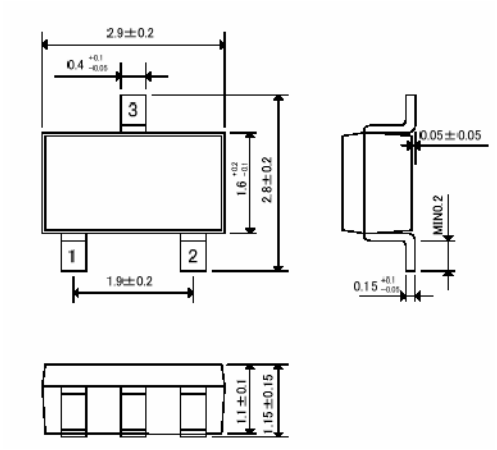


●SOT-25 (SOT-23-5)

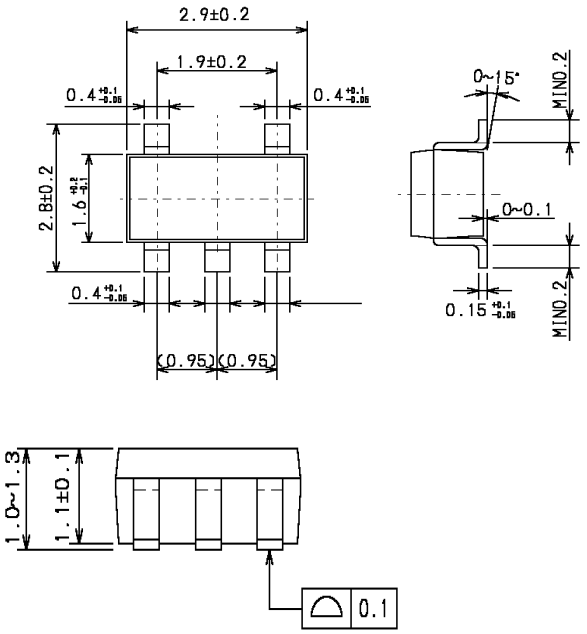

●SOT-89

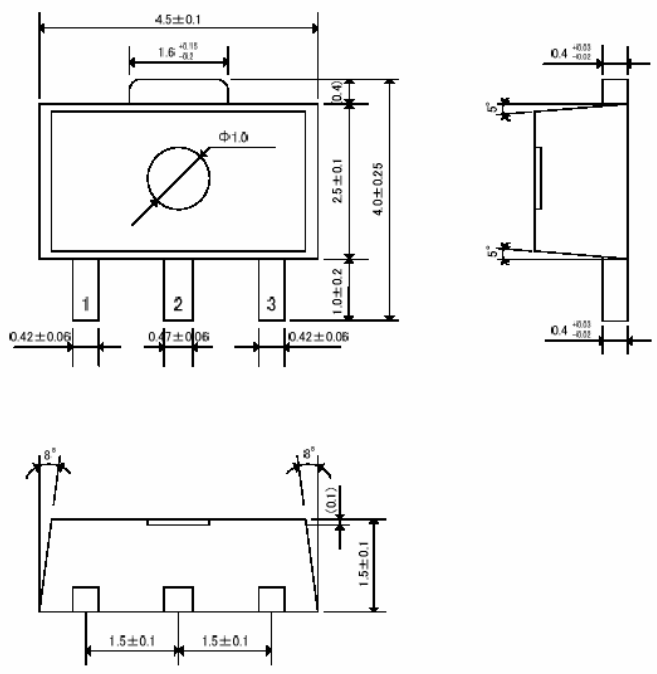


●USP-6C

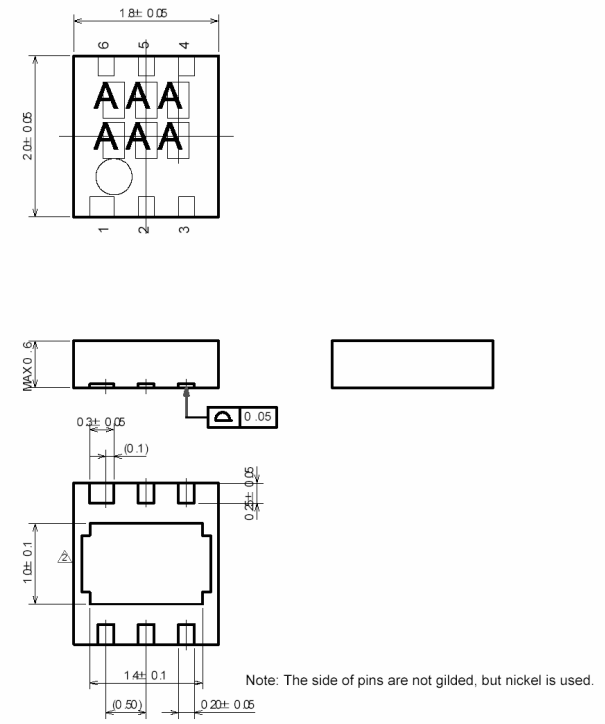


Note: The side of pins are not gilded, but nickel is used.

■PACKAGING INFORMATION (Continued)

●USP-6C Recommended Pattern Layout

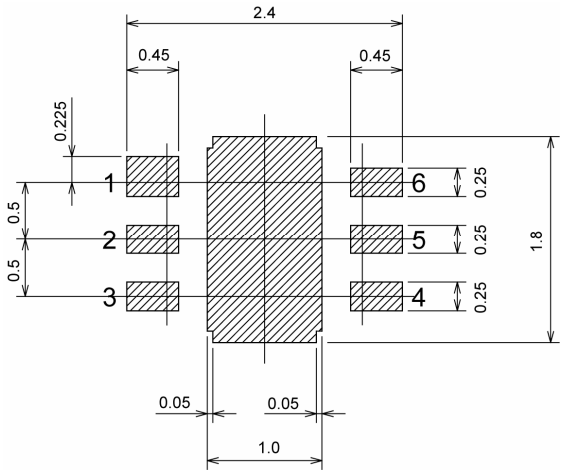


●USP-6C Recommended Metal Mask Design

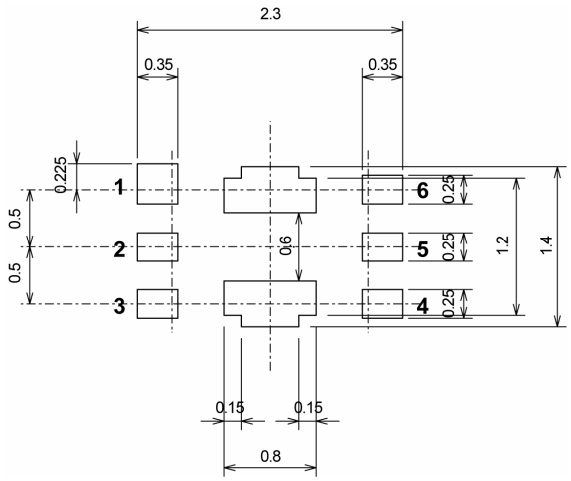

■ MARKING RULE

●SOT-23



SOT-23 (TOP VIEW)

①Represents product series

MARK	FUNCTIONS		PRODUCT SERIES
$\overline{5}$	-	Built-In Transistor	XC9111Axxxxx
$\overline{6}$	-	External Transistor	XC9111Bxxxxx

②Represents integer of output voltage and oscillation frequency

OUTPUT VOLTAGE	MARK
	FOSC=100kHz
1.x	1
2.x	2
3.x	3
4.x	4
5.x	5
6.x	6
7.x	7


OUTPUT VOLTAGE	MARK
	FOSC=100KHz
x.0	0
x.1	1
x.2	2
x.3	3
x.4	4
x.5	5
x.6	6
x.7	7
x.8	8
x.9	9

④Represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

■ MARKING RULE (Continued)

●SOT-25



SOT-25 (TOP VIEW)

①Represents product series

MARK	FUNCTION		PRODUCT SERIES
V	CE	Tr. Built-in	XC9110Cxxxxx
X	CE	External Tr.	XC9110Dxxxxx
Y	VDD/VOUT	Tr. Built-in	XC9110Exxxxx
Z	VDD/VOUT	External Tr.	XC9110Fxxxxx
5	CE	Tr. Built-in	XC9111Cxxxxx
6	CE	External Tr.	XC9111Dxxxxx
7	VDD/VOUT	Tr. Built-in	XC9111Exxxxx
8	VDD/VOUT	External Tr.	XC9111Fxxxxx

②Represents integer of output voltage and oscillation frequency

OUTPUT VOLTAGE	MARK
	FOSC=100kHz
1.x	1
2.x	2
3.x	3
4.x	4
5.x	5
6.x	6
7.x	7

③Represents decimal point of output voltage and oscillation frequency


OUTPUT VOLTAGE	MARK
	FOSC=100kHz
x.0	0
x.1	1
x.2	2
x.3	3
x.4	4
x.5	5
x.6	6
x.7	7
x.8	8
x.9	9

④Represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

■ MARKING RULE (Continued)

●SOT-89



SOT-89 (TOP VIEW)

①Represents product series

MARK	FUNCTIONS		PRODUCT SERIES
$\overline{5}$	-	Built-In Transistor	XC9111Axxxxx
$\overline{6}$	-	External Transistor	XC9111Bxxxxx

②Represents integer of output voltage and oscillation frequency

OUTPUT VOLTAGE	MARK
	FOSC 100kHz
1.x	1
2.x	2
3.x	3
4.x	4
5.x	5
6.x	6
7.x	7

③Represents decimal point of output voltage and oscillation frequency


OUTPUT VOLTAGE	MARK
	FOSC 100kHz
x.0	0
x.1	1
x.2	2
x.3	3
x.4	4
x.5	5
x.6	6
x.7	7
x.8	8
x.9	9

④Represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

■ MARKING RULE (Continued)

●USP-6C



USP-6C (TOP VIEW)

①Represents product series

MARK	PRODUCT SERIES
M	XC9110xxx1Dx
N	XC9111xxx1Dx

②Represents series type

MARK	FUNCTION		PRODUCT SERIES
C	CE	Tr. Built-in	XC911xCxx1Dx
D	CE	External Tr.	XC911xDxx1Dx
E	VDD/VOUT	Tr. Built-in	XC911xExx1Dx
F	VDD/VOUT	External Tr.	XC911xFxx1Dx

③Represents integer of output voltage

MARK	OUTPUT VOLTAGE
1	1.x
2	2.x
3	3.x
4	4.x
5	5.x
6	6.x
7	7.x

④Represents decimal point of output voltage

MARK	OUTPUT VOLTAGE
0	x.0
1	x.1
2	x.2
3	x.3
4	x.4
5	x.5
6	x.6
7	x.7
8	x.8
9	x.9

⑤Represents oscillation frequency

MARK	OSCILLATION FREQUENCY	PRODUCT SERIES
1	x.0	XC911xxxx1Dx

⑥Represents production lot number

0 to 9, A to Z repeated (G, I, J, O, Q, W excepted)

* No character inversion used

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this catalog is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this catalog.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this catalog.
4. The products in this catalog are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
   (e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this catalog within the specified ranges.
   Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this catalog may be copied or reproduced without the prior permission of Torex Semiconductor Ltd.

TOREX SEMICONDUCTOR LTD.