
ADELS contact

LEDtrack Row Lighting System
LEDtrack Components

LEDtrack BU/11-5

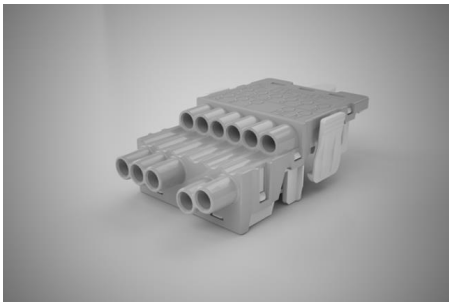

Socket, 5 pole, Current Rating: 16 A, Voltage Rating: 400 V, Core Cross-Section min.: 1.5 mm², Core Cross-Section max.: 2.5 mm²

Order Info

Reference Number (ref. no.)	157505
Applications	Lighting
PU	400
EAN	4028012124237

Type

Type	Socket
Number of poles	5 pole
Clamping Units per Pole	1
Colour	natural grey
Cross-Section	2.5 mm²
Connection Type	screwless
PE Function	yes
Protection Against Incorrect Plugging	yes
Latch	yes

Technical Data

Voltage Rating	400 V
Current Rating	16 A
Insulating Material	PA 6.6
Contact Material	Copper
Core Cross-Section min.	1.5 mm²
Core Cross-Section max.	2.5 mm²
Impulse Voltage Rating	6.0 kV
Flammability Rating	V-2
max. Ambient Temperature Operation	40 °C bei 11x1.5 mm² / 60 °C bei 11x2.5 °C
IP Code	IP20
Type of Conductor Solid	yes
Stripping Length	15.0 mm

Accessories

LEDtrack ABK	159901