CAMBION â

Technical Data Sheet

Wearnes Cambion LTD
Castleton, Hope Valley, Derbyshire, S33 8WR, England
Telephone: +44(0)1433 621555 Fax: +44(0)1433 621290
Web: www.cambion.com Email: enquiries@cambion.com

# 160-2040 Solder terminal, turreted, feed thru

Recommended mounting hole .076 (1,93), #48 drill

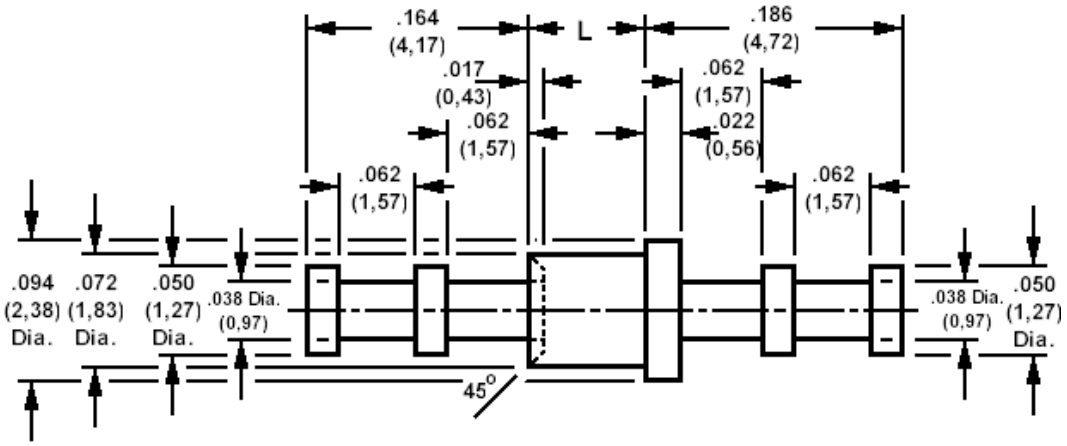


**How to order code**
**160-2040-XX-YY-00**
**Basic Part No XX = L dimension, YY = Plating Finish**

| DIMENSIONS (XX) | | | |
|---|---|---|---|
| **Basic Part No** | **(XX)** | **L** | **Board Thickness** |
| 160-2040 | -01 | .051 (1,29) | .031 (0,79) |
| | -02 | .082 (2,08) | .062 (1,59) |
| | -03 | .113 (2,87) | .094 (2,38) |
| | -04 | .145 (3,68) | .125 (3,18) |
| | -05 | .207 (5,26) | .188 (4,76) |

| MATERIALS | | | |
|---|---|---|---|
| **Component** | **Material** | **Finish (YY)** | |
| | | -01 | -05 |
| Terminal | Brass | Silver | Electro Solder |

| SWAGE TOOLING | |
|---|---|
| **Recommended Swaging Tools:-** | |
| Anvil | 435-6420-01-00-00 |
| Roll punch | 435-6618-01-00-00 |

Copyright© Cambion® Wednesday, 28 May 2003 