

## A 1.55V to 5.25V, 1.9 $\mu$ A, 9kHz to 300kHz Silicon Timer

### FEATURES

- ◆ Ultra Low Supply Current: 1.9 $\mu$ A at 25kHz
- ◆ Supply Voltage Operation: 1.55V to 5.25V
- ◆ Single Resistor Sets FOUT at 50% Duty Cycle
- ◆ FOUT Period:
  - 9kHz  $\leq$  FOUT  $\leq$  300kHz
- ◆ Single Resistor Sets Output Frequency
- ◆ FOUT Period Accuracy: 3%
- ◆ FOUT Period Drift: 0.02%/°C
- ◆ FOUT Output Driver Resistance: 160 $\Omega$

### DESCRIPTION

The TS3006 is a single-supply, second-generation Touchstone Semi oscillator/timer fully specified to operate at a supply voltage range of 1.55V to 5.25V while consuming less than 2.4 $\mu$ A(max) supply current. Requiring only a resistor to set the base output frequency (or output period) at 25kHz (or 40 $\mu$ s) with a 50% duty cycle, the TS3006 timer/oscillator is compact, easy-to-use, and versatile. Optimized for ultra-long life, low frequency, battery-powered/portable applications, TS3006 joins the TS3001, TS3002, TS3004, and TS3005 in Touchstone's CMOS timer family in its "NanoWatt Analog™" series of high-performance analog integrated circuits.


### APPLICATIONS

Portable and Battery-Powered Equipment  
 Low-Parts-Count Nanopower Oscillator  
 Compact Micropower Replacement for Crystal and Ceramic Oscillators  
 Micropower Pulse-width Modulation Control  
 Micropower Pulse-position Modulation Control  
 Micropower Clock Generation  
 Micropower Sequential Timing

The TS3006 output frequency can be user-adjusted from 9kHz to 300kHz with a single resistor. In addition, the TS3006 represents a 25% reduction in pcb area and a factor-of-10 lower power consumption over other CMOS-based integrated circuit oscillators/timers. When compared against industry-standard 555-timer-based products, the TS3006 offers up to 84% reduction in pcb area and over three orders of magnitude lower power consumption.

The TS3006 is fully specified over the -40°C to +85°C temperature range and is available in a low-profile, 8-pin 3x3mm TDFN package with an exposed back-side paddle.

### TYPICAL APPLICATION CIRCUIT

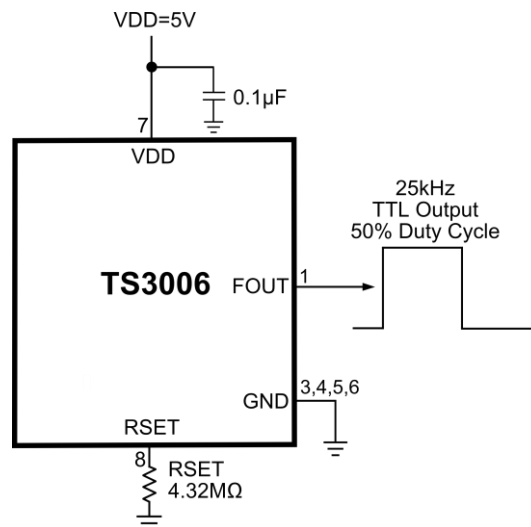

The Touchstone Semiconductor logo and "NanoWatt Analog" are registered trademarks of Touchstone Semiconductor, Incorporated.


## ABSOLUTE MAXIMUM RATINGS

$V_{DD}$  to GND.....-0.3V to +5.5V  
 PWM\_CNTRL to GND .....-0.3V to +5.5V  
 FOUT, PWMOUT to GND.....-0.3V to +5.5V  
 RSET to GND.....-0.3V to +2.5V  
 CPWM to GND .....-0.3V to +5.5V  
 FDIV to GND .....-0.3V to +5.5V

Continuous Power Dissipation ( $T_A = +70^{\circ}\text{C}$ )  
 8-Pin TDFN (Derate at  $23.8\text{mW}/^{\circ}\text{C}$  above  $+70^{\circ}\text{C}$ )..... 1951mW  
 Operating Temperature Range.....  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 Storage Temperature Range.....  $-65^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$   
 Lead Temperature (Soldering, 10s).....  $+300^{\circ}\text{C}$

Electrical and thermal stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to any absolute maximum rating conditions for extended periods may affect device reliability and lifetime.

## PACKAGE/ORDERING INFORMATION

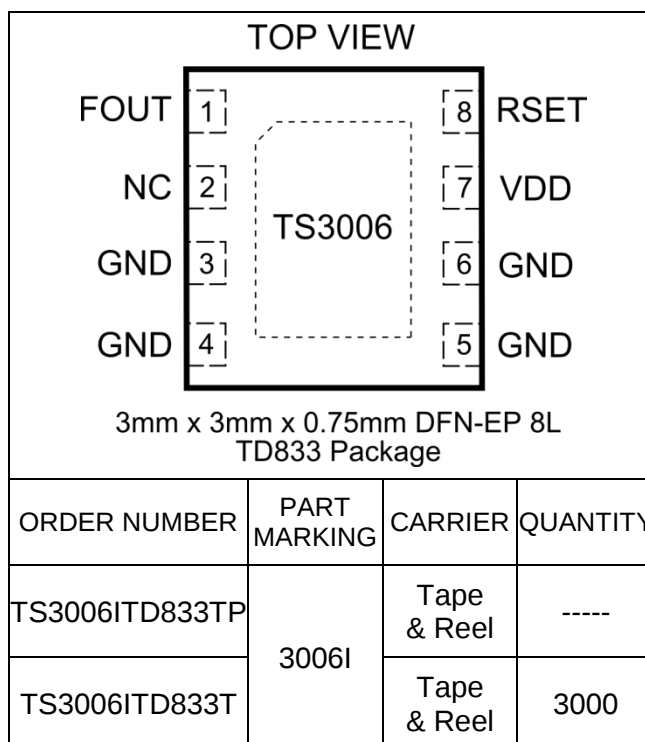

**Lead-free Program:** Touchstone Semiconductor supplies only lead-free packaging.

Consult Touchstone Semiconductor for products specified with wider operating temperature ranges.

## ELECTRICAL CHARACTERISTICS

$V_{DD} = 3V$ ,  $V_{PWM\_CTRL} = V_{DD}$ ,  $R_{SET} = 4.32M\Omega$ ,  $R_{LOAD(FOUT)} = \text{Open Circuit}$ ,  $C_{LOAD(FOUT)} = 0pF$  unless otherwise noted. Values are at  $T_A = 25^\circ C$  unless otherwise noted. See Note 1.

| PARAMETER                           | SYMBOL                     | CONDITIONS                                    | MIN  | TYP   | MAX  | UNITS   |
|-------------------------------------|----------------------------|-----------------------------------------------|------|-------|------|---------|
| Supply Voltage                      | $V_{DD}$                   |                                               | 1.55 |       | 5.25 | V       |
| Supply Current                      | $I_{DD}$                   |                                               |      | 1.9   | 2.4  | $\mu A$ |
|                                     |                            | $-40^\circ C \leq T_A \leq 85^\circ C$        |      |       | 2.7  |         |
| FOUT Period                         | $t_{FOUT}$                 |                                               | 39   | 40.1  | 41.2 | $\mu s$ |
|                                     |                            | $-40^\circ C \leq T_A \leq 85^\circ C$        | 38   |       | 42   |         |
| FOUT Period Line Regulation         | $\Delta t_{FOUT}/V$        | $1.55V \leq V_{DD} \leq 5.25V$                |      | 0.17  |      | %/V     |
| FOUT Duty cycle                     |                            |                                               | 49   |       | 51   | %       |
| FOUT Period Temperature Coefficient | $\Delta t_{FOUT}/\Delta T$ |                                               |      | 0.02  |      | %/°C    |
| UVLO Hysteresis                     | $V_{UVLO}$                 | $(V_{DD}=1.55V) - (V_{DD\_SHUTDOWN VOLTAGE})$ | 150  |       | 250  | mV      |
| FOUT Rise Time                      | $t_{RISE}$                 | See Note 2, $C_L = 15pF$                      |      | 10    |      | ns      |
| FOUT Fall Time                      | $t_{FALL}$                 | See Note 2, $C_L = 15pF$                      |      | 10    |      | ns      |
| FOUT Jitter                         |                            | See Note 3                                    |      | 0.001 |      | %       |
| RSET Pin Voltage                    | $V(RSET)$                  |                                               |      | 0.3   |      | V       |
| Maximum Oscillator Frequency        | $F_{OSC}$                  | $RSET = 360K$                                 |      |       | 300  | kHz     |
| High Level Output Voltage, FOUT     | $V_{DD} - V_{OH}$          | $I_{OH} = 1mA$                                |      | 160   |      | mV      |
| Low Level Output Voltage, FOUT      | $V_{OL}$                   | $I_{OL} = 1mA$                                |      | 140   |      | mV      |







**Note 1:** All devices are 100% production tested at  $T_A = +25^\circ C$  and are guaranteed by characterization for  $T_A = T_{MIN}$  to  $T_{MAX}$ , as specified.

**Note 2:** Output rise and fall times are measured between the 10% and 90% of the  $V_{DD}$  power-supply voltage levels. The specification is based on lab bench characterization and is not tested in production.

**Note 3:** Timing jitter is the ratio of the peak-to-peak variation of the period to the mean of the period. The specification is based on lab bench characterization and is not tested in production.

## TYPICAL PERFORMANCE CHARACTERISTICS


$V_{DD} = 3V$ ,  $V_{PWM\_CNTRL} = V_{DD}$ ,  $R_{SET} = 4.32M\Omega$ ,  $R_{LOAD(FOUT)} = \text{Open Circuit}$ ,  $C_{LOAD(FOUT)} = 0pF$  unless otherwise noted. Values are at  $T_A = 25^\circ C$  unless otherwise noted.

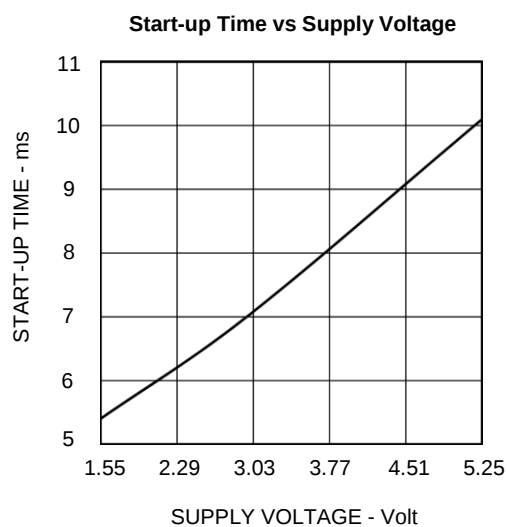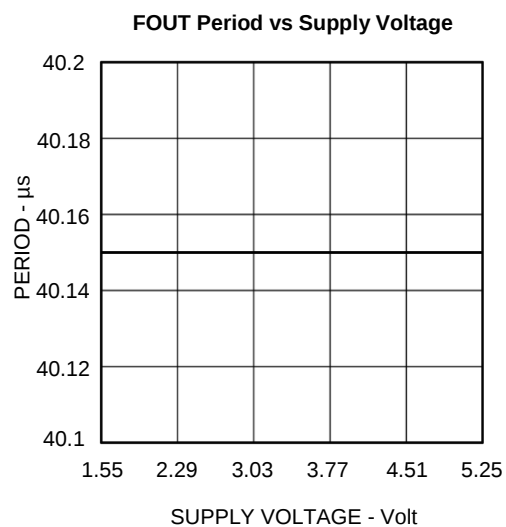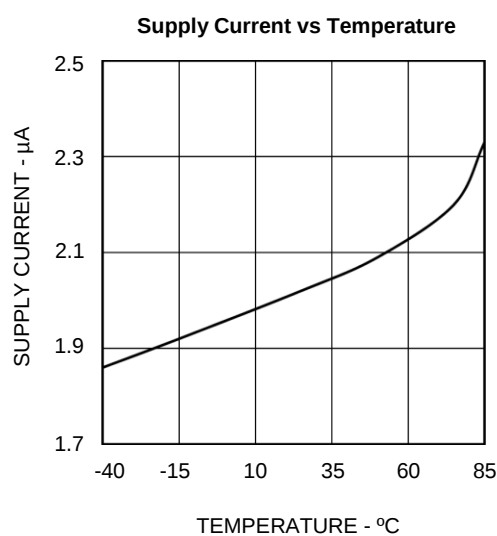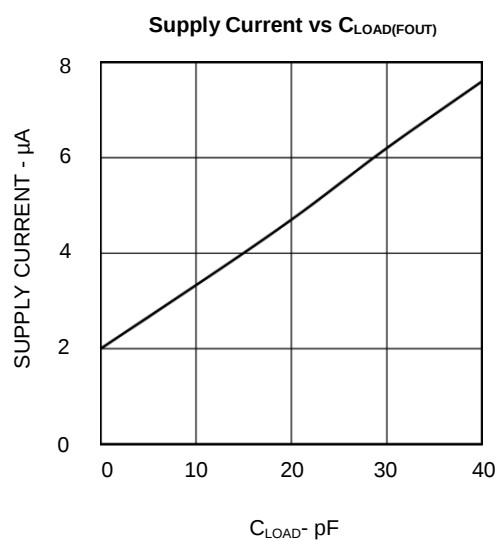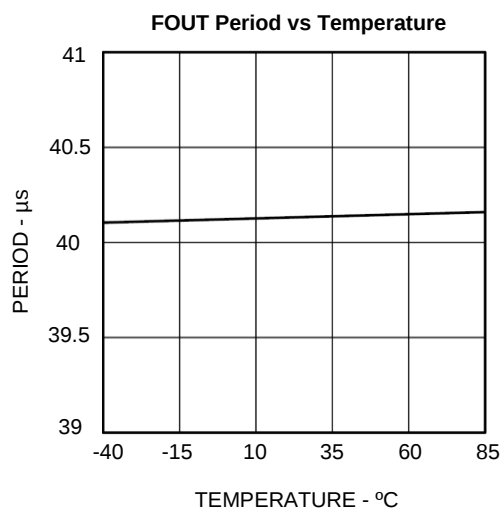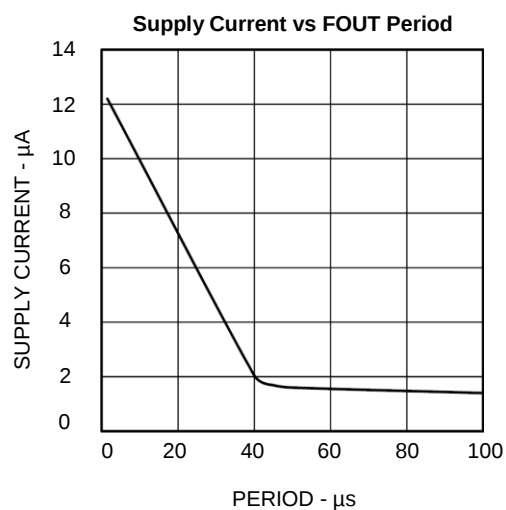


## TYPICAL PERFORMANCE CHARACTERISTICS

$V_{DD} = 3V$ ,  $V_{PWM\_CNTRL} = V_{DD}$ ,  $R_{SET} = 4.32M\Omega$ ,  $R_{LOAD(FOUT)} = \text{Open Circuit}$ ,  $C_{LOAD(FOUT)} = 0pF$  unless otherwise noted. Values are at  $T_A = 25^\circ C$  unless otherwise noted.


Period vs  $R_{SET}$

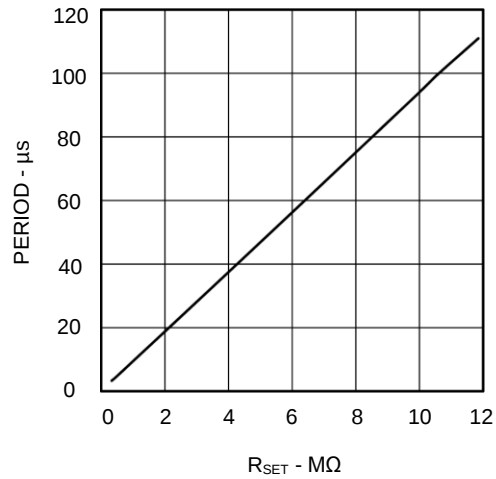

Supply Current Distribution

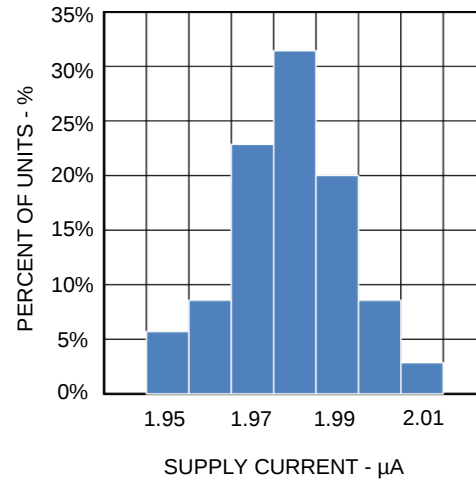


FOUT  
 $V_{DD} = 3V$ ,  $C_{LOAD} = 15pF$

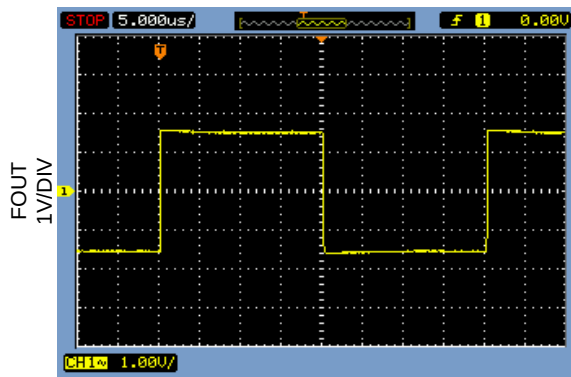

5μs/DIV

FOUT  
 $V_{DD} = 5V$ ,  $C_{LOAD} = 15pF$

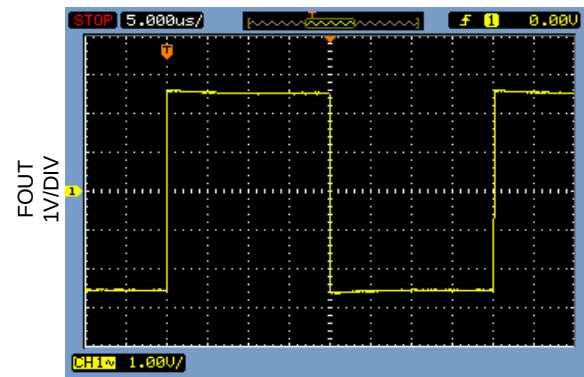


5μs/DIV

## PIN FUNCTIONS

| PIN     | NAME | FUNCTION                                                                                                                                                                                                                                                                                                                  |
|---------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | FOUT | Fixed Frequency Output. A push-pull output stage with an output resistance of 160Ω. FOUT pin swings from GND to VDD. For lowest power operation, capacitance loads should be minimized and resistive loads should be maximized.                                                                                           |
| 2       | NC   | Non-Connect.                                                                                                                                                                                                                                                                                                              |
| 3,4,5,6 | GND  | Ground. Connect this pin to the system's analog ground plane.                                                                                                                                                                                                                                                             |
| 7       | VDD  | Power Supply Voltage Input. The supply voltage range is $1.55V \leq V_{DD} \leq 5.25V$ . Bypass this pin with a 0.1μF ceramic coupling capacitor in close proximity to the TS3006.                                                                                                                                        |
| 8       | RSET | FOUT Programming Resistor Input. A 4.32MΩ resistor connected from this pin to ground sets the T3003's internal oscillator's output period to 40μs (25KHz). For optimal performance, the composition of the RSET resistor shall be consistent with a tolerance of 1% or lower. The RSET pin voltage is approximately 0.3V. |

## BLOCK DIAGRAM

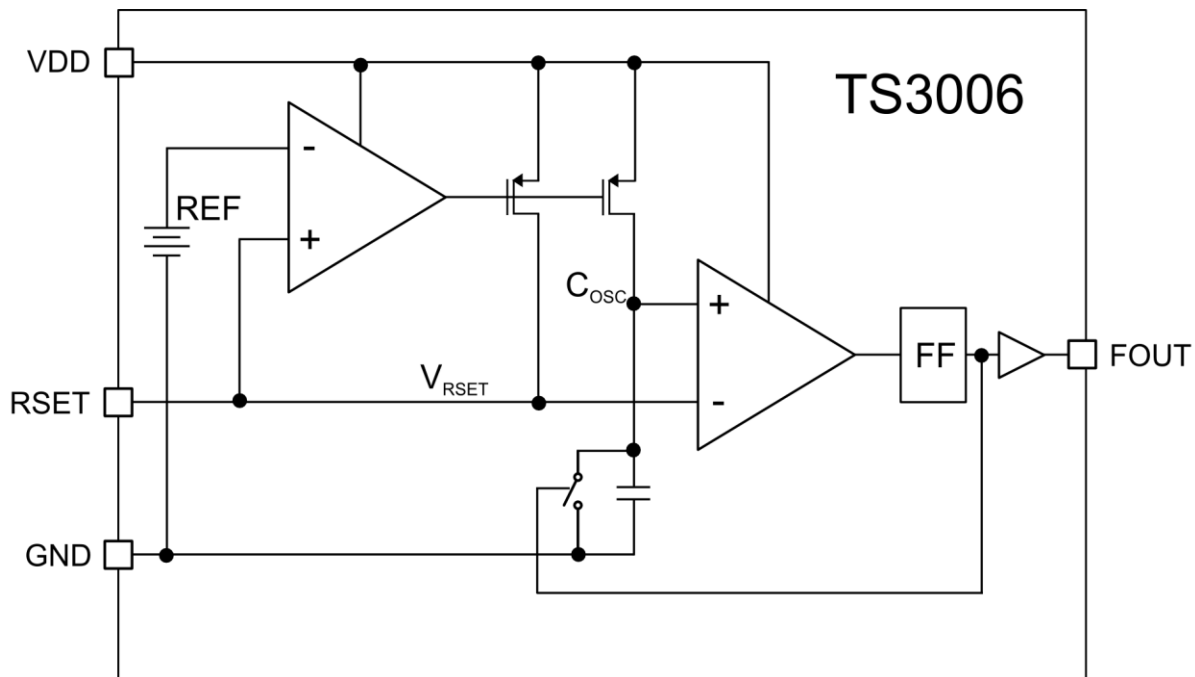

## THEORY OF OPERATION

The TS3006 is a user-programmable oscillator where the period of the square wave at its FOUT terminal is generated by an external resistor connected to the RSET pin. The output frequency is given by:

$$FOUT \text{ (kHz)} = \frac{1.08E11}{RSET}$$

**Equation 1.** FOUT Frequency Calculation

With an  $R_{SET} = 4.32M\Omega$ , the output frequency is approximately 25kHz with a 50% duty cycle. As design aids, Tables 1 lists TS3006's typical FOUT for various standard values for  $R_{SET}$ .

| $R_{SET} \text{ (M}\Omega\text{)}$ | FOUT (kHz) |
|------------------------------------|------------|
| 0.360                              | 300        |
| 1                                  | 108        |
| 2.49                               | 43.37      |
| 4.32                               | 25         |
| 6.81                               | 15.86      |
| 9.76                               | 11.07      |
| 12                                 | 9          |

**Table 1:** FOUT vs  $R_{SET}$

Connect CPWM to VDD to disable the PWM function and in turn, save power. Connect PWM\_CNTRL to VDD for a fixed PWMOUT output pulse width, which is determined by the CPWM pin capacitor only.


## APPLICATIONS INFORMATION

### Minimizing Power Consumption

To keep the TS3006's power consumption low, resistive loads at the FOUT and PWMOUT terminals increase dc power consumption and therefore should be as large as possible. Capacitive loads at the FOUT and PWMOUT terminals increase the TS3006's transient power consumption and, as well, should be as small as possible.

One challenge to minimizing the TS3006's transient power consumption is the probe capacitance of oscilloscopes and frequency counter instruments. Most instruments exhibit an input capacitance of 15pF or more. Unless buffered, the increase in transient load current can be as much as 400nA.

To minimize capacitive loading, the technique shown in Figure 1 can be used. In this circuit, the principle of series-connected capacitors can be used to reduce the effective capacitive load at the TS3006's FOUT and PWMOUT terminals.

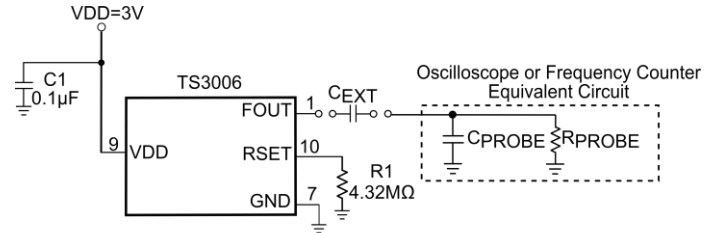

**Figure 1:** Using an External Capacitor in Series with Probes Reduces Effective Capacitive Load.

To determine the optimal value for  $C_{EXT}$  once the probe capacitance is known by simply solving for  $C_{EXT}$  using the following expression:

$$C_{EXT} = \frac{1}{\frac{1}{C_{LOAD(EFF)}} - \frac{1}{C_{PROBE}}}$$

**Equation 2:** External Capacitor Calculation


For example, if the instrument's input probe capacitance is 15pF and the desired effective load capacitance at either or both FOUT and PWMOUT terminals is to be  $\leq 5pF$ , then the value of  $C_{EXT}$  should be  $\leq 7.5pF$ .

### TS3006 Start-up Time

As the TS3006 is powered up, its FOUT terminal (and PWMOUT terminal, if enabled) is active once the applied VDD is higher than 1.55V. Once the applied VDD is higher than 1.55V, the master oscillator achieves steady-state operation within 8ms.

## Using a Potentiometer to Trim the TS3006's Output Frequency

By using a fixed resistor and a potentiometer, the output frequency of the TS3006 can be trimmed as shown in Figure 2. By selecting a fixed resistor R1 with a tolerance of 0.1% and a potentiometer P1 with a 5% tolerance, the output frequency can be trimmed to provide a  $\pm 2\%$  trimming range

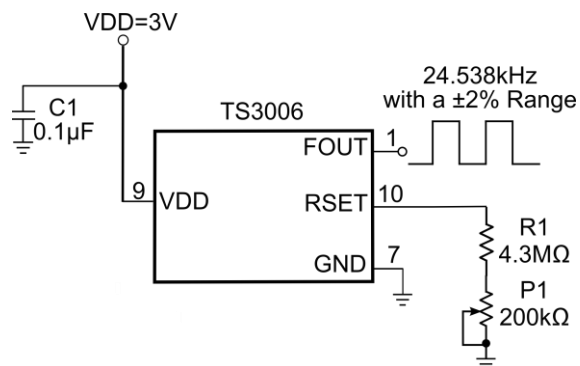


**Figure 2:** Using a Fixed Resistor and a Potentiometer to Trim the TS3006's Output Frequency.

## PACKAGE OUTLINE DRAWING

### 8-Pin TDFN33 Package Outline Drawing

(N.B., Drawings are not to scale)

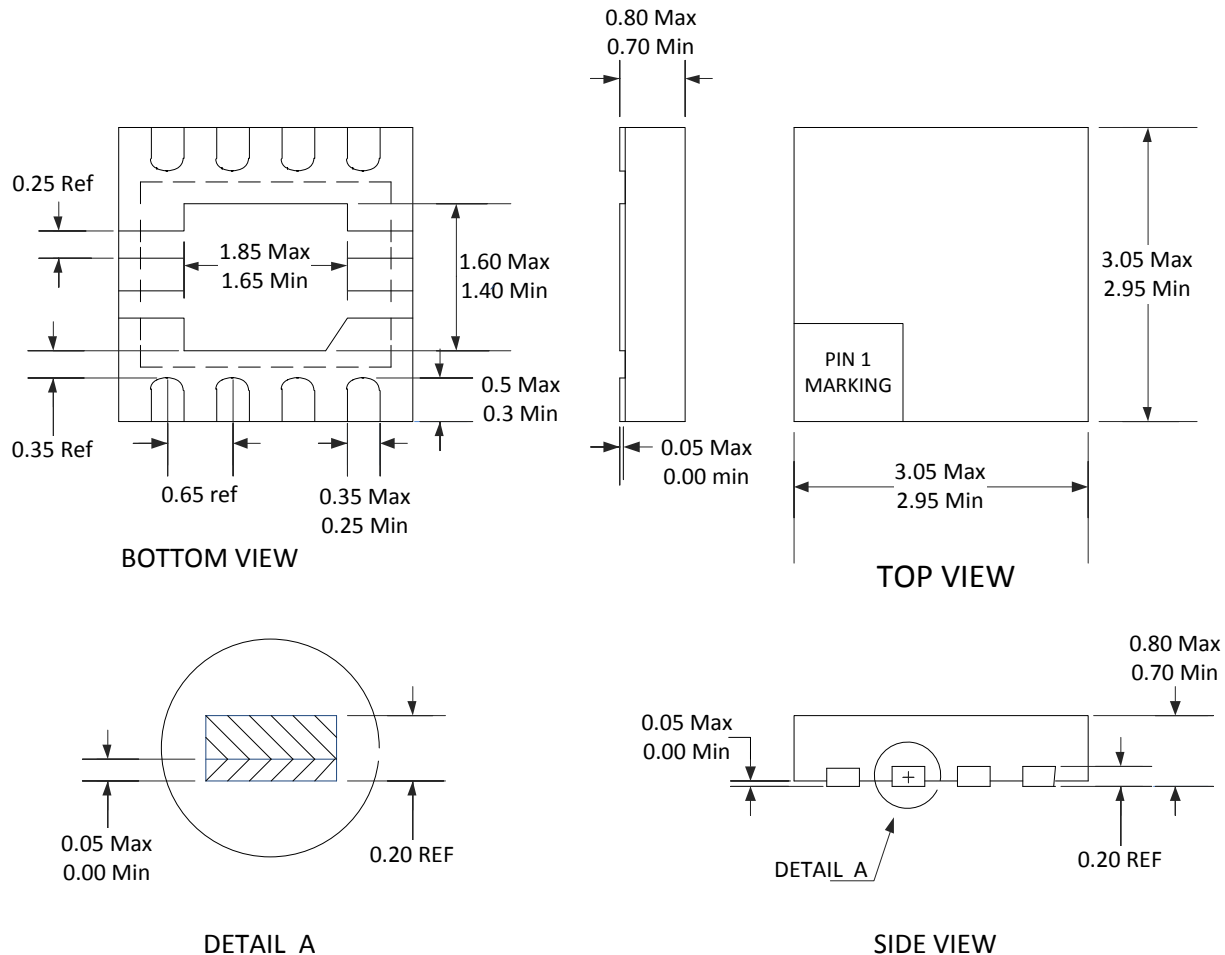

NOTE: CONTROLLING DIMENSIONS IN MILLIMETERS  
Compliant with JEDEC MO-229

Information furnished by Touchstone Semiconductor is believed to be accurate and reliable. However, Touchstone Semiconductor does not assume any responsibility for its use nor for any infringements of patents or other rights of third parties that may result from its use, and all information provided by Touchstone Semiconductor and its suppliers is provided on an AS IS basis, WITHOUT WARRANTY OF ANY KIND. Touchstone Semiconductor reserves the right to change product specifications and product descriptions at any time without any advance notice. No license is granted by implication or otherwise under any patent or patent rights of Touchstone Semiconductor. Touchstone Semiconductor assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using Touchstone Semiconductor components. To minimize the risk associated with customer products and applications, customers should provide adequate design and operating safeguards. Trademarks and registered trademarks are the property of their respective owners.