

**HC-B 24-TFL-76/O1STM40G**

Order No.: 1644669

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1644669>

HEAVYCON sleeve housing B24, for single locking latch, height 76 mm, without support 1x M40, straight conductor exit

**Commercial data**

|                          |                                                                                    |
|--------------------------|------------------------------------------------------------------------------------|
| GTIN (EAN)               |  |
| sales group              | D002                                                                               |
| Pack                     | 10 pcs.                                                                            |
| Customs tariff           | 85389099                                                                           |
| Catalog page information | Page 496 (PC-2009)                                                                 |

**Product notes**

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


**Technical data****General data**

|        |                                                 |
|--------|-------------------------------------------------|
| Note   | For contact inserts HC-B24, BB46, D64, DD108, M |
| Design | B24                                             |
| Height | 76 mm                                           |
| Width  | 43 mm                                           |
| Length | 120 mm                                          |

|                                 |                          |
|---------------------------------|--------------------------|
| Housing type                    | Sleeve housings          |
| Locking type                    | for single locking latch |
| Cable exit                      | Straight                 |
| Type of the screw connection    | 1x M40                   |
| Degree of protection            | IP65                     |
| Ambient temperature (operation) | -40 °C ... 125 °C        |
| Housing material                | Aluminum, die-cast       |
| Housing surface material        | Powder-coated, gray      |

#### Diagrams/Drawings

##### Dimensioned drawing

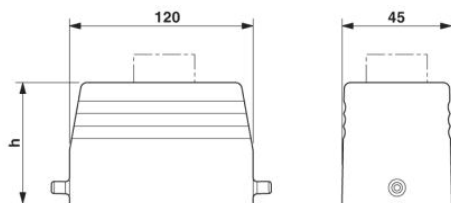

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact  
Technical modifications reserved;