


used for: D-SUB

POS.	A -0.76	B -0.25	C	Part NO.
9	31.19	16.46	$25.00^{+0.12}_{-0.13}$	**164A10269X**
15	39.52	24.79	$33.30^{+0.15}_{-0.1}$	**164A10279X**
25	53.42	38.50	47.04 ± 0.13	**164A10289X**
37	69.70	54.96	63.50 ± 0.13	**164A10299X**

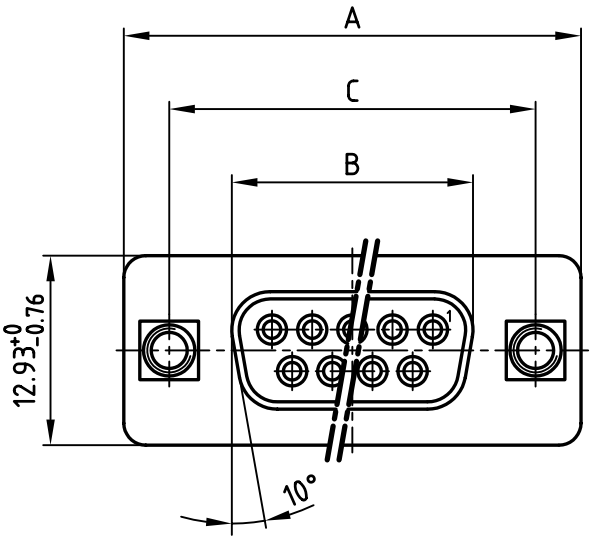

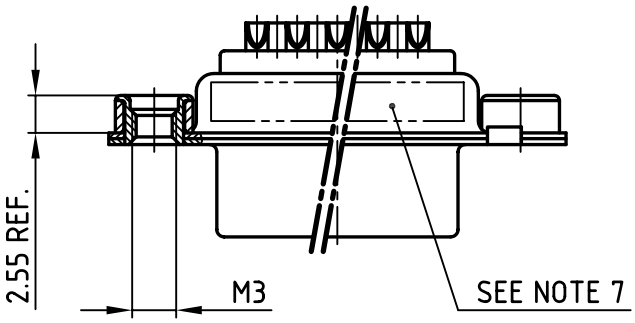

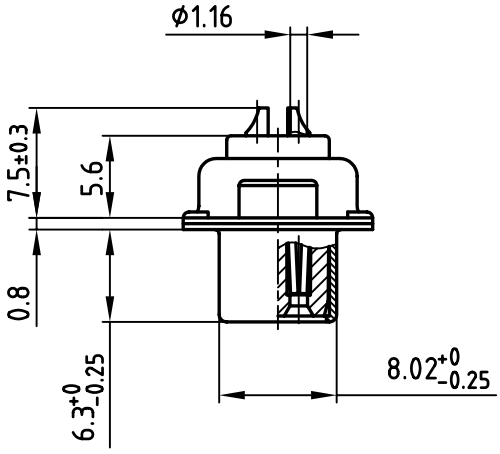

Directive 2002/95/EC „RoHS" Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

NOTES:

1. METALSHELLS: STEEL; min. 315µ" TIN over 40-80µ" NICKEL
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
   PLATING MATING AREA: 8µ" HARD GOLD OVER min. 50µ" NICKEL
   SOLDER CUP ACCEPTS CABLE AWG 20
4. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
7. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance

dim. in mm

	date	name
2006		
drawn	16.06.	Lehmenkühler
appd.	16.06.	Kühle
norm		
d-old		

scale: 2:1

material: SEE NOTES

title:

D-SUB FEMALE

9-37pos. SOLDER CUP
with threaded insert

dwg no: 16K2A1554

AutoCAD 2006

DIN-A 4

sh: 1/1

part no: SEE TABLE