**Data Sheet**
**March 27, 2008**

# LC/LW010- and LC/LW015-Series Power Modules: 18 Vdc to 36 Vdc or 36 Vdc to 75 Vdc Inputs, 10 W and 15 W




**The LC/LW010- and LC/LW015-Series Power Modules use advanced, surface-mount technology and deliver high-quality, compact, dc-dc conversion at an economical price.**

## Features

- Low profile: 10.2 mm x 25.4 mm x 50.8 mm (0.4 in. x 1.0 in. x 2.0 in.) with standoffs (9.6 mm (0.38 in.) with standoffs recessed)
- Wide input voltage range: 18 Vdc to 36 Vdc or 36 Vdc to 75 Vdc
- Output current limiting, unlimited duration
- Output overvoltage clamp
- Undervoltage lockout
- Input-to-output isolation: 1500 V
- Operating case temperature range: –40 °C to +105 °C
- *UL** 1950 Recognized, *CSA*† 22.2 No. 950-95 Certified, IEC950, and VDE0805 Licensed
- CE mark meets 73/23/EEC and 93/68/EEC directives‡
- Within FCC and VDE Class A radiated limits

## Options

- Remote on-off
- Choice of on/off configuration
- Short pin: 2.8 mm ± 0.25 mm (0.110 in. ± 0.010 in.)
- Synchronization (cannot be ordered on units with remote on/off)
- Output voltage adjust: 90% to 110% of $V_{O, nom}$ (single outputs only)
- Tight output voltage tolerance

## Applications

- Telecommunications
- Distributed power architectures
- Private branch exchange (PBX)
- Voice and data multiplexing

## Description

The L Single- and Dual-Output-Series Power Modules are low-profile, dc-dc converters that operate over an input voltage range of 18 Vdc to 36 Vdc or 36 Vdc to 75 Vdc and provide one or two precisely regulated outputs. The outputs are isolated from the input, allowing versatile polarity configurations and grounding connections. The modules have a maximum power rating of 10 W to 15 W and efficiencies of up to 84% for a 5 V output and 82% for a 3.3 V output. Built-in filtering for both input and output minimizes the need for external filtering.

* *UL* is a registered trademark of Underwriters Laboratories, Inc.
† *CSA* is a registered trademark of Canadian Standards Association.
‡ This product is intended for integration into end-use equipment. All the required procedures for CE marking of end-use equipment should be followed. (The CE mark is placed on selected products.)

## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

| Parameter | Device | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Input Voltage: | | | | | | |
| Continuous | LC | $V_I$ | 0 | — | 50 | Vdc |
| | LW | $V_I$ | 0 | — | 80 | Vdc |
| Transient (100 ms) | LW | $V_{I, trans}$ | 0 | — | 100 | V |
| Operating Case Temperature (See Derating Curves, Figures 43—45.) | All | $T_C$ | –40 | — | 105* | °C |
| Storage Temperature | All | $T_{stg}$ | –55 | — | 125 | °C |
| I/O Isolation | All | — | — | — | 1500 | Vdc |

* Maximum case temperature varies based on power dissipation. See derating curves, Figures 43—45, for details.

## Electrical Specifications

**Table 1. Input Specifications**

| Parameter | Device | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Operating Input Voltage | LC | $V_I$ | 18 | 24 | 36 | Vdc |
| | LW | $V_I$ | 36 | 48 | 75 | Vdc |
| Maximum Input Current ($V_I$ = 0 to $V_{I, max}$; $I_O$ = $I_{O, max}$; see Figures 1—4.) | LC | $I_{I, max}$ | — | — | 1.6 | A |
| | LW | $I_{I, max}$ | — | — | 800 | mA |
| Inrush Transient | All | $I^2t$ | — | — | 0.2 | $A^2s$ |
| Input Reflected-ripple Current (5 Hz to 20 MHz; 12 µH source impedance; $T_A$ = 25 °C; see Figure 33.) | All | $I_I$ | — | 5 | — | mAp-p |
| Input Ripple Rejection (100 Hz—120 Hz) | All | — | — | 45 | — | dB |

### Fusing Considerations

**CAUTION: This power module is not internally fused. An input line fuse must always be used.**

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of a sophisticated power architecture. To preserve maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The safety agencies require a normal-blow, dc fuse with a maximum rating of 5 A (see Safety Considerations section). Based on the information provided in this data sheet on inrush energy and maximum dc input current, the same type of fuse with a lower rating can be used. Refer to the fuse manufacturer's data for further information.

## Electrical Specifications (continued)

**Table 2. Output Specifications**

| Parameter | Device Code or Suffix | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Output Voltage Set Point ($V_I = V_{I,nom}$; $I_O = I_{O,max}$; $T_A$ = 25 °C) | D | $V_{O,set}$ | 1.92 | 2.0 | 2.08 | Vdc |
| | G* | $V_{O,set}$ | — | 2.5 | — | Vdc |
| | F | $V_{O,set}$ | 3.17 | 3.3 | 3.43 | Vdc |
| | A | $V_{O,set}$ | 4.85 | 5.0 | 5.20 | Vdc |
| | B | $V_{O,set}$ | 11.52 | 12.0 | 12.48 | Vdc |
| | C | $V_{O,set}$ | 14.40 | 15.0 | 15.60 | Vdc |
| | AJ | $V_{O1,set}$ | 4.75 | 5.0 | 5.25 | Vdc |
| | | $V_{O2,set}$ | –4.75 | –5.0 | –5.25 | Vdc |
| | BK | $V_{O1,set}$ | 11.40 | 12.0 | 12.60 | Vdc |
| | | $V_{O2,set}$ | –11.40 | –12.0 | –12.60 | Vdc |
| | CL | $V_{O1,set}$ | 14.25 | 15.0 | 15.75 | Vdc |
| | | $V_{O2,set}$ | –14.25 | –15.0 | –15.75 | Vdc |
| Output Voltage (Over all line, load, and temperature conditions until end of life; see Figures 35 and 37.) | D | $V_{O,set}$ | 1.90 | — | 2.10 | Vdc |
| | G* | $V_{O,set}$ | — | 2.5 | — | Vdc |
| | F | $V_{O,set}$ | 3.13 | — | 3.47 | Vdc |
| | A | $V_{O,set}$ | 4.80 | — | 5.25 | Vdc |
| | B | $V_{O,set}$ | 11.40 | — | 12.60 | Vdc |
| | C | $V_{O,set}$ | 14.25 | — | 15.75 | Vdc |
| | AJ | $V_{O1,set}$ | 4.5 | — | 5.5 | Vdc |
| | | $V_{O2,set}$ | –4.5 | — | –5.5 | Vdc |
| | BK | $V_{O1,set}$ | 10.80 | — | 13.20 | Vdc |
| | | $V_{O2,set}$ | –10.80 | — | –13.20 | Vdc |
| | CL | $V_{O1,set}$ | 13.50 | — | 16.50 | Vdc |
| | | $V_{O2,set}$ | –13.50 | — | –16.50 | Vdc |
| Output Regulation (See Figures 5—11): | | | | | | |
| Line ($V_I = V_{I,min}$ to $V_{I,max}$) | A, F, D, G* | — | — | — | 5 | mV |
| | B, C | — | — | 0.01 | 0.1 | %$V_O$ |
| Load ($I_O = I_{O,min}$ to $I_{O,max}$) | Lx010 A, F, D, G* | — | — | — | 10 | mV |
| | B, C | — | — | 0.1 | 0.2 | %$V_O$ |
| Load ($I_O = I_{O,min}$ to $I_{O,max}$) | Lx015 A, F, D, G* | — | — | — | 15 | mV |
| | B, C | — | — | 0.1 | 0.2 | %$V_O$ |
| Temperature ($T_C$ = –40 °C to +85 °C) | A, F, D, G* | — | — | 25 | 100 | mV |
| | B, C | — | — | 0.5 | 2.0 | %$V_O$ |
| Output Ripple and Noise (Across 2 x 0.47 µF ceramic capacitors; see Figures 34 and 36.): | | | | | | |
| RMS | A, D, F, G* | — | — | — | 30 | mVrms |
| | AJ, B, C | — | — | — | 35 | mVrms |
| | BK, CL | — | — | — | 50 | mVrms |
| Peak-to-peak (5 Hz to 20 MHz) | A, D, F, G* | — | — | — | 100 | mVp-p |
| | AJ, B, C | — | — | — | 120 | mVp-p |
| | BK, CL | — | — | — | 150 | mVp-p |
| External Load Capacitance | A, F, D, G* | — | — | — | 1000 | µF |
| | B, C | — | — | — | 200 | µF |

* For a 2.5 V output, use the 2 V output module (D code) with an output voltage trim pin (optional feature).

## Electrical Specifications (continued)

**Table 2. Output Specifications** (continued)

| Parameter | Device Code or Suffix | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Output Current<br>(At $I_O < I_{O,min}$, the modules may exceed output ripple specifications, but operation is guaranteed.)<br>**Note:** On the Lx01xF, the output voltage may exceed specifications when $I_O < I_{O,min}$. | Lx015D | $I_O$ | 0.35 | — | 3.0 | A |
| | Lx015F | $I_O$ | 0.25 | — | 3.0 | A |
| | Lx015A | $I_O$ | 0.15 | — | 3.0 | A |
| | Lx015B | $I_O$ | 0.12 | — | 1.25 | A |
| | Lx015C | $I_O$ | 0.10 | — | 1.0 | A |
| | Lx010D, G* | $I_O$ | 0.2 | — | 2.0 | A |
| | Lx010F | $I_O$ | 0.15 | — | 2.42 | A |
| | Lx010A | $I_O$ | 0.1 | — | 2.0 | A |
| | Lx010B | $I_O$ | 0.08 | — | 0.83 | A |
| | Lx010C | $I_O$ | 0.06 | — | 0.67 | A |
| | Lx010AJ | $I_{O1}$, $I_{O2}$ | 0.1 | — | 1.0 | A |
| | Lx010BK | $I_{O1}$, $I_{O2}$ | 0.06 | — | 0.42 | A |
| | Lx010CL | $I_{O1}$, $I_{O2}$ | 0.05 | — | 0.33 | A |
| Output Current-limit Inception ($V_O$ = 90% $V_{O,set}$; see Figures 12—14.) | Lx015D | $I_O$ | — | — | 7.5 | A |
| | Lx015F | $I_O$ | — | — | 6.5 | A |
| | Lx015A | $I_O$ | — | — | 5 | A |
| | Lx015B | $I_O$ | — | — | 3.1 | A |
| | Lx015C | $I_O$ | — | — | 2.5 | A |
| | Lx010D, G* | $I_O$ | — | — | 7.0 | A |
| | Lx010F | $I_O$ | — | — | 5 | A |
| | Lx010A | $I_O$ | — | — | 4 | A |
| | Lx010B | $I_O$ | — | — | 2.5 | A |
| | Lx010C | $I_O$ | — | — | 2 | A |
| | Lx010AJ | $I_{O1}$, $I_{O2}$ | — | — | 4.0 | A |
| | Lx010BK | $I_{O1}$, $I_{O2}$ | — | — | 2.5 | A |
| | Lx010CL | $I_{O1}$, $I_{O2}$ | — | — | 2.5 | A |
| Output Short-circuit Current ($V_O$ = 0.25 V) | Lx015D | $I_O$ | — | — | 8.5 | A |
| | Lx015F | $I_O$ | — | — | 8.5 | A |
| | Lx015A | $I_O$ | — | — | 7.5 | A |
| | Lx015B | $I_O$ | — | — | 4.5 | A |
| | Lx015C | $I_O$ | — | — | 4.5 | A |
| | Lx010D, G* | $I_O$ | — | — | 8 | A |
| | Lx010F | $I_O$ | — | — | 7.5 | A |
| | Lx010A | $I_O$ | — | — | 6 | A |
| | Lx010B | $I_O$ | — | — | 3.5 | A |
| | Lx010C | $I_O$ | — | — | 3.5 | A |
| | Lx010AJ | $I_{O1}$, $I_{O2}$ | — | — | 6.0 | A |
| | Lx010BK | $I_{O1}$, $I_{O2}$ | — | — | 3.5 | A |
| | Lx010CL | $I_{O1}$, $I_{O2}$ | — | — | 3.5 | A |

* For a 2.5 V output, use the 2 V output module (D code) with an output voltage trim pin (optional feature).

## Electrical Specifications (continued)

**Table 2. Output Specifications** (continued)

| Parameter | Device Code or Suffix | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Efficiency ($V_I = V_{I,nom}$; $I_O = I_{O,max}$; $T_A$ = 25 °C; see Figures 15—28, 35, and 37.) | LC015D | η | 64 | 67 | — | % |
| | LC015F | η | 74 | 77 | — | % |
| | LC015A | η | 77 | 80 | — | % |
| | LC015B, C | η | 73 | 76 | — | % |
| | LC010D, G* | η | 65 | 68 | — | % |
| | LC010F | η | 71 | 75 | — | % |
| | LC010A, B, C | η | 75 | 79 | — | % |
| | LC010AJ, BK, CL | η | 75 | 78 | — | % |
| | LW015D | η | 66 | 69 | — | % |
| | LW015F | η | 76 | 79 | — | % |
| | LW015A | η | 79 | 82 | — | % |
| | LW015B, C | η | 75 | 78 | — | % |
| | LW010D, G* | η | 67 | 70 | — | % |
| | LW010F | η | 73 | 76 | — | % |
| | LW010A, B, C | η | 77 | 81 | — | % |
| | LW010AJ, BK, CL | η | 77 | 80 | — | % |
| Efficiency ($V_I = V_{I,nom}$; $I_O$ = 2 A; $T_A$ = 25 °C; see Figures 15, 18, 22, and 25.) | LC015F | η | — | 79 | — | % |
| | LC015A | η | — | 82 | — | % |
| | LW015F | η | — | 82 | — | % |
| | LW015A | η | — | 84 | — | % |
| Switching Frequency | All | — | — | 265 | — | kHz |
| Dynamic Response (for duals: $I_{O1}$ or $I_{O2} = I_{O,max}$; $\Delta I_O/\Delta t$ = 1A/10 µs; $V_I = V_{I,nom}$; $T_A$ = 25 °C; see Figures 29 and 30.): | | | | | | |
| Load Change from $I_O$ = 50% to 75% of $I_{O,max}$: | | | | | | |
| Peak Deviation | All | — | — | 2 | — | $\%V_{O,set}$ |
| Settling Time ($V_O$ < 10% of peak deviation) | All | — | — | 0.8 | — | ms |
| Load Change from $I_O$ = 50% to 25% of $I_{O,max}$: | | | | | | |
| Peak Deviation | All | — | — | 2 | — | $\%V_{O,set}$ |
| Settling Time ($V_O$ < 10% of peak deviation) | All | — | — | 0.8 | — | ms |

* For a 2.5 V output, use the 2 V output module (D code) with an output voltage trim pin (optional feature).

**Table 3. Isolation Specifications**

| Parameter | Min | Typ | Max | Unit |
|---|---|---|---|---|
| Isolation Capacitance | — | 600 | — | pF |
| Isolation Resistance | 10 | — | — | MΩ |

## Electrical Specifications (continued)

**Table 4. General Specifications**

| Parameter | Min | Typ | Max | Unit |
|---|---|---|---|---|
| Calculated MTBF ($I_O$ = 80% of $I_{O, max}$; $T_C$ = 40 °C): | | | | |
| Lx010 | — | 7,800,000 | — | hours |
| Lx015 | — | 5,400,000 | — | hours |
| Weight | — | — | 28.3 (1.0) | g (oz.) |
| Hand Soldering (soldering iron 3 mm (0.125 in.) tip, 425 °C) | — | — | 12 | s |

**Table 5. Feature Specifications**

| Parameter | Device Code or Suffix | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Remote On/Off Signal Interface (optional): ($V_I$ = 0 V to $V_{I, max}$; open collector or equivalent compatible; signal referenced to $V_I$(–) terminal. See Figure 38 and Feature Descriptions.): | | | | | | |
| Positive Logic— Device Code Suffix "4": | | | | | | |
| Logic Low—Module Off | | | | | | |
| Logic High—Module On | | | | | | |
| Negative Logic— Device Code Suffix "1": | | | | | | |
| Logic Low—Module On | | | | | | |
| Logic High—Module Off | | | | | | |
| Module Specifications: | | | | | | |
| On/Off Current—Logic Low | All | $I_{on/off}$ | — | — | 1.0 | mA |
| On/Off Voltage: | | | | | | |
| Logic Low | All | $V_{on/off}$ | –0.7 | — | 1.2 | V |
| Logic High ($I_{on/off}$ = 0) | All | $V_{on/off}$ | — | — | 10 | V |
| Open Collector Switch Specifications: | | | | | | |
| Leakage Current During Logic High ($V_{on/off}$ = 10 V) | All | $I_{on/off}$ | — | — | 50 | µA |
| Output Low Voltage During Logic Low ($I_{on/off}$ = 1 mA) | All | $V_{on/off}$ | — | — | 1.2 | V |
| Turn-on Delay and Rise Times (At 80% of $I_{O, max}$; $T_A$ = 25 °C; see Figures 31 and 32.): | | | | | | |
| Case 1: On/Off Input Is Set for Unit On and then Input Power Is Applied (delay from point at which $V_I$ = $V_{I, min}$ until $V_O$ = 10% of $V_{O, nom}$). | All | $T_{delay}$ | — | 5 | 20 | ms |
| Case 2: Input Power Is Applied for at Least One Second, and then the On/Off Input Is Set to Turn the Module On (delay from point at which on/off input is toggled until $V_O$ = 10% of $V_{O, nom}$). | All | $T_{delay}$ | — | 1 | 10 | ms |
| Output Voltage Rise Time (time for $V_O$ to rise from 10% of $V_{O, nom}$ to 90% of $V_{O, nom}$) | All | $T_{rise}$ | — | 0.2 | 5 | ms |
| Output Voltage Overshoot (at 80% of $I_{O, max}$; $T_A$ = 25 °C) | All | — | — | — | 5 | % |

## Electrical Specifications (continued)

**Table 5. Feature Specifications** (continued)

| Parameter | Device Code or Suffix | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|---|
| Output Voltage Set-point Adjustment Range (optional: single outputs only) | A, B, F | — | 90 | — | 110 | $\%V_{O,\,nom}$ |
| | C | — | 90 | — | 100 | $\%V_{O,\,nom}$ |
| | D | — | 90 | — | 125 | $\%V_{O,\,nom}$ |
| Output Overvoltage Clamp ($V_{O,\,clamp}$ may be set higher on units with output voltage set-point adjustment option.) | D | $V_{O,\,clamp}$ | 2.60 | — | 4.0 | V |
| | F | $V_{O,\,clamp}$ | 3.7 | — | 5.7 | V |
| | A | $V_{O,\,clamp}$ | 5.6 | — | 7.0 | V |
| | B | $V_{O,\,clamp}$ | 13.2 | — | 16.0 | V |
| | C | $V_{O,\,clamp}$ | 16.5 | — | 21.0 | V |
| | AJ | $V_{O1,\,clamp}$ | 5.6 | — | 7.0 | V |
| | | $V_{O2,\,clamp}$ | –5.6 | — | –7.0 | V |
| | BK | $V_{O1,\,clamp}$ | 13.2 | — | 18.0 | V |
| | | $V_{O2,\,clamp}$ | –13.2 | — | –18.0 | V |
| | CL | $V_{O1,\,clamp}$ | 16.5 | — | 21.0 | V |
| | | $V_{O2,\,clamp}$ | –16.5 | — | –21.0 | V |
| Undervoltage Lockout | LCxxx | $V_{uvlo}$ | 11 | 14 | — | V |
| | LWxxx | $V_{uvlo}$ | 20 | 27 | — | V |

## Characteristic Curves

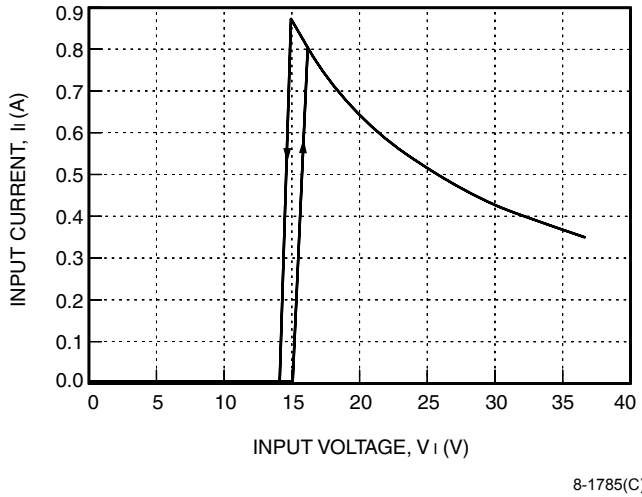



**Figure 1. LC010 Input Current vs. Input Voltage at $I_O = I_{O,\,max}$ and $T_C$ = 25 °C**

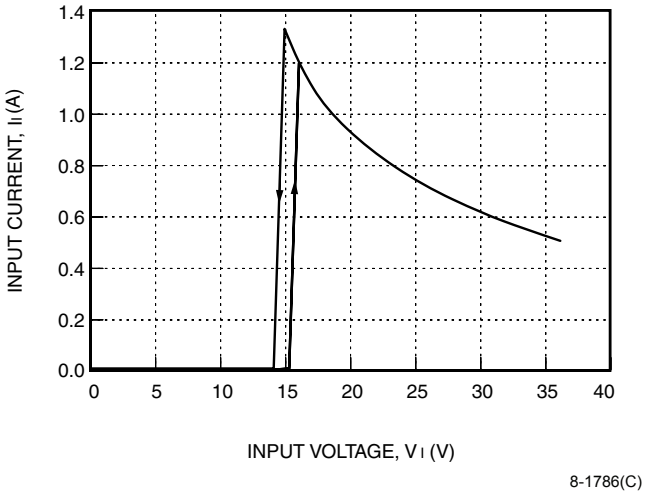



**Figure 2. LC015 Input Current vs. Input Voltage at $I_O = I_{O,\,max}$ and $T_C$ = 25 °C**

## Characteristics Curves (continued)

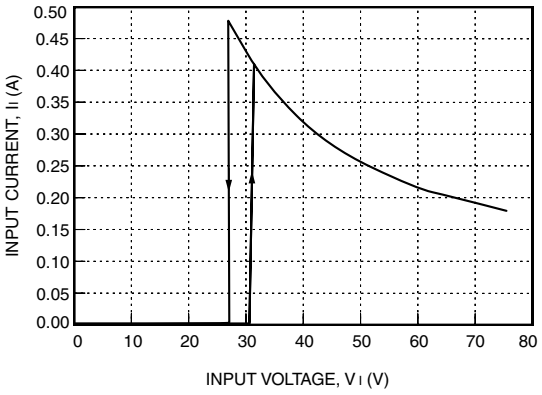



**Figure 3. LW010 Input Current vs. Input Voltage at Io = Io, max and Tc = 25 °C**

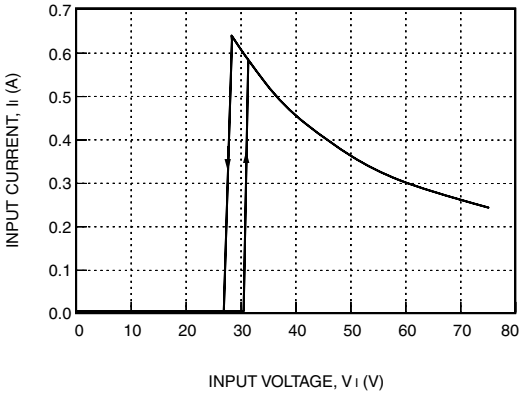



**Figure 4. LW015 Input Current vs. Input Voltage at Io = Io, max and Tc = 25 °C**



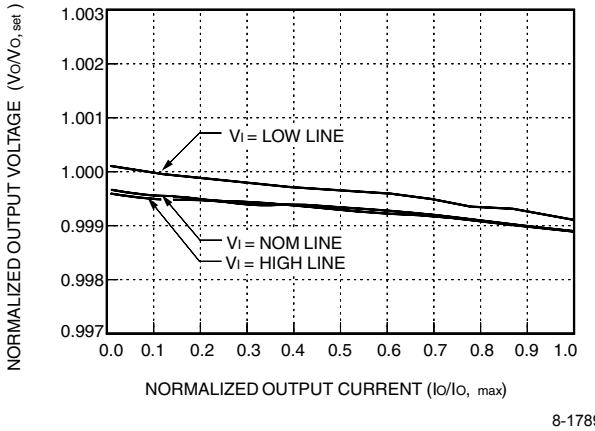



**Figure 5. Lx010x/Lx015x Single-Output Load Regulation, Normalized Output Voltage vs. Normalized Output Current at Tc = 25 °C**

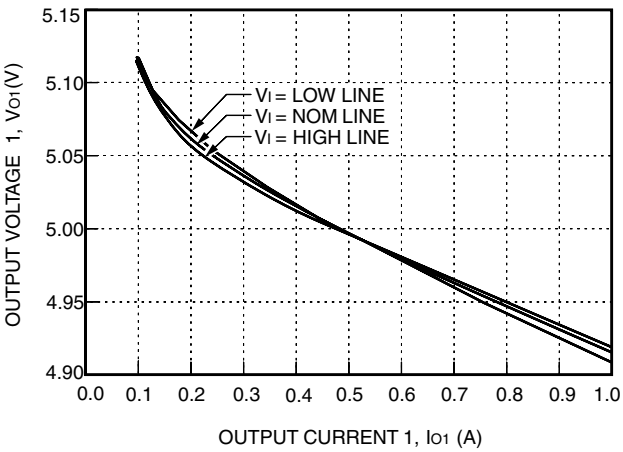


Note: Output2 has characteristics similar to output1 when $I_{O1}$ = 0.5 A and $I_{O2}$ varies.


**Figure 6. Lx010AJ Typical Load Regulation of Output1 with Fixed $I_{O2}$ = 0.5 A at $T_C$ = 25 °C**

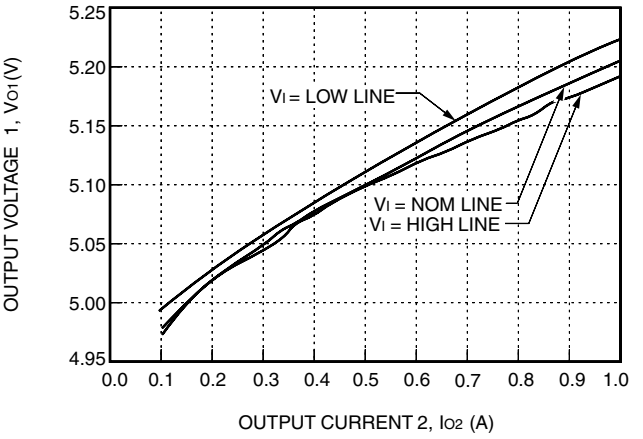


Note: Output2 has characteristics similar to output1 when $I_{O2}$ = 0.1 A and $I_{O1}$ varies.


**Figure 7. Lx010AJ Typical Cross Regulation, $V_{O1}$ vs. $I_{O2}$ with Fixed $I_{O1}$ = 0.1 A at $T_C$ = 25 °C**

## Characteristics Curves (continued)

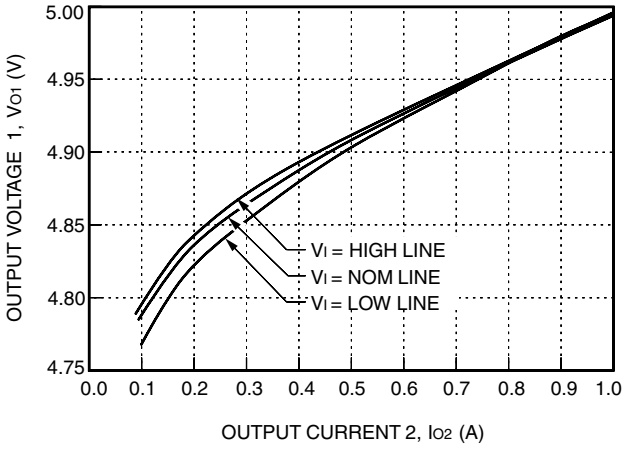



Note: Output2 has characteristics similar to output1 when $I_{O2}$ = 1.0 A and $I_{O1}$ varies.

**Figure 8. Lx010AJ Typical Cross Regulation, $V_{O1}$ vs. $I_{O2}$ with Fixed $I_{O1}$ = 1.0 A at $T_C$ = 25 °C**

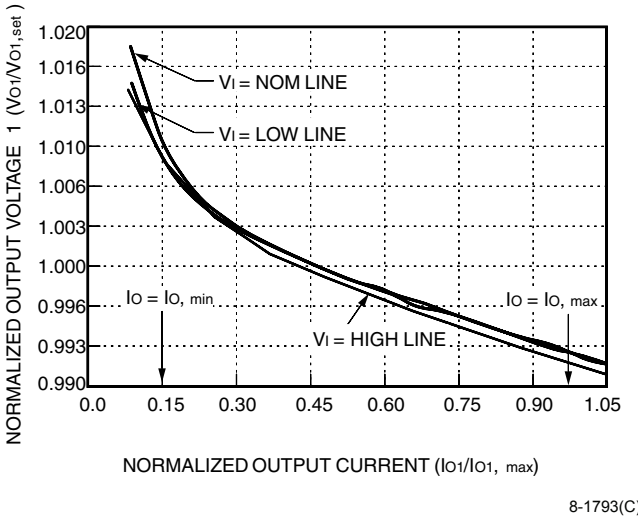



Note: Output2 has characteristics similar to output1 when $I_{O1}$ = (0.5 * $I_{O, max}$) and $I_{O2}$ varies.

**Figure 9. Lx010BK, CL Load Regulation of Output1 with Fixed $I_{O2}$ = 0.5 * $I_{O, max}$ at $T_C$ = 25 °C, Normalized $V_{O1}$ vs. Normalized Current $I_{O1}$**

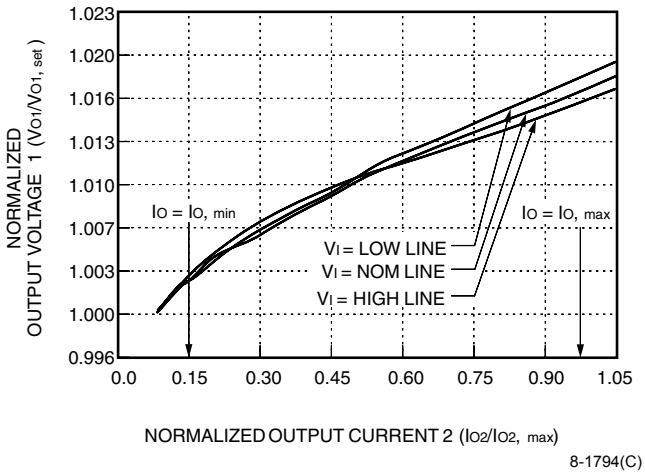


Note: Output2 has characteristics similar to output1 when $I_{O2}$ = $I_O$, min and $I_{O1}$ varies.

**Figure 10. Lx010BK, CL Typical Cross Regulation, Normalized $V_{O1}$ vs. Normalized $I_{O2}$ with Fixed $I_{O1}$ = $I_{O, min}$ at $T_C$ = 25 °C**

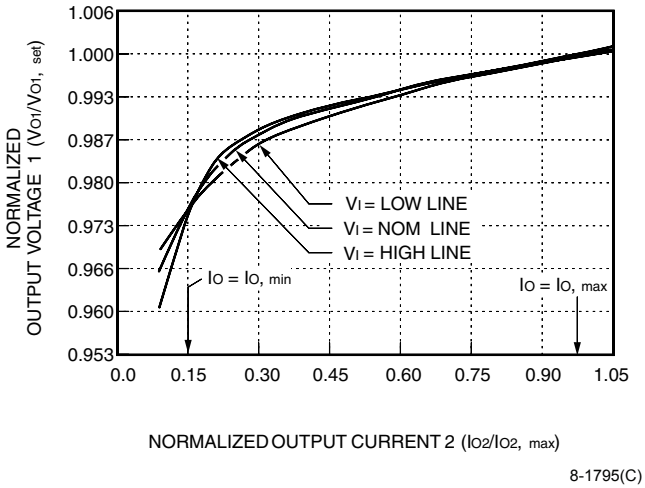


Note: Output2 has characteristics similar to output1 when $I_{O2}$ = $I_{O, max}$ and $I_{O1}$ varies.

**Figure 11. Lx010BK, CL Typical Cross Regulation, Normalized $V_{O1}$ vs. Normalized $I_{O2}$ with Fixed $I_{O1}$ = $I_{O, max}$ at $T_C$ = 25 °C**

## Characteristics Curves (continued)



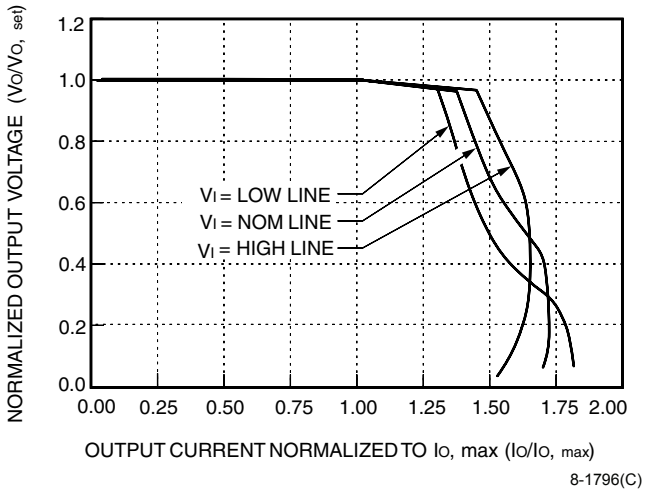



**Figure 12. Lx010x/Lx015x Single-Output Normalized Output Current vs. Normalized Output Voltage at $T_C$ = 25 °C**

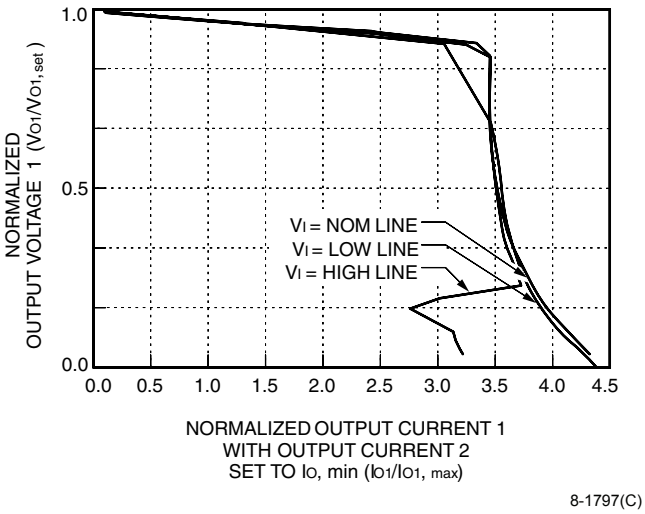


Note: Output2 has characteristics similar to output1 when output1 is set to $I_{O, min}$.

**Figure 13. Lx010xx Dual-Output Normalized Output Current vs. Normalized Output Voltage at $T_C$ = 25 °C with Other Output at $I_{O, min}$**

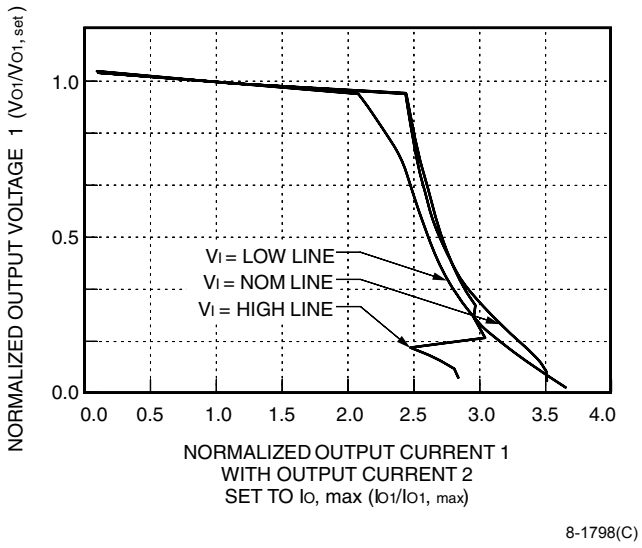


Note: Output2 has characteristics similar to output1 when output1 is set to $I_{O, max}$.

**Figure 14. Lx010xx Dual-Output Normalized Output Current vs. Normalized Output Voltage at $T_C$ = 25 °C with Other Output at $I_O = I_{O, max}$**

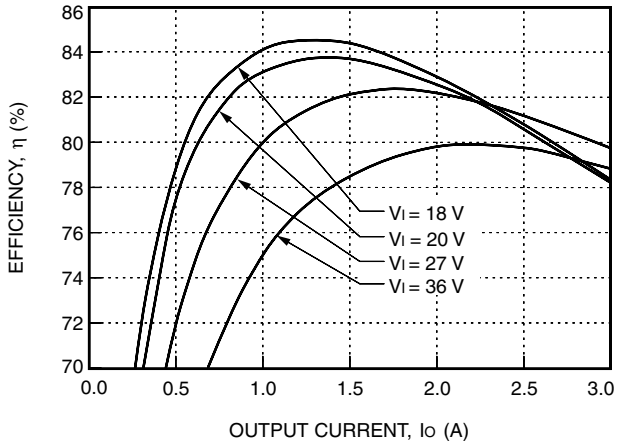



**Figure 15. LC015A Typical Efficiency vs. Output Current at $T_C$ = 25 °C**

## Characteristics Curves (continued)

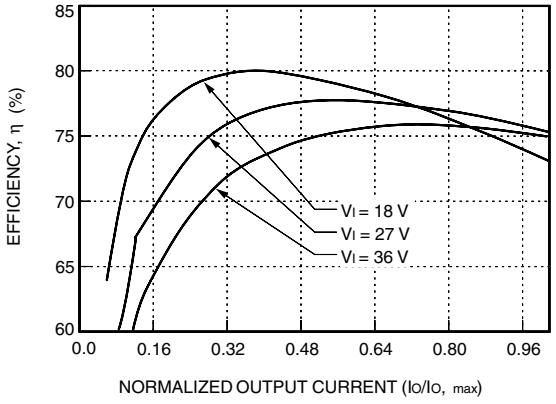



**Figure 16. LC015B, C Typical Efficiency vs. Normalized Output Current at $T_C$ = 25 °C**

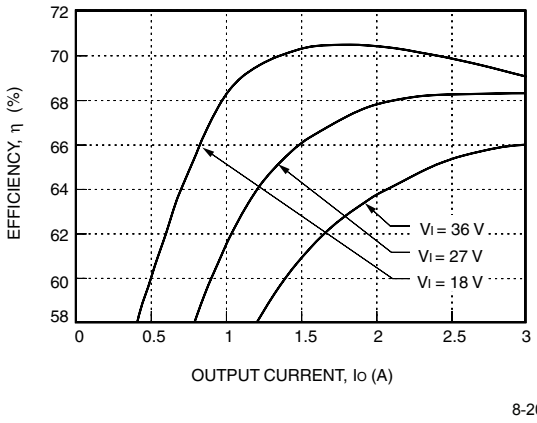



**Figure 17. LC010D and LC015D Typical Efficiency vs. Output Current at $T_C$ = 25 °C**

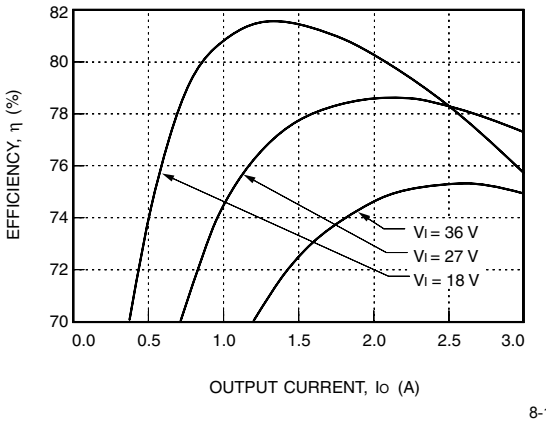



**Figure 18. LC015F Typical Efficiency vs. Output Current at $T_C$ = 25 °C**

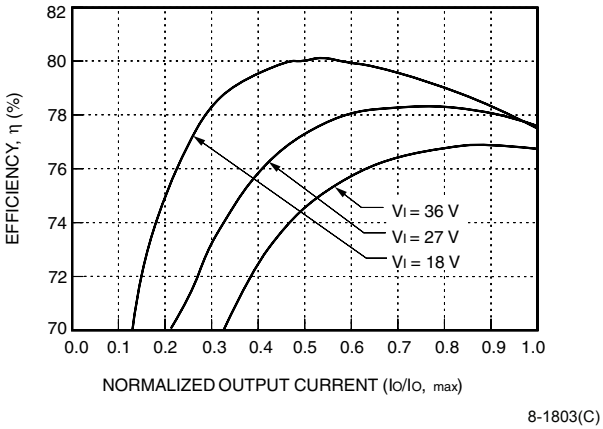



**Figure 19. LC010A, B, C Typical Efficiency vs. Normalized Output Current at $T_C$ = 25 °C**

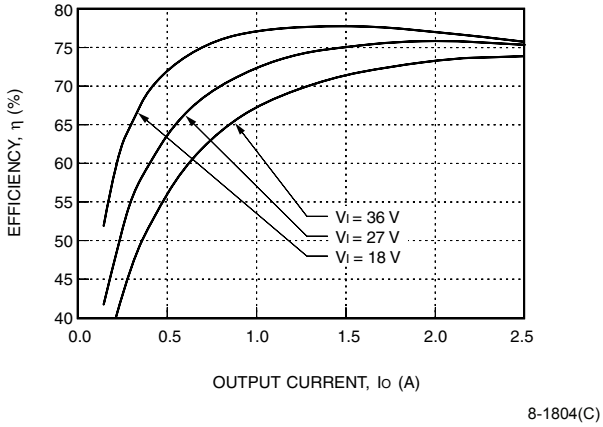



**Figure 20. LC010F Typical Efficiency vs. Output Current at $T_C$ = 25 °C**

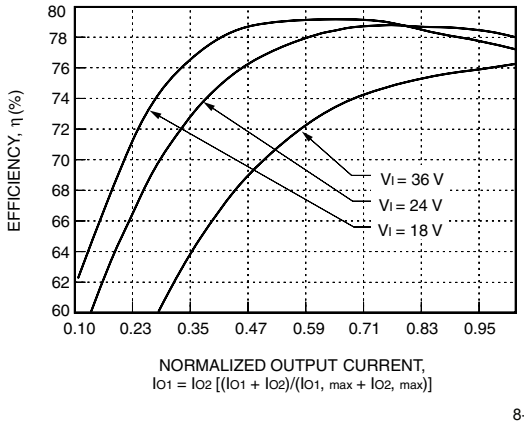



**Figure 21. LC010AJ, BK, CL Typical Efficiency vs. Normalized Output Current at $T_C$ = 25 °C**

## Characteristics Curves (continued)

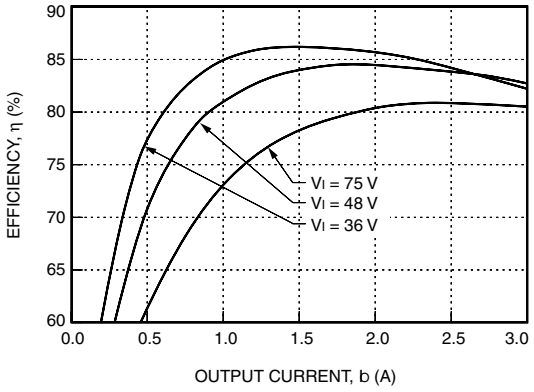



**Figure 22. LW015A Typical Efficiency vs. Output Current at $T_C$ = 25 °C**

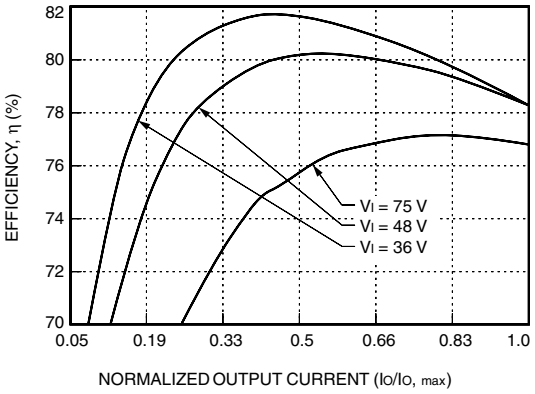



**Figure 23. LW015B, C Typical Efficiency vs. Normalized Output Current at $T_C$ = 25 °C**

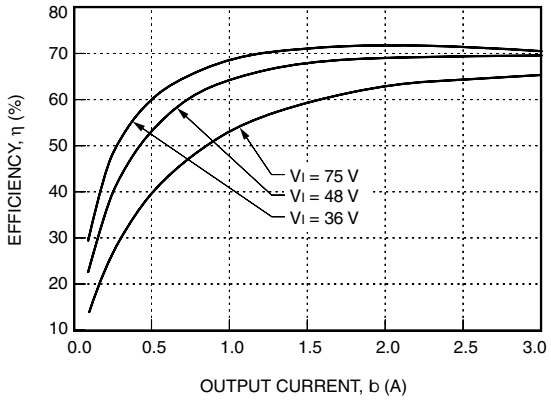



**Figure 24. LW010D, 015D Typical Efficiency vs. Output Current at $T_C$ = 25 °C**

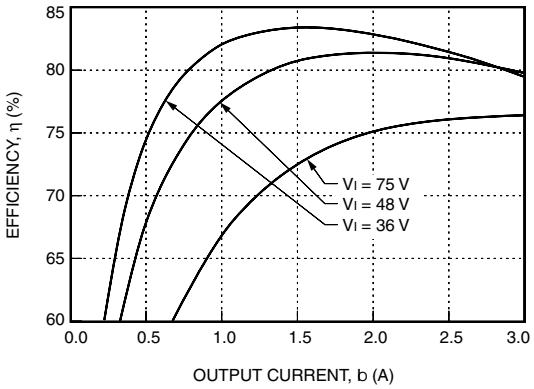



**Figure 25. LW015F Typical Efficiency vs. Output Current at $T_C$ = 25 °C**

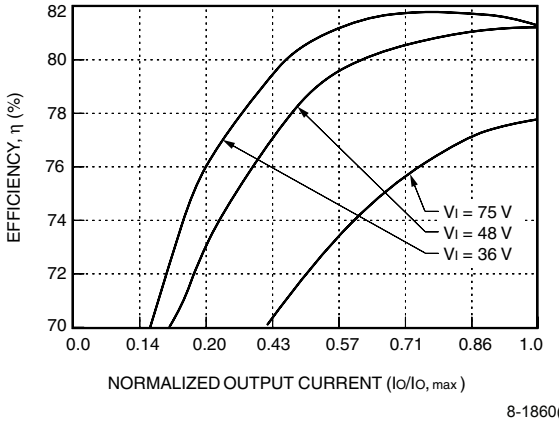



**Figure 26. LW010A, B, C Typical Efficiency vs. Normalized Output Current at $T_C$ = 25 °C**


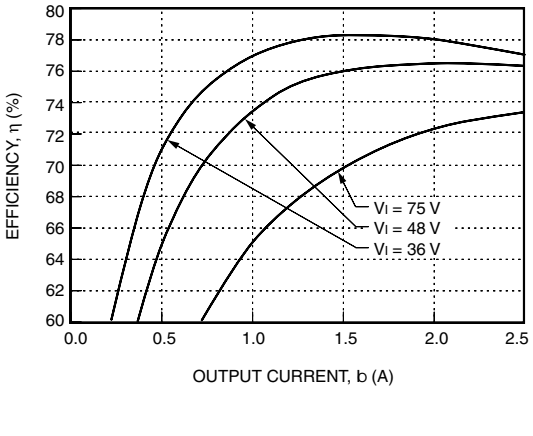




**Figure 27. LW010F Typical Efficiency vs. Output Current at $T_C$ = 25 °C**

## Characteristics Curves (continued)

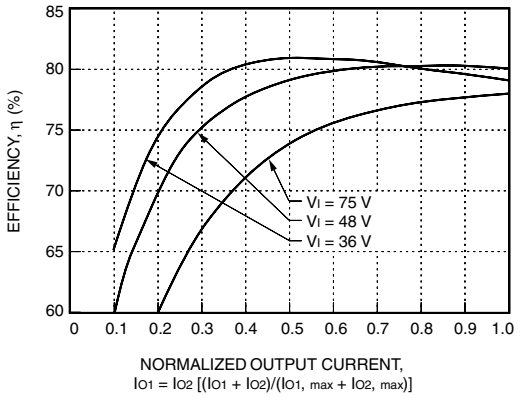



8-1858(C)

**Figure 28. LW010AJ, BK, CL Typical Efficiency vs. Normalized Output Current at $T_C$ = 25 °C**

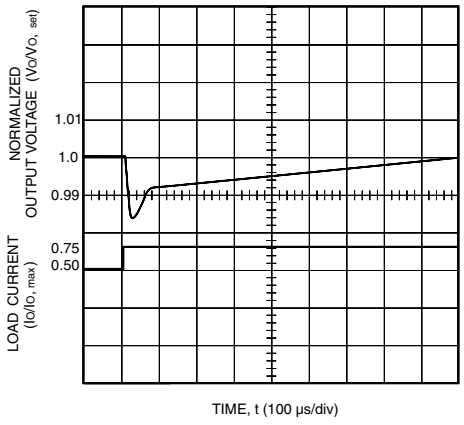



8-1857(C)

**Figure 29. Single-Output Typical Output Voltage for Step Load Change from 50% to 75% of $I_O = I_{O,\ max}$**

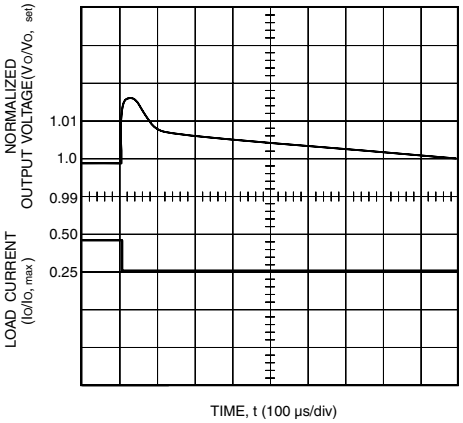



8-1856(C)

**Figure 30. Single-Output Typical Output Voltage for Step Load Change from 50% to 25% of $I_O = I_{O,\ max}$**

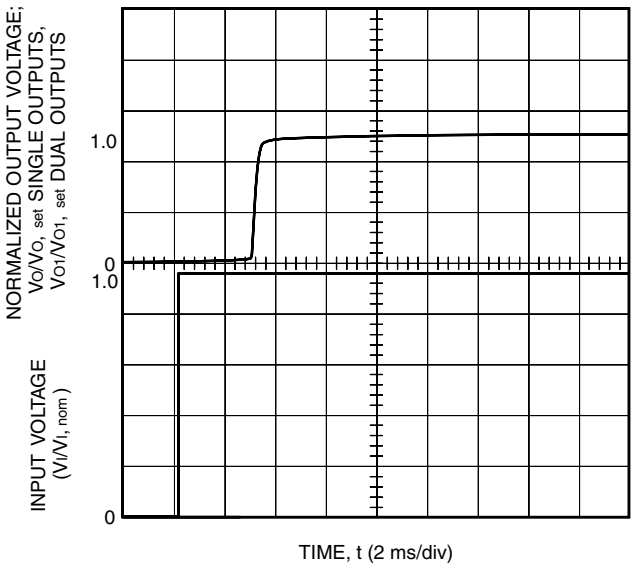


8-1806(C)


**Figure 31. Typical Output Voltage Start-Up when Input Voltage Is Applied; $I_O$ = 80% of $I_{O,\ max}$, $V_I$ = Nominal Line**

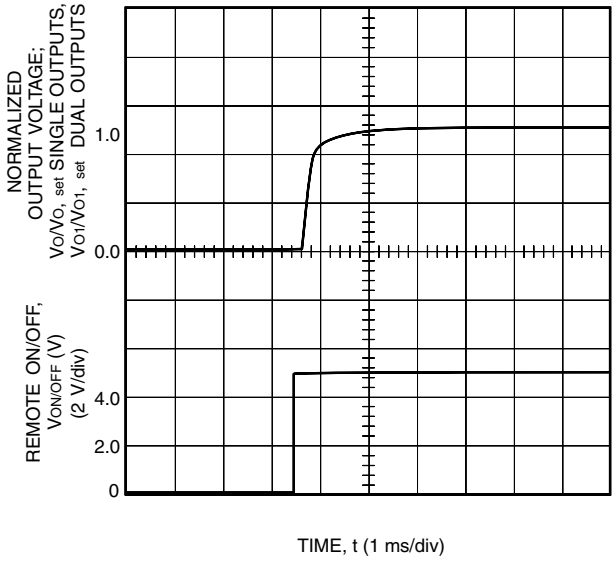


8-1807(C).a


**Figure 32. Typical Output Voltage Start-Up when Signal Is applied to Remote On/Off; $I_O$ = 80% of $I_{O,\ max}$**

## Test Configurations

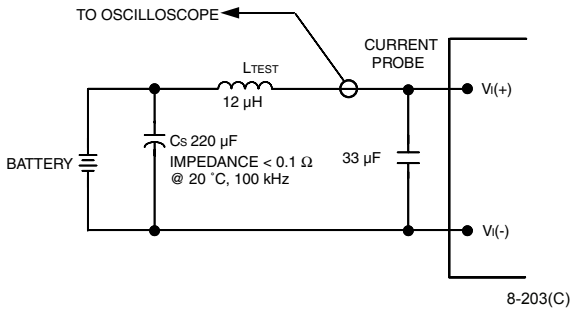



Note: Input reflected-ripple current is measured with a simulated source impedance of 12 µH. Capacitor Cs offsets possible battery impedance. Current is measured at the input of the module.

**Figure 33. Input Reflected-Ripple Test Setup**

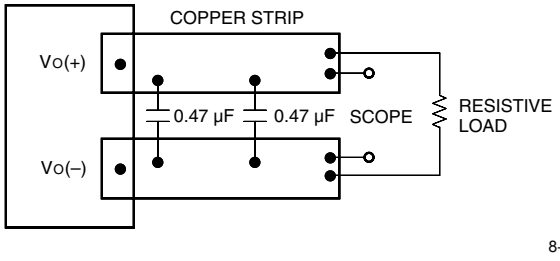


Note: Use two 0.47 µF ceramic capacitors. Scope measurement should be made using a BNC socket. Position the load between 50 mm and 75 mm (2 in. and 3 in.) from the module.


**Figure 34. Peak-to-Peak Output Noise Measurement Test Setup for Single Outputs**

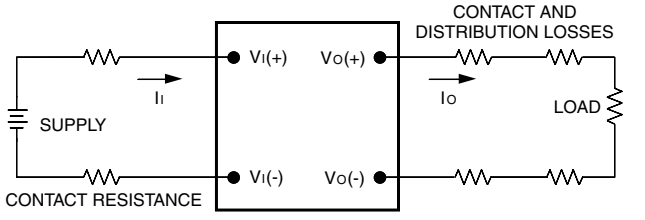


Note: All measurements are taken at the module terminals. When socketing, place Kelvin connections at module terminals to avoid measurement errors due to socket contact resistance.


$$\eta = \left(\frac{[V_O(+) - V_O(-)]I_O}{[V_I(+) - V_I(-)]I_I}\right) \times 100$$

**Figure 35. Output Voltage and Efficiency Measurement Test Setup for Single Outputs**

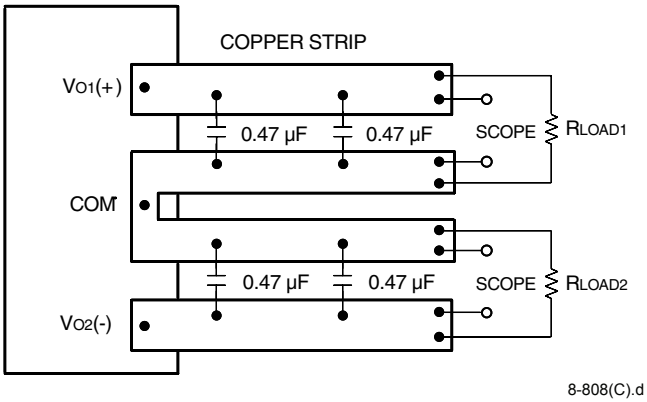


Note: Use four 0.47 µF ceramic capacitors. Scope measurement should be made using a BNC socket. Position the load between 50 mm and 75 mm (2 in. and 3 in.) from the module.

**Figure 36. Peak-to-Peak Output Noise Measurement Test Setup for Dual Outputs**

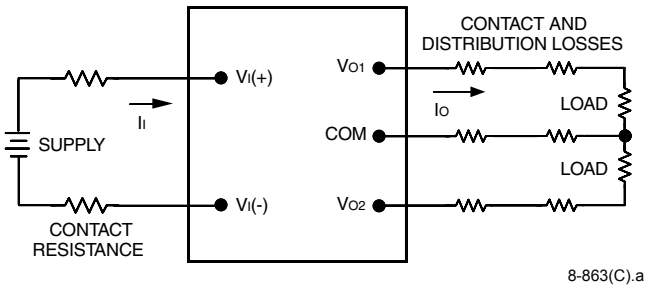


Note: All measurements are taken at the module terminals. When socketing, place Kelvin connections at module terminals to avoid measurement errors due to socket contact resistance.

$$\eta = \left[\frac{\sum_{J=1}^{2} |[V_{OJ} - COM]I_{OJ}|}{[V_I(+) - V_I(-)]I_I}\right] \times 100$$

**Figure 37. Output Voltage and Efficiency Measurement Test Setup for Dual Outputs**

# Design Considerations

## Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. If the source inductance exceeds 4 µH, a 33 µF electrolytic capacitor (ESR < 0.7 Ω at 100 kHz) mounted close to the power module helps ensure stability of the unit.

# Safety Considerations

For safety-agency approval of the system in which the power module is used, the power module must be installed in compliance with the spacing and separation requirements of the end-use safety agency standard, i.e., *UL* 1950, *CSA* 22.2 No. 950-95, EN60950, and IEC950.

For the converter output to be considered meeting the requirements of safety extra-low voltage (SELV), one of the following must be true of the dc input:

- All inputs are SELV and floating, with the output also floating.
- All inputs are SELV and grounded, with the output also grounded.
- Any non-SELV input must be provided with reinforced insulation from any other hazardous voltages, including the ac mains, and must have a SELV reliability test performed on it in combination with the converters.

The power module has extra-low voltage (ELV) outputs when all inputs are ELV.

The input to these units is to be provided with a maximum 5 A normal-blow fuse in the ungrounded lead.

# Feature Descriptions

## Output Overvoltage Clamp

The output overvoltage clamp consists of control circuitry, independent of the primary regulation loop, that monitors the voltage on the output terminals. This control loop has a higher voltage set point than the primary loop (see Feature Specifications table). In a fault condition, the overvoltage clamp ensures that the output voltage does not exceed $V_{O, clamp, max}$. This provides a redundant voltage-control that reduces the risk of output overvoltage.

## Current Limit

To provide protection in a fault (output overload) condition, the unit is equipped with internal current-limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. If the output voltage is pulled very low during a severe fault, the current-limit circuit can exhibit either foldback or tailout characteristics (output-current decrease or increase). The unit operates normally once the output current is brought back into its specified range.

## Remote On/Off (Optional)

Two remote on/off options are available. Positive logic, device code suffix “4”, remote on/off turns the module on during a logic-high voltage on the remote ON/OFF pin, and off during a logic low. Negative logic, device code suffix “1”, remote on/off turns the module off during a logic high and on during a logic low.

To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the $V_I(-)$ terminal ($V_{on/off}$). The switch may be an open collector or equivalent (see Figure 38). A logic low is $V_{on/off}$ = –0.7 V to +1.2 V. The maximum $I_{on/off}$ during a logic low is 1 mA. The switch should maintain a logic-low voltage while sinking 1 mA.

During a logic high, the maximum $V_{on/off}$ generated by the power module is 10 V. The maximum allowable leakage current of the switch at $V_{on/off}$ = 10 V is 50 µA.

The module has internal capacitance to reduce noise at the ON/OFF pin. Additional capacitance is not generally needed and may degrade the start-up characteristics of the module.

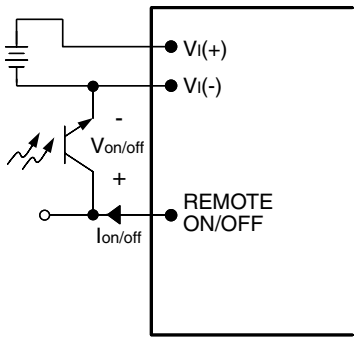



**Figure 38. Remote On/Off Implementation**

## Feature Descriptions (continued)

### Output Voltage Adjustment (Optional on Single-Output Units)

Output voltage set-point adjustment allows the user to increase or decrease the output voltage set point of a module. This is accomplished by connecting an external resistor between the TRIM pin and either the $V_O(+)$ or $V_O(–)$ pins. With an external resistor between the TRIM and $V_O(+)$ pins ($R_{adj\text{-}down}$), the output voltage set point ($V_{O,\,adj}$) decreases (see Figure 39). The following equation determines the required external resistor value to obtain an output voltage change from $V_{O,\,nom}$ to $V_{O,\,adj}$:

$$R_{adj\text{-}down} = \left[\frac{(V_{O,\,adj} - L)G}{(V_{O,\,nom} - V_{O,\,adj})} - H\right]\Omega$$

where $R_{adj\text{-}down}$ is the resistance value connected between TRIM and $V_O(+)$, and G, H, and L are defined in the following table.

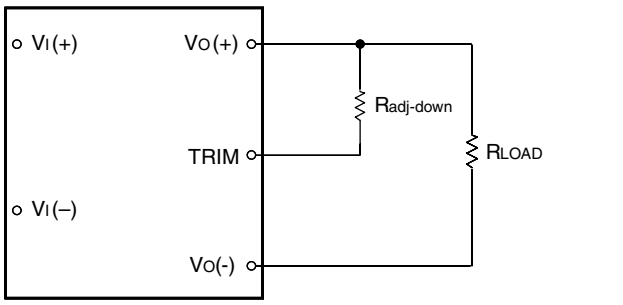



**Figure 39. Circuit Configuration to Decrease Output Voltage**

With an external resistor connected between the TRIM and $V_O(–)$ pins ($R_{adj\text{-}up}$), the output voltage set point ($V_{O,\,adj}$) increases (see Figure 40). The following equation determines the required external resistor value to obtain an output voltage from $V_{O,\,nom}$ to $V_{O,\,adj}$:

$$R_{adj\text{-}up} = \left(\left[\frac{GL}{[(V_{O,\,adj} - L) - K]}\right] - H\right)\Omega$$

where $R_{adj\text{-}up}$ is the resistance value connected between TRIM and $V_O$ (–), and the values of G, H, K, and L are shown in the following table:

| | G | H | K | L |
|---|---|---|---|---|
| Lx010, 5A | 5110 | 2050 | 2.5 | 2.5 |
| Lx010, 5B | 10,000 | 5110 | 9.5 | 2.5 |
| Lx010, 5C | 10,000 | 5110 | NA | 2.5 |
| Lx010, 5D | 5110 | 2050 | 0.76 | 1.23 |
| Lx010, 5F | 5110 | 2050 | 0.75 | 2.5 |

The combination of the output voltage adjustment and the output voltage tolerance cannot exceed 110% (125% for the D) of the nominal output voltage between the $V_O(+)$ and $V_O(–)$ terminals.

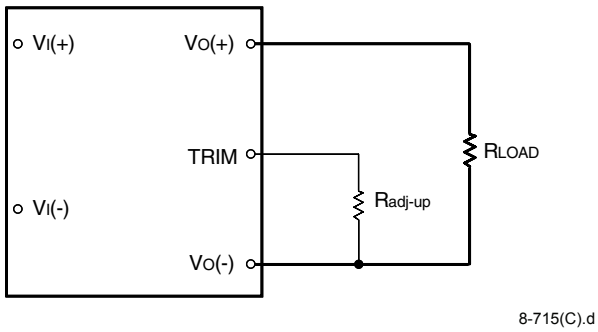



**Figure 40. Circuit Configuration to Increase Output Voltage**


The L-Series power modules have a fixed current-limit set point. Therefore, as the output voltage is adjusted down, the available output power is reduced. In addition, the minimum output current is a function of the output voltage. As the output voltage is adjusted down, the minimum required output current can increase (i.e., minimum power is constant).

### Synchronization (Optional)

With external circuitry, the unit is capable of synchronization from an independent time base with a switching rate of 256 kHz. Other frequencies may be available; please consult the factory for application guidelines and/or a description of the external circuit needed to use this feature.


## Thermal Considerations

The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat-dissipating components inside the unit are thermally coupled to the case. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the case temperature. The case temperature ($T_C$) should be measured at the position indicated in Figures 41 and 42.

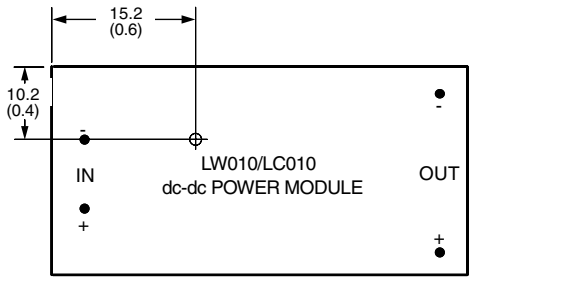


Note: Dimensions are in millimeters and (inches). Pin locations are for reference only.

**Figure 41. LW010 and LC010 Case Temperature Measurement Location**

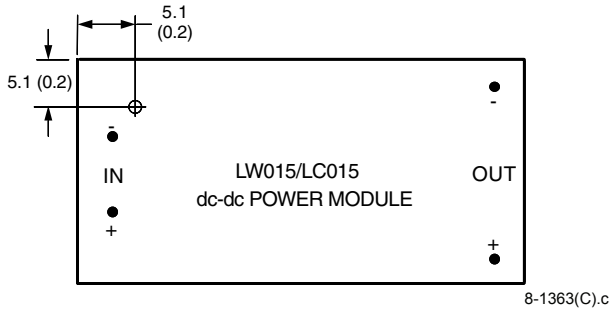


Note: Dimensions are in millimeters and (inches). Pin locations are for reference only.

**Figure 42. LW015 and LC015 Case Temperature Measurement Location**

Note that the views in Figures 41 and 42 are of the surface of the modules. The temperatures at these locations should not exceed the maximum case temperature indicated on the derating curve. The output power of the module should not exceed the rated power for the module as listed in the Ordering Information table.

## Heat Transfer Characteristics

Increasing airflow over the module enhances the heat transfer via convection. Figures 43 through 45 show the maximum power that can be dissipated by the module without exceeding the maximum case temperature versus local ambient temperature ($T_A$) for natural convection through 3.0 $ms^{-1}$ (600 ft./min.).

Systems in which these power modules are used typically generate natural convection airflow rates of 0.25 $ms^{-1}$ (50 ft./min.) due to other heat dissipating components in the system. Therefore, the natural convection condition represents airflow rates of approximately 0.25 $ms^{-1}$ (50 ft./min.). Use of Figure 43 is shown in the following example.

**Example**

What is the minimum airflow necessary for an LW010A operating at 48 V, an output current of 2.0 A, and a maximum ambient temperature of 91 °C?

Solution:

Given: $V_I$ = 48 V, $I_O$ = 2.0 A ($I_{O,\,max}$), $T_A$ = 91 °C
Determine $P_D$ (Figure 58): $P_D$ = 2.5 W
Determine airflow (Figure 43): v = 2.0 $ms^{-1}$ (400 ft./min.)

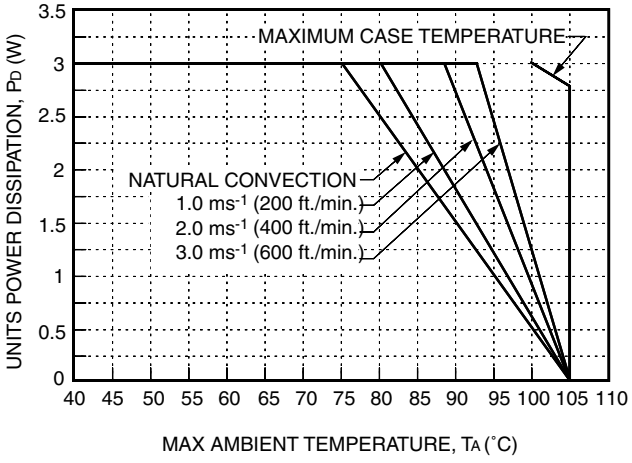



**Figure 43. LW010/LC010 Forced Convection Power Derating; Either Orientation**

## Thermal Considerations (continued)

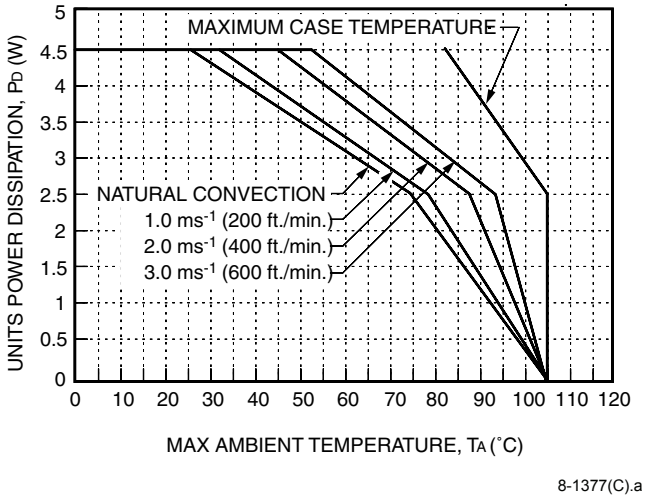



**Figure 44. LC015 Forced Convection Power Derating; Either Orientation**


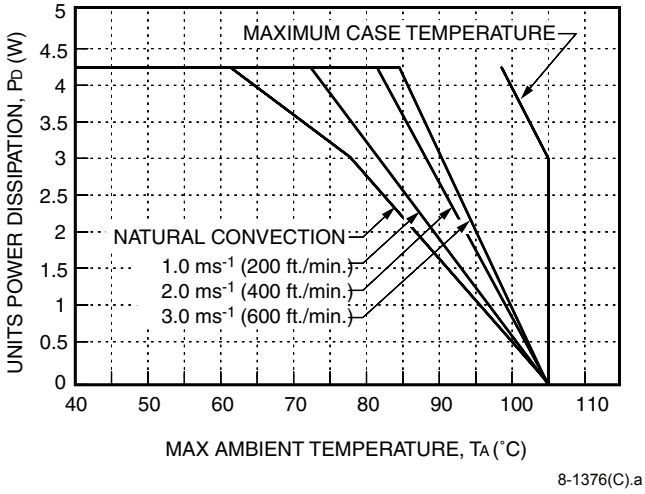



**Figure 45. LW015 Forced Convection Power Derating; Either Orientation**

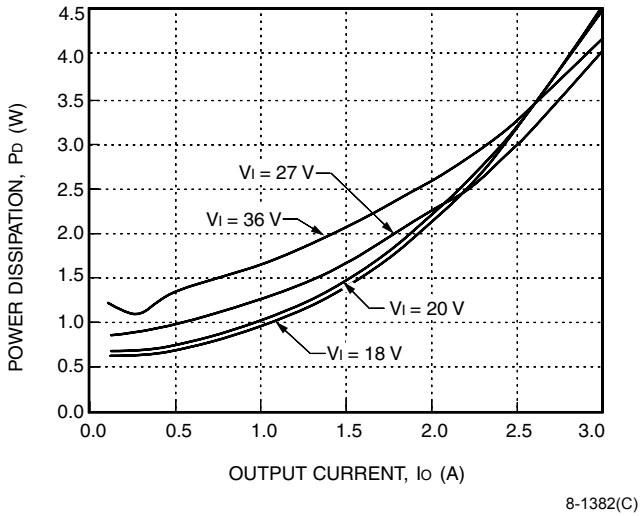


Note: The power dissipation of this unit is shown at $T_C = T_{C,max}$ because the efficiency of this power module drops at high temperatures.

**Figure 46. LC015A Power Dissipation at Maximum Case Temperature**

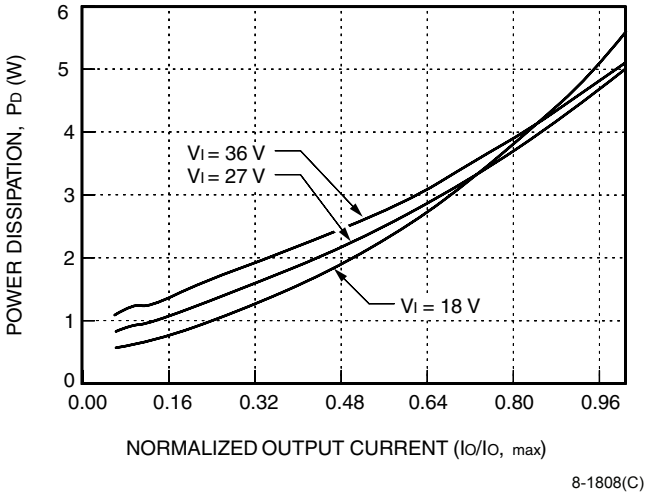



**Figure 47. LC015B, C Typical Power Dissipation vs. Normalized Output Current at $T_C$ = 25 °C**

## Thermal Considerations (continued)


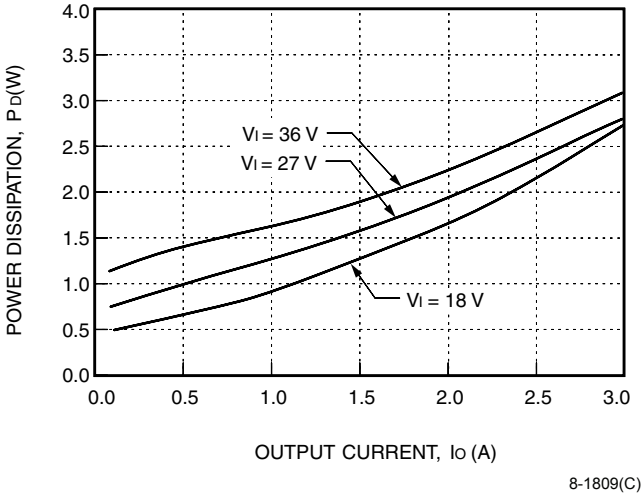



**Figure 48. LC010D, 015D Typical Power Dissipation vs. Output Current at $T_C$ = 25 °C**

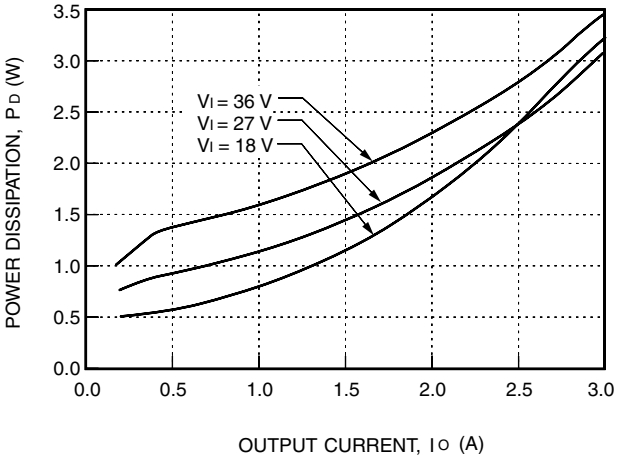


Note: The power dissipation of this unit is shown at $T_C = T_{C, max}$ because the efficiency of this power module drops at high temperatures.

**Figure 49. LC015F Typical Power Dissipation vs. Output Current at Maximum Case Temperature**

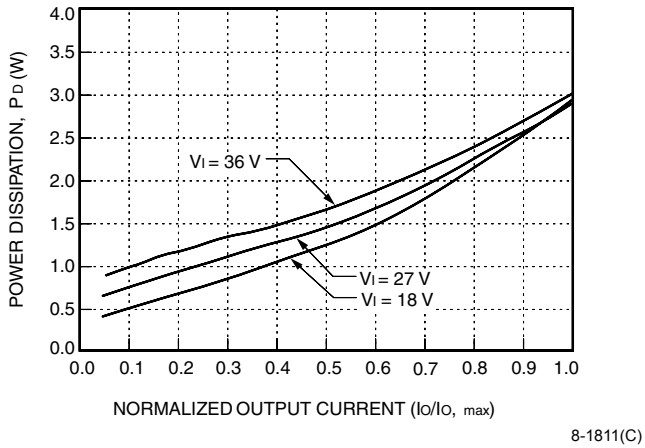



**Figure 50. LC010A, B, C Typical Power Dissipation vs. Normalized Output Current at $T_C$ = 25 °C**

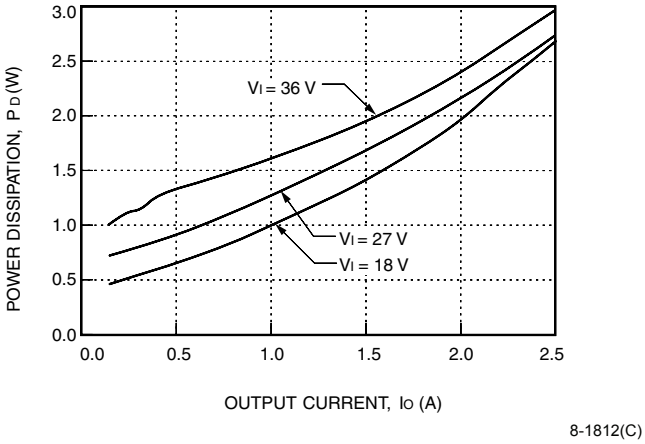



**Figure 51. LC010F Typical Power Dissipation vs. Output Current at $T_C$ = 25 °C**


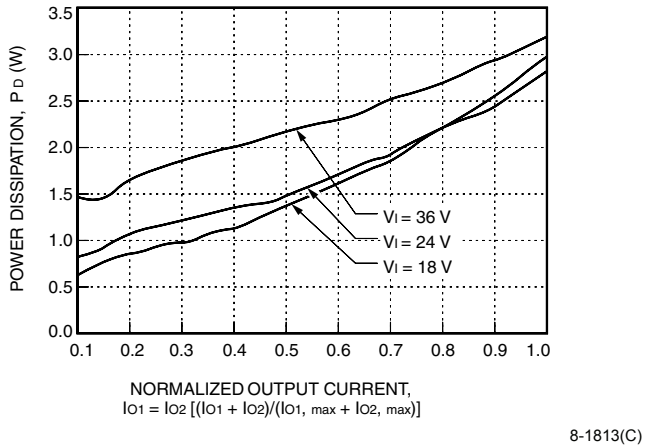



**Figure 52. LC010AJ, BK, CL Typical Power Dissipation vs. Normalized Output Current at $T_C$ = 25 °C**

## Thermal Considerations (continued)

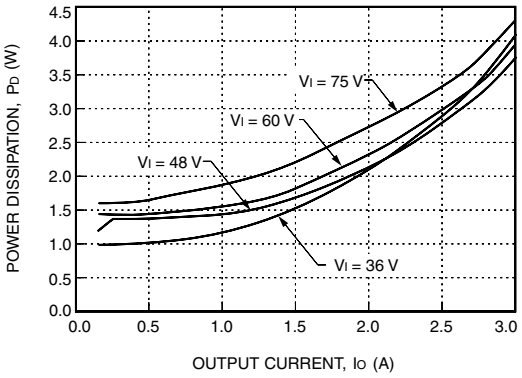


Note: The power dissipation of this unit is shown at $T_C = T_{C,max}$ because the efficiency of this power module drops at high temperatures.

**Figure 53. LW015A Power Dissipation at Maximum Case Temperature**

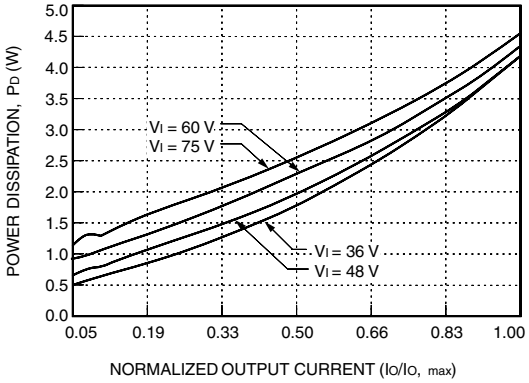



**Figure 54. LW015B, C Typical Power Dissipation vs. Normalized Output Current at $T_C$ = 25 °C**

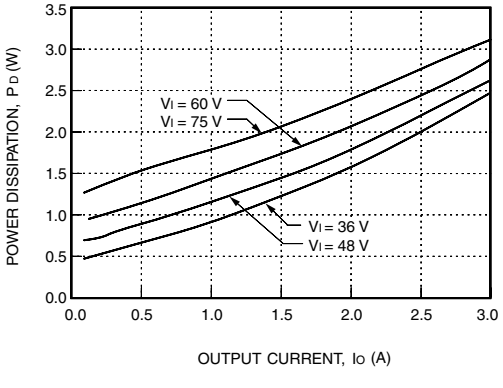



**Figure 55. LW010D, LW015D Typical Power Dissipation vs. Output Current at $T_C$ = 25 °C**


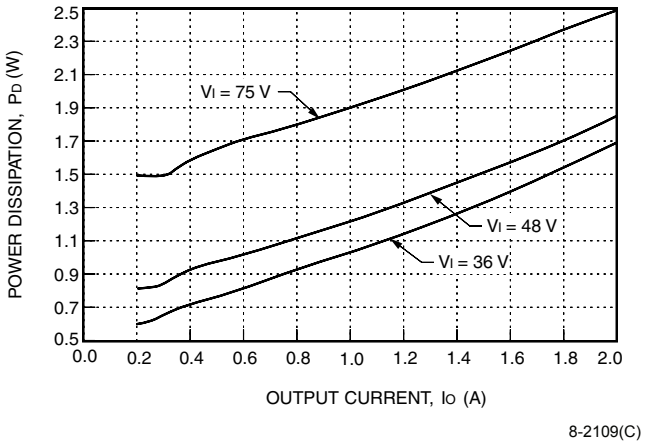



**Figure 56. LW010D9 Typical Power Dissipation vs. Output Current at $T_C$ = 25 °C with Output Voltage Trimmed Up to 2.5 V**

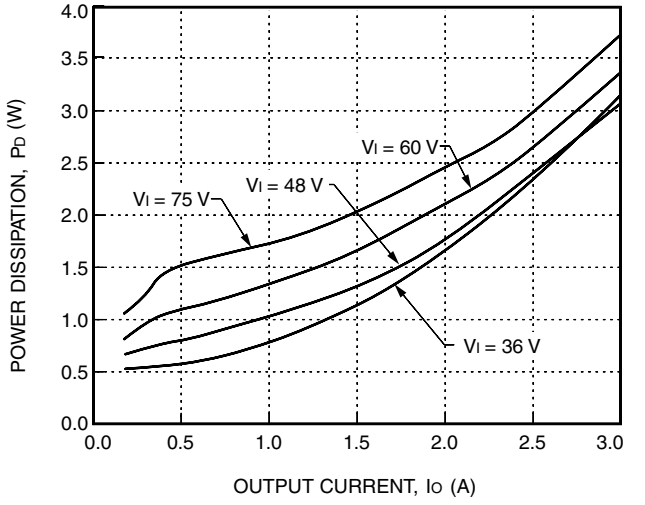


Note: The power dissipation of this unit is shown at $T_C = T_{C,max}$ because the efficiency of this power module drops at high temperatures.

**Figure 57. LW015F Power Dissipation at Maximum Case Temperature**

## Thermal Considerations (continued)

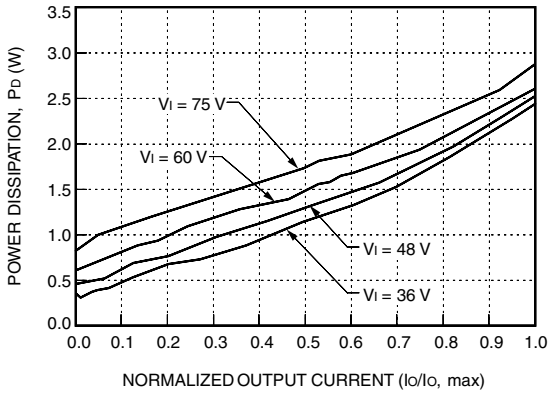



**Figure 58. LW010A, B, C Typical Power Dissipation vs. Normalized Output Current at $T_C$ = 25 °C**

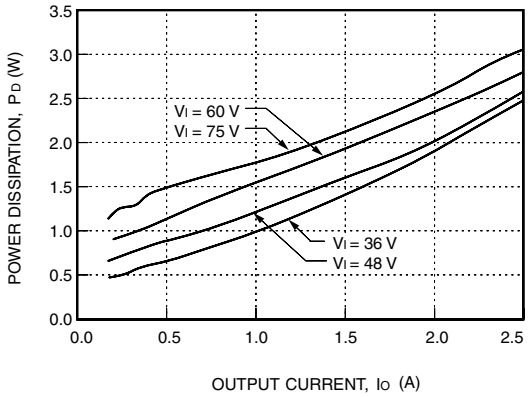



**Figure 59. LW010F Typical Power Dissipation vs. Output Current at $T_C$ = 25 °C**


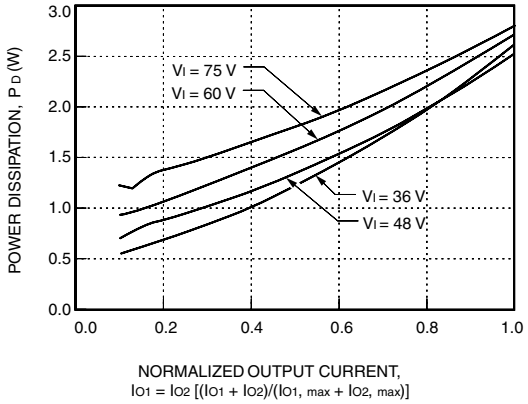



**Figure 60. LW010AJ, BK, CL Typical Power Dissipation vs. Normalized Output Current at $T_C$ = 25 °C**

## Module Derating

The derating curves in Figures 43 through 45 were determined by measurements obtained in an experimental apparatus shown in Figure 61. Note that the module and the printed-wiring board (PWB) that it is mounted on are both vertically oriented. The passage has a rectangular cross section.

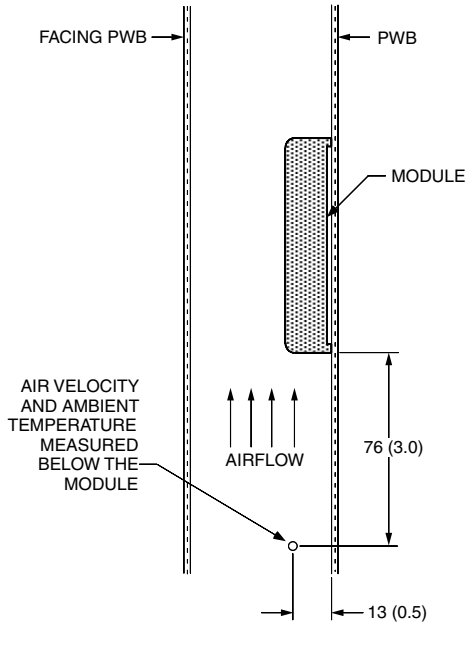


Note: Dimensions are in millimeters and (inches).

**Figure 61. Experimental Test Setup**

## Layout Considerations

Copper paths must not be routed beneath the power module standoffs.


## Outline Diagram

Dimensions are in millimeters and (inches).


Tolerance: x.x ± 0.5 mm (0.020 in.); x.xx ± 0.38 mm (0.015 in.).

If slightly lower height is needed, the four standoffs can be dropped through holes on the user's PWB. By dropping the standoffs through the PWB, the module height will be decreased to 9.5 mm (0.375 in.) typical height.


**Top View**

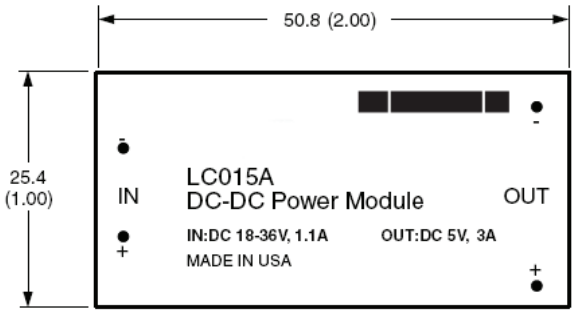


**Side View**

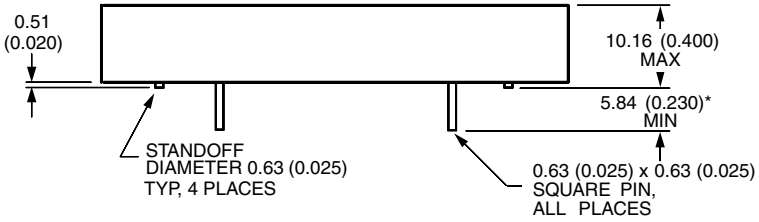


**Bottom View**

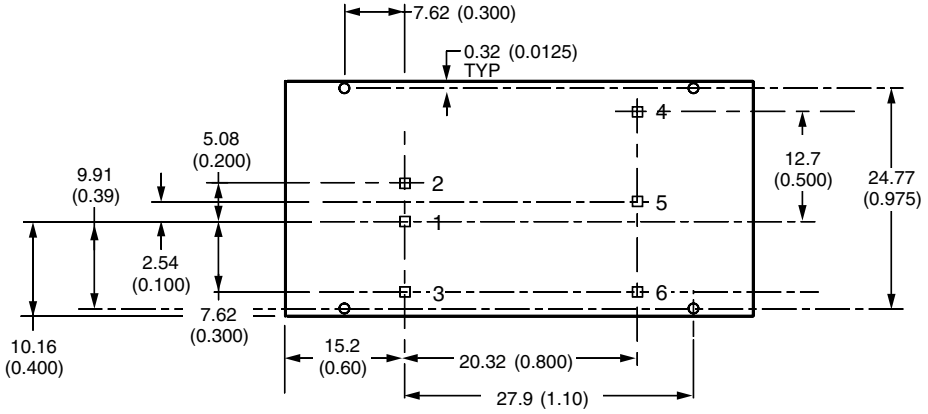


8-1329(C).b


* An optional short pin dimension is 2.8 mm ± 0.25 mm (0.110 in. ± 0.010 in.).

| Pin | Function | Pin | Function |
|---|---|---|---|
| 1 | $V_I(-)$ | 4 | $V_O(+)$ or $V_{O1}(+)$ |
| 2 | $V_I(+)$ | 5 | COMMON (dual outputs) or<br>TRIM (optional on single outputs)<br>Pin is not present on single outputs unless option is specified.<br>Pin is always present on dual outputs. |
| 3 | ON/OFF or SYNC (optional)<br>Pin is not present unless one of these options is specified. | 6 | $V_O(-)$ or $V_{O2}(-)$ |

## Recommended Hole Pattern

Component-side footprint.

Dimensions are in millimeters and (inches).

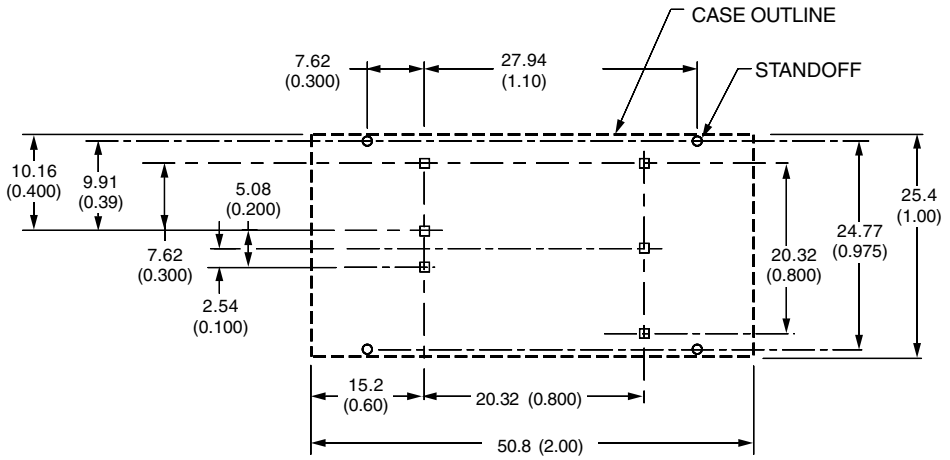


8-1329(C).b

## Ordering Information

**Table 6. Device Codes**

| Input Voltage | Output Voltage | Output Power | Device Code | Comcode |
|---|---|---|---|---|
| 18 V—36 V | 5 V | 15 W | LC015A | 107809550 |
| 18 V—36 V | 12 V | 15 W | LC015B | 107983140 |
| 18 V—36 V | 15 V | 15 W | LC015C | TBD |
| 36 V—75 V | 2 V | 6 W | LC015D | TBD |
| 18 V—36 V | 3.3 V | 10 W | LC015F | 107809543 |
| 18 V—36 V | 5 V | 10 W | LC010A | 107747925 |
| 18 V—36 V | 12 V | 10 W | LC010B | 107747933 |
| 18 V—36 V | 15 V | 10 W | LC010C | 107747941 |
| 18 V—36 V | 2 V | 4 W | LC010D | 107747958 |
| 18 V—36 V | 3.3 V | 8 W | LC010F | 107747966 |
| 18 V—36 V | ±5 V | 15 W | LC010AJ | 107987083 |
| 18 V—36 V | ±12 V | 15 W | LC010BK | 107809592 |
| 18 V—36 V | ±15 V | 15 W | LC010CL | TBD |
| 36 V—75 V | 5 V | 15 W | LW015A | 107809527 |
| 36 V—75 V | 12 V | 15 W | LW015B | 107935413 |
| 36 V—75 V | 15 V | 15 W | LW015C | 107935421 |
| 36 V—75 V | 2 V | 6 W | LW015D | 107809501 |
| 36 V— 75 V | 3.3 V | 10 W | LW015F | 107809535 |
| 36 V—75 V | 5 V | 10 W | LW010A | 107747974 |
| 36 V—75 V | 12 V | 10 W | LW010B | 107747982 |
| 36 V—75 V | 15 V | 10 W | LW010C | 107747990 |
| 36 V—75 V | 2 V | 4 W | LW010D | 107748006 |
| 36 V—75 V | 3.3 V | 8 W | LW010F | 107748014 |
| 36 V—75 V | ±5 V | 10 W | LW010AJ | 107935405 |
| 36 V—75 V | ±12 V | 10 W | LW010BK | 107809568 |
| 36 V—75 V | ±15 V | 10 W | LW010CL | TBD |

## Ordering Information (continued)

Optional features may be ordered using the device code suffixes shown below. The feature suffixes are listed numerically in descending order. Please contact your Lineage Power Account Manager or Application Engineer for pricing and availability of options.

**Table 7. Option Codes**

| Option | Device Code Suffix |
|---|---|
| Output voltage adjustment | 9 |
| Short pin: 2.8 mm ± 0.25 mm (0.110 in. ± 0.010 in.) | 8 |
| Short pin: 3.7 mm ± 0.25 mm (0.145 in. ± 0.010 in.) | 6 |
| Positive logic remote on/off | 4 |
| Synchronization (cannot be ordered on units with remote on/off) | 3 |
| Negative logic remote on/off | 1 |

LINEAGE POWER

**World Wide Headquarters**
**Lineage Power Corporation**
3000 Skyline Drive, Mesquite, TX 75149, USA
**+1-800-526-7819**
(Outside U.S.A.: **+1-972-284-2626**)
**www.lineagepower.com**
**e-mail: techsupport1@lineagepower.com**

**Asia-Pacific Headquarters**
Tel: +65 6416 4283

**Europe, Middle-East and Africa Headquarters**
Tel: +49 89 6089 286

**India Headquarters**
Tel: +91 80 28411633

Lineage Power reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

© 2008 Lineage Power Corporation, (Mesquite, Texas) All International Rights Reserved.

March 2008
DS98-041EPS (Replaces DS98-040EPS)