




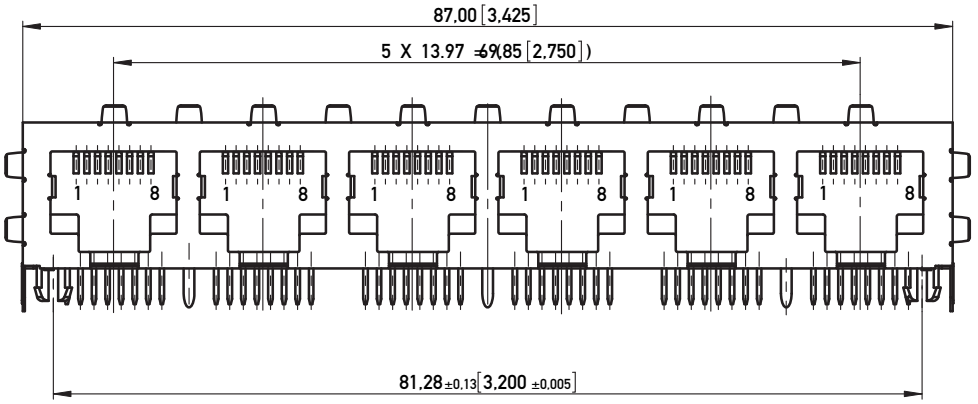


RECOMMENDED PANEL CUTOUT
EMPFOHLENER FRONTPLATTEN-AUSSCHNITT

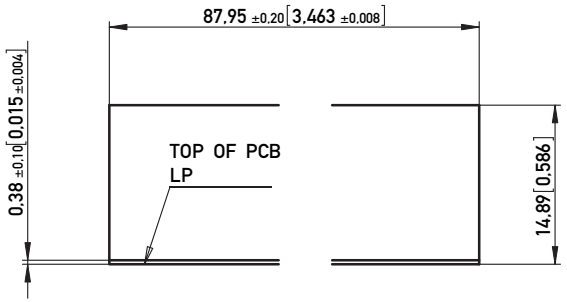

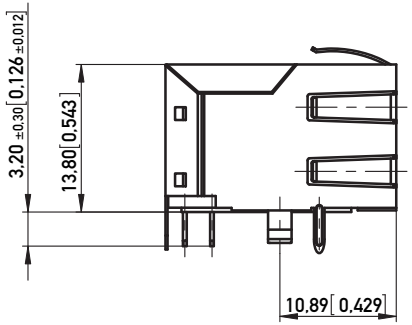

IMPROVED CONTACT DESIGN
(PRE BEND)



Technical specifications

Materials & Finish	Standard applic.	Value
Insulation body	Standard description	PBT 30%
Contact material	Standard description	C5210 (acc. JIS)
Contact finish, mating zone	Thickness of plating	30 µin Au over 50 µin Ni
Contact finish termination zone	Thickness of plating	80 µin matte Sn over 50 µin Ni
Shell/shield material	Standard description	C2680 (acc. JIS)
Shell/shield plating	Thickness of plating	50 µin Ni

Assembly process		
Packaging		Tray
Solder temperature		235°C at 3-5s
Suitable assembly process		wave

Approvals		
UL insulation body	UL 94	V0
UL File No.	E145613	
RoHS compliant		Yes

Test Data	Standard applic.	Value
Mechanical properties		.
Insertion/withdrawal force	IEC 603-7	max. 20 n
Mechanical operations	IEC 512-5, 9a	min. 1.000
Effectiveness of connector coupling device	IEC 512-8, 15f	50 N
Electrical properties		
Creepage / clearance distances		
a) Contact - contact	IEC 807-3	0,52 mm
b) Contact - shell	IEC 807-3	min. 1,0 mm
Voltage proof (Dielectric Withstand Voltage)		
a) Contact - contact	IEC 512-2, 4a	min. 1.000 VDC/VAC
b) Contact - shell/testpanel	IEC 512-2, 4a	min. 1.500 VDC/VAC
Current carrying capacity	IEC 512-3, 5b	1,5 A @ 25° C
Contact resistance	IEC 512-2, 2a	max. 30 mOhm
Insulation resistance	IEC 512-2, 3a	min. 500 MOhm
Environmental properties		
Operation temperature		0 - 70° C

NOTE 1: SIDE SHIELD PINS IN FRONT (3,68mm)
NOTE 2: REAR GROUNDING PINS BETWEEN EVERY OTHER PORT (P)
NOTE 3: PANEL GROUND FLANGES BOTH SIDES AND TOP (GF5)
NOTE 4: C-UL APPROVED E145613 AND MEETS FCC REQUIREMENTS
NOTE 5: RoHS COMPLIANT

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:

Tolerances

All Dimensions in mm[in]

Scale 2:1

All rights reserved.
Only for Information.
To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation

MOD JACK - MJR
8P8C, 1X6, CATEGORY 5E

ERNI www.ERNI.com

133785


I (1/2)


A3

Index		Date	
A		28.06.2007	

Class MJ

RECOMMENDED PCB LAYOUT (COMPONENT SIDE VIEW)
EMPFOHLENES LEITERPLATTEN-LAYOUT (BESTUECKUNGSSEITE)
TOL. ±0.05 [0.002] UNLESS NOTED

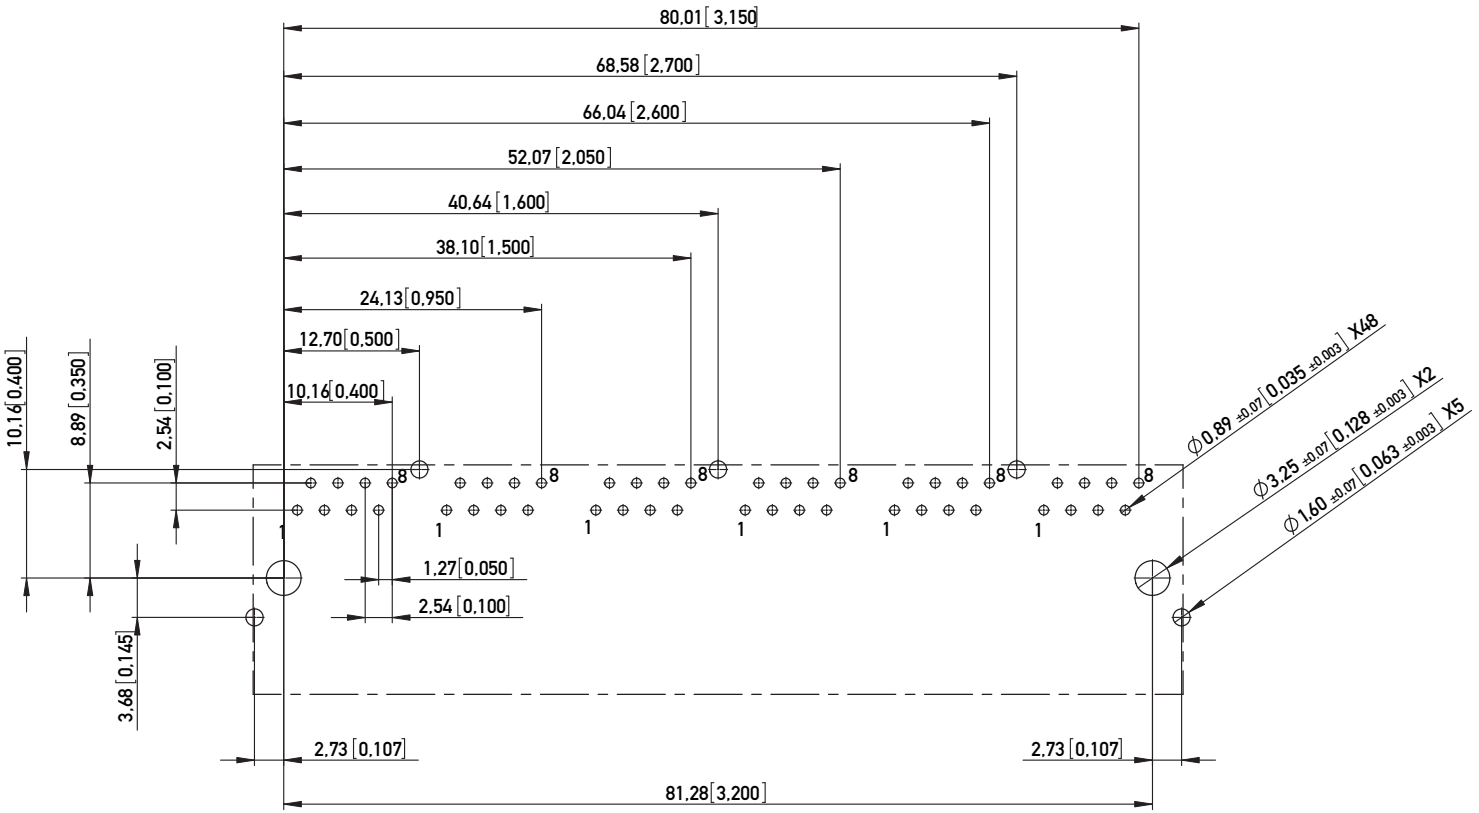

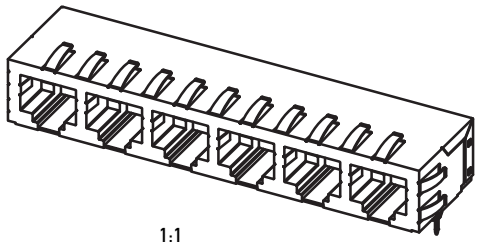

1:1

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:	Tolerances All Dimensions in mm[in]	Scale 2:1	
All rights reserved. Only for Information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation MOD JACK - MJR 8P8C, 1X6, CATEGORY 5E	
	ERNI www.ERNI.com	133785	I(2/2) A3
Index / Date		Class MJ	