

General Description


KR Electronics part number 3306-3381-2100 is a 3381 MHz Bandpass filter. The filter has a 3 dB bandwidth of 2100 MHz. Other center frequencies and bandwidths are available. Please consult the factory.

Features

- 3381 MHz Bandpass Filter
- 3 dB Bandwidth 2100 MHz
- 40 dB Bandwidth 3055 MHz typical
- 50 Ω Source and Load
- Other frequencies available

Typical Performance

Overall Response
(10 dB/div)

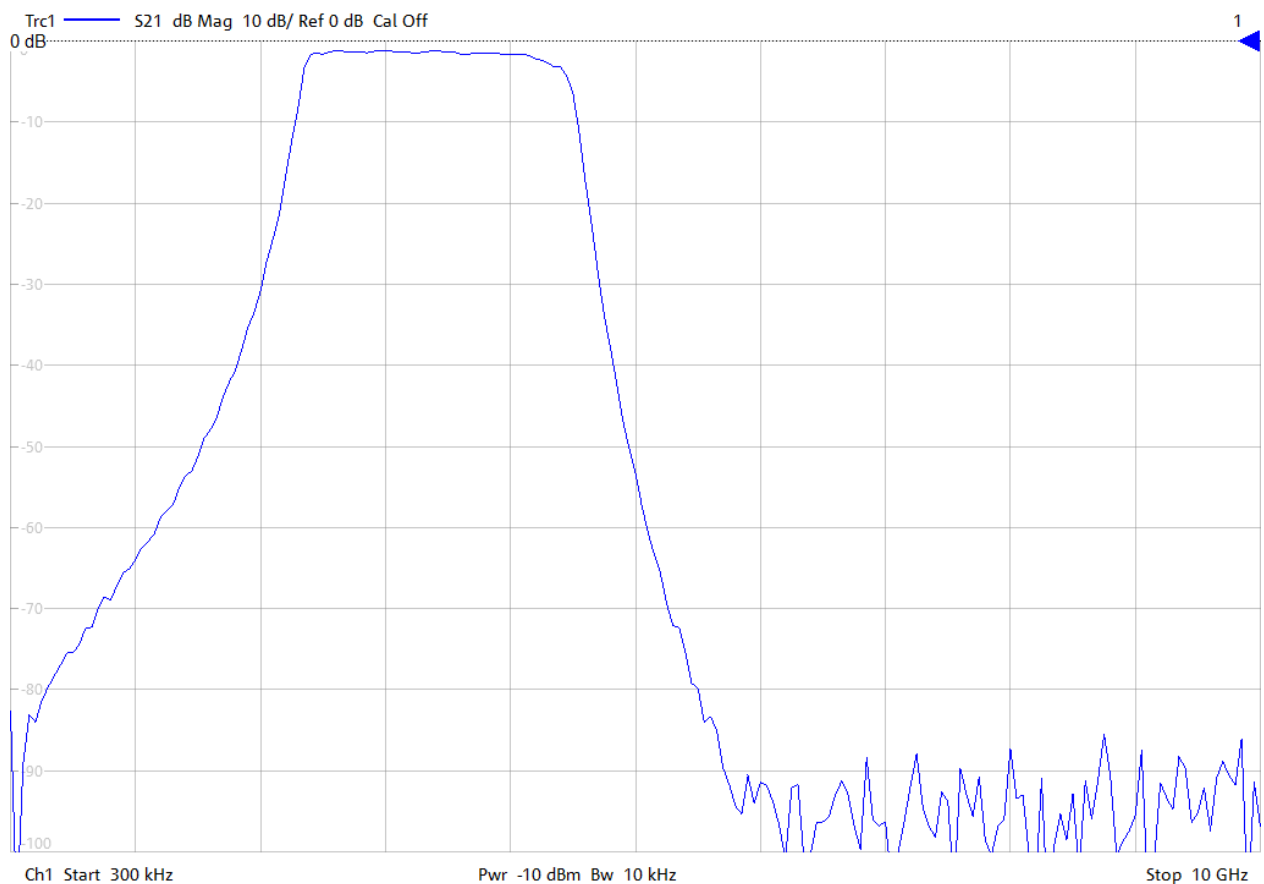


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3306-3381-2100

Passband Amplitude & Group Delay (1 dB/div)

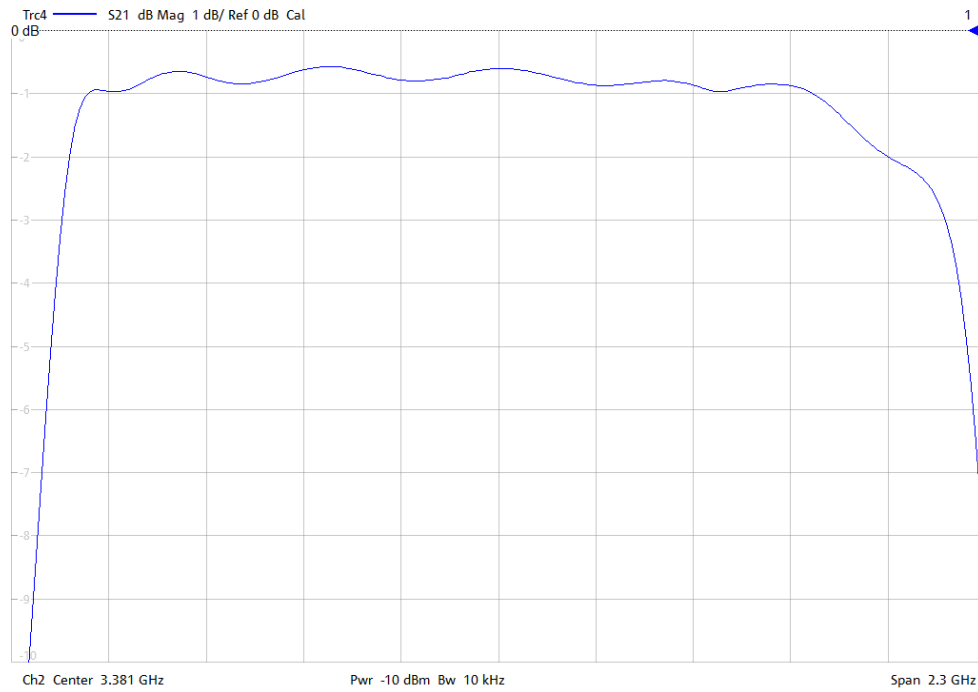

Overall Response (10 dB/div)

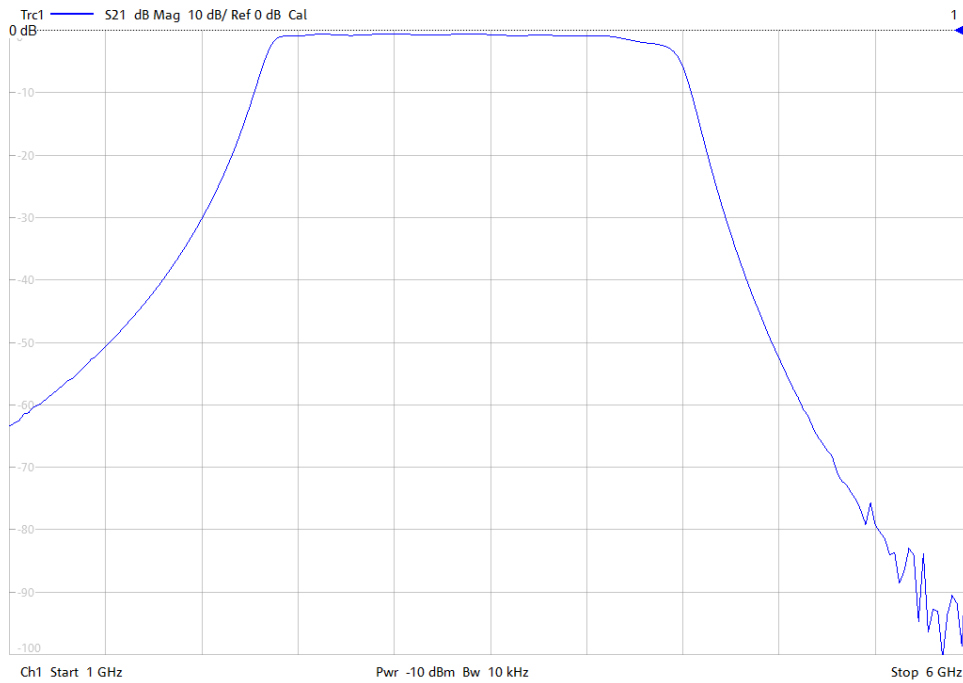

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3306-3381-2100

Specifications

Parameter	Specification	Notes
Filter type	Bandpass	
Center Frequency	3381 MHz	
Insertion Loss at Fc	2 dBa max	0.7 dBa typical
1 dBc Bandwidth	1840 MHz typical	
3 dBc Bandwidth	2100 MHz ±10%	
40 dBc Bandwidth	3055 MHz typical	
60 dBc Bandwidth	4000 MHz typical	
Source and Load	50 Ω	

Physical Dimensions

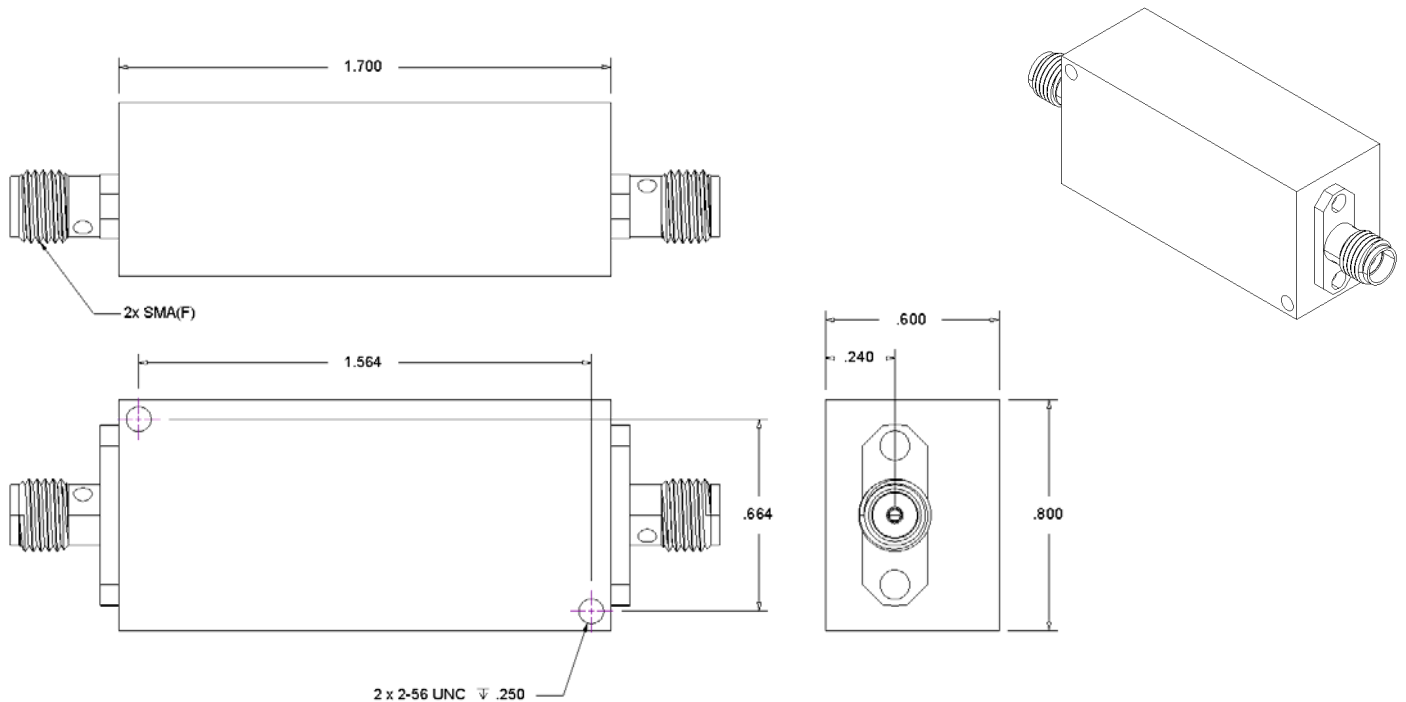

Notes:

1. Dimensions in inches

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982