


16F(R) SERIES

STANDARD RECOVERY DIODE


$$V_{RRM} = 100-1200V, I_{F(AV)} = 16A, VF = 1.23 \text{ Volt.}$$


Cathode to Stud Shown
(Anode to Stud add Suffix R)

Symbol

MAXIMUM RATINGS (T _J = 25 °C unless stated otherwise)		Add Prefix“A” for avalanche 400-1200V							
Parameter	Symbol	16F(R) -10	16F(R) -20	16F(R) -40	16F(R) -60	16F(R) -80	16F(R) -100	16F(R) -120	Unit
Repetitive Peak Reverse Voltage	V _{RRM}	100	200	400	600	800	1000	1200	Volt
Maximum Average On-State Current	I _{F(AV)}	16.0 at tc = 140°C							Amp
Peak Forward Surge Current 8.3mS	I _{FSM}	310							Amp
Maximum I ² T for Fusing 8.3ms	I ² T	395							A ² /S
Maximum Storage Temperature Range	T _(STG)	-65 to +200							°C
Maximum Junction Temperature Range	T _J	-65 to +175							°C

ELECTRICAL CHARACTERISICS at Tj = 25°C Maximum. Unless stated Otherwise						
		Condition	Value			Unit
Parameter	Symbol		Min	Typ	Max	
Maximum Forward Voltage	V _{FM}	I _{FM} = 50 Amps			1.23	Volt
Repetitive Peak Reverse Current	I _{RRM}	V _R = V _{RRM} , t _j =175°C			12.0	mA
Maximum non-repetitive peak reverse power (Avalanche Version)	P _R	tp= 10μs rect wave at t _j Max			15	kW
Thermal Resistance (Junction to Case)	R _{TH (J-c)}				1.6	°C/W
Mounting Torque	M _T				1.2	NM
Weight	Wt				7.0	grms

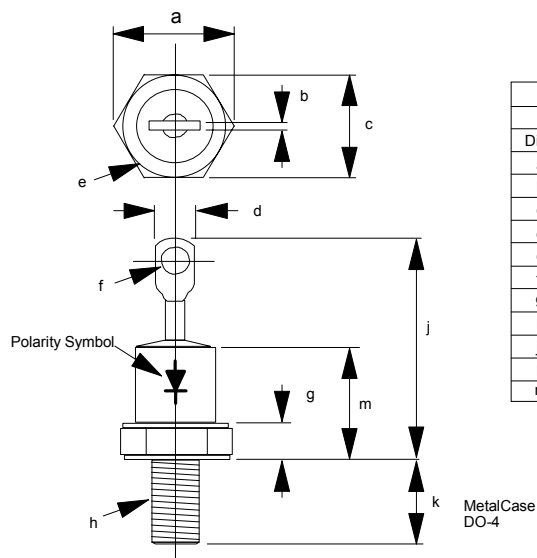

DIMENSIONS				
	Millimetres		Inches	
Dim	Min	Max	Min	Max
a		12.82		0.505
b	0.020	0.065	0.51	1.65
c	0.424	0.437	10.77	11.20
d		0.310		7.87
e		0.413		10.49
f	0.060	0.100	1.53	2.54
g	0.075	0.175	1.91	4.44
h	10-32 UNF3A			
j	0.600	0.820	15.24	20.82
k	0.422	0.453	10.72	11.50
m		0.405		10.29