FUJITSU SEMICONDUCTOR
DATA SHEET

DS04-21215-3E

ASSP

IF Band PLL Frequency Synthesizer

MB15C101

■ DESCRIPTION

The Fujitsu MB15C101 is an exclusive Intermediate Frequency (IF) band Phase Locked Loop (PLL) frequency synthesizer with pulse swallow operation. The reference divider and comparison divider have fixed divide ratios, so that it is not required to set the divide ratios by a microcontroller externally.

It operates with a supply voltage of 3.0 V typ. and dissipates 1.0 mA typ.(270MHz) of current realized through the use of Fujitsu's CMOS technology.


The MB15C101 is ideally suitable for PHS systems.

■ FEATURES

- Low power supply current: I_{CC} = 1.0 mA typ. (V_{CC} = 3 V, 270MHz)
- Pulse swallow function; Prescaler: 16/17
- Setting frequency (Selectable by Div input.)
  – fosc = 19.2 MHz, fIF = 233.15 MHz (Div = "H")
  – fosc = 19.2 MHz, fIF = 259.20 MHz (Div = "L")
- Lock detector
- Low power supply voltage: V_{CC} = 2.4 V min.
- Wide operating temperature: Ta = –40 to +85°C


■ PACKAGE

8-pin plastic SSOP




(FPT-8P-M03)

16-pad plastic BCC



(LCC-16P-M06)


■ PIN ASSIGNMENT

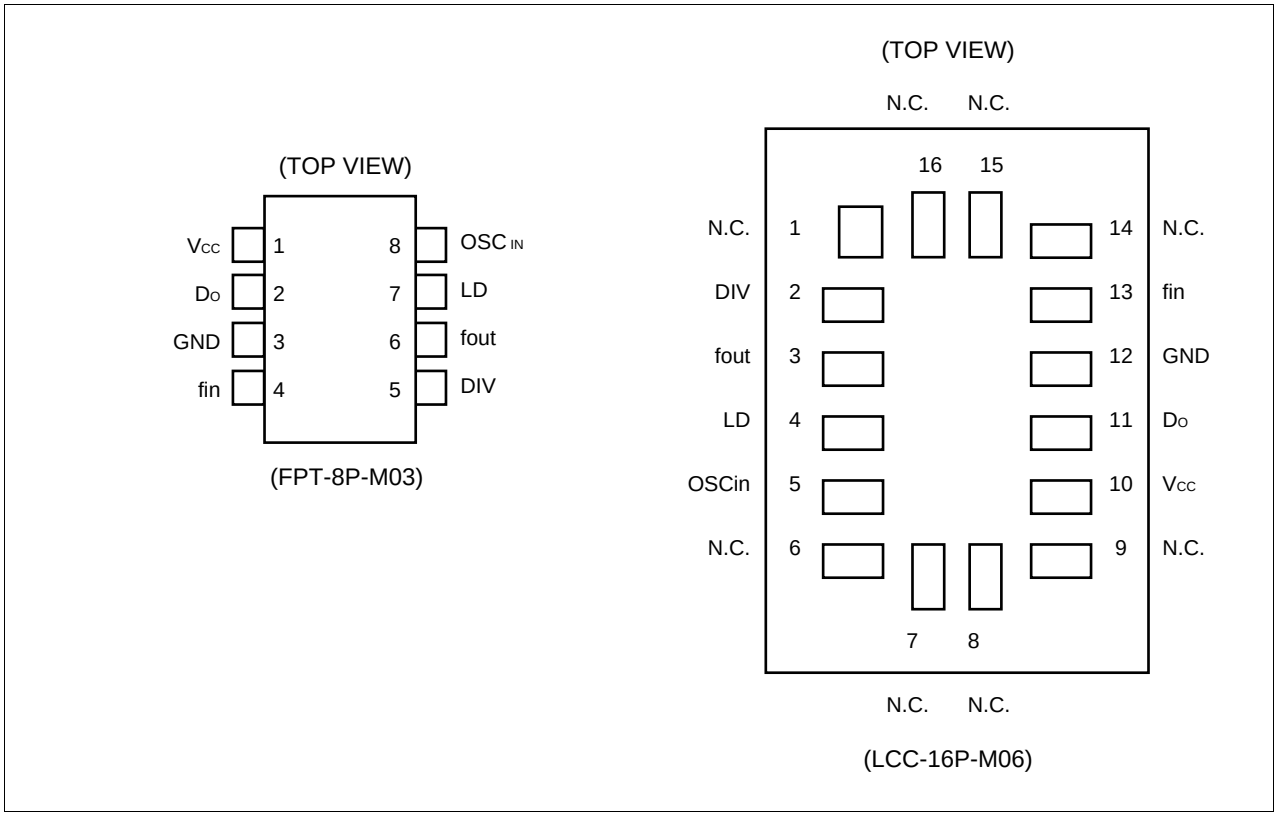

■ PIN DESCRIPTIONS

Pin No.		Pin name	I/O	Descriptions
SSOP-8	BCC-16			
–	1,6,7,8, 9,14, 15,16	N.C	–	No connection
1	10	V_{CC}	–	Power supply voltage input (2.4 V to 3.6 V).
2	11	D_O	O	Charge pump output
3	12	GND	–	Ground
4	13	fin	I	Prescaler input. Connection should be with AC coupling.
5	2	Div	I	Divide ratio switching input. Two kinds of divide ratios are selectable by Div input “H” or “L”.
6	3	fout	O	Test purpose output. This pin is an open drain output so that should be left open usually.
7	4	LD	O	Lock detector output. LD = H ; Lock LD = L ; Unlock
8	5	OSCin	I	Reference counter input. Connection should be with AC coupling.

■ BLOCK DIAGRAM

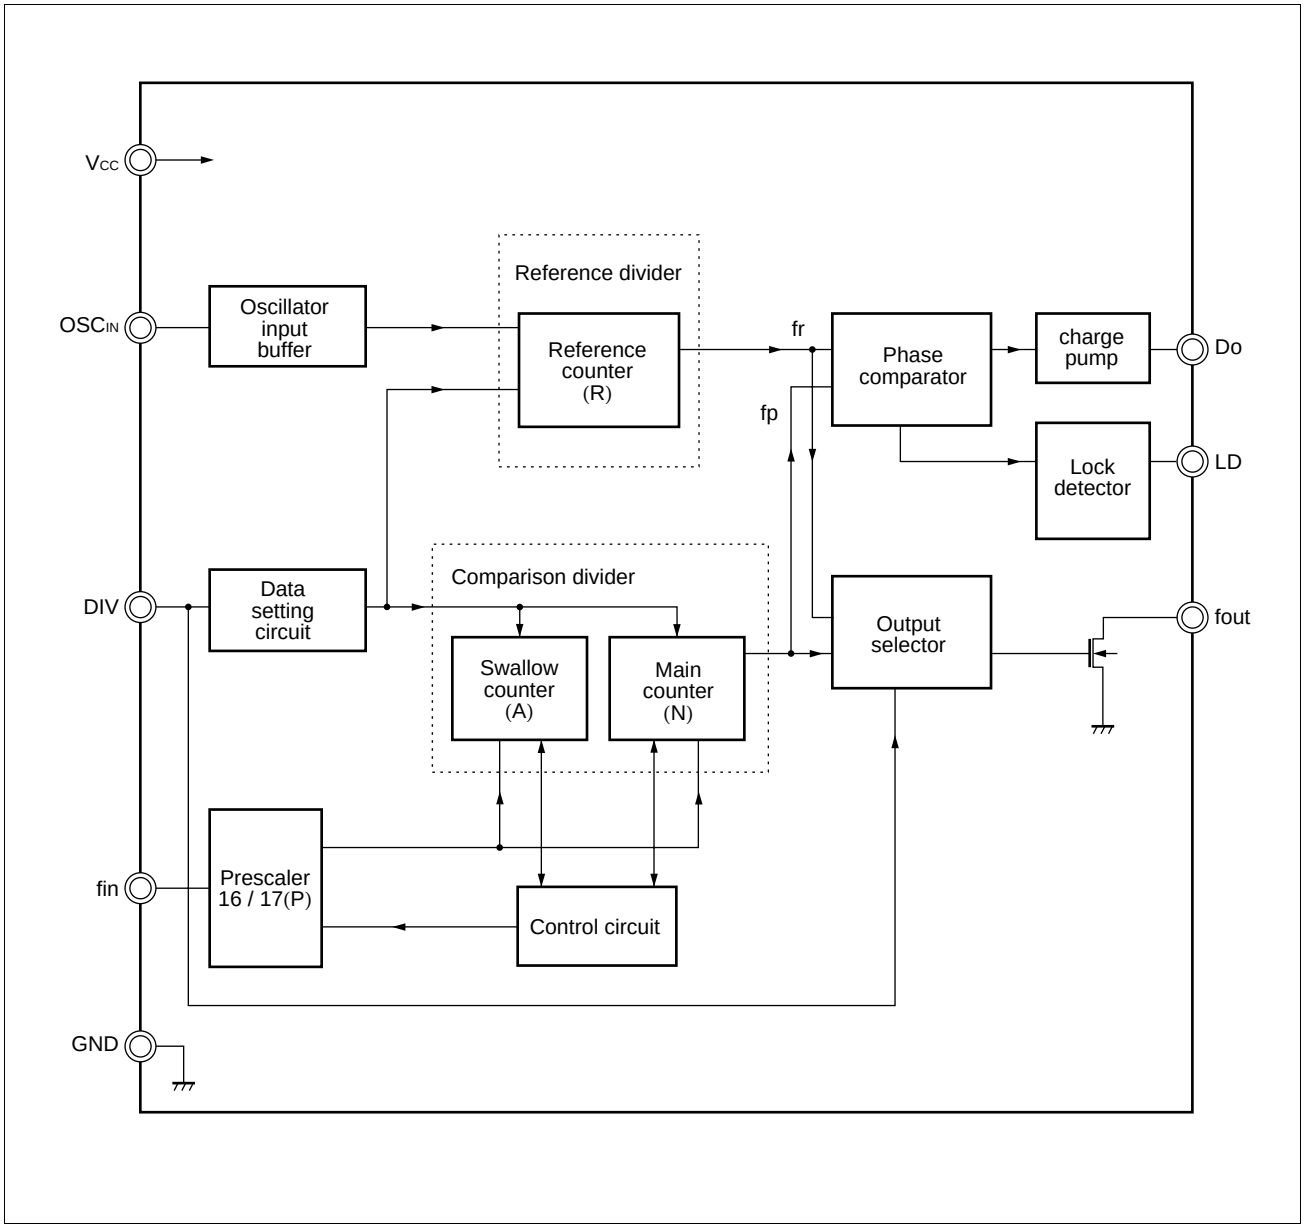

■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating		Unit
		Min.	Max.	
Power supply voltage	V_{CC}	–0.5	+4.0	V
Input voltage	V_I	–0.5	V_{CC} +0.5	V
Output voltage	V_{OUT}	–0.5	V_{CC} +0.5	V
Output current	I_{OUT}	0	+5	mA
Storage temperature	T_{STG}	–55	+125	°C

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

■ RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Power supply voltage	V_{CC}	2.4	3.0	3.6	V	
Input voltage	V_{IN}	GND	–	V_{CC}	V	
Operating temperature	Ta	–40	–	+85	°C	

Handling Precautions

- This device should be transported and stored in anti-static containers.
- This is a static-sensitive device; take proper anti-ESD precautions. Ensure that personnel and equipment are properly grounded. Cover workbenches with grounded conductive mats.
- Always turn the power supply off before inserting or removing the device from its socket.
- Protect leads with a conductive sheet when handling or transporting PC boards with devices.

■ ELECTRICAL CHARACTERISTICS

Recommended operating conditions unless otherwise noted.

Parameter		Symbol	Condition	Value			Unit
				Min.	Typ.	Max.	
Power supply current		I_{CC}	PLL is locked.(270MHz) V_{CC} = 3.0 V, Ta = +25°C	0.1	1.0	2.0	mA
Operating frequency	fin	fin	AC coupling by 1000 pF capacitor	50	–	270	MHz
	OSC_{IN}	fosc	AC coupling by 1000 pF capacitor	3	–	26	MHz
Input sensitivity	fin	Pfin	AC coupling by 1000 pF capacitor	–10	–	+2	dBm
	OSC_{IN}	Vosc	AC coupling by 1000 pF capacitor	0.5	–	–	Vpp
Input voltage	Div	V_{IH}	–	V_{CC} × 0.7	–	–	V
		V_{IL}	–	–	–	V_{CC} × 0.3	V
Input current	Div	I_{IH}	–	–	–	1.0	µA
		I_{IL}	–	–1.0	–	–	µA
Input current	OSC_{IN}	I_{OSC}	–	–100	–	100	µA
Output voltage	Do	V_{OH}	V_{CC} = 3.0 V, I_{OH}=–0.3mA	2.6	–	–	V
		V_{OL}	V_{CC} = 3.0 V, I_{OL}= 0.3mA	–	–	0.4	V
Output current	Do	I_{OH}	V_{CC} = 3.0 V, V_{OH} = 2V, Ta = +25°C	–	–6.0	–	mA
		I_{OL}	V_{CC} = 3.0 V, V_{OL} = 1V, Ta = +25°C	–	6.0	–	mA
High impedance cut off current	Do	I_{OFF}	$0 \le V_{DO} \le V_{CC}$	–	–	3	nA


■ FUNCTIONAL DESCRIPTIONS

Two different frequencies can be selected by Div input “H” or “L”.
The divide ratios are calculated using the following equation:

$f_{VCO} = \{(P \times N) + A\} \times f_{OSC} \div R \quad (A < N)$

Symbol	Description	Div = “H”	Div = “L”
fvco	Output frequency of external VCO	233.15 MHz	259.20 MHz
fosc	Reference oscillation frequency	19.2 MHz	19.2 MHz
N	Divide ratio of the main counter	291	33
A	Divide ratio of the swallow counter	7	12
P	Preset divide ratio of dual modulus prescaler	16/17	16/17
R	Divide ratio of the reference counter	384 (fr = 50 kHz)	40 (fr = 480 kHz)


■ PHASE DETECTOR TIME CHART

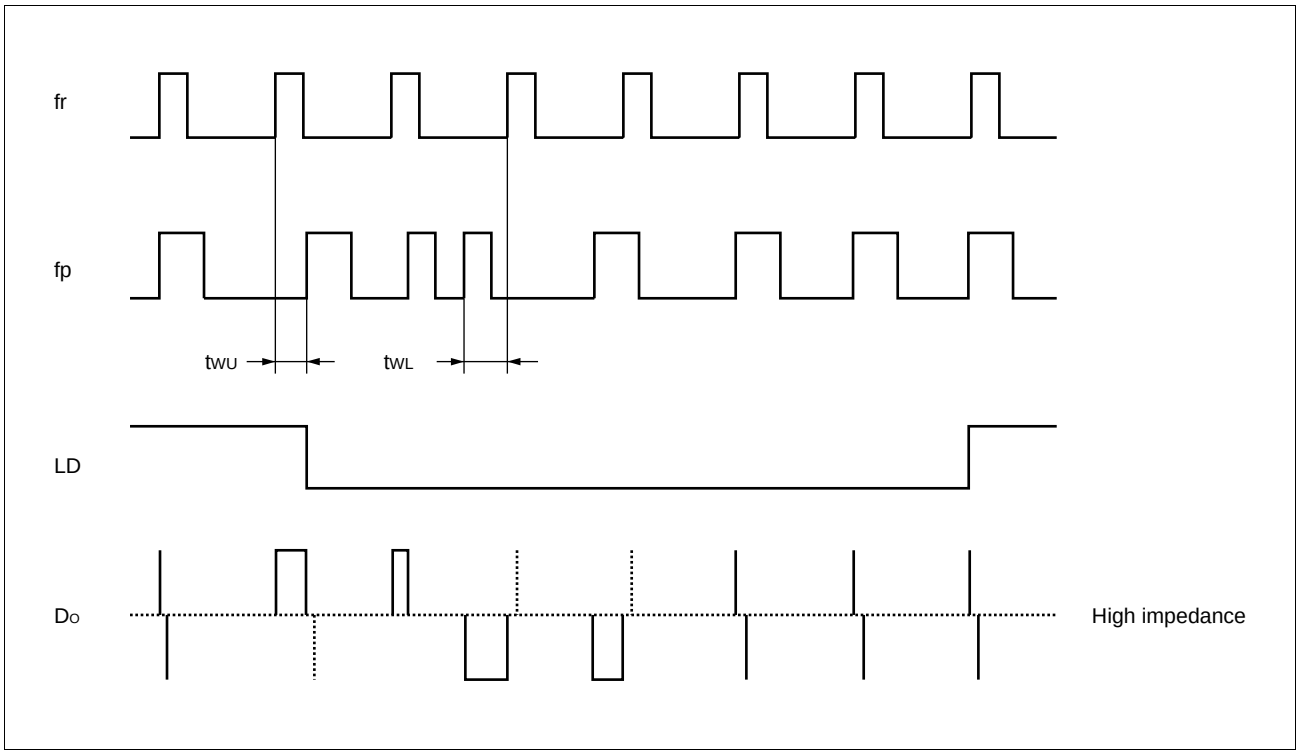


Note: • Phase error detection range: -2π to $+2\pi$
- Pulses on Do output signal during locked state are output to prevent dead zone.
- LD output becomes low when phase is t_{WU} or more. LD output becomes high when phase error is t_{WL} or less and continues to be so for three cycles or more.
- t_{WU} and t_{WL} depend on OSCin input frequency.
  $t_{WU} \geq$ 8/fosc (s) (e. g.$t_{WU} \geq$ 625.0ns, foscin = 12.8 MHz)
  $t_{WL} \leq$ 16/fosc (s) (e. g. $t_{WL} \leq$ 1250.0ns, foscin = 12.8 MHz)

■ MEASURMENT CIRCUIT (for measuring input sensitivity fin/OSCin)

SSOP-8

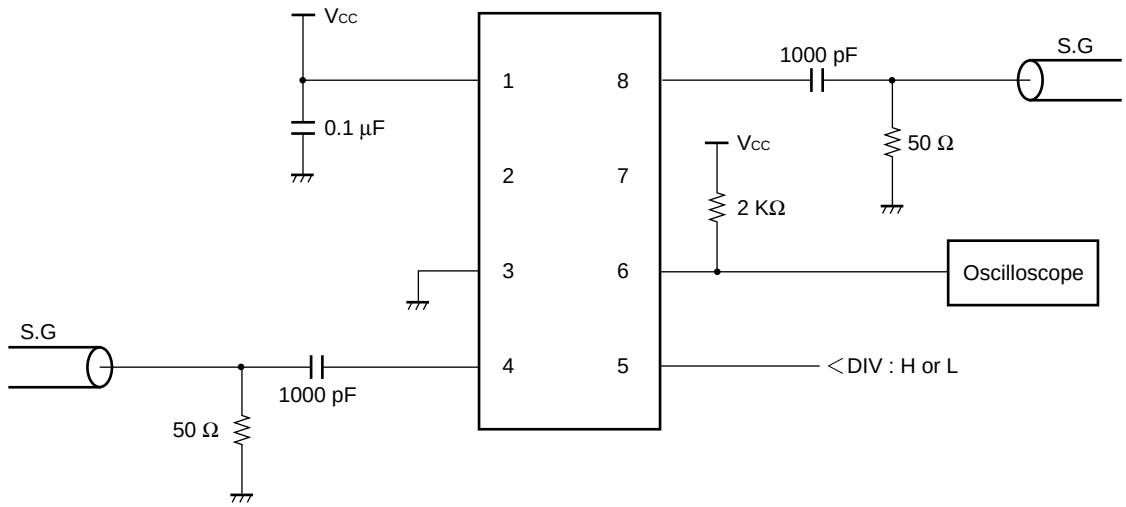


BCC-16

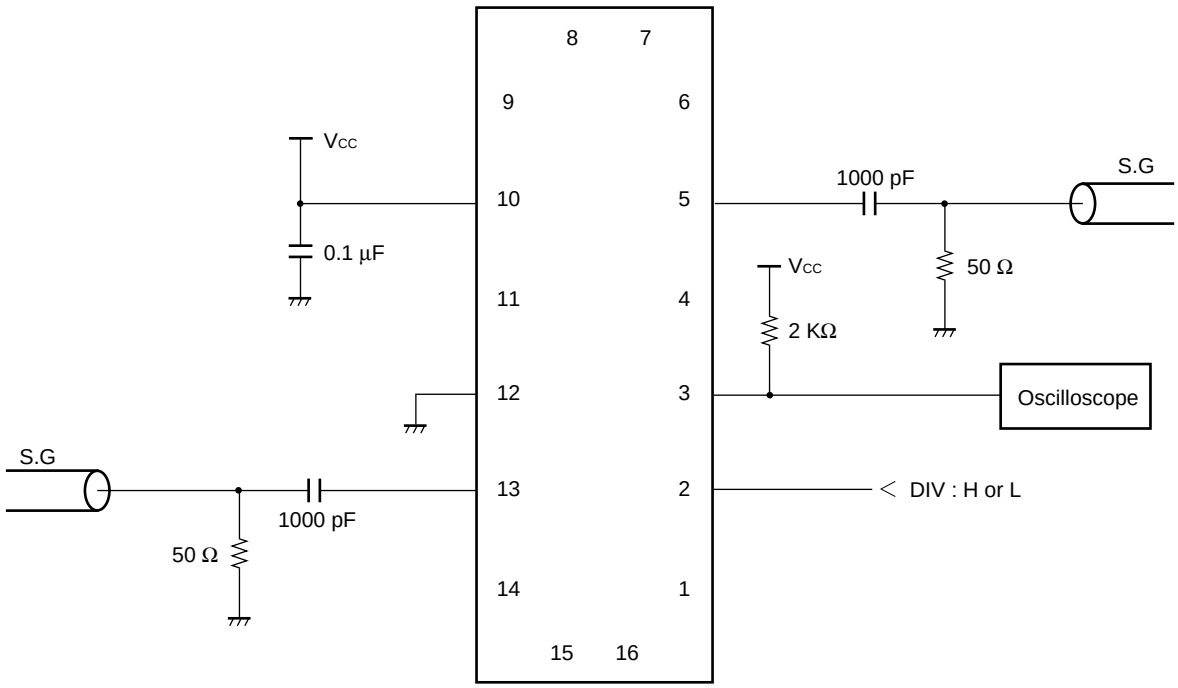


■ TYPICAL CHARACTERISTICS


1. fin Input Sensitivity

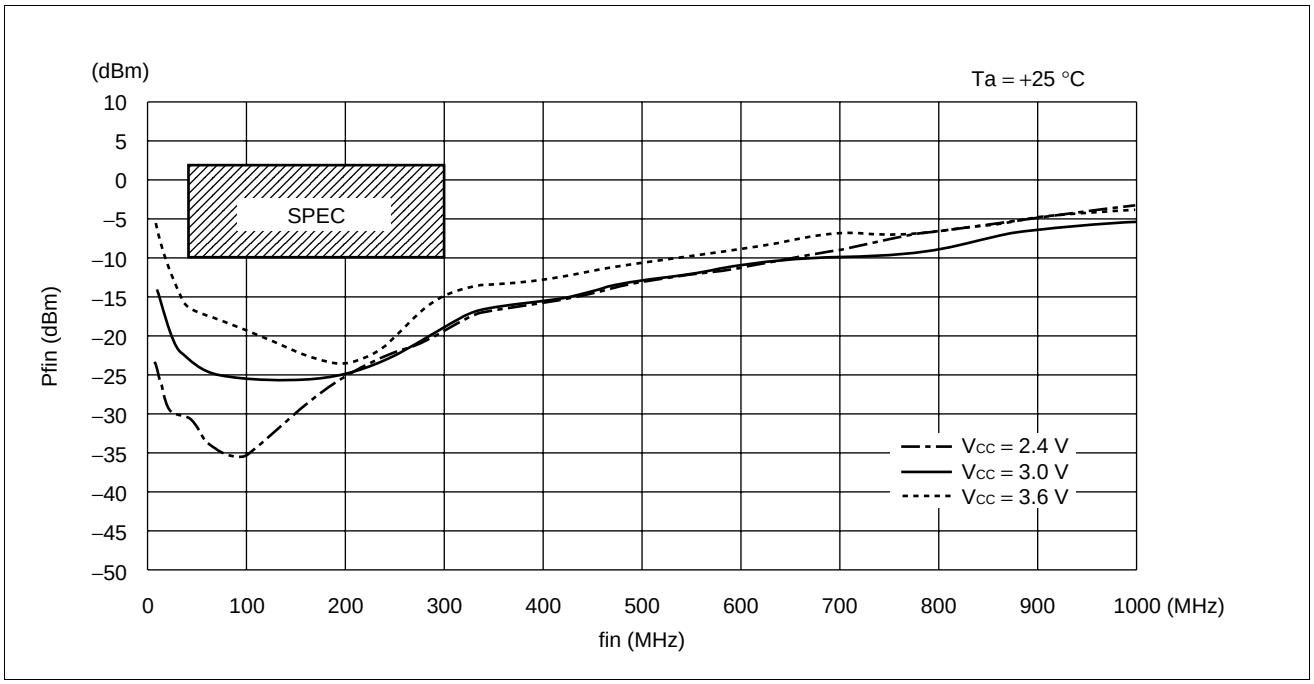


2. OSC_{IN} Input Sensitivity

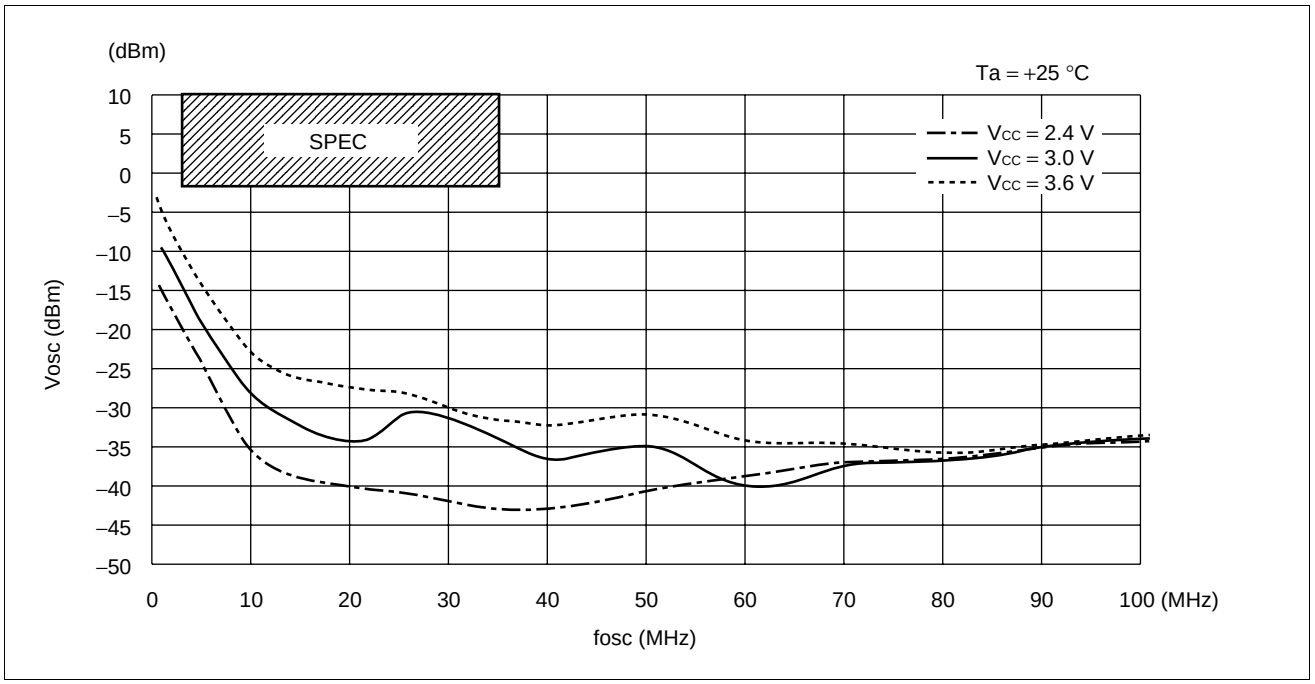

3. fin Input Impedance

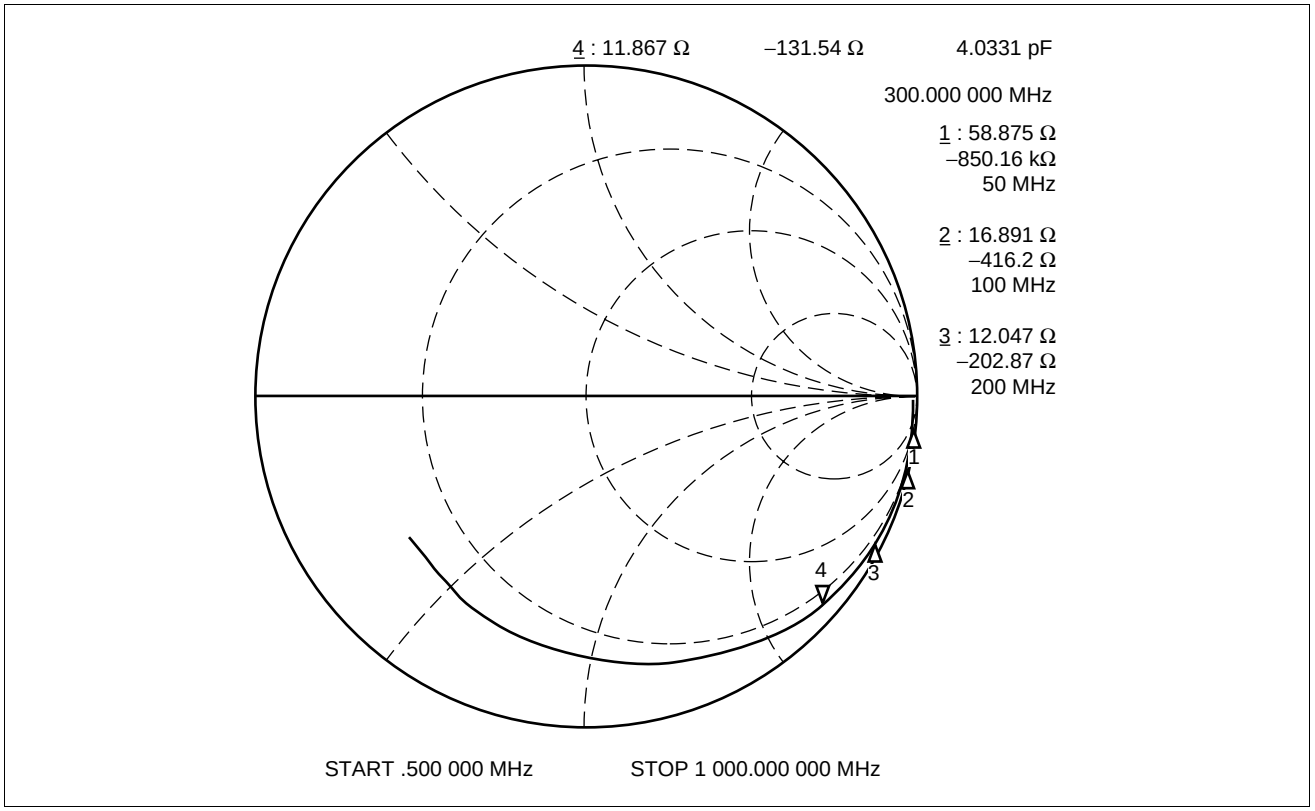


4. OSC_{IN} Input Impedance

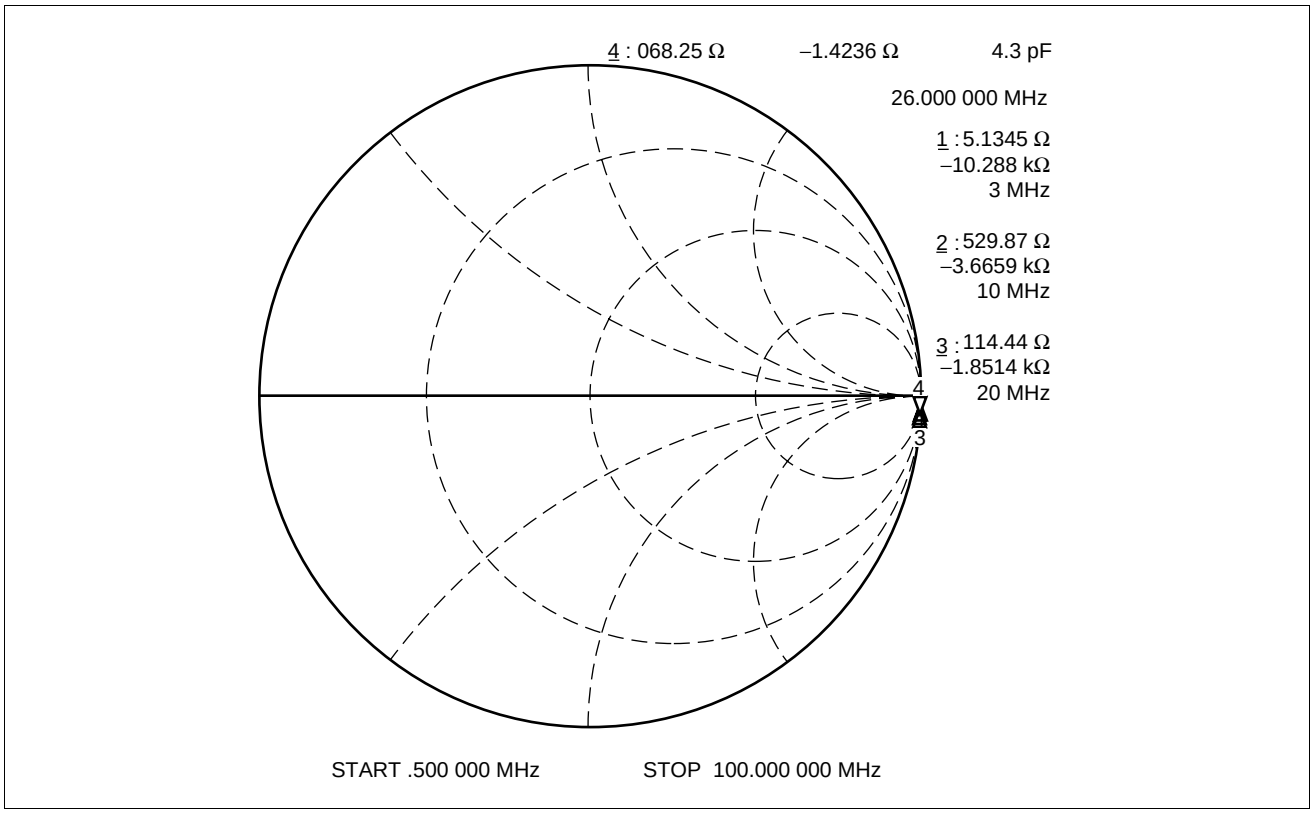

5. Do Outut Current


V_{OH} – I_{OH}

V_{CC} = 3.0 V, Ta =+ 25 °C

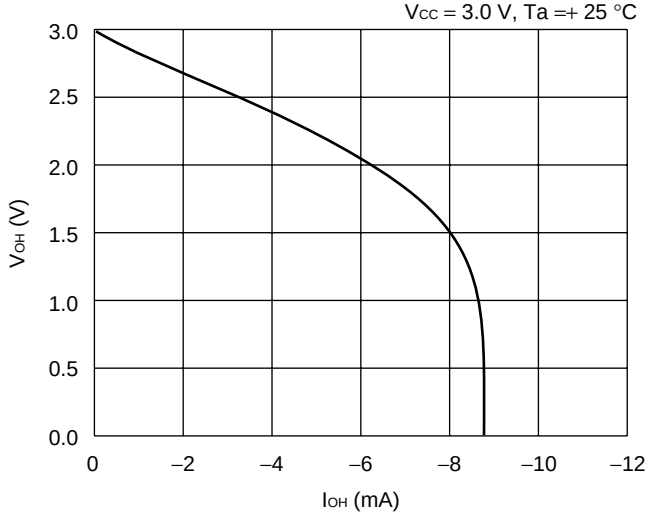


V_{OL} – I_{OL}

V_{CC} = 3.0 V, Ta = +25 °C

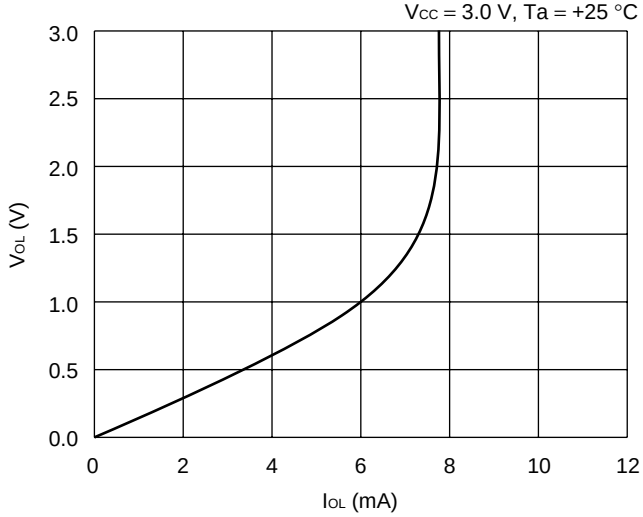

Measurement Circuit

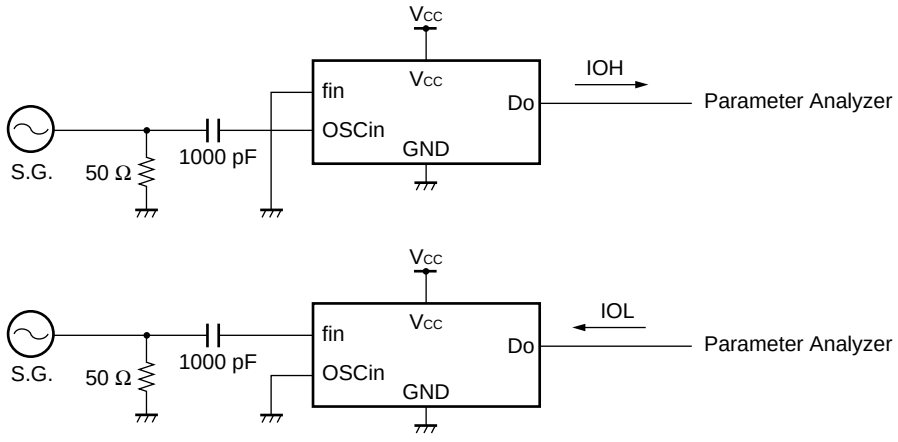


■ REFERENCE INFORMATION

1. Application Measurement

• Test Results


		Results
Lockup time ±1 kHz Un lock → Lock Power on → Lock		 2.3 ms 3.4 ms
Reference leakage (Δf = 58 kHz)		–88.5 dBc
Phase noise	(Δf = 1 kHz) (Δf = 10 kHz) (Δf = 100 kHz) (Δf = 1 MHz)	–88.0 dBc/Hz –111.0 dBc/Hz –118.0 dBc/Hz –134.0 dBc/Hz
V_{CC} (V)		3.0 V
VCO		Discrete VCO (Kv = 3.5 MHz/V) Lock Frequency = 274.0 MHz (fr = 58 kHz)

• Measurement Circuit

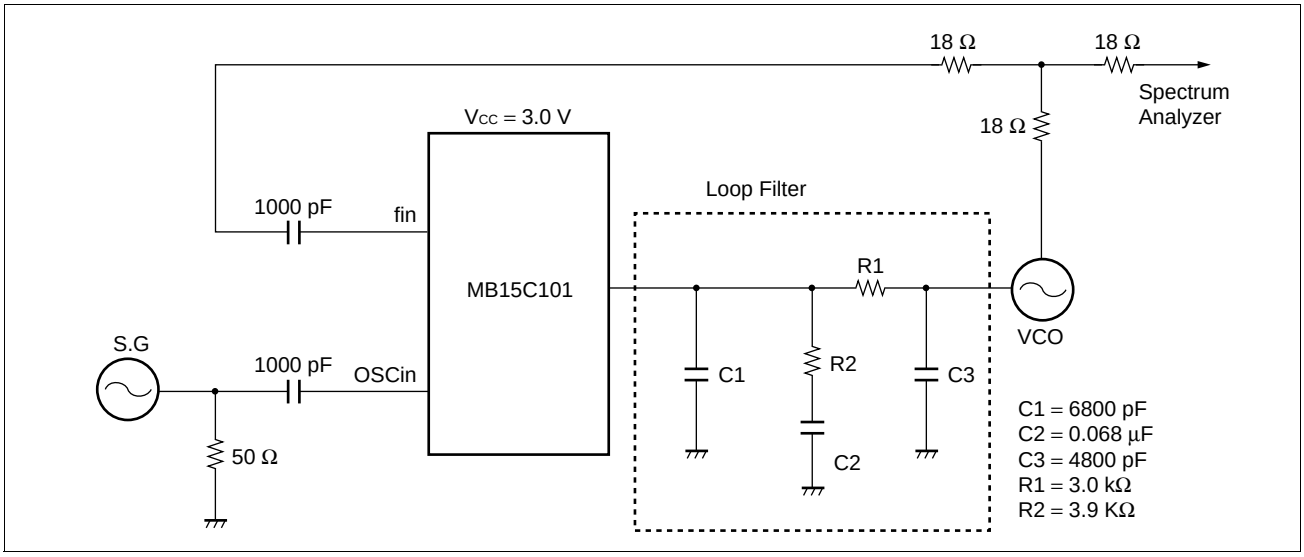


2. Phase Noise


Δ f = 1 kHz

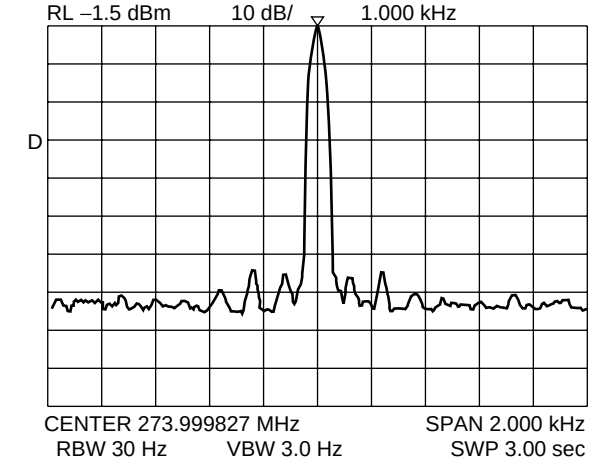


Δ f = 10 kHz

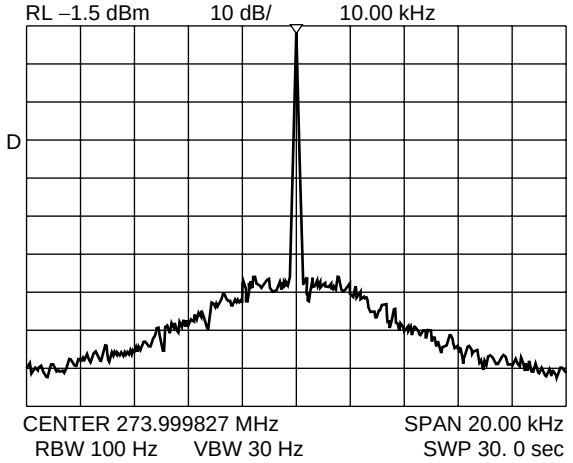


Δ f = 100 kHz

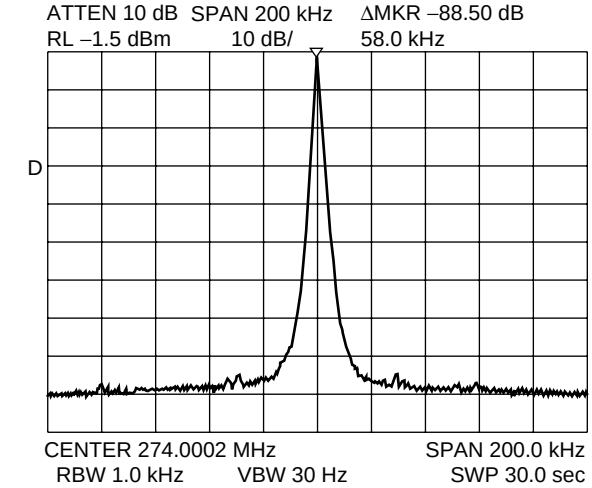

Δ f = 1 MHz

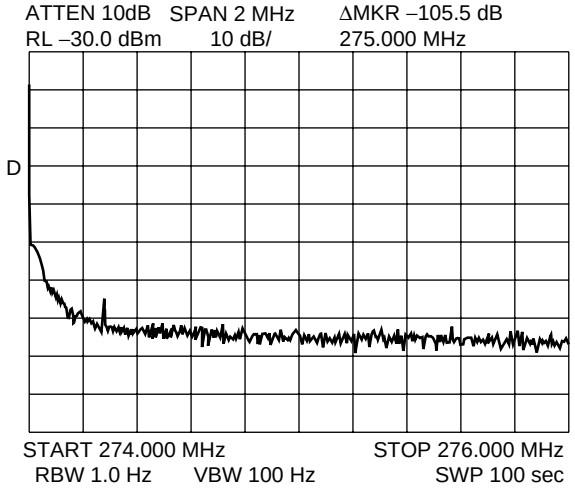

3. Lockup Time: Un-Lock to Lock

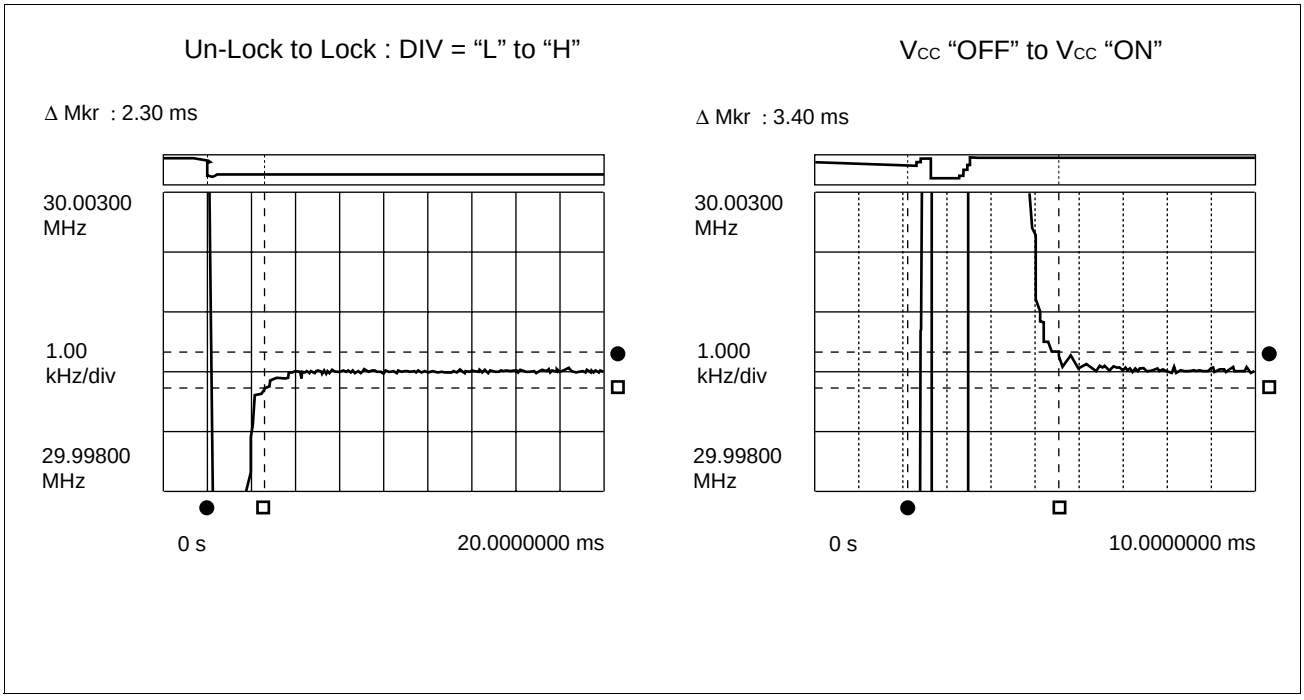


■ ORDERING INFORMATION

Part number	Package	Remarks
MB15C101PFV	8-pin, Plastic SSOP (FPT-8P-M03)	
MB15C101PV1	16-pad, Plastic BCC (LCC-16P-M06)	

■ PACKAGE DIMENSIONS

8-pin plastic SSOP
(FPT-8P-M03)

*: This dimension does not include resin protrusion.

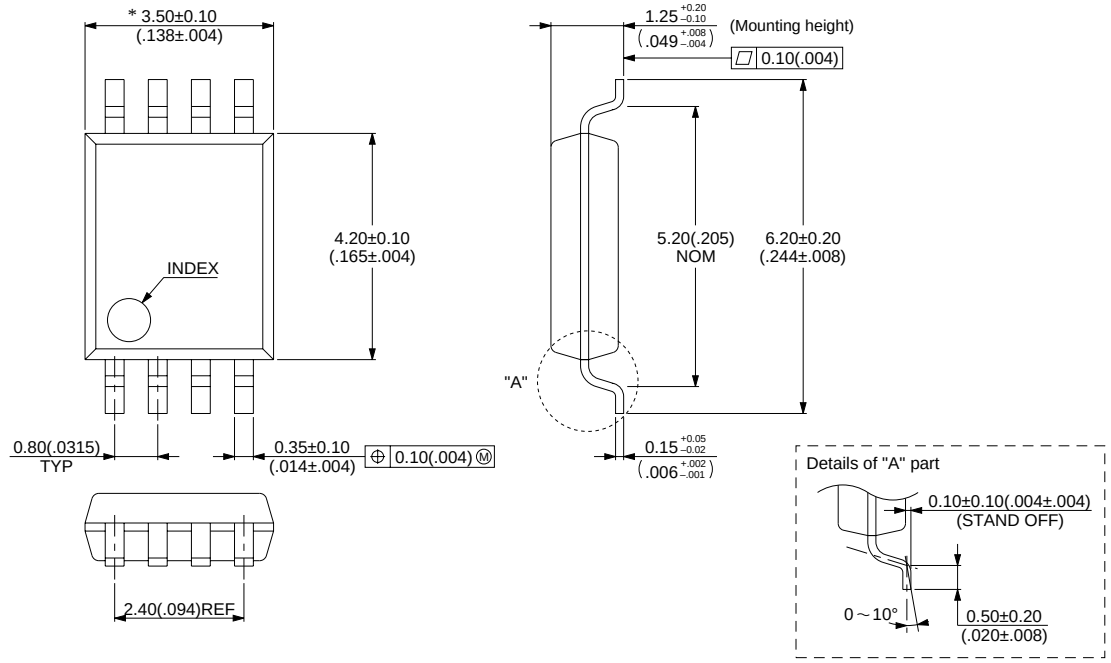


© 1994 FUJITSU LIMITED F08005S-1C-2

Dimensions in mm (inches)

(Continued)

(Continued)

16-pad plastic BCC
(LCC-16P-M06)

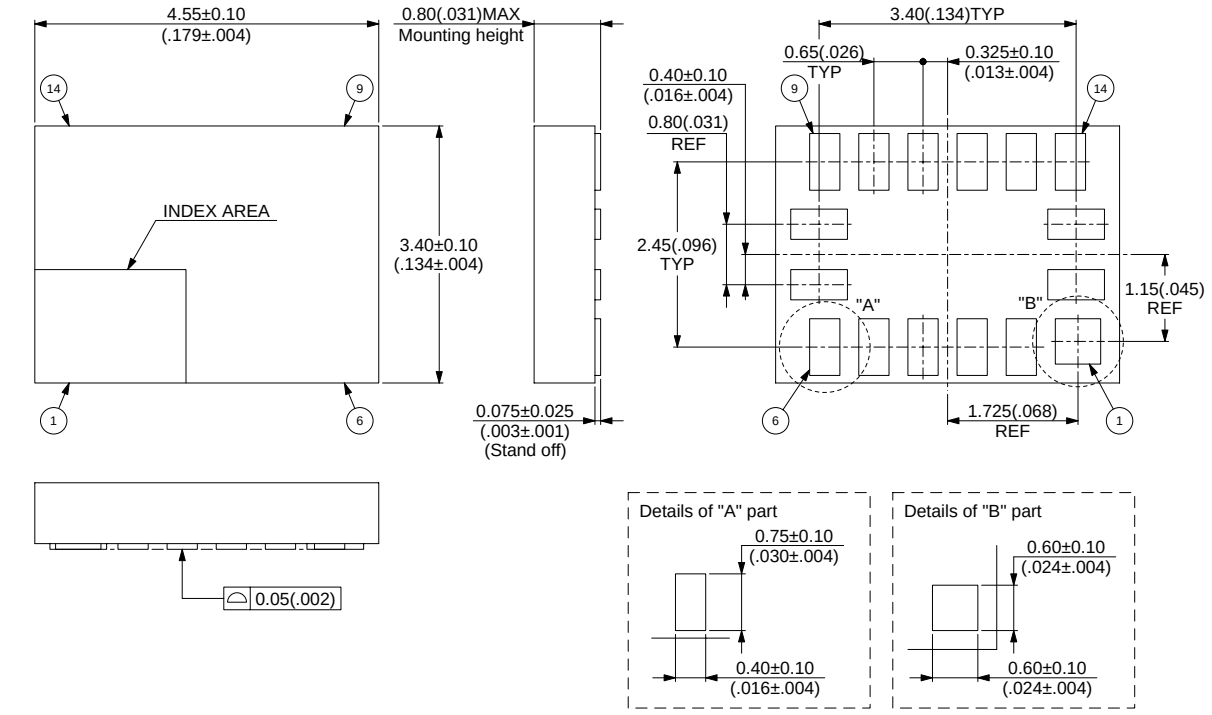

© 1999 FUJITSU LIMITED C16017S-1C-1

Dimensions in mm (inches)

FUJITSU LIMITED

For further information please contact:

Japan
FUJITSU LIMITED
Corporate Global Business Support Division
Electronic Devices
KAWASAKI PLANT, 4-1-1, Kamikodanaka
Nakahara-ku, Kawasaki-shi
Kanagawa 211-8588, Japan
Tel: 81(44) 754-3763
Fax: 81(44) 754-3329

http://www.fujitsu.co.jp/

North and South America
FUJITSU MICROELECTRONICS, INC.
Semiconductor Division
3545 North First Street
San Jose, CA 95134-1804, USA
Tel: (408) 922-9000
Fax: (408) 922-9179

Customer Response Center
Mon. - Fri.: 7 am - 5 pm (PST)
Tel: (800) 866-8608
Fax: (408) 922-9179

http://www.fujitsumicro.com/

Europe
FUJITSU MIKROELEKTRONIK GmbH
Am Siebenstein 6-10
D-63303 Dreieich-Buchschlag
Germany
Tel: (06103) 690-0
Fax: (06103) 690-122

http://www.fujitsu-ede.com/

Asia Pacific
FUJITSU MICROELECTRONICS ASIA PTE LTD
#05-08, 151 Lorong Chuan
New Tech Park
Singapore 556741
Tel: (65) 281-0770
Fax: (65) 281-0220

http://www.fmap.com.sg/

F9904
© FUJITSU LIMITED Printed in Japan

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).
CAUTION:
Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.