
THIS DRAWING IS UNPUBLISHED. | RELEASED FOR PUBLICATION
© COPYRIGHT | ALL RIGHTS RESERVED.


LOC	DIST
HB	

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	PN. OBSOLETE ECO-12-004810	24APR12	BL.L	BH.Y

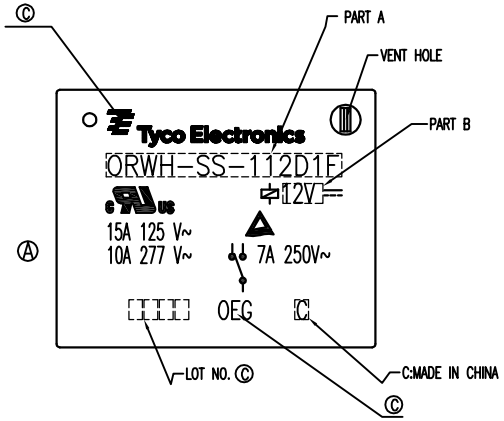

CIRCUIT DIAGRAM (BOTTOM VIEW)




DRILLING DIAGRAM (BOTTOM VIEW)

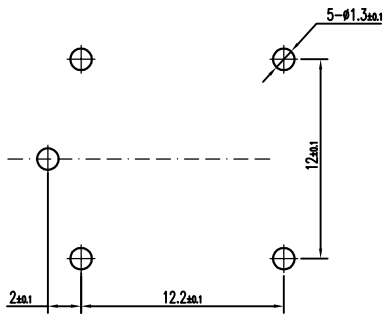


Ⓓ


STATUS	PART NO	PART B	PART A	ITEM
OBSOLETE	1721150-1	3V	ORWH-SS-103D1F	A
ACTIVE	1721150-2	5V	ORWH-SS-105D1F	B
ACTIVE	1721150-3	6V	ORWH-SS-106D1F	C
ACTIVE	1721150-4	9V	ORWH-SS-109D1F	D
ACTIVE	1721150-5	12V	ORWH-SS-112D1F	E
OBSOLETE	1721150-6	18V	ORWH-SS-118D1F	F
ACTIVE	1721150-7	24V	ORWH-SS-124D1F	G
ACTIVE	1721150-8	48V	ORWH-SS-148D1F	H
OBSOLETE	1721150-9	3V	ORWH-SH-103D1F	I
ACTIVE	1-1721150-0	5V	ORWH-SH-105D1F	J
OBSOLETE	1-1721150-1	6V	ORWH-SH-106D1F	K
OBSOLETE	1-1721150-2	9V	ORWH-SH-109D1F	L
ACTIVE	1-1721150-3	12V	ORWH-SH-112D1F	M
OBSOLETE	1-1721150-4	18V	ORWH-SH-118D1F	N
ACTIVE	1-1721150-5	24V	ORWH-SH-124D1F	O
ACTIVE	1-1721150-6	48V	ORWH-SH-148D1F	P
ACTIVE	1-1721150-7	24V	ORWH-SH-124D1F	R

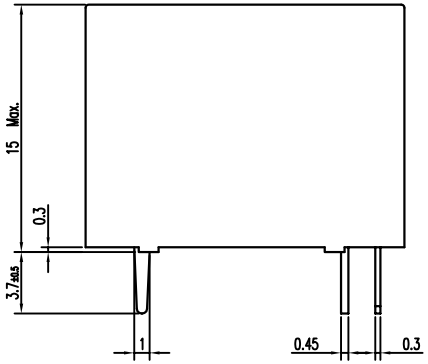

NOTE
©1.LOT NO. SYSTEM AS FOLLOWING:



Ⓑ

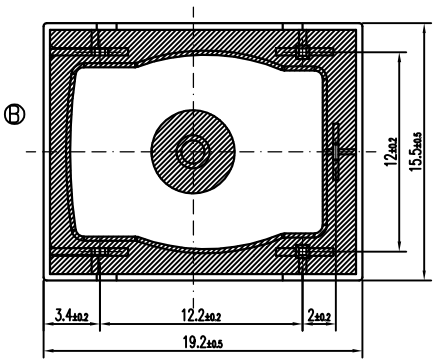

GENERAL TOLERANCE

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 – 2.99mm	±0.2mm
3mm min.	±0.3mm

		UV RESIN	UV SEAL (FOR SH)	14
		EPOXY RESIN	SEAL	13
CLASS 155 F		MW79	MAGNETIC WIRE	12
		HCP	COIL TERMINAL	11
UL94 V-0		PBT	BOBBIN	10
UL94 V-0		PBT	CASE	9
		Ag ALLOY	STATIONARY CONTACT	8
		Ag ALLOY	MOVABLE CONTACT	7
		Cu ALLOY	MOVABLE SPRING	6
		Cu ALLOY	NC TERMINAL	5
		Cu ALLOY	NO TERMINAL	4
	Cu PLATED	STEEL	CORE	3
	Cu PLATED	STEEL	ARMATURE FORM C	2
	Ni PLATED	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±

MATERIAL: SEE MATERIAL TABLE

FINISH: ———

DWN	XN.ZHANG
CHK	WAYNE.PENG
APVD	MJ.HO
PRODUCT SPEC	———
APPLICATION SPEC	———
WEIGHT	———

TE Connectivity

ORWH-1T Cd FREE CUSTOMER DRAWING

SIZE	GAGE CODE	DRAWING NO	RESTRIC TO
A3	00779	C- 1721150	

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV D