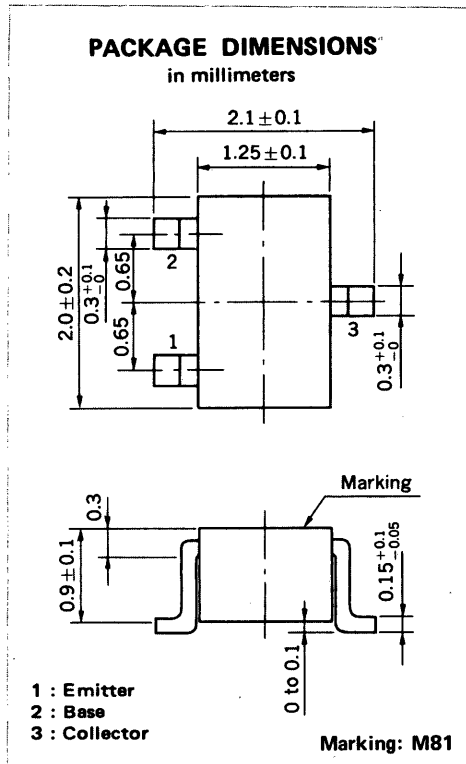
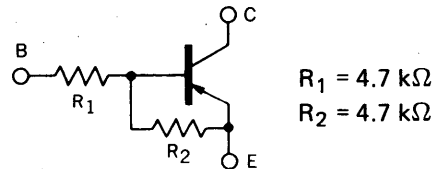


MEDIUM SPEED SWITCHING
RESISTOR BUILT-IN TYPE PNP TRANSISTOR
**FEATURES**

- Resistors Built-in TYPE



- Complementary to GA1L3M

ABSOLUTE MAXIMUM RATINGSMaximum Voltages and Currents ($T_a = 25^\circ\text{C}$)

Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-10	V
Collector Current (DC)	I_C	-100	mA
Collector Current (Pulse)	I_C	-200	mA

Maximum Power Dissipation

Total Power Dissipation

at 25°C Ambient Temperature

P_T	150	mW
-------	-----	----

Maximum Temperatures

Junction Temperature

T_j	150	$^\circ\text{C}$
-------	-----	------------------

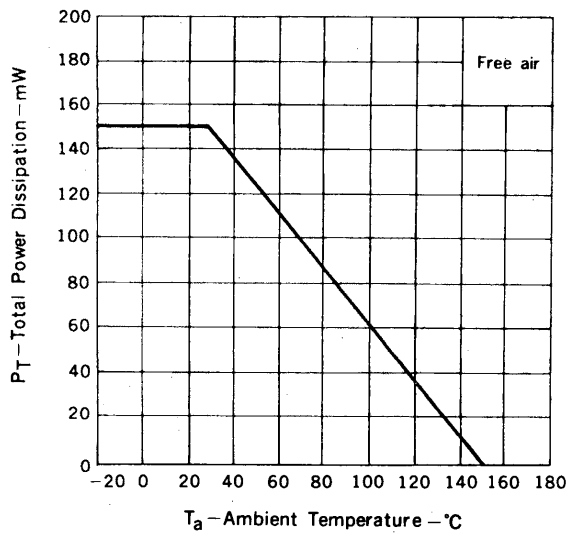
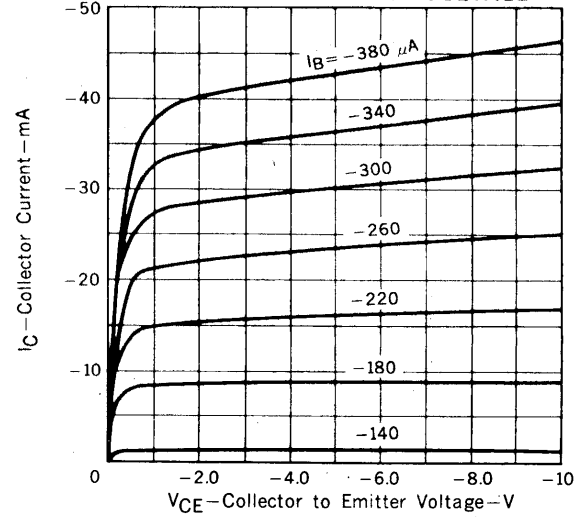
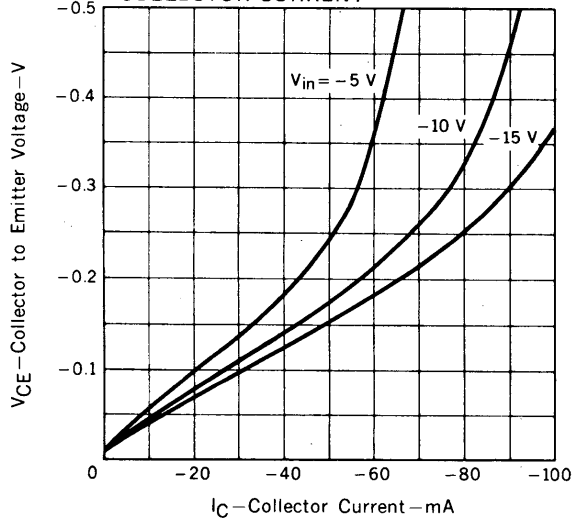
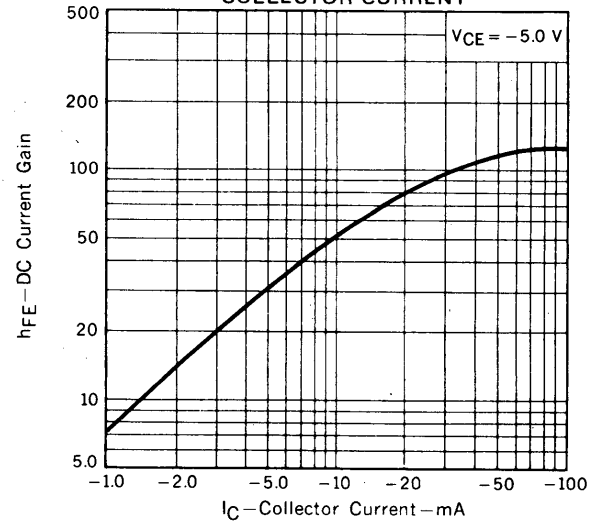
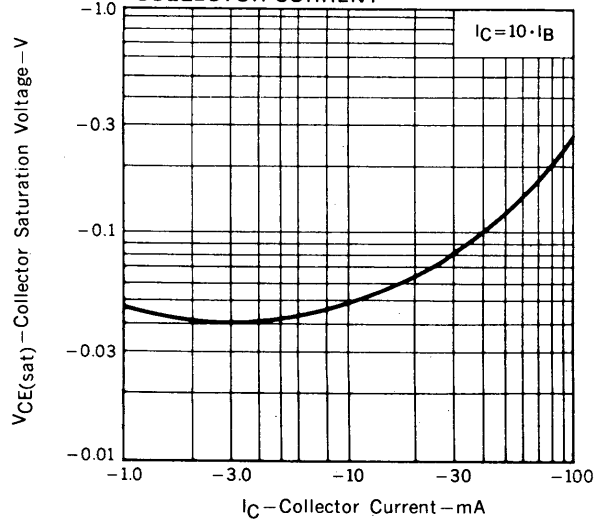
Storage Temperature Range

T_{stg}	-55 to +150	$^\circ\text{C}$
-----------	-------------	------------------

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I_{CBO}			-100	nA	$V_{CB} = -50 \text{ V}, I_E = 0$
DC Current Gain	h_{FE1}^*	20	40	80		$V_{CE} = -5.0 \text{ V}, I_C = -5.0 \text{ mA}$
DC Current Gain	h_{FE2}^*	70	110			$V_{CE} = -5.0 \text{ V}, I_C = -50 \text{ mA}$
Collector Saturation Voltage	$V_{CE(sat)}^*$		-0.08	-0.3	V	$I_C = -5.0 \text{ mA}, I_B = -0.25 \text{ mA}$
Low-Level Input Voltage	V_{IL}^*		-1.1	-0.8	V	$V_{CE} = -5.0 \text{ V}, I_C = -100 \mu\text{A}$
High-Level Input Voltage	V_{IH}^*	-3.0	-1.5		V	$V_{CE} = -0.2 \text{ V}, I_C = -5.0 \text{ mA}$
Input Resistor	R_1	3.29	4.70	6.11	k Ω	
Resistor Ratio	R_1/R_2	0.9	1.0	1.1		
Turn-on Time	t_{on}			0.5	μs	$V_{CC} = -5 \text{ V}, V_{in} = -5 \text{ V}$ $R_L = 1 \text{ k}\Omega$ $PW = 2 \mu\text{s}, \text{Duty Cycle} \leq 2 \%$
Storage Time	t_{stg}			3.0	μs	
Turn-off Time	t_{off}			5.0	μs	

* Pulsed: $PW \leq 350 \mu\text{s}$, Duty Cycle $\leq 2 \%$

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)TOTAL POWER DISSIPATION vs.
AMBIENT TEMPERATURECOLLECTOR CURRENT vs.
COLLECTOR TO EMITTER VOLTAGECOLLECTOR TO EMITTER VOLTAGE vs.
COLLECTOR CURRENTDC CURRENT GAIN vs.
COLLECTOR CURRENTCOLLECTOR SATURATION VOLTAGE vs.
COLLECTOR CURRENTINPUT VOLTAGE vs.
COLLECTOR CURRENT