

Photosensor amplifier C8366

Current-to-voltage conversion amplifier for high-speed Si PIN photodiode



Features

- Wide band
DC to 100 MHz Typ. (at -3 dB; varied by the photodiode used)
- Easy photodiode connection
Just inserting the photodiode lead pins makes the connection. (Compatible with TO-8, TO-5 and TO-18 packages)
- Adjustable response speed
Response speed can be adjusted by a trimmer potentiometer easily
- Compact size

Applications

- High-speed photometry
- Laser monitors
- Optical power meters

Absolute maximum ratings

Parameter	Symbol	Value	Unit
Supply voltage	Vs	±18	V
Operating temperature	Topr	0 to +50	°C
Storage temperature	Tstg	0 to +70	°C

Electrical and optical characteristics (Ta=25 °C, Vs= ±15 V)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Conversion impedance	Rf		-	1×10^3	-	V/A
Frequency bandwidth	fc	Limited to that of C8366	DC	1×10^8	-	Hz
Maximum output amplitude	VFS	RL=1 kΩ	+3	-	-	V
Output offset voltage	Vos	Without photodiode	-	±1	-	mV
Equivalent noise input current	In	Without photodiode, f=100 MHz	-	5×10^{-11}	-	A/Hz ^{1/2}
Output resistance	Ro		-	50	-	Ω
Photodiode reverse bias voltage output	VR		-	-12	-	V
Current consumption	Is	Without photodiode	-	-	±30	mA

Connectable Hamamatsu Si PIN photodiodes


TO-8 type: S3071

TO-5 type: S3399, S3883 *

TO-18 type: S5821 series, S5971, S5972 *, S5973 series *


* Frequency bandwidth is limited to that of C8366 when used with C8366.

■ Frequency response example (with S5972 connected)

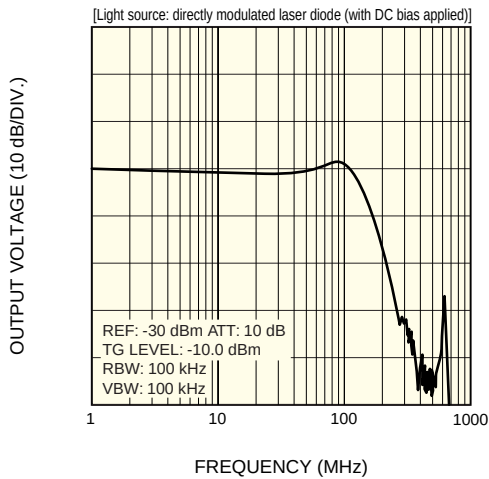

KACC80055EA


■ Output response waveform by input of step function light (with S5972 connected)

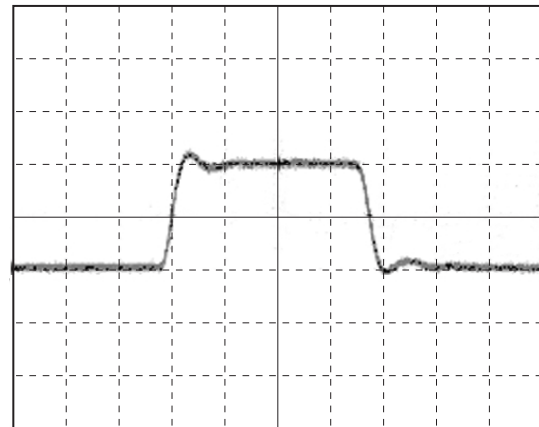

50 mV/DIV, 10 ns/DIV.

KACC80056EA

■ Dimensional outline (unit: mm)

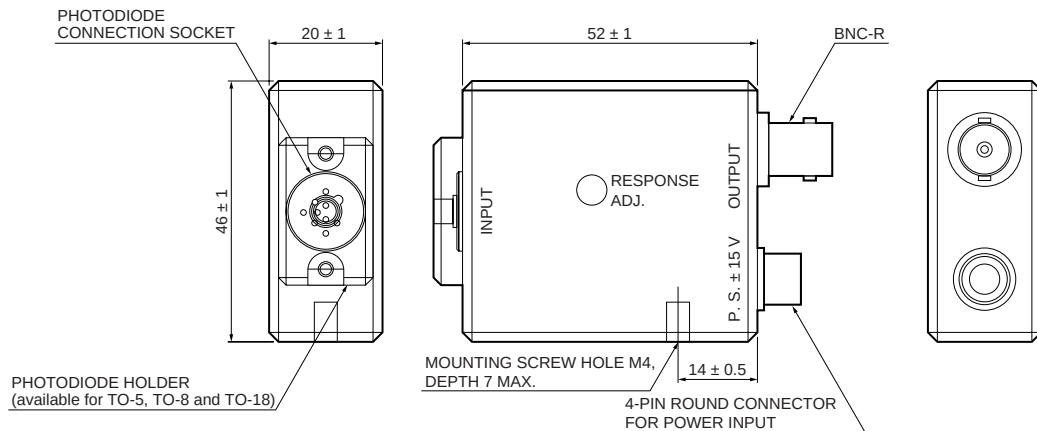

KACCA0104EA

■ Accessories

Power plug: HR10-7P-4S [HIROSE, with 500 mm long lead wires (AWG24)]

Photodiode holder: One each for TO-5, TO-8 and TO-18

HAMAMATSU

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, www.hamamatsu.com

U.S.A.: Hamamatsu Corporation, 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH, Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited, 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB, Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2006 Hamamatsu Photonics K.K.