
GENERAL DESCRIPTION

The XRT83SL216 is a fully integrated 16-channel E1 short-haul LIU which optimizes system cost and performance by offering key design features. The XRT83SL216 operates from a single 3.3V power supply. The LIU features are programmed through a standard serial microprocessor interface. EXAR's LIU has patented high impedance circuits that allow the transmitter outputs and receiver inputs to be placed in a high impedance mode when experiencing a power failure or when the LIU is powered off. Additional features include TAOS for transmit and receive, RLOS, LCV, on chip Jitter Attenuator, AIS detector, and diagnostic loopback modes.

APPLICATIONS

- ISDN Primary Rate Interface
- CSU/DSU E1 Interface
- E1 LAN/WAN Routers
- Public Switching Systems and PBX Interfaces
- E1 Multiplexer and Channel Banks
- Integrated Multi-Service Access Platforms (IMAPs)
- Integrated Access Devices (IADs)
- Inverse Multiplexing for ATM (IMA) Wireless Base Stations

FIGURE 1. BLOCK DIAGRAM OF THE XRT83SL216

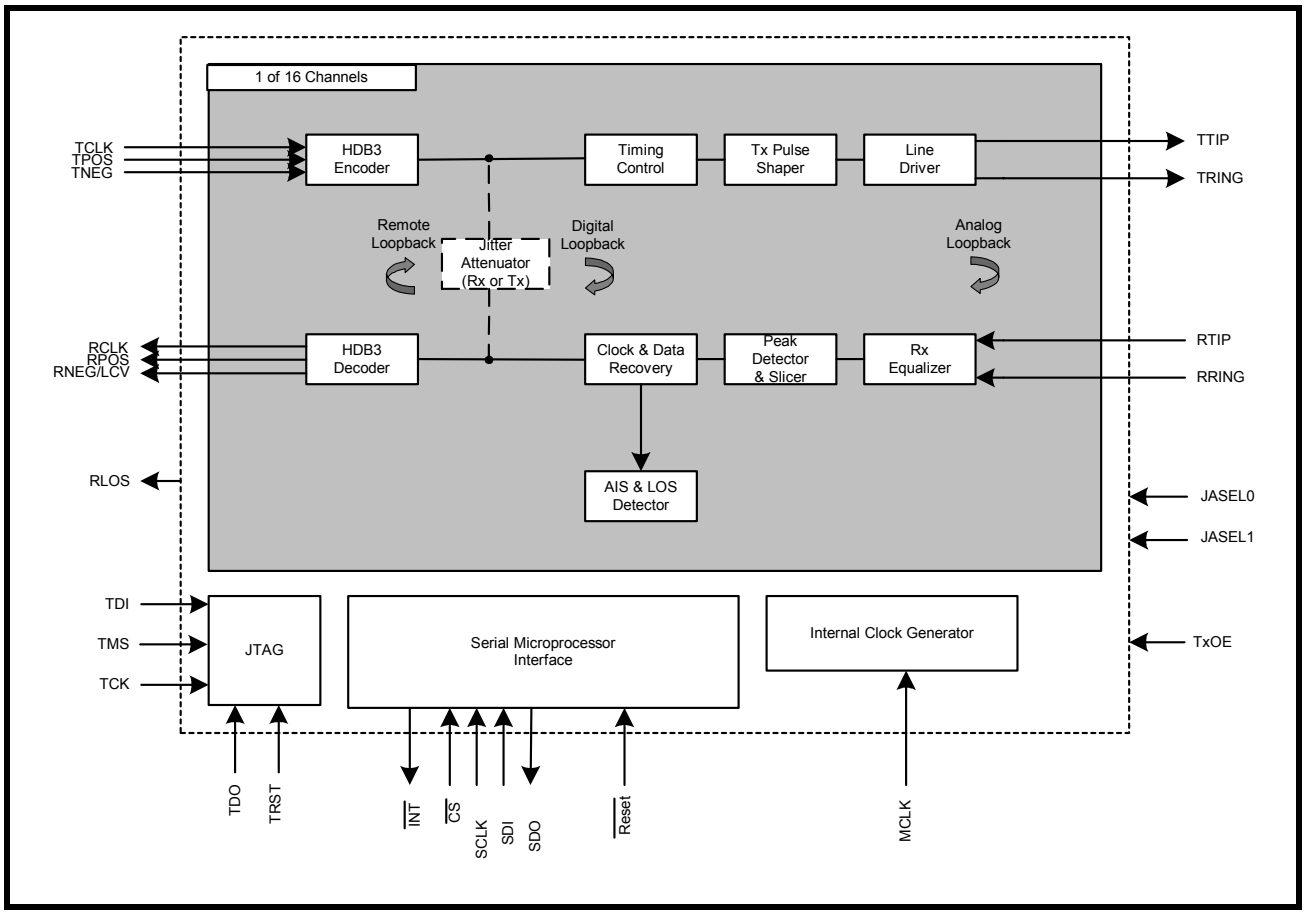

FEATURES

- Fully integrated 16-Channel short haul transceivers for E1 (2.048MHz) applications
- Tri-State on a per channel basis for the transmit selection
- Crystal-Less digital jitter attenuators (JA) with 32-Bit or 64-Bit FIFO for the receive or transmit paths
- Transmit outputs and receive inputs stay in the High Impedance mode upon power failure
- Support for automatic protection switching
- RLOS/AIS according to ITU-T G.775 or ETSI-300-233
- On-Chip HDB3 encoder/decoder for each channel
- On-Chip digital clock recovery circuit for high input jitter tolerance
- On-Chip per channel driver failure monitoring circuit
- On-Chip transmit pulse shaper for CEPT 75Ω and 120Ω line terminations
- High receiver interference immunity
- Transmit return loss meets or exceeds ETS1 300-166
- Meets or exceeds ITU G.703, G,775, G.736 and G.823
- Line code error and bipolar violation detection
- Transmit all ones (TAOS) for the Transmit and Receive Outputs
- Supports local analog, remote, and digital loopback modes
- Supports gapped clocks for mapper/multiplexer applications
- Low Power dissipation
- Single 3.3V supply operation (3V to 5V I/O tolerant)
- 289-Pin STBGA package
- -40°C to +85°C Temperature Range

PRODUCT ORDERING INFORMATION

PRODUCT NUMBER	PACKAGE TYPE	OPERATING TEMPERATURE RANGE
XRT83SL216IB	289 Ball STBGA	-40°C to +85°C

FIGURE 2. PIN OUT FOR THE XRT83SL216 (BOTTOM VIEW)

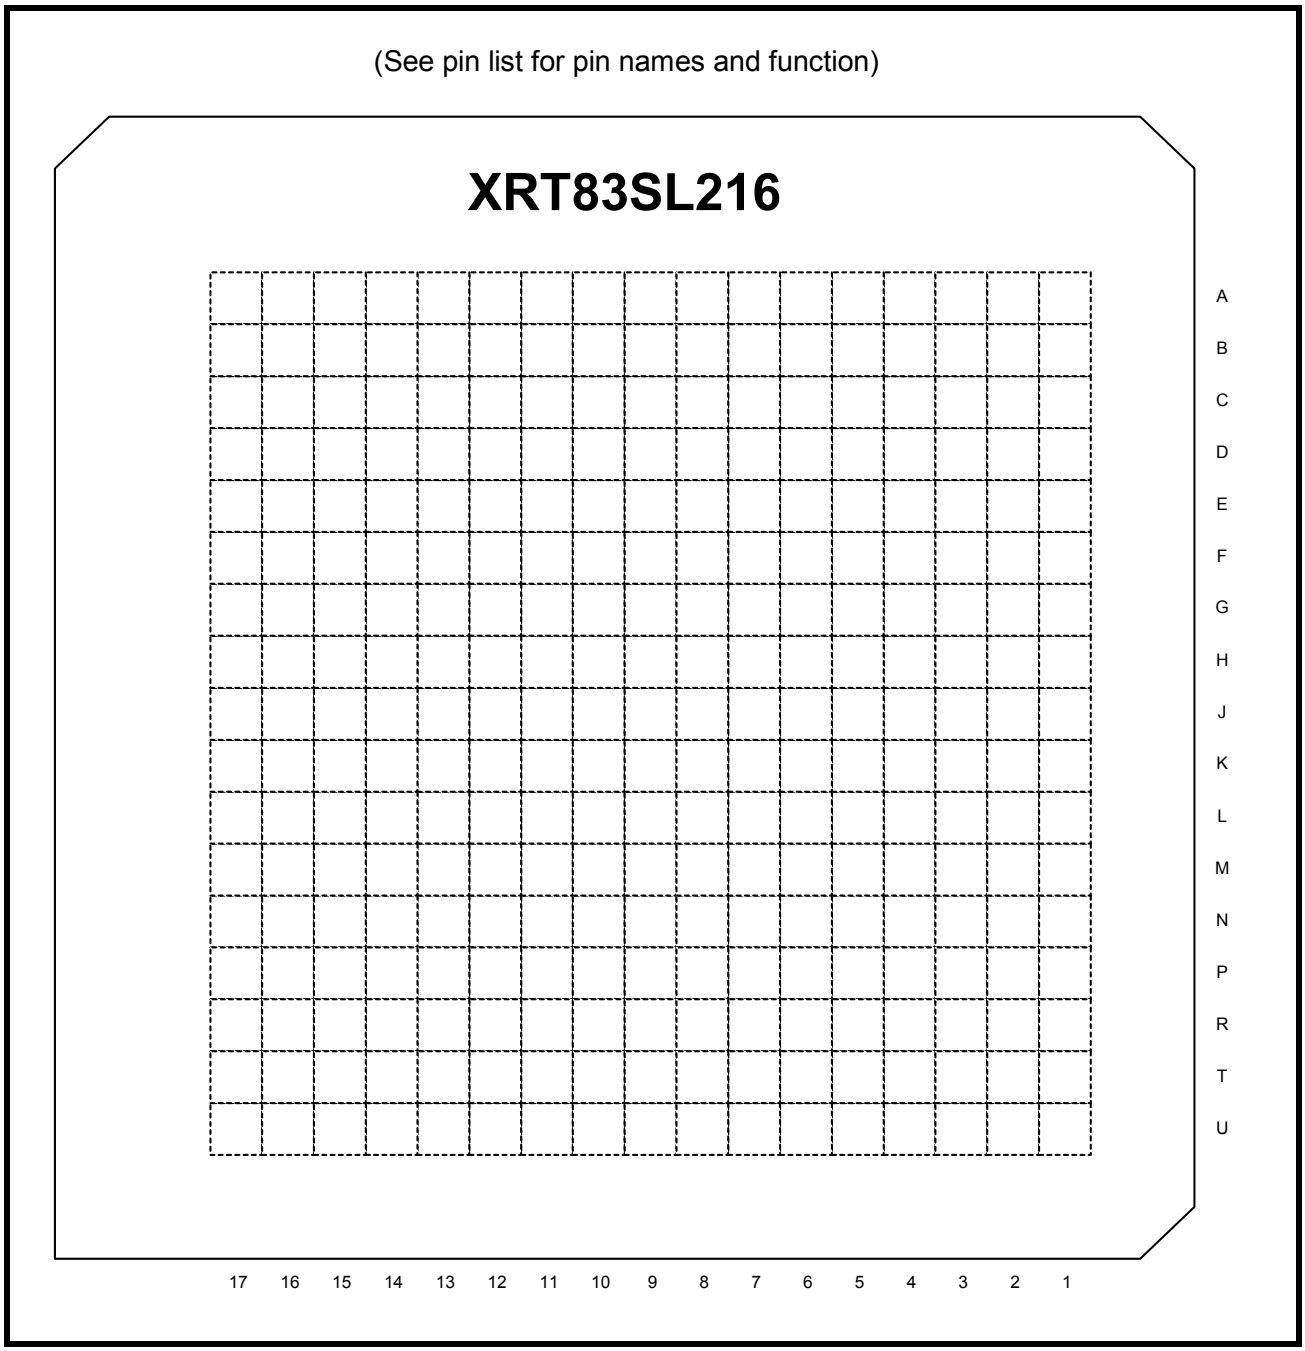


TABLE OF CONTENTS

GENERAL DESCRIPTION 1
APPLICATIONS 1
FIGURE 1. BLOCK DIAGRAM OF THE XRT83SL216 1
FEATURES 2
PRODUCT ORDERING INFORMATION 2
FIGURE 2. PIN OUT FOR THE XRT83SL216 (BOTTOM VIEW) 3
TABLE OF CONTENTS I
PIN DESCRIPTIONS 4
SERIAL MICROPROCESSOR INTERFACE 4
RECEIVER SECTION 5
TRANSMITTER SECTION 8
CONTROL FUNCTION 11
JTAG SECTION 11
POWER AND GROUND 12
1.0 RECEIVE PATH LINE INTERFACE 15
FIGURE 3. SIMPLIFIED BLOCK DIAGRAM OF THE RECEIVE PATH LINE TERMINATION (RTIP/RRING) 15
1.1 PEAK DETECTOR/DATA SLICER 15
1.2 CLOCK AND DATA RECOVERY 15
FIGURE 4. RECEIVE DATA UPDATED ON THE RISING EDGE OF RCLK 15
FIGURE 5. RECEIVE DATA UPDATED ON THE FALLING EDGE OF RCLK 15
TABLE 1: TIMING SPECIFICATIONS FOR RCLK/RPOS/RNEG 16
1.3 RECEIVE SENSITIVITY 16
FIGURE 6. TEST CONFIGURATION FOR MEASURING RECEIVE SENSITIVITY 16
1.4 GENERAL ALARM DETECTION AND INTERRUPT GENERATION 16
1.4.1 RLOS (RECEIVER LOSS OF SIGNAL) 17
1.4.2 AIS (ALARM INDICATION SIGNAL) 17
1.4.3 LCV (LINE CODE VIOLATION DETECTION) 17
1.5 RECEIVE JITTER ATTENUATOR 17
1.6 HDB3 DECODER 17
1.7 ARAOS (AUTOMATIC RECEIVE ALL ONES) 18
FIGURE 7. SIMPLIFIED BLOCK DIAGRAM OF THE ARAOS FUNCTION 18
1.8 RPOS/RNEG/RCLK 18
FIGURE 8. SINGLE RAIL MODE WITH A FIXED REPEATING "0011" PATTERN 18
FIGURE 9. DUAL RAIL MODE WITH A FIXED REPEATING "0011" PATTERN 18
2.0 TRANSMIT PATH LINE INTERFACE 19
FIGURE 10. SIMPLIFIED BLOCK DIAGRAM OF THE TRANSMIT PATH 19
2.1 TCLK/TPOS/TNEG DIGITAL INPUTS 19
FIGURE 11. TRANSMIT DATA SAMPLED ON FALLING EDGE OF TCLK 19
FIGURE 12. TRANSMIT DATA SAMPLED ON RISING EDGE OF TCLK 19
TABLE 2: TIMING SPECIFICATIONS FOR TCLK/TPOS/TNEG 20
2.2 HDB3 ENCODER 20
TABLE 3: EXAMPLES OF HDB3 ENCODING 20
2.3 TRANSMIT JITTER ATTENUATOR 20
TABLE 4: MAXIMUM GAP WIDTH FOR MULTIPLEXER/MAPPER APPLICATIONS 20
2.4 TAOS (TRANSMIT ALL ONES) 21
FIGURE 13. TAOS (TRANSMIT ALL ONES) 21
2.5 ATAOS (AUTOMATIC TRANSMIT ALL ONES) 21
FIGURE 14. SIMPLIFIED BLOCK DIAGRAM OF THE ATAOS FUNCTION 21
3.0 APPLICATIONS 22
3.1 LOOPBACK DIAGNOSTICS 22
3.1.1 LOCAL ANALOG LOOPBACK 22
FIGURE 15. SIMPLIFIED BLOCK DIAGRAM OF LOCAL ANALOG LOOPBACK 22
3.1.2 REMOTE LOOPBACK 22
FIGURE 16. SIMPLIFIED BLOCK DIAGRAM OF REMOTE LOOPBACK 22
3.1.3 DIGITAL LOOPBACK 23
FIGURE 17. SIMPLIFIED BLOCK DIAGRAM OF DIGITAL LOOPBACK 23
3.2 INTERFACING THE TRANSMIT SECTION OF THE XRT83L216 TO THE LINE 23
FIGURE 18. INTERFACING THE XRT83L216 TO THE LINE FOR 75W APPLICATIONS (1 CHANNEL SHOWN) 23
FIGURE 19. INTERFACING THE XRT83L216 TO THE LINE FOR 120 W APPLICATIONS (1CHANNEL SHOWN) 24

The following Ferrite Bead is Recommended for Use 24
The following Transformer is Recommended for Use 25
4.0 SERIAL MICROPROCESSOR INTERFACE BLOCK 26
FIGURE 20. SIMPLIFIED BLOCK DIAGRAM OF THE SERIAL MICROPROCESSOR INTERFACE 26
TABLE 5: MICROPROCESSOR REGISTER DESCRIPTION 27
TABLE 6: MICROPROCESSOR REGISTER 0X00H BIT DESCRIPTION 29
TABLE 7: MICROPROCESSOR REGISTERS 0X01H &0X02H BIT DESCRIPTION 30
TABLE 8: MICROPROCESSOR REGISTER 0X03H BIT DESCRIPTION 31
TABLE 9: MICROPROCESSOR REGISTERS 0X04H & 0X05H BIT DESCRIPTION 31
TABLE 10: MICROPROCESSOR REGISTER BIT DESCRIPTION 31
TABLE 11: MICROPROCESSOR REGISTER BIT DESCRIPTION 33
TABLE 12: MICROPROCESSOR REGISTER BIT DESCRIPTION 33
ELECTRICAL CHARACTERISTICS 35
TABLE 13: ABSOLUTE MAXIMUM RATINGS 35
TABLE 14: DC DIGITAL INPUT AND OUTPUT ELECTRICAL CHARACTERISTICS 35
TABLE 15: AC ELECTRICAL CHARACTERISTICS 35
TABLE 16: POWER CONSUMPTION 35
TABLE 17: RECEIVER ELECTRICAL CHARACTERISTICS 36
TABLE 18: E1 TRANSMITTER ELECTRICAL CHARACTERISTICS 37
ORDERING INFORMATION 38
PACKAGE DIMENSIONS 38
FIGURE 21. 15X15MM 289 BALL STBGA 38
REVISION HISTORY 39

PIN DESCRIPTIONS

HOST MODE INTERFACE

SERIAL MICROPROCESSOR INTERFACE

NAME	PIN	TYPE	DESCRIPTION
$\overline{CS}$	J4	I	**Chip Select Input** Active low signal. This signal enables the serial microprocessor interface by pulling chip select "Low". The serial interface is disabled when the chip select signal returns "High".
SCLK	J5	I	**Serial Clock Input** The serial clock input samples SDI on the rising edge and updates SDO on the falling edge. See the Serial Microprocessor section of this datasheet for more details.
SDI	K5	I	**Serial Data Input** The serial data input pin is used to supply an address and data string to program the internal registers within the device. See the Serial Microprocessor section of this datasheet for more details.
SDO	L5	O	**Serial Data Output** The serial data output pin is used to retrieve the internal contents of a selected register in readback mode. See the Microprocessor section of this datasheet for more details.
$\overline{Reset}$	J6	I	**Hardware Reset Input** Active low signal. When this pin is pulled "Low" for more than 10µS, all internal registers and state machines are set to their default state. ***NOTE:*** *Internally pulled "High" with 50kΩ.*
$\overline{INT}$	K4	O	**Interrupt Output** Active low signal. This signal is asserted "Low" when a change in alarm status occurs. Once the status registers have been read, the interrupt pin will return "High". GIE (Global Interrupt Enable) must be set "High" in the appropriate global register to enable interrupt generation. ***NOTE:*** *This pin is an open-drain output that requires an external 10KΩ pull-up resistor.*

RECEIVER SECTION

NAME	PIN	TYPE	DESCRIPTION
RLOS15 RLOS14 RLOS13 RLOS12 RLOS11 RLOS10 RLOS9 RLOS8 RLOS7 RLOS6 RLOS5 RLOS4 RLOS3 RLOS2 RLOS1 RLOS0	B10 D11 F10 B12 T12 T11 M10 R10 U8 R7 M8 T6 B6 B7 F8 C8	O	**Receive Loss of Signal** When a receive loss of signal occurs, the RLOS pin will go "High" for a minimum of one RCLK cycle. RLOS will remain "High" until the loss of signal condition clears. See the Receive Loss of Signal section of this datasheet for more details.
RCLK15 RCLK14 RCLK13 RCLK12 RCLK11 RCLK10 RCLK9 RCLK8 RCLK7 RCLK6 RCLK5 RCLK4 RCLK3 RCLK2 RCLK1 RCLK0	A10 A11 E10 A12 U12 U11 N10 P10 T8 P7 N8 U6 A6 A7 E8 D8	O	**Receive Clock Output** RCLK is the recovered clock from the incoming data stream. If the incoming signal is absent, RCLK maintains its timing by using an internal master clock as its reference. RPOS/RNEG data can be updated on either edge of RCLK selected by RCLKinv in the appropriate channel register.

RECEIVER SECTION

NAME	PIN	TYPE	DESCRIPTION
RPOS15 RPOS14 RPOS13 RPOS12 RPOS11 RPOS10 RPOS9 RPOS8 RPOS7 RPOS6 RPOS5 RPOS4 RPOS3 RPOS2 RPOS1 RPOS0	C10 C11 E11 C12 R12 R11 M11 T10 R8 T7 N7 R6 C6 C7 F7 A8	O	**RPOS/RDATA Output** Receive digital output pin. In dual rail mode, this pin is the receive positive data output. In single rail mode, this pin is the receive non-return to zero (NRZ) data output.
RNEG/LCV15 RNEG/LCV14 RNEG/LCV13 RNEG/LCV12 RNEG/LCV11 RNEG/LCV10 RNEG/LCV9 RNEG/LCV8 RNEG/LCV7 RNEG/LCV6 RNEG/LCV5 RNEG/LCV4 RNEG/LCV3 RNEG/LCV2 RNEG/LCV1 RNEG/LCV0	D10 B11 F11 D12 P12 P11 N11 U10 P8 U7 M7 P6 D6 D7 E7 B8	O	**RNEG/LCV Output** In dual rail mode, this pin is the receive negative data output. In single rail mode, this pin is a Line Code Violation indicator. If a line code violation or a bi-polar violation occur, the LCV pin will pull "High" for a minimum of one RCLK cycle. LCV will remain "High" until there are no more violations. If AMI coding is selected, every bipolar violation will cause this pin to go "High".

RECEIVER SECTION

NAME	PIN	TYPE	DESCRIPTION
RTIP15 RTIP14 RTIP13 RTIP12 RTIP11 RTIP10 RTIP9 RTIP8 RTIP7 RTIP6 RTIP5 RTIP4 RTIP3 RTIP2 RTIP1 RTIP0	B17 D17 F17 H17 K17 M17 P17 T17 T1 P1 M1 K1 H1 F1 D1 B1	I	**Receive Differential Tip Input** RTIP is the positive differential input from the line interface. Along with the RRING signal, these pins should be coupled to a 2:1 transformer for proper operation.
RRING15 RRING14 RRING13 RRING12 RRING11 RRING10 RRING9 RRING8 RRING7 RRING6 RRING5 RRING4 RRING3 RRING2 RRING1 RRING0	C17 E17 G17 J17 L17 N17 R17 T16 T2 R1 N1 L1 J1 G1 E1 C1	I	**Receive Differential Ring Input** RRING is the negative differential input from the line interface. Along with the RTIP signal, these pins should be coupled to a 2:1 transformer for proper operation.

TRANSMITTER SECTION

NAME	PIN	TYPE	DESCRIPTION
TxOE	K14	I	**Transmit Output Enable** Upon power up, the transmitters are tri-stated. Enabling the transmitters is selected through the serial microprocessor interface by programming the appropriate channel register if this pin is pulled "High". If the TxOE pin is pulled "Low", all 16 transmitters are tri-stated. ***NOTE:*** *TxOE is ideal for redundancy applications. See the Redundancy Applications Section of this datasheet for more details. Internally pulled "Low" with a 50kΩ resistor.*
TCLK15 TCLK14 TCLK13 TCLK12 TCLK11 TCLK10 TCLK9 TCLK8 TCLK7 TCLK6 TCLK5 TCLK4 TCLK3 TCLK2 TCLK1 TCLK0	A14 D13 C14 E14 N14 P13 U16 R13 R5 U2 P5 N4 E4 A3 F5 C5	I	**Transmit Clock Input** TCLK is the input facility clock used to sample the incoming TPOS/TNEG data. TPOS/TNEG data can be sampled on either edge of TCLK selected by TCLK-inv in the appropriate channel register.
TPOS15 TPOS14 TPOS13 TPOS12 TPOS11 TPOS10 TPOS9 TPOS8 TPOS7 TPOS6 TPOS5 TPOS4 TPOS3 TPOS2 TPOS1 TPOS0	B13 E13 A15 F13 M14 N13 U15 T13 T5 U3 N5 M4 D4 B4 D5 B5	I	**TPOS/TDATA Input** Transmit digital input pin. In dual rail mode, this pin is the transmit positive data input. In single rail mode, this pin is the transmit non-return to zero (NRZ) data input.

TRANSMITTER SECTION

NAME	PIN	TYPE	DESCRIPTION
TNEG15 TNEG14 TNEG13 TNEG12 TNEG11 TNEG10 TNEG9 TNEG8 TNEG7 TNEG6 TNEG5 TNEG4 TNEG3 TNEG2 TNEG1 TNEG0	A13 C13 B14 D14 L14 M13 U14 U13 U5 U4 M5 L4 C4 A4 E5 A5	I	**Transmit Negative Data Input** In dual rail mode, this pin is the transmit negative data input. In single rail mode, this pin can be tied to ground.

TRANSMITTER SECTION

NAME	PIN	TYPE	DESCRIPTION
TTIP15 TTIP14 TTIP13 TTIP12 TTIP11 TTIP10 TTIP9 TTIP8 TTIP7 TTIP6 TTIP5 TTIP4 TTIP3 TTIP2 TTIP1 TTIP0	B15 D15 F15 H15 K15 M15 P15 T14 T4 P3 M3 K3 H3 F3 D3 B3	O	**Transmit Differential Tip Output** TTIP is the positive differential output to the line interface. Along with the TRING signal, these pins should be coupled to a 1:2 step up transformer for proper operation.
TRING15 TRING14 TRING13 TRING12 TRING11 TRING10 TRING9 TRING8 TRING7 TRING6 TRING5 TRING4 TRING3 TRING2 TRING1 TRING0	C15 E15 G15 J15 L15 N15 R15 R14 R4 R3 N3 L3 J3 G3 E3 C3	O	**Transmit Differential Ring Output** TRING is the negative differential output to the line interface. Along with the TTIP signal, these pins should be coupled to a 1:2 step up transformer for proper operation.

CONTROL FUNCTION

NAME	PIN	TYPE	DESCRIPTION
JASEL0 JASEL1	G13 H13	I	**Jitter Attenuator Select:** The Jitter Attenuator can be slected to be in the Transmit or Receive path. **JASEL1** / **JASEL0** / **Jitter Attenuator State** 0 / 0 / JA Disabled 0 / 1 / JA in Tx Path 1 / 0 / JA in Rx Path 1 / 1 / JA Select is enabled through µP Control ***NOTE:*** *Internally pulled "High" with a 50kΩ resistor.*
MCLK	L6	I	**Master Clock Input** This pin is used as the internal reference to the LIU. This clock must be 2.048MHz +/-50ppm.

JTAG SECTION

NAME	PIN	TYPE	DESCRIPTION
TCK	G5	I	**JTAG Test Clock input, Boundary Scan Clock input:**
TDI	G4	I	**JTAG Test Data input, Boundary Scan Test Data Input:** ***NOTE:*** *Internally pulled "High" with a 50kΩ resistor.*
TDO	H5	O	**JTAG Test Data output:** Boundary Scan Test Data Output:
TMS	G6	I	**JTAG Test Mode Select, Boundary Scan Test Mode Select input pin:** ***NOTE:*** *Internally pulled "High" with a 50kΩ resistor.*
TRST	H4	I	**JTAG Test Mode Reset, Boundary Scan Mode Reset Input pin:** ***NOTE:*** *This input pin should be pulled "Low" for normal operation. Internally pulled "High" with a 50kΩ resistor.*

POWER AND GROUND

NAME	PIN	TYPE	DESCRIPTION
TVDD15 TVDD14 TVDD13 TVDD12 TVDD11 TVDD10 TVDD9 TVDD8 TVDD7 TVDD6 TVDD5 TVDD4 TVDD3 TVDD2 TVDD1 TVDD0	C16 E16 G16 J16 L16 N16 R16 P14 P4 R2 N2 L2 J2 G2 E2 C2	PWR	**Transmit Analog Power Supply (3.3V ±5%)** TVDD can be shared with DVDD. However, it is recommended that TVDD be isolated from the analog power supply RVDD. For best results, use an internal power plane for isolation. If an internal power plane is not available, a ferrite bead can be used. Each power supply pin should be bypassed to ground through an external 0.1μF capacitor and a 10μF capacitor.
RefVDD AVDD_pll	K12 K6	PWR	**Analog Power Supply (3.3V ±5%)** Thes analog supply pins should not be shared with other power supplies. It is recommended that they be isolated from the digital power supply, DVDD. For best results, use an internal power plane for isolation. If an internal power plane is not available, a ferrite bead can be used. Each power supply pin should be bypassed to ground through an external 0.1μF capacitor.
DVDD	A2 A17 C9 D9 H6 H12 P9 R9	PWR	**Digital Power Supply (3.3V ±5%)** DVDD should be isolated from the analog power supplies except for TVDD. For best results, use an internal power plane for isolation. If an internal power plane is not available, a ferrite bead can be used. Every two DVDD power supply pins should be bypassed to ground through at least one 0.1μF capacitor.
RVDD_1 RVDD_2	E9 F6 F9 F12 M6 M9 M12 N9	PWR	**Receive Power Supply (3.3V ±5%)** RVDD should be isolated from the digital power supplies. For best results, use an internal power plane for isolation. If an internal power plane is not available, a ferrite bead can be used. Each power supply pin should be bypassed to ground through at least one 0.1μF capacitor and a 10μF capacitor.

POWER AND GROUND

NAME	PIN	TYPE	DESCRIPTION
TGND15 TGND14 TGND13 TGND12 TGND11 TGND10 TGND9 TGND8 TGND7 TGND6 TGND5 TGND4 TGND3 TGND2 TGND1 TGND0	B16 D16 F16 H16 K16 M16 P16 T15 T3 P2 M2 K2 H2 F2 D2 B2	GND	**Transmit Analog Ground** It's recommended that all ground pins of this device be tied together and to a ground plane.
DGND	A1 A9 A16 B9 T9 U1 U9 U17	GND	**Digital Ground** It's recommended that all ground pins of this device be tied together and to a ground plane.


POWER AND GROUND

NAME	PIN	TYPE	DESCRIPTION
AGND	G7 G8 G9 G10 G11 H7 H8 H9 H10 H11 J7 J8 J9 J10 J11 K7 K8 K9 K10 K11 L7 L8 L9 L10 L11 J14	GND	**Analog Ground** It's recommended that all ground pins of this device be tied together and to a ground plane. ***NOTE:*** *J14 is a factory test pin and MUST be grounded for normal operation.*
NC	E6 E12 F4 F14 G12 G14 H14 J12 J13 K13 L12 L13 N6 N12	NC	**No Connects**

1.0 RECEIVE PATH LINE INTERFACE

The receive path consists of 16 independent E1 receivers. The following section describes the complete receive path from RTIP/RRING inputs to RCLK/RPOS/RNEG outputs. A simplified block diagram of the receive path is shown in Figure 3.

FIGURE 3. SIMPLIFIED BLOCK DIAGRAM OF THE RECEIVE PATH LINE TERMINATION (RTIP/RRING)

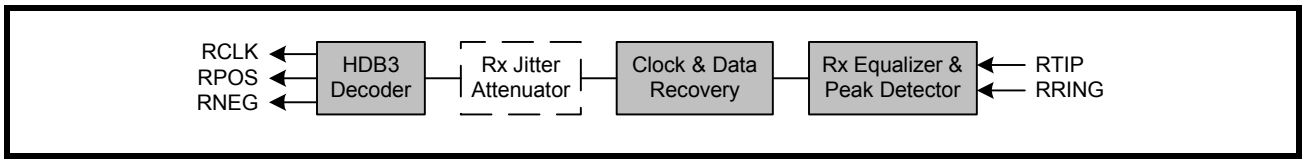

1.1 Peak Detector/Data Slicer

In the receive path, the line signal is coupled into the RTIP and RRing pins via a 2:1 transformer and are converted into digital pulses by an equalizer and an adaptive data slicer. Clock and data signals are recovered from the output of the slicer with the help of a digital PLL that provides excellent jitter accommodation for high input jitter tolerance.

1.2 Clock and Data Recovery

The receive clock (RCLK) is recovered by the clock and data recovery circuitry. An internal PLL locks on the incoming data stream and outputs a clock that's in phase with the incoming signal. In the absence of an incoming signal, RCLK maintains its timing by using MCLK as its reference. The recovered data can be updated on either edge of RCLK. By default, data is updated on the rising edge of RCLK. To update data on the falling edge of RCLK, set RCLKinv to "1" in the appropriate global register. Figure 4 is a timing diagram of the receive data updated on the rising edge of RCLK. Figure 5 is a timing diagram of the receive data updated on the falling edge of RCLK. The timing specifications are shown in Table 1.

FIGURE 4. RECEIVE DATA UPDATED ON THE RISING EDGE OF RCLK

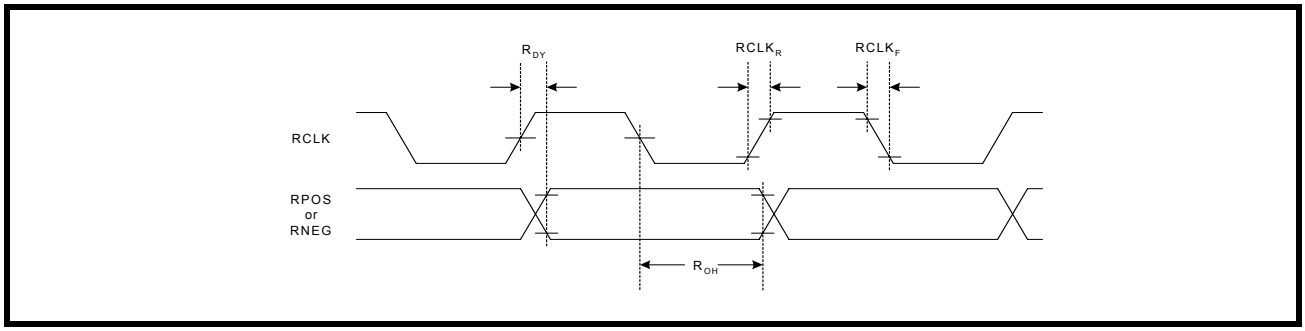


FIGURE 5. RECEIVE DATA UPDATED ON THE FALLING EDGE OF RCLK

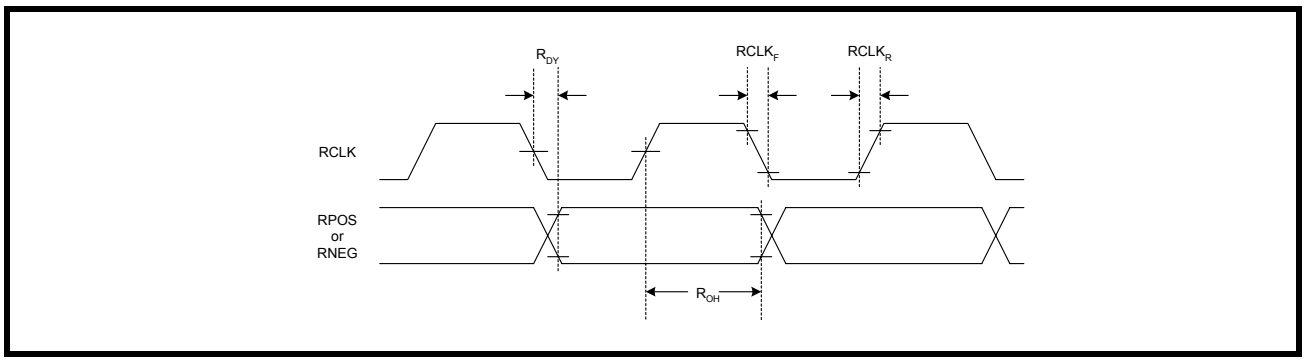


TABLE 1: TIMING SPECIFICATIONS FOR RCLK/RPOS/RNEG


PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
RCLK Duty Cycle	R_{CDU}	45	50	55	%
Receive Data Setup Time	R_{SU}	150	-	-	ns
Receive Data Hold Time	R_{HO}	150	-	-	ns
RCLK to Data Delay	R_{DY}	-	-	40	ns
RCLK Rise Time (10% to 90%) with 25pF Loading	$RCLK_R$	-	-	40	ns
RCLK Fall Time (90% to 10%) with 25pF Loading	$RCLK_F$	-	-	40	ns

NOTE: *VDD=3.3V ±5%, T_A=25°C, Unless Otherwise Specified*

1.3 Receive Sensitivity

To meet short haul requirements, the XRT83SL216 can accept E1 signals that have been attenuated by 11dB of flat loss in E1 mode. The test configuration for measuring the receive sensitivity is shown in Figure 6.

FIGURE 6. TEST CONFIGURATION FOR MEASURING RECEIVE SENSITIVITY

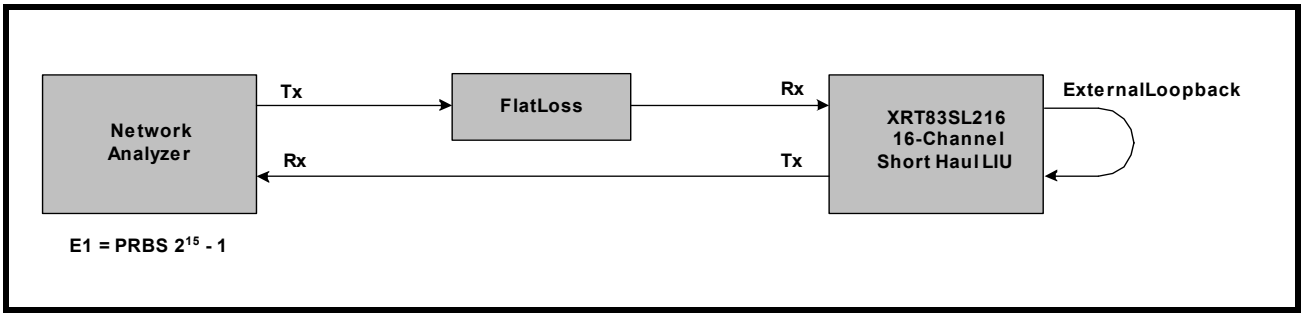

1.4 General Alarm Detection and Interrupt Generation

The receive path detects RLOS and AIS. These alarms can be individually masked to prevent the alarm from triggering an interrupt. To enable interrupt generation, the Global Interrupt Enable (GIE) bit must be set "High" in the appropriate global register. Any time a change in status occurs (if the alarms are enabled), the interrupt pin will pull "Low" to indicate an alarm has occurred. Once the status registers have been read, the $\overline{INT}$ pin will return "High". The status registers are Reset Upon Read (RUR).

NOTE: *The interrupt pin is an Open-Drain output that requires a 10kΩ pull-up resistor.*

1.4.1 RLOS (Receiver Loss of Signal)

The XRT83SL216 supports both G.775 or ETSI-300-233 RLOS detection scheme.

In G.775 mode, RLOS is declared when the received signal is less than 320mV for more than 32 consecutive pulse periods (typical). The device clears RLOS when the receive signal achieves 12.5% ones density with no more than 15 consecutive zeros in a 32 bit sliding window and the signal level exceeds 550mV (typical).

In ETSI-300-233 mode the device declares RLOS when the input level drops below 320mV (typical) for more than 2048 pulse periods (1msec). The device clears RLOS when the receive signal achieves 12.5% ones density with no more than 15 consecutive zeros in a 32 bit sliding window and the signal level exceeds 550mV (typical).

1.4.2 AIS (Alarm Indication Signal)

The XRT83SL216 adheres to ITU-T G.775 or ETSI-300-233 specifications for an all ones pattern detection by programming the appropriate channel register. The alarm indication signal is set to "1" if an all ones pattern is detected. In G.775 mode, AIS is defined as 2 or less zeros in 2 consecutive double frame (512-bit window) periods. AIS will clear when the incoming signal has 3 or more zeros in the same time period. In ETSI-300-233 mode, AIS is defined as less than 3 zeros in a 512-bit window.

1.4.3 LCV (Line Code Violation Detection)

In HDB3 mode, the LCV pin will be set to "High" if the receiver detects excessive zero's, bipolar violations or HDB3 code violations. If the device is configured in AMI mode, any bipolar violations will cause the LCV pin to go "High".

1.5 Receive Jitter Attenuator

The jitter attenuator can be configured in the receive path to reduce phase and frequency jitter in the recovered clock. The jitter attenuator uses a data FIFO (First In First Out) with a programmable depth of 32-bit or 64-bit. If the LIU is used for line synchronization (loop timing systems), the JA should be enabled. When the Read and Write pointers of the FIFO are within 2-Bits of over-flowing or under-flowing, the bandwidth of the jitter attenuator is widened to track the short term input jitter, thereby avoiding data corruption. When this condition occurs, the jitter attenuator will not attenuate input jitter until the Read/Write pointer's position is outside the 2-Bit window. The JA has a typical clock delay equal to ½ of the FIFO bit depth.

NOTE: *If the LIU is used in a multiplexer/mapper application where stuffing bits are typically removed, the JA can be configured in the transmit path to smooth out the gapped clock. See the Transmit Section of this datasheet.*


1.6 HDB3 Decoder

In single rail mode, RPOS is the output of decoded AMI or HDB3 signals and RNEG is the LCV output. HDB3 data is defined as any block of 4 successive zeros replaced with OOOV or BOOV, so that two successive V pulses are of opposite polarity to acheive zero DC offset. If the HDB3 decoder is selected, the receive path removes the V and B pulses so that the original data is output to RPOS.

1.7 ARAOS (Automatic Receive All Ones)

If ARAOS is enabled in the appropriate channel register and an RLOS condition occurs, the Receiver outputs will generate an All Ones pattern using MCLK as reference. When RLOS clears, the All Ones pattern ends and the Receive path returns to normal operation.

FIGURE 7. SIMPLIFIED BLOCK DIAGRAM OF THE ARAOS FUNCTION

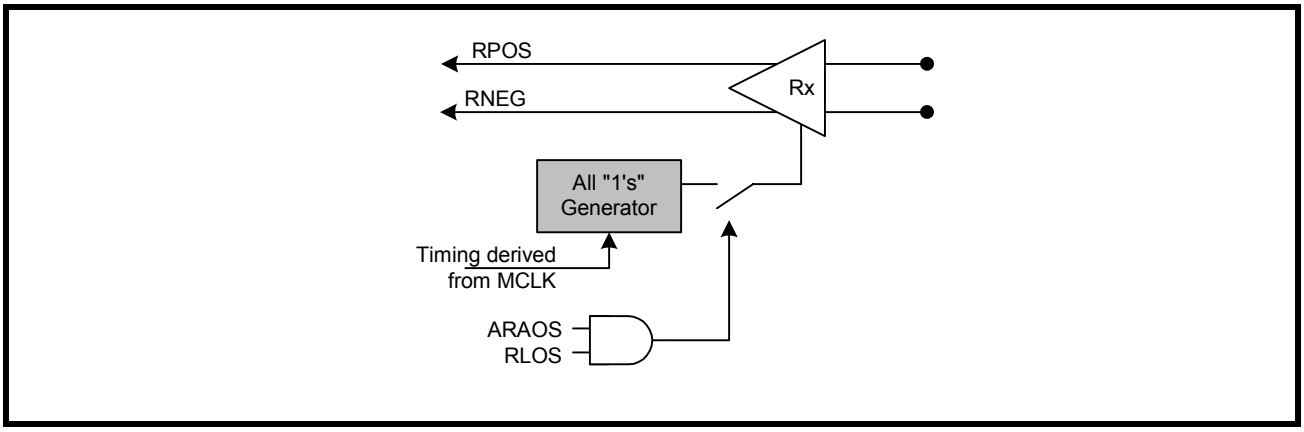

1.8 RPOS/RNEG/RCLK

The digital output data can be programmed to either single rail or dual rail formats. Figure 8 is a timing diagram of a repeating "0011" pattern in single-rail mode. Figure 9 is a timing diagram of the same fixed pattern in dual rail mode.

FIGURE 8. SINGLE RAIL MODE WITH A FIXED REPEATING "0011" PATTERN


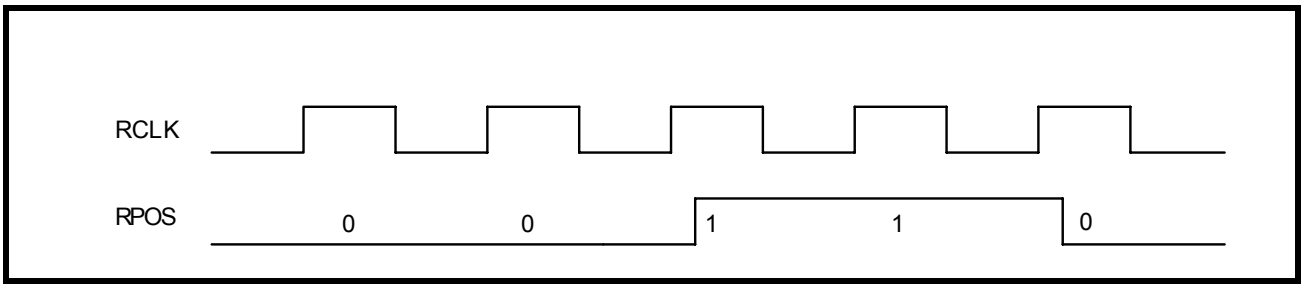



FIGURE 9. DUAL RAIL MODE WITH A FIXED REPEATING "0011" PATTERN

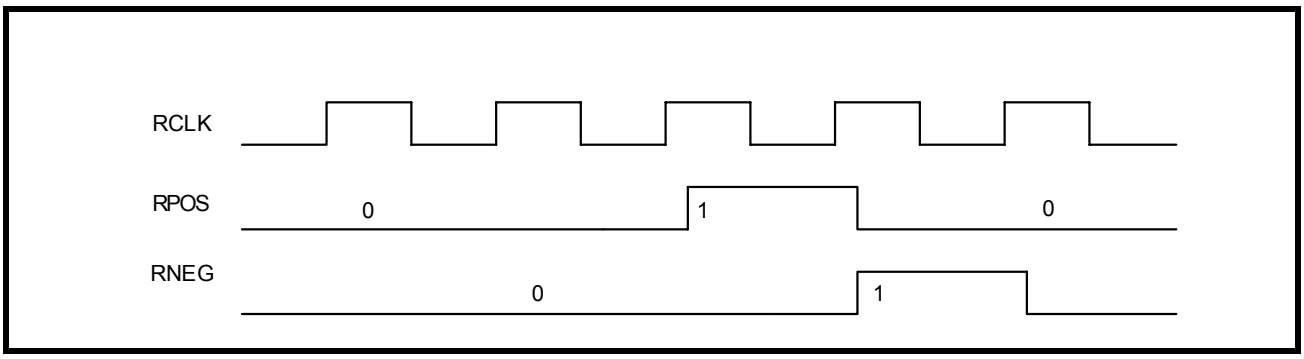

2.0 TRANSMIT PATH LINE INTERFACE

The transmit path consists of 16 independent E1 transmitters. The following section describes the complete transmit path from TCLK/TPOS/TNEG inputs to TTIP/TRING outputs. A simplified block diagram of the transmit path is shown in Figure 10.

FIGURE 10. SIMPLIFIED BLOCK DIAGRAM OF THE TRANSMIT PATH

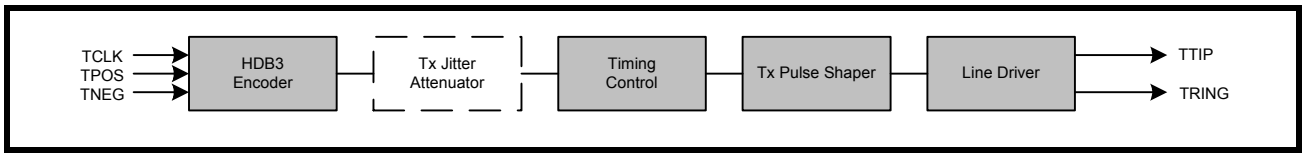

2.1 TCLK/TPOS/TNEG Digital Inputs

In dual rail mode, TPOS and TNEG are the digital inputs for the transmit path. In single rail mode, TNEG can be tied to ground. The XRT83SL216 can be programmed to sample the inputs on either edge of TCLK. By default, data is sampled on the falling edge of TCLK. To sample data on the rising edge of TCLK, set TCLKinv to "1" in the appropriate global register. Figure 11 is a timing diagram of the transmit input data sampled on the falling edge of TCLK. Figure 12 is a timing diagram of the transmit input data sampled on the rising edge of TCLK. The timing specifications are shown in Table 2.

FIGURE 11. TRANSMIT DATA SAMPLED ON FALLING EDGE OF TCLK

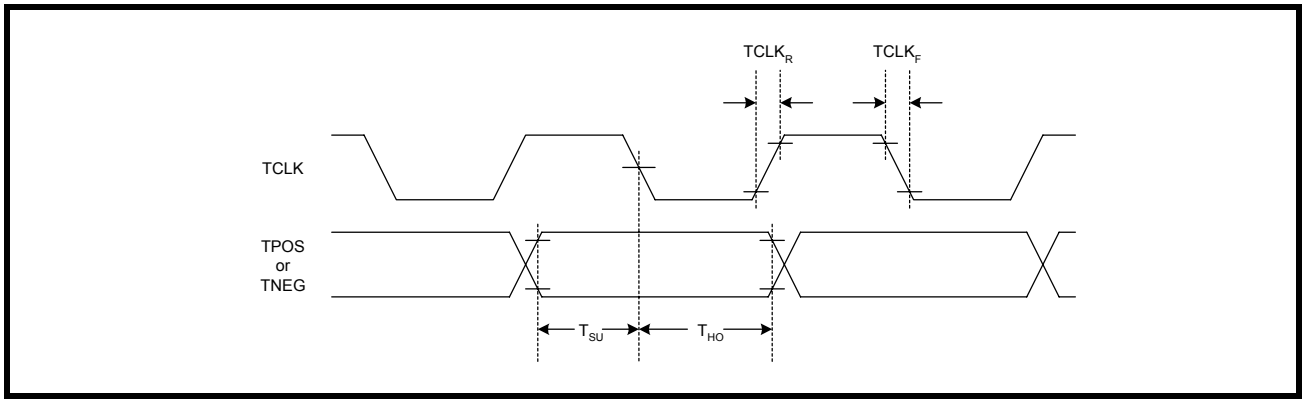


FIGURE 12. TRANSMIT DATA SAMPLED ON RISING EDGE OF TCLK

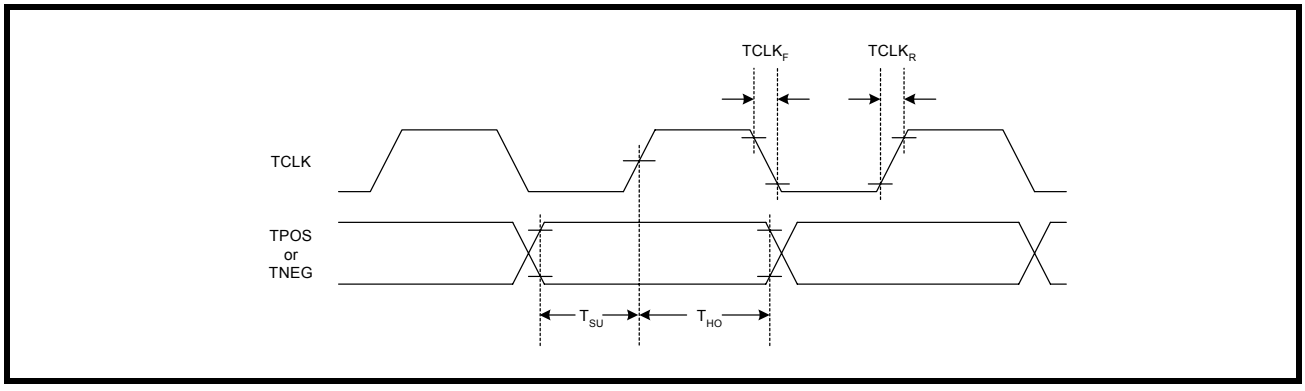


TABLE 2: TIMING SPECIFICATIONS FOR TCLK/TPOS/TNEG

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS
TCLK Duty Cycle	T_{CDU}	30	50	70	%
Transmit Data Setup Time	T_{SU}	50	-	-	ns
Transmit Data Hold Time	T_{HO}	30	-	-	ns
TCLK Rise Time (10% to 90%)	$TCLK_R$	-	-	40	ns
TCLK Fall Time (90% to 10%)	$TCLK_F$	-	-	40	ns

NOTE: *VDD=3.3V ±5%, T_A=25°C, Unless Otherwise Specified*

2.2 HDB3 Encoder

In single rail mode, the LIU can encode the TPOS input signal to AMI or HDB3 data. If HDB3 encoding is selected, any sequence with four or more consecutive zeros in the input will be replaced with 000V or B00V, where "B" indicates a pulse conforming to the bipolar rule and "V" representing a pulse violating the rule. An example of HDB3 encoding is shown in Table 3.

TABLE 3: EXAMPLES OF HDB3 ENCODING

	NUMBER OF PULSES BEFORE NEXT 4 ZEROS	
Input		0000
HDB3 (Case 1)	Odd	000V
HDB3 (Case 2)	Even	B00V

2.3 Transmit Jitter Attenuator

The XRT83SL216 LIU is ideal for multiplexer or mapper applications where the network data crosses multiple timing domains. As the higher data rates are de-multiplexed to E1 data, stuffing bits are typically removed which can leave gaps in the incoming data stream. The JA can be configured in the transmit path with a 32-Bit or 64-Bit FIFO that is used to smooth the gapped clock into a steady E1 output. The maximum gap width the JA in the Transmit path can tolerate is shown in Table 4.

TABLE 4: MAXIMUM GAP WIDTH FOR MULTIPLEXER/MAPPER APPLICATIONS


FIFO DEPTH	MAXIMUM GAP WIDTH
32-Bit	20 UI
64-Bit	50 UI

NOTE: *If the LIU is used in a loop timing system, the JA should be configured in the receive path. See the Receive Section of this datasheet.*

2.4 TAOS (Transmit All Ones)

The XRT83SL216 has the ability to transmit all ones on a per channel basis by programming the appropriate channel register. If TAOS is enabled, the Transmitter outputs will generate an All Ones pattern regardless of the Transmit Input data. The Remote Loop Back mode has priority over TAOS. Figure 13 is a diagram showing the all ones signal at TTIP and TRING.


FIGURE 13. TAOS (TRANSMIT ALL ONES)

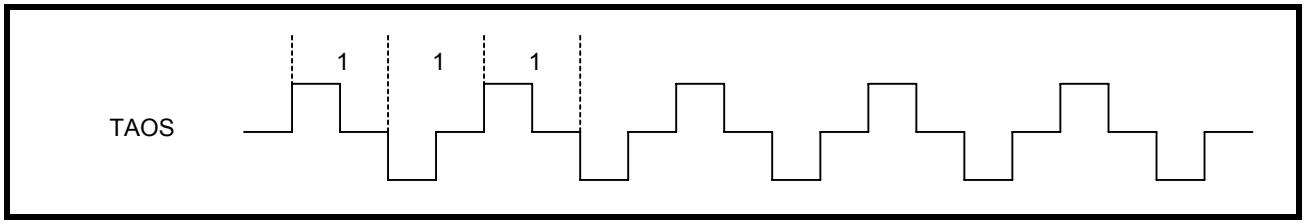

2.5 ATAOS (Automatic Transmit All Ones)

ATAOS is used to generate an All Ones signal only when an RLOS condition occurs. If ATAOS is enabled, any channel that experiences an RLOS condition will automatically cause the transmitter on that channel to send an All Ones Pattern to the line using MCLK as reference. When RLOS clears, the All Ones pattern ends and the Transmit path returns to normal operation.

FIGURE 14. SIMPLIFIED BLOCK DIAGRAM OF THE ATAOS FUNCTION

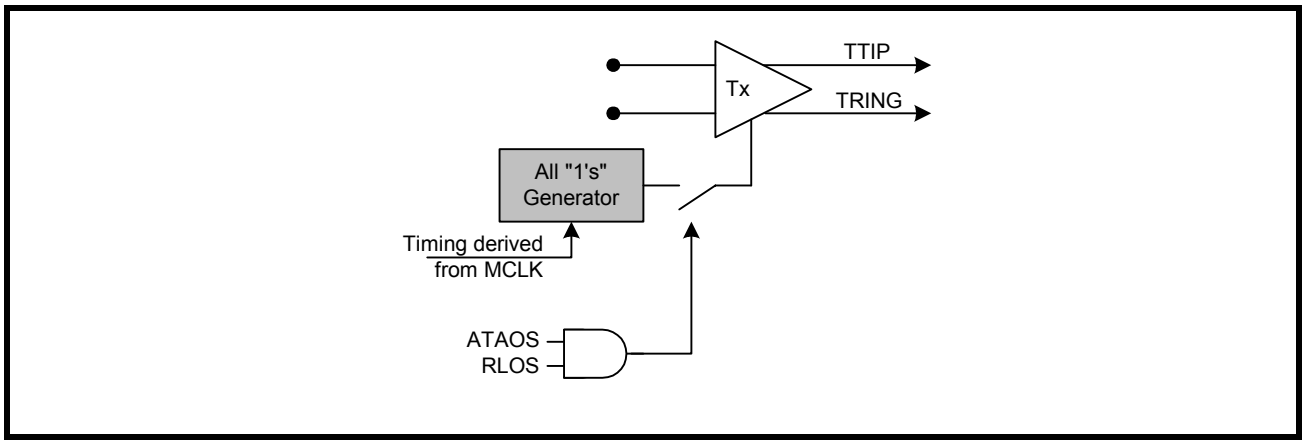

3.0 APPLICATIONS

This applications section describes system considerations along with references to application notes available for reference where applicable.


3.1 Loopback Diagnostics

The XRT83SL216 supports several loopback modes for diagnostic testing. The following section describes the local analog loopback, remote loopback, and digital loopback.

3.1.1 Local Analog Loopback

With local analog loopback activated, the transmit output data at TTIP/TRING is internally looped back to the analog inputs at RTIP/RRING. External inputs at RTIP/RRING are ignored while valid transmit output data continues to be sent to the line. A simplified block diagram of local analog loopback is shown in Figure 15.

FIGURE 15. SIMPLIFIED BLOCK DIAGRAM OF LOCAL ANALOG LOOPBACK

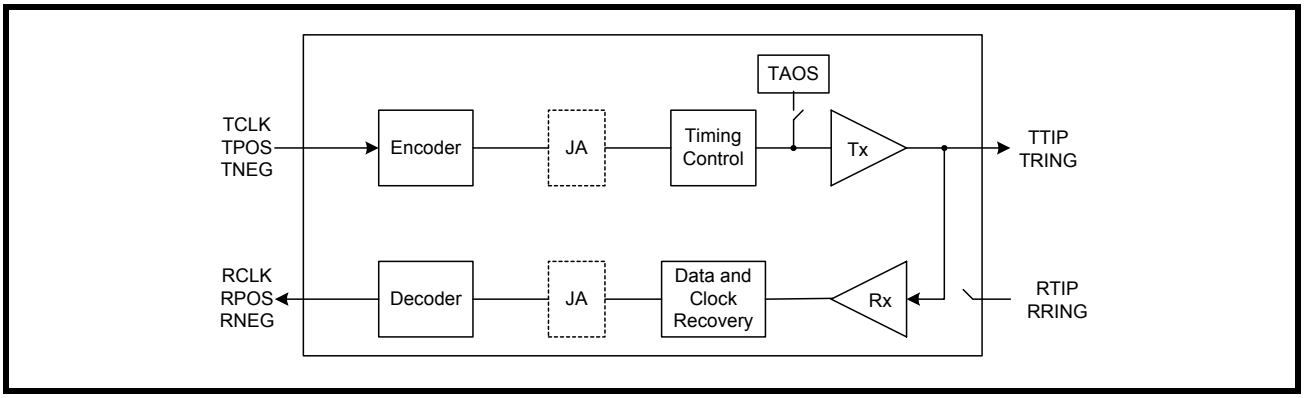


NOTE: *TAOS takes priority over the transmit input data at TPOS/TNEG.*

3.1.2 Remote Loopback

With remote loopback activated, the receive input data at RTIP/RRING is internally looped back to the transmit output data at TTIP/TRING. The transmit input data at TCLK/TPOS/TNEG are ignored while valid receive output data continues to be sent to the system. A simplified block diagram of remote loopback is shown in Figure 16.

FIGURE 16. SIMPLIFIED BLOCK DIAGRAM OF REMOTE LOOPBACK

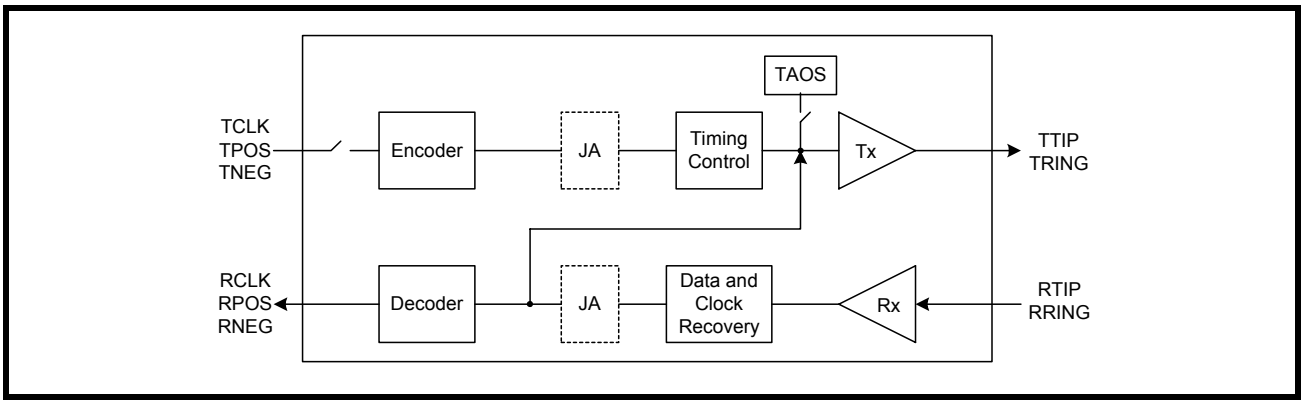


NOTE: *Remote Loop Back takes priority over TAOS.*

3.1.3 Digital Loopback

With digital loopback activated, the transmit input data at TCLK/TPOS/TNEG is looped back to the receive output data at RCLK/RPOS/RNEG. The receive input data at RTIP/RRING is ignored while valid transmit output data continues to be sent to the line. A simplified block diagram of digital loopback is shown in Figure 17.

FIGURE 17. SIMPLIFIED BLOCK DIAGRAM OF DIGITAL LOOPBACK

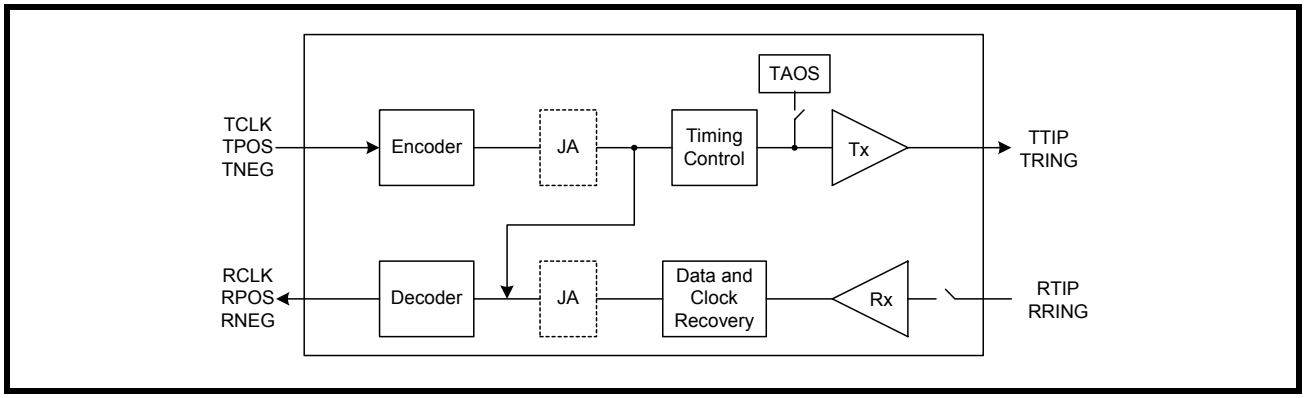

3.2 Interfacing the Transmit Section of the XRT83L216 to the Line

ITU-T G.703 specifies that the E1 line signal can be transmitted over coaxial cable and terminated with 75Ω or transmitted over twisted-pair and terminated with 120Ω.

In both applications (e.g., 75Ω or 120Ω, the user is advised to interface the Transmitter to the Line, in the manner as depicted in Figure 18 and Figure 19, respectively.

FIGURE 18. INTERFACING THE XRT83L216 TO THE LINE FOR 75Ω APPLICATIONS (1 CHANNEL SHOWN)


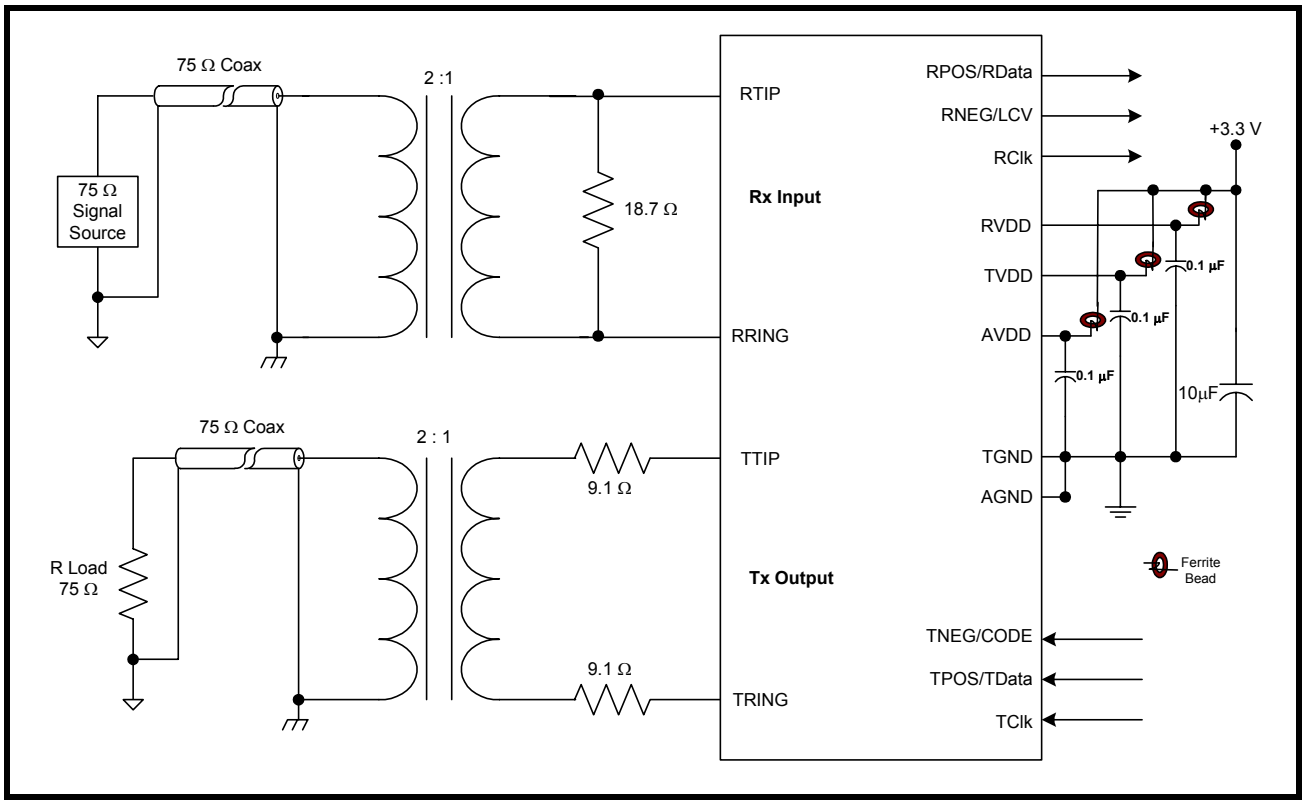


FIGURE 19. INTERFACING THE XRT83L216 TO THE LINE FOR 120 Ω APPLICATIONS (1CHANNEL SHOWN)

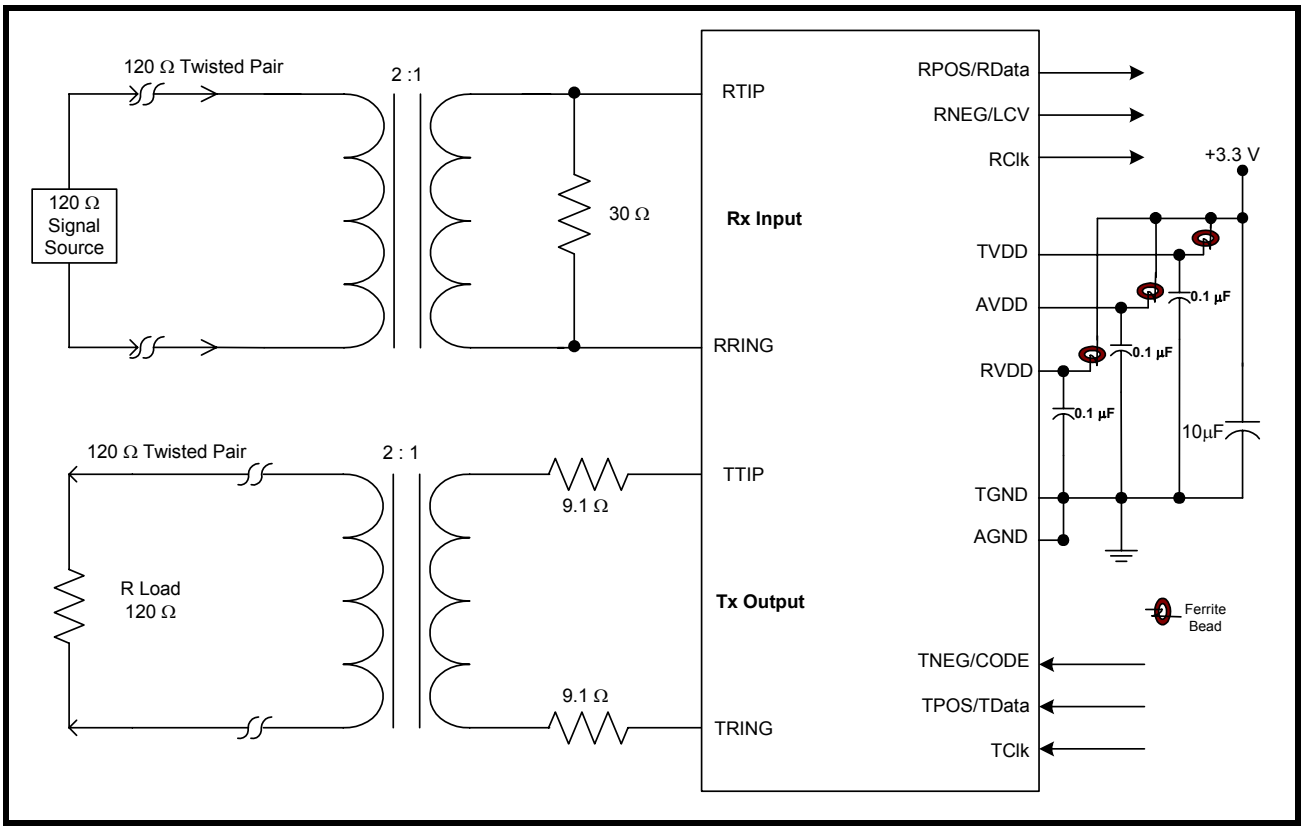

THE FOLLOWING FERRITE BEAD IS RECOMMENDED FOR USE

PART NUMBER	VENDOR	TYP. IMPEDANCE @ 100MHZ	TYP. IMPEDANCE @ 200MHZ
HZ0402A601r-00	Steward	600Ω	925Ω

Supplier Information

Steward		
Corporate Office	***Europe***	***Asia***
P.O. Box 510	Brucefield Industrial Park	3791 Jalan Bukit Merah
Chattanooga, TN 37401-510	Livingston EH%$ 9DR	#10-14 E-Centre @ Redhill
Phone: +1 (423) 308-1690	Scotland, UK	Singapore 159471
Phone: (800) 634-2673 - Toll Free	Phone +44-[0]1-506-414200	Phone: +65-6272-2646
Fax: +1 (423) 308-1622	Fax: +44-[0]1-506-410694	Fax: +65-6272-6165

THE FOLLOWING TRANSFORMER IS RECOMMENDED FOR USE

PART NUMBER	VENDOR	TURNS RATIO	PACKAGE TYPE
T1113	Pulse	1:2 Transmit 2:1 Receive	TOU 2

Magnetic Supplier Information

Supplier Information

PULSE		
Corporate Office	***Europe***	***Asia***
12220 World Trade Drive San Diego, CA 92128 Tel: (619)-674-8100 FAX: (619)-674-8262	1 & 2 Huxley Road The Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom Tel: 44-1483-401700 FAX: 44-1483-401701	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 Tel: 65-287-8998 FAX: 65-280-0080

4.0 SERIAL MICROPROCESSOR INTERFACE BLOCK

The serial microprocessor uses a standard 3-pin serial port with $\overline{CS}$, SCLK, and SDI for programming the LIU. Optional pins such as SDO, $\overline{INT}$, and $\overline{RESET}$ allow the ability to read back contents of the registers, monitor the LIU via an interrupt pin, and reset the LIU to its default configuration by pulling reset "Low" for more than 10μS. A simplified block diagram of the Serial Microprocessor is shown in Figure 20.

FIGURE 20. SIMPLIFIED BLOCK DIAGRAM OF THE SERIAL MICROPROCESSOR INTERFACE

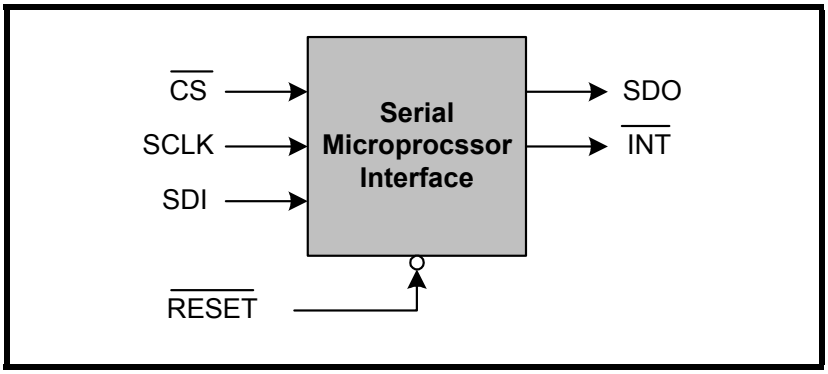


TABLE 5: MICROPROCESSOR REGISTER DESCRIPTION

REG	ADDR	TYPE	D7	D6	D5	D4	D3	D2	D1	D0
Global Control Register for All 16 Channels (0x00h)										
0	0x00	R/W	GIE	Reserved	SR/$\overline{DR}$	CODE	FIFO	JABW	JASEL1	JASEL0
1	0x01	RO	INTS7	INTS6	INTS5	INTS4	INTS3	INTS2	INTS1	INTS0
2	0x02	RO	INTS15	INTS14	INTS13	INTS12	INTS11	INTS10	INTS9	INTS8
3	0x03	RO	**Revision ID (See Bit Description)**							
4	0x04	RO	**Device ID (See Bit Description)**							
5	0x05	RO	**Device ID (See Bit Description)**							
Channel 0 Control Register (0x04h - 0x06h)										
6	0x06	R/W	SRES_0 *	ARAOS_0	ATAOS_0	TAOS_0	RLAM_0	TXOE_0	RCLKinv_0	TCLKinv_0
7	0x07	R/W	Reserved	AISIE_0	DMOIE_0	RLOSIE_0	Reserved	Reserved	LPB1	LPB0
8	0x08	RUR/ RO	Reserved	AISIS_0	DMOIS_0	RLOSIS_0	Reserved	AISS_0	DMOS_0	RLOSS_0
Channel 1 Control Register (0x07h - 0x09h)										
9	0x09	R/W	SRES_1 *	ARAOS_1	ATAOS_1	TAOS_1	RLAM_1	TXOE_1	RCLKinv_1	TCLKinv_1
10	0x0A	R/W	Reserved	AISIE_1	DMOIE_1	RLOSIE_1	Reserved	Reserved	LPB1	LPB0
11	0x0B	RUR/ RO	Reserved	AISIS_1	DMOIS_1	RLOSIS_1	Reserved	AISS_1	DMOS_1	RLOSS_1
Channel 2 Control Register (0x0Ah - 0x0Ch)										
12	0x0C	R/W	SRES_2 *	ARAOS_2	ATAOS_2	TAOS_2	RLAM_2	TXOE_2	RCLKinv_2	TCLKinv_2
13	0x0D	R/W	Reserved	AISIE_2	DMOIE_2	RLOSIE_2	Reserved	Reserved	LPB1	LPB0
14	0X0E	RUR/ RO	Reserved	AISIS_2	DMOIS_2	RLOSIS_2	Reserved	AISS_2	DMOS_2	RLOSS_2
Channel 3 Control Register (0x0Dh - 0x0Fh)										
15	0x0F	R/W	SRES_3 *	ARAOS_3	ATAOS_3	TAOS_3	RLAM_3	TXOE_3	RCLKinv_3	TCLKinv_3
16	0x10	R/W	Reserved	AISIE_3	DMOIE_3	RLOSIE_3	Reserved	Reserved	LPB1	LPB0
17	0x11	RUR/ RO	Reserved	AISIS_3	DMOIS_3	RLOSIS_3	Reserved	AISS_3	DMOS_3	RLOSS_3
Channel 4 Control Register (0x10h - 0x12h)										
18	0x12	R/W	SRES_4 *	ARAOS_4	ATAOS_4	TAOS_4	RLAM_4	TXOE_4	RCLKinv_4	TCLKinv_4
19	0x13	R/W	Reserved	AISIE_4	DMOIE_4	RLOSIE_4	Reserved	Reserved	LPB1	LPB0
20	0x14	RUR/ RO	Reserved	AISIS_4	DMOIS_4	RLOSIS_4	Reserved	AISS_4	DMOS_4	RLOSS_4
Channel 5 Control Register (0x13h - 0x15h)										
21	0x15	R/W	SRES_5 *	ARAOS_5	ATAOS_5	TAOS_5	RLAM_5	TXOE_5	RCLKinv_5	TCLKinv_5
22	0x16	R/W	Reserved	AISIE_5	DMOIE_5	RLOSIE_5	Reserved	Reserved	LPB1	LPB0
23	0x17	RUR/ RO	Reserved	AISIS_5	DMOIS_5	RLOSIS_5	Reserved	AISS_5	DMOS_5	RLOSS_5
Channel 6 Control Register (0x16h - 0x18h)										

TABLE 5: MICROPROCESSOR REGISTER DESCRIPTION

REG	ADDR	TYPE	D7	D6	D5	D4	D3	D2	D1	D0
24	0x18	R/W	SRES_6 *	ARAOS_6	ATAOS_6	TAOS_6	RLAM_6	TXOE_6	RCLKinv_6	TCLKinv_6
25	0x19	R/W	Reserved	AISIE_6	DMOIE_6	RLOSIE_6	Reserved	Reserved	LPB1	LPB0
26	0x1A	RUR/ RO	Reserved	AISIS_6	DMOIS_6	RLOSIS_6	Reserved	AISS_6	DMOS_6	RLOSS_6
Channel 7 Control Register (0x19h - 0x1Bh)										
27	0x1B	R/W	SRES_7 *	ARAOS_7	ATAOS_7	TAOS_7	RLAM_7	TXOE_7	RCLKinv_7	TCLKinv_7
28	0x1C	R/W	Reserved	AISIE_7	DMOIE_7	RLOSIE_7	Reserved	Reserved	LPB1	LPB0
29	0x1D	RUR/ RO	Reserved	AISIS_7	DMOIS_7	RLOSIS_7	Reserved	AISS_7	DMOS_7	RLOSS_7
Channel 8 Control Register (0x1Ch - 0x1Eh)										
30	0x1E	R/W	SRES_8 *	ARAOS_8	ATAOS_8	TAOS_8	RLAM_8	TXOE_8	RCLKinv_8	TCLKinv_8
31	0x1F	R/W	Reserved	AISIE_8	DMOIE_8	RLOSIE_8	Reserved	Reserved	LPB1	LPB0
32	0x20	RUR/ RO	Reserved	AISIS_8	DMOIS_8	RLOSIS_8	Reserved	AISS_8	DMOS_8	RLOSS_8
Channel 9 Control Register (0x1Fh - 0x21h)										
33	0x21	R/W	SRES_9 *	ARAOS_9	ATAOS_9	TAOS_9	RLAM_9	TXOE_9	RCLKinv_9	TCLKinv_9
34	0x22	R/W	Reserved	AISIE_9	DMOIE_9	RLOSIE_9	Reserved	Reserved	LPB1	LPB0
35	0x23	RUR/ RO	Reserved	AISIS_9	DMOIS_9	RLOSIS_9	Reserved	AISS_9	DMOS_9	RLOSS_9
Channel 10 Control Register (0x22h - 0x24h)										
36	0x24	R/W	SRES_10 *	ARAOS_10	ATAOS_10	TAOS_10	RLAM_10	TXOE_10	RCLKinv_10	TCLKinv_10
37	0x25	R/W	Reserved	AISIE_10	DMOIE_10	RLOSIE_10	Reserved	Reserved	LPB1	LPB0
38	0x26	RUR/ RO	Reserved	AISIS_10	DMOIS_10	RLOSIS_10	Reserved	AISS_10	DMOS_10	RLOSS_10
Channel 11 Control Register (0x25h - 0x27h)										
39	0x27	R/W	SRES_11 *	ARAOS_11	ATAOS_11	TAOS_11	RLAM_11	TXOE_11	RCLKinv_11	TCLKinv_11
40	0x28	R/W	Reserved	AISIE_11	DMOIE_11	RLOSIE_11	Reserved	Reserved	LPB1	LPB0
41	0x29	RUR/ RO	Reserved	AISIS_11	DMOIS_11	RLOSIS_11	Reserved	AISS_11	DMOS_11	RLOSS_11
Channel 12 Control Register (0x28h - 0x2Ah)										
42	0x2A	R/W	SRES_12 *	ARAOS_12	ATAOS_12	TAOS_12	RLAM_12	TXOE_12	RCLKinv_12	TCLKinv_12
43	0x2B	R/W	Reserved	AISIE_12	DMOIE_12	RLOSIE_12	Reserved	Reserved	LPB1	LPB0
44	0x2C	RUR/ RO	Reserved	AISIS_12	DMOIS_12	RLOSIS_12	Reserved	AISS_12	DMOS_12	RLOSS_12
Channel 13 Control Register (0x2Bh - 0x2Dh)										
45	0x2D	R/W	SRES_13 *	ARAOS_13	ATAOS_13	TAOS_13	RLAM_13	TXOE_13	RCLKinv_13	TCLKinv_13
46	0x2E	R/W	Reserved	AISIE_13	DMOIE_13	RLOSIE_13	Reserved	Reserved	LPB1	LPB0
47	0x2F	RUR/ RO	Reserved	AISIS_13	DMOIS_13	RLOSIS_13	Reserved	AISS_13	DMOS_13	RLOSS_13

TABLE 5: MICROPROCESSOR REGISTER DESCRIPTION

REG	ADDR	TYPE	D7	D6	D5	D4	D3	D2	D1	D0
Channel 14 Control Register (0x2Eh - 0x30h)										
48	0x30	R/W	SRES_14 *	ARAOS_14	ATAOS_14	TAOS_14	RLAM_14	TXOE_14	RCLKinv_14	TCLKinv_14
49	0x31	R/W	Reserved	AISIE_14	DMOIE_14	RLOSIE_14	Reserved	Reserved	LPB1	LPB0
50	0x32	RUR/ RO	Reserved	AISIS_14	DMOIS_14	RLOSIS_14	Reserved	AISS_14	DMOS_14	RLOSS_14
Channel 15 Control Register (0x31h - 0x33h)										
51	0x33	R/W	SRES_15 *	ARAOS_15	ATAOS_15	TAOS_15	RLAM_15	TXOE_15	RCLKinv_15	TCLKinv_15
52	0x34	R/W	Reserved	AISIE_15	DMOIE_15	RLOSIE_15	Reserved	Reserved	LPB1	LPB0
53	0x35	RUR/ RO	Reserved	AISIS_15	DMOIS_15	RLOSIS_15	Reserved	AISS_15	DMOS_15	RLOSS_15

NOTE: ** Indicates that these bits are WRITE-ONLY Reset for that channel register only.*

TABLE 6: MICROPROCESSOR REGISTER 0X00H BIT DESCRIPTION

GLOBAL CONTROL REGISTER FOR ALL 16 CHANNELS (0X00H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D7	GIE	**Global Interrupt Enable** The global interrupt enable is used to enable/disable all interrupt activity for all 16 channels. This bit must be set "High" for the interrupt pin to operate. "0" = Disable all interrupt generation "1" = Enable interrupt generation to the individual channel registers	R/W	0
D6	Reserved	This Register Bit is Not Used	R/W	0
D5	SR/$\overline{DR}$	**Single Rail / Dual Rail Select** This bit is used to configure the receive outputs and transmit inputs to single rail or dual rail data formats. "0" = Dual Rail "1" = Single Rail	R/W	0
D4	CODE	**Encoding / Decoding Select (Single Rail Mode Only)** This bit is used to select between AMI or HDB3. "0" = HDB3 "1" = AMI	R/W	0
D3	FIFOS	**FIFO Depth Select** The FIFO depth select is used to configure the part for a 32-bit or 64-bit FIFO (Within the Jitter Attenuator Block). The delay of the FIFO is typically equal to ½ the FIFO depth. "0" = 32-bit FIFO "1" = 64-bit FIFO	R/W	0

TABLE 6: MICROPROCESSOR REGISTER 0X00H BIT DESCRIPTION

GLOBAL CONTROL REGISTER FOR ALL 16 CHANNELS (0X00H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D2	JABW	**JA Band width Select** This bit is used to select the band with of the JA PLL. "0" = 10 Hz "1" = 1.5Hz ***NOTE:*** *If a "1" is written into this bit, JA FIFO size of 64 bit wide is automatically selected.*	R/W	0
D1 D0	JASEL1 JASEL0	**Jitter Attenuator Select** These bits are used to configure the Jitter Attenuator into the Receive or Transmit path. "00" = Disabled "01" = Transmit Path "10" = Receive Path "11" = Disabled	R/W	0 0

TABLE 7: MICROPROCESSOR REGISTERS 0X01H &0X02H BIT DESCRIPTION

INTERRUPT STATUS REGISTERS (0X01H) & 0X02H				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D7 D6 D5 D4 D3 D2 D1 D0	INTS_n	**Interrupt Status** These 2 registers are ready only to determine when an interrupt event occurs, the channel that generates interrupt can be identified with minimum read/write operation.	RO	0 0 0 0 0 0 0 0

TABLE 8: MICROPROCESSOR REGISTER 0X03H BIT DESCRIPTION

REVISION "ID" REGISTER (0X03H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D7 D6 D5 D4 D3 D2 D1 D0	Revision "ID"	The revision "ID" of the XRT83SL216 LIU is used to enable software to identify which revision of silicon is currently being tested. The revision "ID" for the first revision of silicon (Revision A) will be 0x01h.	RO	0 0 0 0 0 0 0 1

TABLE 9: MICROPROCESSOR REGISTERS 0X04H & 0X05H BIT DESCRIPTION

DEVICE "ID" REGISTERS (0X04H & 0X05H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D7 D6 D5 D4 D3 D2 D1 D0	Device "ID"	The device for this chip consists of 2 read only registers. The ID for the XR T83SL216 is 0x8004h.	RO	

TABLE 10: MICROPROCESSOR REGISTER BIT DESCRIPTION

CHANNEL CONTROL REGISTER (CHANNEL_n, where n = 0:15) (0X06H, 0X09H, 0X0CH, 0X0FH, 0X12H, 0X15H, 0X18H, 0X1BH, 1EH, 0X21H, 0X24H, 0X27H, 0X2AH, 0X2DH, 0X30H, 0X33H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D7	SRES_n	**Software Reset** Writing a "1" to this bit will cause the channel register to reset to it's default value. ***NOTE:*** *This is a Write-Only bit.*	WO	X
D6	ARAOS_n	**Automatic Receive All Ones** If ARAOS_n is selected, an all ones pattern will be sent to the RPOS/RNEG outputs if the channel experiences an RLOS condition. If RLOS does not occur, ARAOS_n will remain inactive. "0" = Disabled "1" = Enabled	R/W	0

TABLE 10: MICROPROCESSOR REGISTER BIT DESCRIPTION

CHANNEL CONTROL REGISTER (CHANNEL_n, where n = 0:15) (0X06H, 0X09H, 0X0CH, 0X0FH, 0X12H, 0X15H, 0X18H, 0X1BH, 1EH, 0X21H, 0X24H, 0X27H, 0X2AH, 0X2DH, 0X30H, 0X33H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D5	ATAOS_n	**Automatic Transmit All Ones** If ATAOS_n is selected, an all ones pattern will be transmitted from TTIP/TRING if the channel experiences an RLOS condition. If RLOS does not occur, ATAOS_n will remain inactive. "0" = Disabled "1" = Enabled	R/W	0
D4	TAOS_n	**Transmit All Ones** If TAOS_n is selected, an all ones pattern will be transmitted from TTIP/TRING if the transmitter is turned on. Remote Loop Back has priority over TAOS. "0" = Disabled "1" = Enabled	R/W	0
D3	RLAM_n	**RLOS/AIS Mode Select for channel n** This bit is used to select the industry standard for declaring / clearing RLOS and AIS functionality. See the Receive section of the Line Interface description. "0" = ITU G.775 "1" =ETSI300233	R/W	0
D2	TXOE_n	**Transmit Output Enable** Upon power up, the tranmitters are tri-stated. This bit is used to enable the transmitter for this channel if the TxOE pin is pulled "High". If the TxOE pin is pulled "Low", all 8 transmitters are tri-stated. "0" = Transmitter is disabled "1" = Transmitter is enabled if TxOE pin is pulled "High"	R/W	0
D1	RCLKinv_n	**Receiver Clock Invert** This bit is used to invert receive clock update edge with respect to RPOS/RNEG output data. "0" =RPOS/RNEG data is updated on the rising edge of RCLK "1" =RPOS/RNEG data is updated on the falling edge of RCLK.	R/W	0 0
D0	TCLKinv_n	**Transmit Clock Invert** This bit is used to invert transmit clock sampling edge with respect to TPOS/TNEG input data. "0" =TPOS/TNEG data is sampled on the falling edge of TCLK "1" =TPOS/TNEG data is sampled on the rising edge of TCLK.	R/W	0

TABLE 11: MICROPROCESSOR REGISTER BIT DESCRIPTION

CHANNEL CONTROL REGISTER (CHANNEL_n, where n = 0:15) (0X07H, 0X0AH, 0X0DH, 0X10H, 0X13H, 0X16H, 0X19H, 0X1CH, 0X1FH, 0X22H, 0X25H, 0X28H, 0X2BH, 0X2EH, 0X31H, 0X34H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D7	Reserved	This Register Bit is Not Used	X	X
D6	AISIE_n	**Alarm Indication Signal Interrupt Enable** "0" = Masks the AIS interrupt generation "1" = Enables Interrupt generation	R/W	0
D5	DMOIE_n	**Driver Monitor Output Interrupt Enable** "0" = Masks the DMO interrupt generation "1" = Enables Interrupt generation	R/W	0
D4	RLOSIE_n	**Receiver Loss of Signal Interrupt Enable** "0" = Masks the RLOS interrupt generation "1" = Enables Interrupt generation	R/W	0
D3	Reserved	This Register Bit is Not Used	X	X
D2	Reserved	This Register Bit is Not Used	X	X
D1 D0	LPB1 LPB0	**Loop Back Select** These bits are used to configure the channel in one of three loop-back modes. For additional information on loopback modes, see the Application Section of this datasheet.	R/W	0

LPB1	LPB0	Loopback Mode
0	0	No Loopback
0	1	Analog Loopback
1	0	Remote Loopback
1	1	Digital Loopback

TABLE 12: MICROPROCESSOR REGISTER BIT DESCRIPTION

CHANNEL CONTROL REGISTER (CHANNEL_n, where n = 0:15) (0X08H, 0X0BH, 0X0EH, 0X11H, 0X14H, 0X17H, 0X1AH, 0X1DH, 0X20H, 0X23H, 0X26H, 0X29H, 0X2CH, 0X2FH, 0X32H, 0X35H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D7	Reserved	This Register Bit is Not Used	R/W	X
D6	AISIS_n	**Alarm Indication Signal Interrupt Status** "0" = No Change "1" = Change in Status Occured	RUR	0

TABLE 12: MICROPROCESSOR REGISTER BIT DESCRIPTION

CHANNEL CONTROL REGISTER (CHANNEL_n, where n = 0:15) (0X08H, 0X0BH, 0X0EH, 0X11H, 0X14H, 0X17H, 0X1AH, 0X1DH, 0X20H, 0X23H, 0X26H, 0X29H, 0X2CH, 0X2FH, 0X32H, 0X35H)				
BIT	**NAME**	**FUNCTION**	Register Type	Default Value (HW reset)
D5	DMOIS_n	**Driver Monitor Output Interrupt Status** "0" = No Change "1" = Change in Status Occured	RUR	0
D4	RLOSSI_n	**Receiver Loss of Signal Interrupt Status** "0" = No Change "1" = Change in Status Occured	RUR	0
D3	Reserved	This Register Bit is Not Used	R/W	X
D2	AISS_n	**AIS Alarm Status** This alarm indication signal detection is always active regardless if the interrupt generation is disabled. This bit indicates the AIS activity at the time of reading. "0" = No Alarm "1" = An All "Ones" Signal is detected.	RO	0
D1	DMOS_n	**Driver Monitor Output Status** The Driver Monitor output is always active regardless if the interrupt generation is disabled. This bit indicates the DMO output activity at the time of reading. "0" = No alarm "1" = Failure at the transmit output is detected.	RO	0
D0	RLOSS_n	**Receive Loss of Signal Status** The receiver loss of signal detection is always active regardless if the interrupt generation is disabled. This bit indicates the RLOS activity at the time of reading. "0" = No Alarm "1" = Loss of Signal condition is detected.	RO	0

ELECTRICAL CHARACTERISTICS

TABLE 13: ABSOLUTE MAXIMUM RATINGS

Storage Temperature	-65°C to +150°C
Operating Temperature	-40°C to +85°C
Supply Voltage	-0.5V to +6.0V

TABLE 14: DC DIGITAL INPUT AND OUTPUT ELECTRICAL CHARACTERISTICS

VDD=3.3V ±5%, T_A=25°C, UNLESS OTHERWISE SPECIFIED					
PARAMETER	**SYMBOL**	**MIN**	**TYP**	**MAX**	**UNITS**
Power Supply Voltage	VDD	3.13	3.3	3.46	V
Input High Voltage	V_{IH}	2.0	-	5.0	V
Input Low Voltage	V_{IL}	-0.5	-	0.8	V
Output High Voltage IOH=2.0mA	V_{OH}	2.4	-		V
Output Low Voltage IOL=2.0mA	V_{OL}	-	-	0.4	V
Input Leakage Current	I_L	-	-	±10	µA
Input Capacitance	C_I	-	5.0		pF
Output Lead Capacitance	C_L	-	-	25	pF

NOTE: *Input leakage current excludes pins that are internally pulled "Low" or "High".*

TABLE 15: AC ELECTRICAL CHARACTERISTICS

VDD=3.3V ±5%, T_A=25°C, UNLESS OTHERWISE SPECIFIED					
PARAMETER	**SYMBOL**	**MIN**	**TYP**	**MAX**	**UNITS**
MCLK Clock Duty Cycle		40	-	60	%
MCLK Clock Tolerance		-	±50	-	ppm

TABLE 16: POWER CONSUMPTION

VDD=3.3V ±5%, T_A=25°C, UNLESS OTHERWISE SPECIFIED							
MODE	**IMPEDANCE**	**RECEIVER**	**TRANSMITTER**	**TYP**	**MAX**	**UNIT**	**TEST CONDITION**
E1	75Ω	2:1	1:2	1.6 2.3	TBD	W	50% ones 100% ones
E1	120Ω	2:1	1:2	1.4 1.9	TBD	W	50% ones 100% ones
E1	75Ω/120Ω	2:1	1.2	400	TBD	mW	Transmitter OFF

TABLE 17: RECEIVER ELECTRICAL CHARACTERISTICS

VDD=3.3V ±5%, T_A=25°C, UNLESS OTHERWISE SPECIFIED					
PARAMETER	**MIN**	**TYP**	**MAX**	**UNIT**	**TEST CONDITION**
Receiver Loss of Signal					
Number of consecutive zeros before RLOS is declared	- -	32 2048	- -		G.775 ETSI 300 233
Input signal level at RLOS	15	20	-	dB	Cable attenuation @ 1024kHz
RLOS clear	12.5	-	-	% ones	ITU-G.775, ETSI 300 233
Receiver Sensitivity (flat loss only)	11	13	-	dB	With nominal pulse amplitude of 3.0V for 120Ω and 2.37V for 75Ω. With -18dB interference signal added.
Interference Margin	-18	-14			With 6dB cable loss.
Input Impedance	-	15	-	kΩ	
Input Jitter Tolerance 1Hz 10kHz - 100kHz	 37 0.2	 - -	 - -	 UI_{p-p} UI_{p-p}	 ITU-G.823
Recovered Clock Jitter Transfer Corner Frequency Peaking Amplitude	 - -	 36 -	 - +0.5	 kHz dB	
Jitter Attenuator Corner Frequency JABW = "0" JABW = "1"	 - -	 10 1.5	 - -	 Hz Hz	
Return Loss 51kHz - 102kHz 102kHz - 2048kHz 2048kHz - 3072kHz	 14 20 16	 - - -	 - - -	 dB dB dB	 ITU-G.703

TABLE 18: E1 TRANSMITTER ELECTRICAL CHARACTERISTICS

VDD=3.3V ±5%, T_A=25°C, UNLESS OTHERWISE SPECIFIED					
PARAMETER	**MIN**	**TYP**	**MAX**	**UNIT**	**TEST CONDITION**
AMI Output Pulse Amplitude					
75Ω	2.13	2.37	2.60	V	1:2 Transformer
120Ω	2.70	3.00	3.30	V	
Output Pulse Width	224	244	264	ns	
Output Pulse Width Ratio	0.95	-	1.05		ITU-G.703
Output Pulse Amplitude Ratio	0.95	-	1.05		ITU-G.703
Jitter Added by the Transmitter Output	-	0.025	0.05	UI_{p-p}	Broad Band with jitter free TCLK applied to the input.
Output Return Loss					
51kHz - 102kHz	12	-	-	dB	ETSI 300 166
102kHz - 2048kHz	10	-	-	dB	
2048kHz - 3072kHz	8	-	-	dB	


NOTE: *Transmit output return loss is dependent on the transformer characteristics.*

ORDERING INFORMATION

PRODUCT NUMBER	PACKAGE	OPERATING TEMPERATURE RANGE
XRT83SL216IB	289 ball STBGA	-40^{0}C to +85^{0}C

PACKAGE DIMENSIONS

FIGURE 21. 15X15MM 289 BALL STBGA

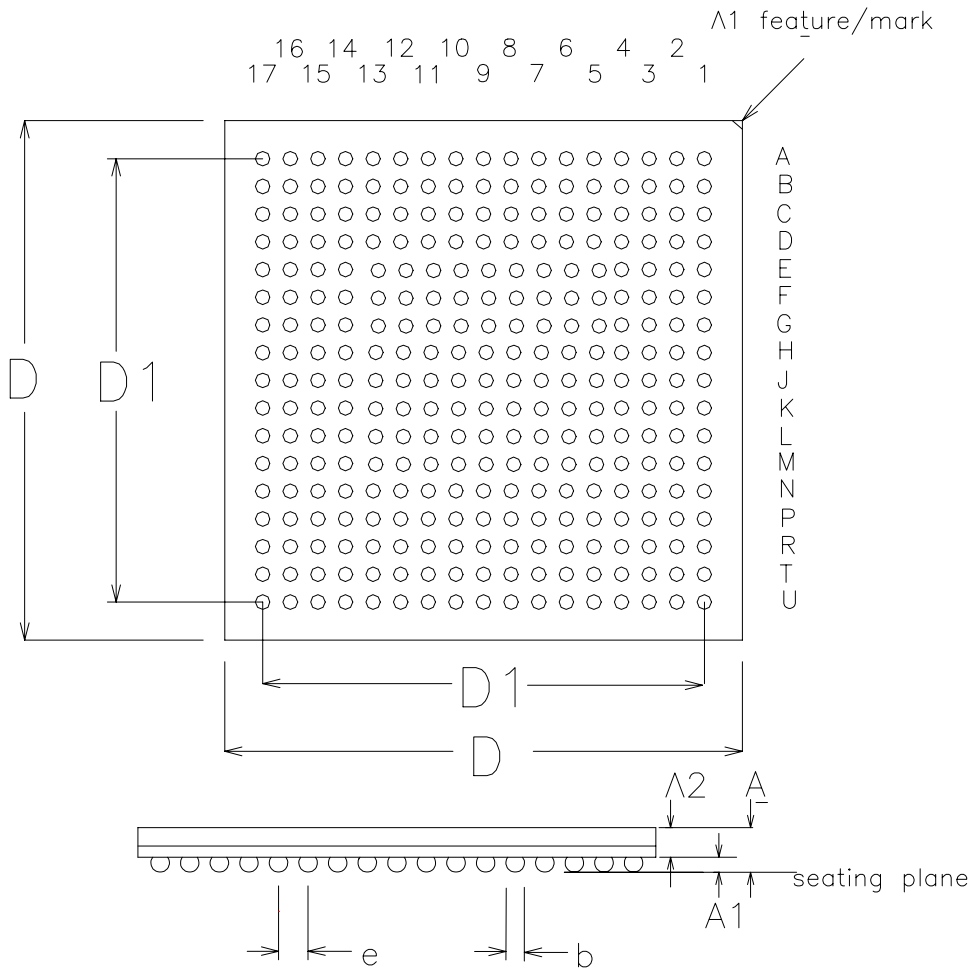

Note: The control dimension is in millimeter.

	INCHES		MILLIMETERS	
SYMBOL	MIN	MAX	MIN	MAX
A	0.056	0.067	1.42	1.70
A1	0.010	0.014	0.25	0.35
A2	0.046	0.053	1.17	1.35
D	0.583	0.598	14.80	15.20
D1	0.504 BSC		12.80 BSC	
b	0.015	0.019	0.37	0.47
e	0.0315 BSC		0.80 BSC	

REVISION HISTORY

REVISION #	DATE	DESCRIPTION
P1.0.0	07/07/05	First release of the 16-Channel LIU Preliminary Datasheet
P1.0.1	08/04/05	Edits to features, RNEG description,figure 6,, electrical supply voltage.
P1.0.2	11/05	Edits
P1.0.3	12/06/05	Changed receive transformer turns ratio from 1:1 to 2:1. Added register information.Table 16: Power Consumption added TYP values.

NOTICE

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Copyright 2005 EXAR Corporation

Datasheet December 2005.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.