19-3671; Rev 0; 5/05

EVALUATION KIT AVAILABLE

200mA Step-Up Converters in 6-Pin SOT23 and TDFN

General Description

The MAX8569A/MAX8569B low-quiescent-current boost regulators provide up to 200mA at output voltages up to 5.5V from a 1.5V to 5.5V input source. The built-in synchronous rectifier allows for over 90% efficiency while achieving small size and low cost by eliminating the need for an external Schottky diode.

The MAX8569A provides an adjustable output while the MAX8569B is fixed at 3.0V or 3.3V. The MAX8569B features a power-on reset output ($\overline{RST}$) to signal that the output has reached regulation. All devices connect the battery input to the output during shutdown, allowing the input battery to be used as a backup or real-time clock supply when the converter is off.

Applications

Medical Diagnostic Equipment

Digital Cameras

PDAs and Smartphones


Cordless Phones

Battery Backup

PC Cards

Local 3.3V or 5V Supply

Typical Operating Circuit

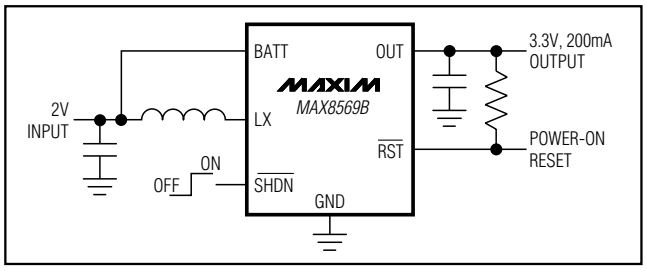

Selector Guide appears at end of data sheet.

Features

- **Over 200mA Available Output Current**
- **1.5V to 5.5V Input Voltage Range**
- **BATT Connected to OUT in Shutdown for Backup Power**
- **Up to 95% Efficiency**
- **7µA Typical Quiescent Current**
- **<1µA Shutdown Supply Current**
- **Internal Synchronous Rectifier**
- **750mA Switch Current Limit**
- **$\overline{RST}$ Output (MAX8569B)**
- **Adjustable Output Voltage (MAX8569A)**
- **Fixed 3.0V or 3.3V Output Voltage (MAX8569B)**


Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX8569AEUT-T*	-40°C to +85°C	6 SOT23-6 (U6FH-6)
MAX8569AETT+	-40°C to +85°C	6 TDFN 3mm x 3mm (T633-1)
MAX8569BEUT-T*	-40°C to +85°C	6 SOT23-6 (U6FH-6)
MAX8569BETT+	-40°C to +85°C	6 TDFN 3mm x 3mm (T633-1)
MAX8569BETT30+	-40°C to +85°C	6 TDFN 3mm x 3mm (T633-1)

**Future product—contact factory for availability.*

+Denotes lead-free packaging.

Pin Configurations

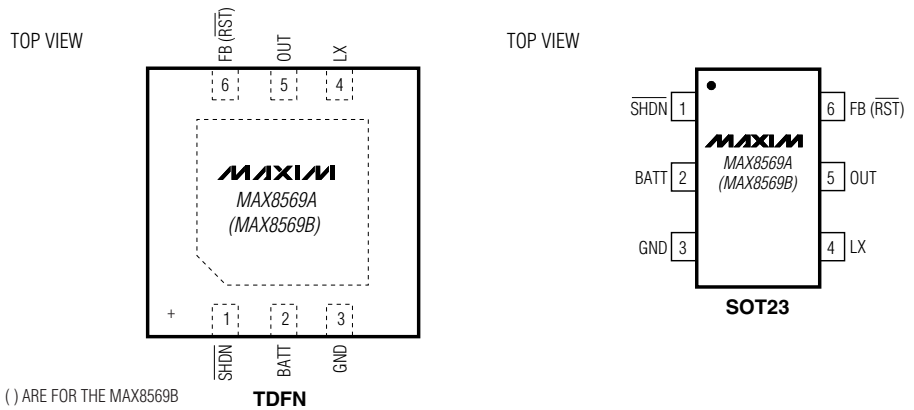

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

200mA Step-Up Converters in 6-Pin SOT23 and TDFN

ABSOLUTE MAXIMUM RATINGS

BATT, LX, OUT, FB, $\overline{RST}$ to GND .....-0.3V to +6V
$\overline{SHDN}$ to GND.....-0.3V to (V_{OUT} + 0.3V)
LX Current.....1.5A Peak
Continuous Power Dissipation (T_A = +70°C)
6-Pin SOT23 (derate 9.1mW/°C above +70°C).....727mW
6-Pin TDFN 3mm x 3mm
(derate 18.2mW/°C above +70°C).....1454mW

Operating Temperature Range .....-40°C to +85°C
Junction Temperature.....+150°C
Storage Temperature Range .....-65°C to +150°C
Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

($V_{\overline{SHDN}}$ = V_{OUT} = 3.3V, V_{BATT} = 2.0V, T_A = -40°C to +85°C. Typical values are at T_A = +25°C, unless otherwise noted.) (Note 1)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Battery Input Range			1.5		5.5	V
Startup Voltage	R_{LOAD} = 2.6kΩ	T_A = +25°C		1.22	1.5	V
		T_A = -40°C to +85°C		1.24		
Output Voltage	MAX8569A		2.0		5.5	V
	MAX8569BETT30	T_A = +25°C	2.94	3.0	3.06	
		T_A = -40°C to +85°C	2.925		3.075	
	MAX8569B	T_A = +25°C	3.233	3.300	3.366	
		T_A = -40°C to +85°C	3.217		3.373	
Feedback Threshold	MAX8569A	T_A = +25°C	1.208	1.228	1.248	V
		T_A = -40°C to +85°C	1.203		1.253	
Feedback Bias Current	MAX8569A, V_{FB} = 1.27V	T_A = +25°C		3.5	20	nA
		T_A = -40°C to +85°C		4		
n-Channel On-Resistance	I_{LX} = 100mA			0.3	0.7	Ω
p-Channel On-Resistance	I_{LX} = 100mA			0.3	0.9	Ω
n-Channel Switch Current Limit	T_A = +25°C		650	750	920	mA
	T_A = -40°C to +85°C		600		975	
Switch Maximum On-Time	V_{OUT} = 2.8V		3.5	5	6.5	µs
Synchronous Rectifier Zero-Crossing Current	T_A = +25°C		3	25	50	mA
	T_A = -40°C to +85°C		0		60	
OUT Quiescent Current	V_{OUT} = 3.5V, V_{FB} = 1.3V (Note 2)			4	10	µA
OUT Shutdown Current	V_{OUT} = 3.5V, $V_{\overline{SHDN}}$ = V_{FB} = 0V			0.05	1	µA
BATT Quiescent Current	V_{OUT} = 3.5V, V_{FB} = 1.3V (Note 3)			3	10	µA
BATT Shutdown Current	V_{OUT} = 3.5V, $V_{\overline{SHDN}}$ = 0V			0.01	1	µA
$\overline{SHDN}$ Logic-Low					0.3	V

ELECTRICAL CHARACTERISTICS (continued)

($V_{\overline{SHDN}}$ = V_{OUT} = 3.3V, V_{BATT} = 2.0V, T_A = -40°C to +85°C. Typical values are at T_A = +25°C, unless otherwise noted.) (Note 1)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
$\overline{SHDN}$ Threshold	Rising edge, 100mV hysteresis (typ), V_{OUT} = 2.8V	T_A = +25°C	1.185	1.228	1.271	V
		T_A = -40°C to +85°C	1.170		1.286	
$\overline{SHDN}$ Input Bias Current	V_{OUT} = 5.5V	T_A = +25°C		13	100	nA
		T_A = -40°C to +85°C		13		
$\overline{RST}$ Low Voltage	$I_{\overline{RST}}$ = 1mA, V_{OUT} = 2.5V				0.2	V
$\overline{RST}$ Leakage Current	$V_{\overline{RST}}$ = 5.5V	T_A = +25°C		0.1	100	nA
		T_A = -40°C to +85°C		1		
$\overline{RST}$ Threshold	Relative to OUT, 3.3V for MAX8569B, 3.0V for MAX8569BETT30	T_A = +25°C	85	90	95	%
		T_A = -40°C to +85°C	85	90	97	
LX Leakage Current	V_{OUT} = 5.5V	T_A = +25°C		1	150	nA
		T_A = -40°C to +85°C		150		
Maximum Load Current	V_{BATT} = 2V, V_{OUT} = 3.3V			200		mA
Efficiency	V_{BATT} = 2V, V_{OUT} = 3.3V, Figures 1 or 2, I_{LOAD} = 40mA			88		%

Note 1: Specifications to -40°C are guaranteed by design and not production tested.

Note 2: Supply current into OUT. This current is drawn from the source battery, but is reduced in value according to the step-up ratio and efficiency.


Note 3: Does not include switching losses and output quiescent current. See the Input Current and Output Voltage vs. Input Voltage (On, 330Ω) graph in the *Typical Operating Characteristics* for operating quiescent current.

200mA Step-Up Converters in 6-Pin SOT23 and TDFN


Typical Operating Characteristics

(Circuit of Figure 2, V_{OUT} = 3.3V, V_{BATT} = +2V, T_A = +25°C, circuit of Figure 1, T_A = +25°C, unless otherwise noted.)


EFFICIENCY vs. LOAD CURRENT
V_{OUT} = 5V

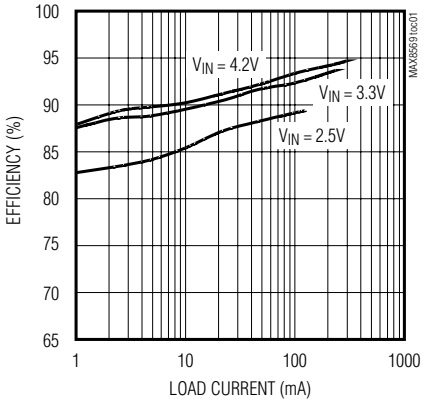


EFFICIENCY vs. LOAD CURRENT
V_{OUT} = 3.3V

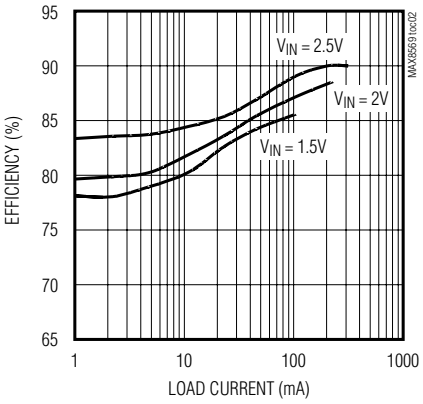


EFFICIENCY vs. LOAD CURRENT
V_{OUT} = 2.5V

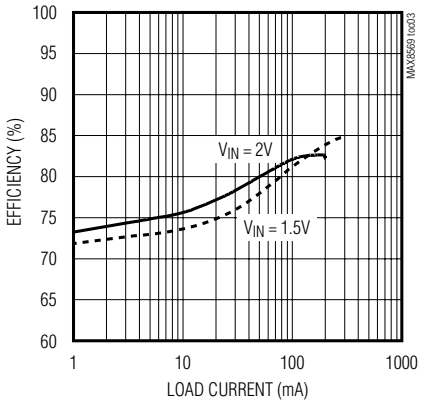


MAXIMUM OUTPUT CURRENT
vs. BATTERY VOLTAGE

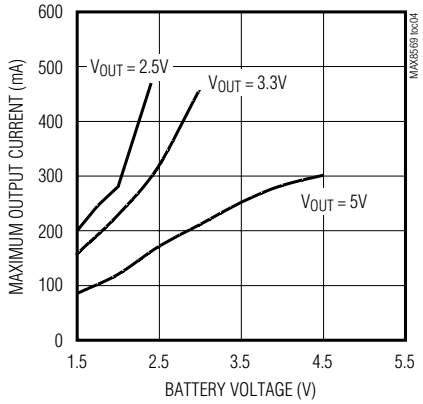

STARTUP VOLTAGE vs. LOAD RESISTANCE

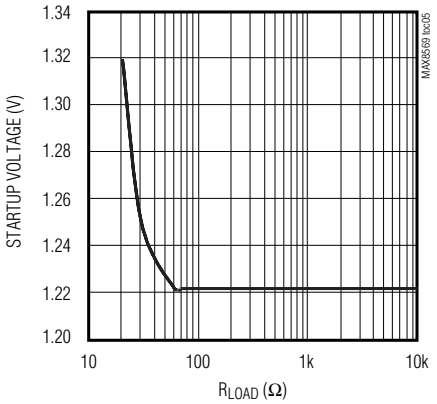


OUTPUT VOLTAGE AND INPUT CURRENT
vs. INPUT VOLTAGE (SHUTDOWN, NO LOAD)

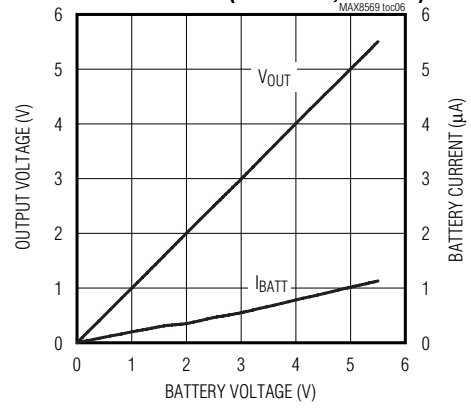


Typical Operating Characteristics (continued)

(Circuit of Figure 2, V_{OUT} = 3.3V, V_{BATT} = +2V, T_A = +25°C, circuit of Figure 1, T_A = +25°C, unless otherwise noted.)


OUTPUT VOLTAGE AND INPUT CURRENT vs. INPUT VOLTAGE (SHUTDOWN, 200mA LOAD)

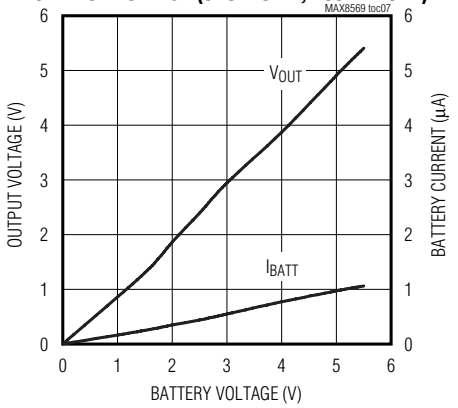


OUTPUT VOLTAGE AND INPUT CURRENT vs. INPUT VOLTAGE (ON, 330Ω)

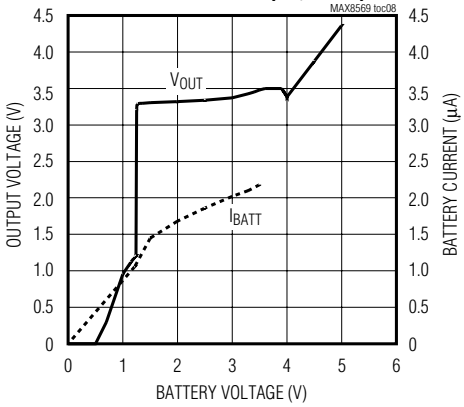


OUTPUT VOLTAGE AND INPUT CURRENT vs. INPUT VOLTAGE (ON, 16Ω LOAD)

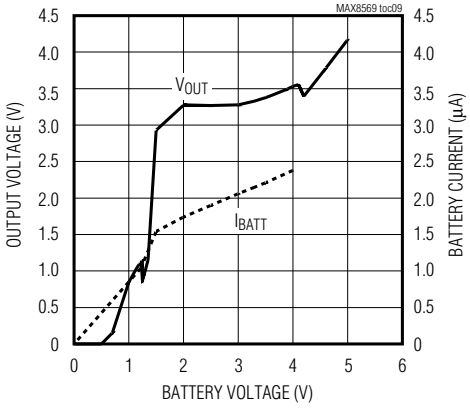


ON/OFF RESPONSE (R_{LOAD} = 33Ω)

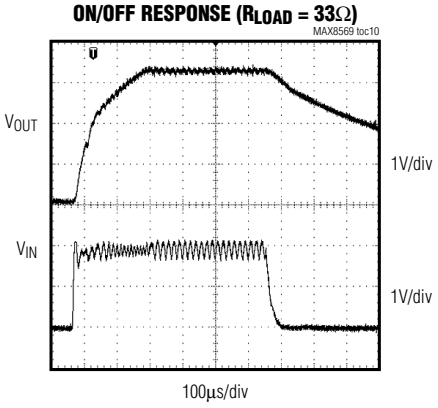

LOAD TRANSIENT

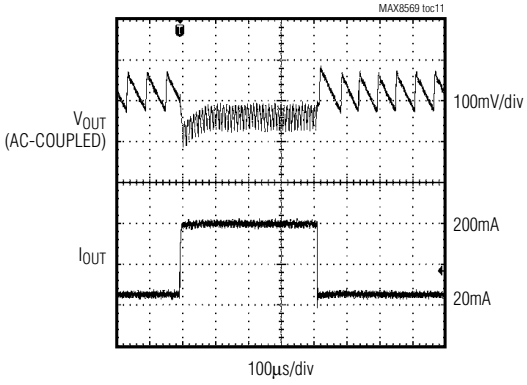

LINE TRANSIENT

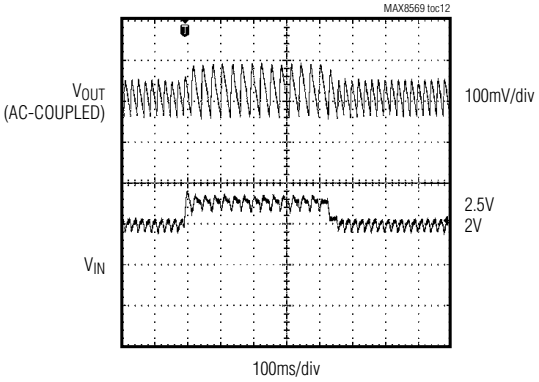


200mA Step-Up Converters in 6-Pin SOT23 and TDFN


Typical Operating Characteristics (continued)

(Circuit of Figure 2, V_{OUT} = 3.3V, V_{BATT} = +2V, T_A = +25°C, circuit of Figure 1, T_A = +25°C, unless otherwise noted.)

SHUTDOWN RESPONSE
(R_{LOAD} = 33Ω)

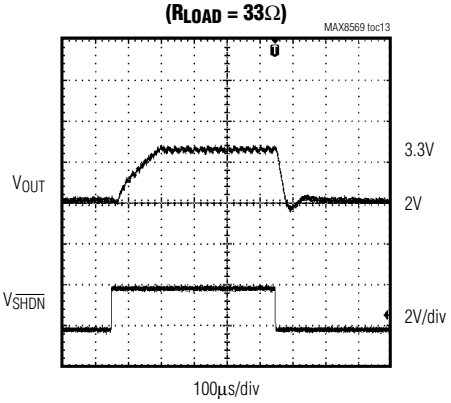

SWITCHING WAVEFORMS
(R_{LOAD} = 33Ω)

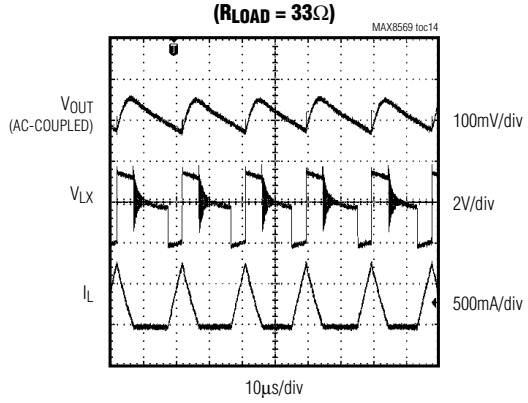

Pin Description

PIN		NAME	FUNCTION
MAX8569A	MAX8569B		
1	1	$\overline{SHDN}$	Shutdown Input. Drive $\overline{SHDN}$ low to place the MAX8569 in shutdown mode. $\overline{SHDN}$ can be used for a low-battery cutoff (1.228V threshold). See the *Low-Battery Cutoff* section for details. Drive $\overline{SHDN}$ high for normal operation.
2	2	BATT	Battery Voltage Connection. Connect BATT to a 1.5V to 5.5V supply. Bypass BATT to GND with a 10µF or larger ceramic capacitor.
3	3	GND	Ground
4	4	LX	Inductor Connection. Connect the switched side of the inductor to LX. During shutdown, LX is connected to OUT.
5	5	OUT	Output Voltage. Bypass OUT to GND with a 10µF or larger ceramic capacitor. During shutdown, OUT is connected to LX. OUT is also the bootstrapped supply input for the IC.
6	—	FB	Feedback Input. Connect FB to the center tap of an external resistor-divider from OUT to GND to set the output voltage. V_{FB} regulates to 1.228V.
—	6	$\overline{RST}$	Reset Output. $\overline{RST}$ is an open-drain output that goes high impedance when the output voltage rises above 90% of the nominal regulation voltage. $\overline{RST}$ pulls low when the output is below 90% of the nominal regulation voltage. $\overline{RST}$ is high impedance during shutdown.
—	—	EP	Exposed Paddle (TDFN Package Only). Connect to the PC board ground plane for increased thermal performance.

Detailed Description

The MAX8569A and MAX8569B compact high-efficiency step-up converters feature low-quiescent supply current to ensure the highest possible efficiency over a wide load range. With a minimum 1.5V input voltage, these devices are well suited for applications with two alkaline cells, two nickel-metal-hydride (NiMH) cells, or one lithium-ion (Li+) cell. When $\overline{SHDN}$ is low, the output is connected to the battery through the inductor and an internal p-channel MOSFET. This allows the input battery to be used as a backup or real-time clock supply when the converter is off by eliminating the voltage drop across the MOSFET body diode. These devices are ideal for low-power applications where a small footprint is critical. The internal synchronous rectifier improves efficiency significantly and reduces size and cost by eliminating the need for an external Schottky diode.

Control Scheme

The MAX8569A/MAX8569B feature a current-limited control scheme that provides ultra-low quiescent current and high efficiency over a wide output current range. The switching cycles are not controlled by an oscillator. Instead, switch on-time is terminated when the inductor current reaches the 780mA (typ) n-channel current limit, or when the 5µs maximum n-channel switch on-time is reached. Following each on-cycle, the synchronous rectifier turns on, shunts the MOSFET body diode, and the inductor current ramps to zero before another cycle begins. The next cycle occurs when the error comparator senses that the output has fallen below the regulation threshold.

Applications Information

Shutdown

Drive $\overline{SHDN}$ low to shut down the MAX8569A/MAX8569B and reduce the input current to less than 1µA. During shutdown, the battery input is connected to the output through the inductor and the internal synchronous rectifier. This allows the input battery (rather than a separate backup battery) to provide backup power for devices such as an idled microcontroller, SRAM, or real-time clock, without the usual diode forward drop. Drive $\overline{SHDN}$ to V_{OUT} (logic-high) to enable the IC for normal operation.

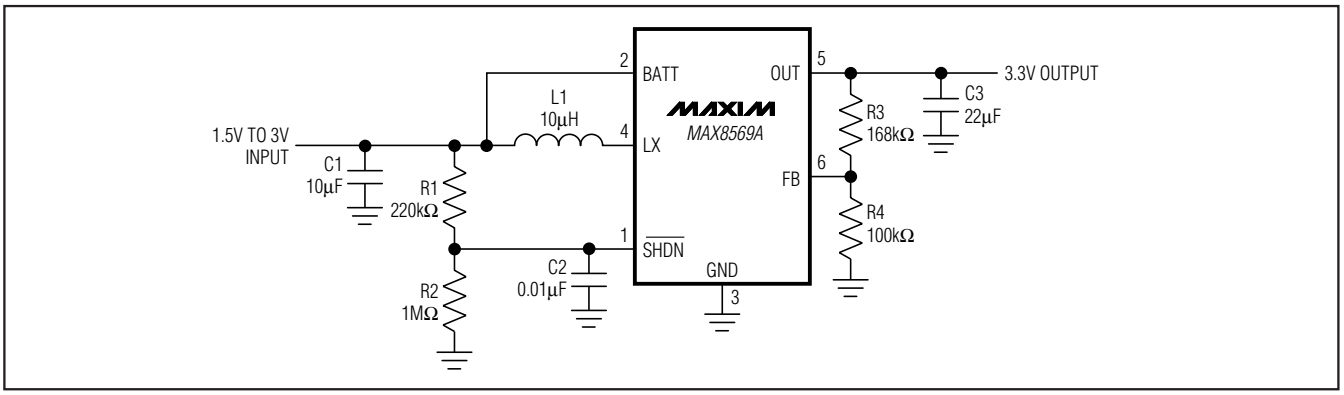


Figure 1. Typical Application Circuit for MAX8569A

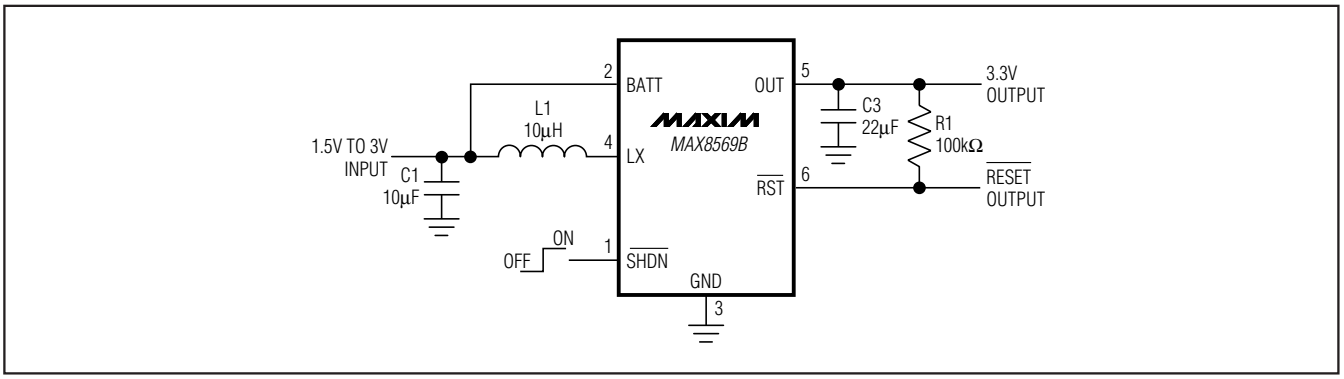


Figure 2. Typical Application Circuit for MAX8569B

200mA Step-Up Converters in 6-Pin SOT23 and TDFN

Low-Battery Cutoff

The $\overline{SHDN}$ trip threshold of the MAX8569A/MAX8569B can be used as an input voltage detector that disables the IC when the battery voltage falls to a set level. The $\overline{SHDN}$ trip threshold is 1.228V. Use a resistor-divider to set the battery-detection voltage (R1 and R2 in Figure 1). Select R2 between 100kΩ and 1MΩ to minimize battery drain. Calculate R1 as follows:

$$R1 = R2 \times ((V_{OFF} / V_{\overline{SHDN}}) - 1)$$

where V_{OFF} is the battery voltage at which the part shuts down and $V_{\overline{SHDN}}$ = 1.228V. Note that input ripple can sometimes cause false shutdowns. To minimize the effect of ripple, connect a low-value capacitor (C2) from $\overline{SHDN}$ to GND to filter out input noise. Select a C2 value so the R1, C2 time constant is above 2ms.

Power-On Reset ($\overline{RST}$, MAX8569B)

The MAX8569B provides a power-on reset output ($\overline{RST}$) that goes high impedance when the output reaches 90% of its regulation point. $\overline{RST}$ pulls low when the output is below 90% of the regulation point. Connect a 100kΩ to 1MΩ pullup resistor from $\overline{RST}$ to OUT to provide a logic control signal for a microprocessor. Connect $\overline{RST}$ to GND when the reset function is not used.

Setting the Output Voltage (MAX8569A)

The output of the MAX8569A is adjustable from 2V to 5.5V. Connect a resistor-divider from the output to ground with FB connected to the center tap to set the desired output voltage (R3 and R4, Figure 1). Select R4 between 100kΩ and 1MΩ. R3 is then calculated as follows:

$$R3 = R4 \times ((V_{OUT} / V_{FB}) - 1)$$

where V_{OUT} is the desired output voltage and V_{FB} is 1.228V.

Inductor Selection

The control scheme of the MAX8569A/MAX8569B permits flexibility in choosing an inductor. A 10µH inductor performs well for most applications, but values from 4.7µH to 100µH can be used as well. Small inductance values typically offer smaller physical size. Output power is reduced when the inductance is large enough to prevent the maximum current limit (780mA) from being reached before the maximum on-time (5µs) expires. For maximum output current, choose L so that:

$$\frac{V_{BATT(MAX)} \times 1\mu s}{0.78A} < L < \frac{V_{BATT(MIN)} \times 5\mu s}{0.78A}$$

$$I_{OUT(MAX)} = \frac{\frac{0.78A}{2} \times \left(V_{BATT(MIN)} - \frac{0.78A}{2} \times (R_{NCH} + R_L)\right)}{V_{OUT}}$$

where R_L is the inductor series resistance and R_{NCH} is the $R_{DS(ON)}$ of the internal n-channel MOSFET (0.3Ω typ).

Capacitor Selection

Choose an output capacitor to achieve the desired output ripple percentage.

$$C_{OUT} > (0.5 \times L \times 0.780A^2) / (r\% \times V_{OUT}^2)$$

where L is the inductor value and r is the desired output ripple in %. A 22µF ceramic capacitor is a good starting value.

The input capacitor reduces the peak current drawn from the battery and can be the same value as the output capacitor. A larger input capacitor can be used to further reduce the input ripple and improve efficiency.

PC Board Layout and Grounding

Careful printed circuit layout is important for minimizing ground bounce and noise. Keep the IC's GND pin and the ground leads of the input- and output-filter capacitors less than 0.2in (5mm) apart. In addition, keep all connections to the FB and LX pins as short as possible. In particular, when using external feedback resistors, locate them as close to FB as possible. To maximize output power and efficiency and minimize output ripple voltage, use a ground plane and solder the IC's GND directly to the ground plane. A sample layout is available in the MAX8569A/MAX8569B evaluation kit to speed designs.

Chip Information

PROCESS: BiCMOS


Selector Guide

PART	OUTPUT VOLTAGE	PIN-PACKAGE	TOP MARK
MAX8569AEUT	Adjustable	SOT23-6	ABWK
MAX8569BEUT	Fixed 3.3V	SOT23-6	ABWL
MAX8569AETT	Adjustable	TDFN	AJN
MAX8569BETT	Fixed 3.3V	TDFN	AJO
MAX8569BETT30	Fixed 3.0V	TDFN	AJP

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to **www.maxim-ic.com/packages**.)

6, 8, &10L, DFN THIN.EPS

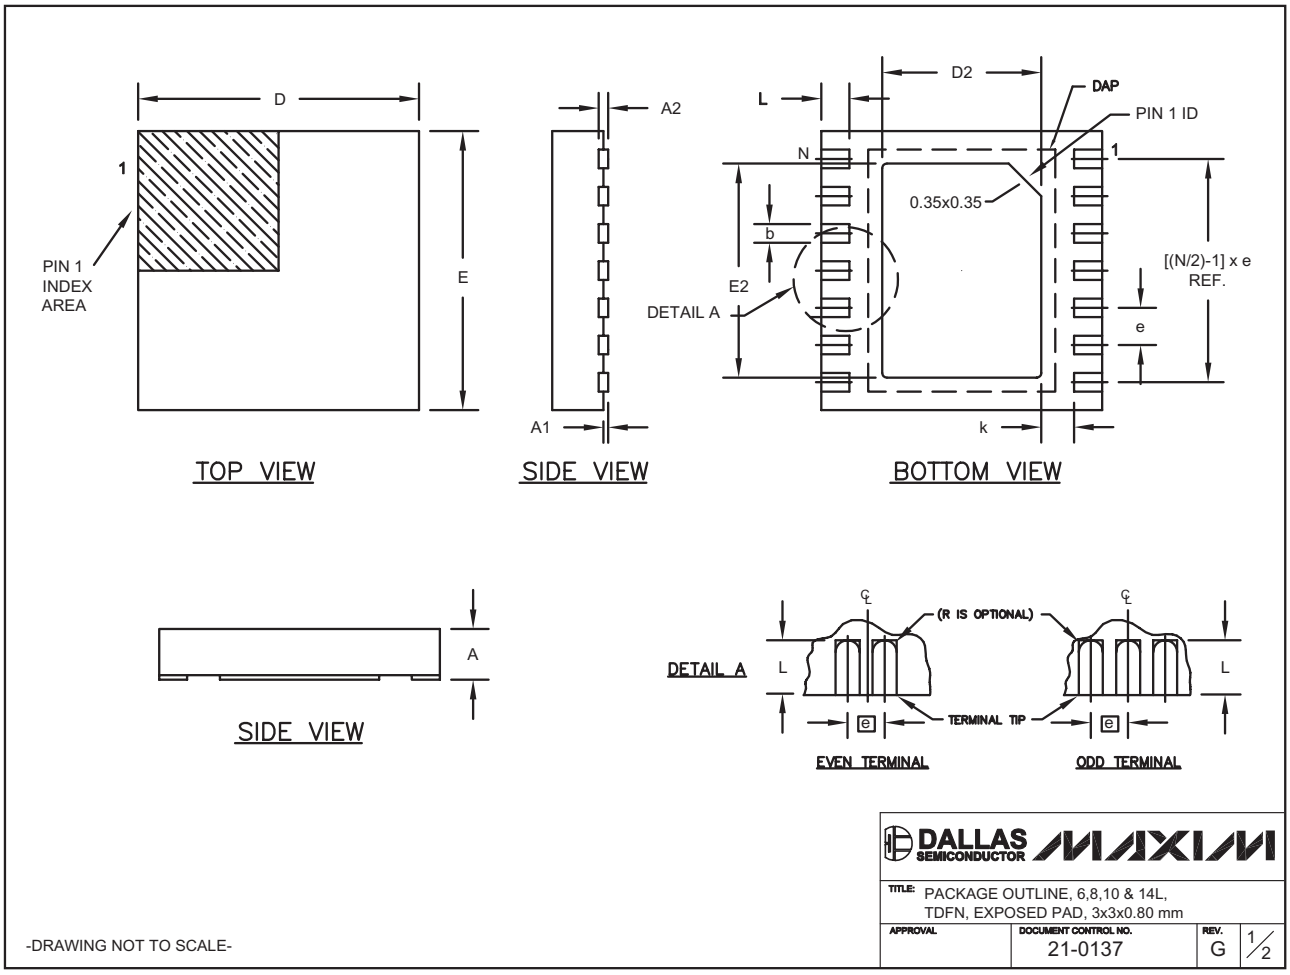

200mA Step-Up Converters in 6-Pin SOT23 and TDFN

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to **www.maxim-ic.com/packages**.)

COMMON DIMENSIONS		
SYMBOL	MIN.	MAX.
A	0.70	0.80
D	2.90	3.10
E	2.90	3.10
A1	0.00	0.05
L	0.20	0.40
k	0.25 MIN.	
A2	0.20 REF.	

PACKAGE VARIATIONS								
PKG. CODE	N	D2	E2	e	JEDEC SPEC	b	[(N/2)-1] x e	DOWNBONDS ALLOWED
T633-1	6	1.50–0.10	2.30–0.10	0.95 BSC	MO229 / WEEA	0.40–0.05	1.90 REF	NO
T633-2	6	1.50–0.10	2.30–0.10	0.95 BSC	MO229 / WEEA	0.40–0.05	1.90 REF	NO
T833-1	8	1.50–0.10	2.30–0.10	0.65 BSC	MO229 / WEEC	0.30–0.05	1.95 REF	NO
T833-2	8	1.50–0.10	2.30–0.10	0.65 BSC	MO229 / WEEC	0.30–0.05	1.95 REF	NO
T833-3	8	1.50–0.10	2.30–0.10	0.65 BSC	MO229 / WEEC	0.30–0.05	1.95 REF	YES
T1033-1	10	1.50–0.10	2.30–0.10	0.50 BSC	MO229 / WEED-3	0.25–0.05	2.00 REF	NO
T1433-1	14	1.70–0.10	2.30–0.10	0.40 BSC	- - - -	0.20–0.05	2.40 REF	YES
T1433-2	14	1.70–0.10	2.30–0.10	0.40 BSC	- - - -	0.20–0.05	2.40 REF	NO

NOTES:
1. ALL DIMENSIONS ARE IN mm. ANGLES IN DEGREES.
2. COPLANARITY SHALL NOT EXCEED 0.08 mm.
3. WARPAGE SHALL NOT EXCEED 0.10 mm.
4. PACKAGE LENGTH/PACKAGE WIDTH ARE CONSIDERED AS SPECIAL CHARACTERISTIC(S).
5. DRAWING CONFORMS TO JEDEC MO229, EXCEPT DIMENSIONS "D2" AND "E2", AND T1433-1 & T1433-2.
6. "N" IS THE TOTAL NUMBER OF LEADS.
7. NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.

-DRAWING NOT TO SCALE-

DALLAS SEMICONDUCTOR MAXIM


TITLE: PACKAGE OUTLINE, 6,8,10 & 14L, TDFN, EXPOSED PAD, 3x3x0.80 mm


APPROVAL	DOCUMENT CONTROL NO.	REV.	
	21-0137	G	2/2

Package Information (continued)


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to **www.maxim-ic.com/packages**.)

6LSOT.EPS

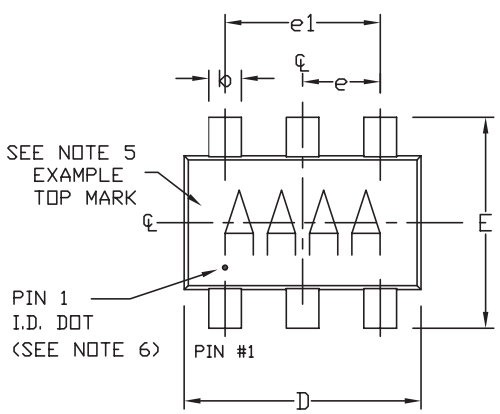

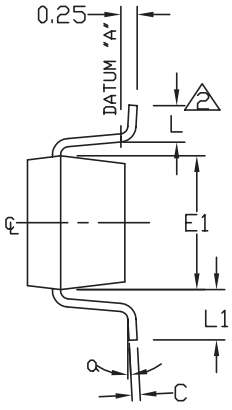

SYMBOL	MIN	MAX
A	0.90	1.45
A1	0.00	0.15
A2	0.90	1.30
b	0.35	0.50
C	0.08	0.20
D	2.80	3.00
E	2.60	3.00
E1	1.50	1.75
L	0.35	0.60
L1	0.60 REF.	
e1	1.90 BSC.	
e	0.95 BSC.	
α	0°	10°

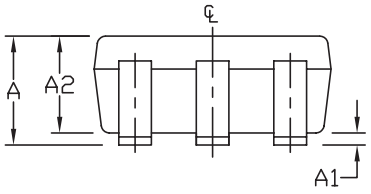

NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE.
3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR. MOLD FLASH, PROTRUSION OR METAL BURR SHOULD NOT EXCEED 0.25 MM.
4. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
5. PIN 1 IS LOWER LEFT PIN WHEN READING TOP MARK FROM LEFT TO RIGHT. (SEE EXAMPLE TOP MARK)
6. PIN 1 I.D. DOT IS 0.3 MM ø MIN. LOCATED ABOVE PIN 1.
7. MEETS JEDEC MO178, VARIATION AB.
8. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEADTIP.
9. LEAD TO BE COPLANAR WITHIN 0.1 MM.

DALLAS SEMICONDUCTOR MAXIM
PROPRIETARY INFORMATION

TITLE: PACKAGE OUTLINE, SOT-23, 6L

APPROVAL	DOCUMENT CONTROL NO.	REV.	
	21-0058	F	1/1

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

© 2005 Maxim Integrated Products Printed USA MAXIM is a registered trademark of Maxim Integrated Products, Inc.