

D-Sub Connectors Solder Cup Termination

17JE Series



FEATURES

- Solder-cup termination contact for manual soldering.
- Number of contact is 9, 15, 25 and 37.
- Stranded cable AWG22 is applicable to this connector. Please use the soldering iron of 40W (max.)
- The metal shell is in Nickel plating. The pin connectors of metal shell are beat-finished.
- Connection of cable and plug can be shielded by the metarize-finished hood, improving resistance against EMI shield.

SPECIFICATIONS

Rated Voltage	300V AC (r.m.s.)
Rated Current	5A / Contact
Dielectric Withstanding Voltage	1000V AC (r.m.s.) / 1 minute
Insulation Resistance	1000M Ω (min.) at 500V DC
Contact Resistance	10m Ω (max.)
Applicable Cable	Solid Cable AWG20(max.), Stranded Cable AWG22(max.)
Operating Temperature	-25°C~ 85°C

MATERIAL / FINISH



Item	Material / Finish
Insulator	PBT Resin (UL94V-0) / White
Shell	Steel / Ni Plating
Contact	Copper Alloy / Au over Ni Plating
Hood	ABS Resin / Ni Plating
Lock Screw	Steel or Copper Alloy / Ni Plating

© Specifications and/or dimensions in this catalogue are subject to change without notice.
Your catalogue checking the latest specifications with our drawings would be highly appreciated.


► Solder Cup Termination Connector

17JE-13250-02(D1)A

Mating Style 1 : Socket Connector 2 : Pin Connector	Contact Material A: Phosphor Bronze(Socket Connector)
Plating on Shell 3: Ni Plating	Deviation D1: Standard Type
Number of Contact 09 15 25 37	Contat Plating 2: Au(Flash) over Ni Plating
	Termination Style 0: Solder Cup Style


17JE-13 □□ 0-02(D1)A

Socket Connector

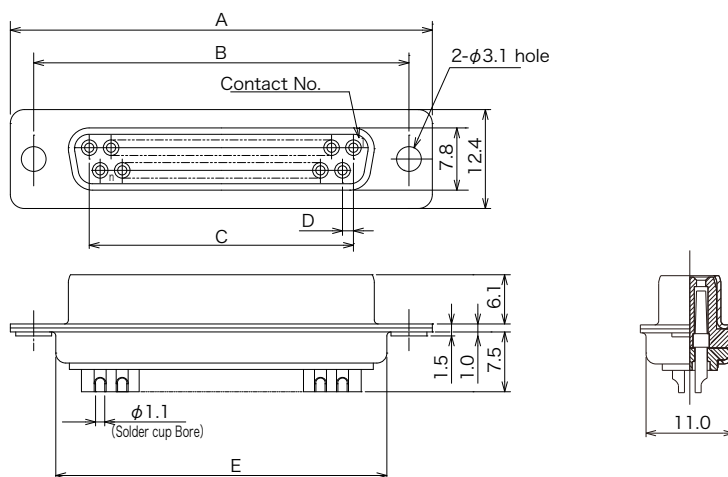

17JE-23 □□ 0-02(D1)

Pin Connector

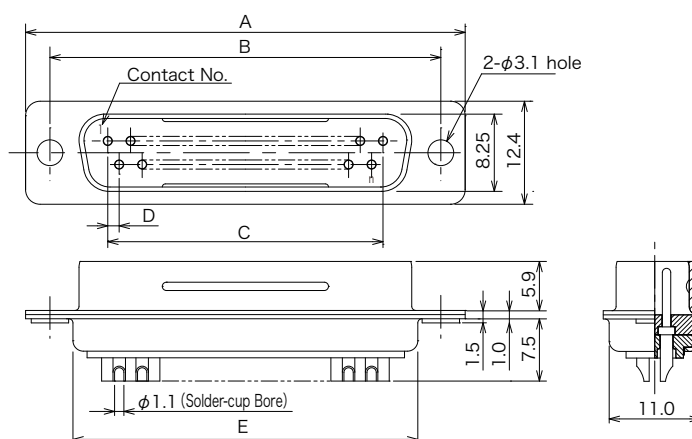

Number of Contact	Part Number		A	B	C	D	E
	Socket Connector	Pin Connector					
9	17JE-13090-02(D1)A	17JE-23090-02(D1)	30.70	24.99	10.98	1.37	19.50
15	17JE-13150-02(D1)A	17JE-23150-02(D1)	39.00	33.32	19.20	1.37	27.75
25	17JE-13250-02(D1)A	17JE-23250-02(D1)	52.90	47.04	33.12	1.38	41.50
37	17JE-13370-02(D1)A	17JE-23370-02(D1)	69.20	63.50	49.66	1.38	57.95

▶ D-Sub Connectors with Cable Hood Kit

Connector with Cable Hood Kit

EMI Shielded

17JE-13250-02(D8Ax)A-CG

Mating Style

- 1: Socket Connector (for Standard Cable)
- 2: Pin Connector (for Standard Cable)
- 3: Socket Connector (for Slim Cable)
- 4: Pin Connector (for Slim Cable)

Plating on Shell

3: Ni Plating

Number of Contact

09, 15, 25, 37

Termination

0: Solder-cup

Contact Plating

2: Au(Flash) over Ni Plating

Lead and Cadmium Free

No digit : Lead Free

A-CG : Lead and Cadmium Free (Socket Connector)

-CG : Lead and Cadmium Free (Pin Connector)

Deviation

D 8

A

x

Lock Screw

No Digit : Standard

2, 6 : Refer to page 7

Thread

A : M2.6×0.45


B : M3×0.5

C : # 4-40UNC


Straight Hood

Nickel Plating Metarised-finish


Socket Connector

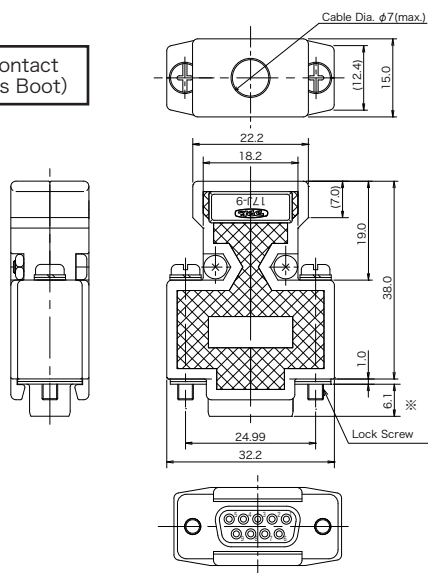9 contact
(Less Boot)


15 contact

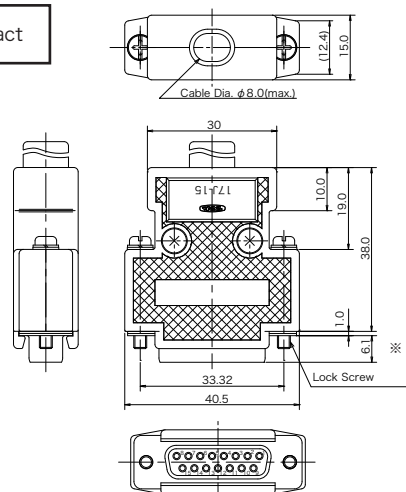

25 contact

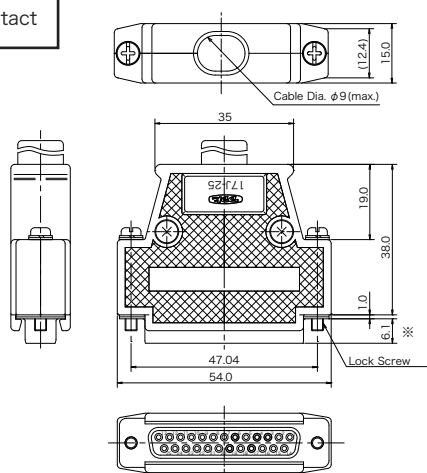

37 contact

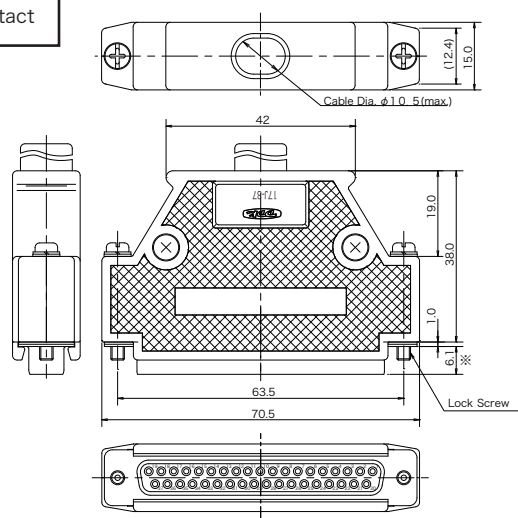


※ Dimension is including the connector.

© Specifications and/or dimensions in this catalogue are subject to change without notice.
Your catalogue checking the latest specifications with our drawings would be highly appreciated.


D-Sub Connector with Cable Hood Kit

Pin Connector 17JE-23xx0-02(D8xx)-CG


9 contact
(Less Boot)

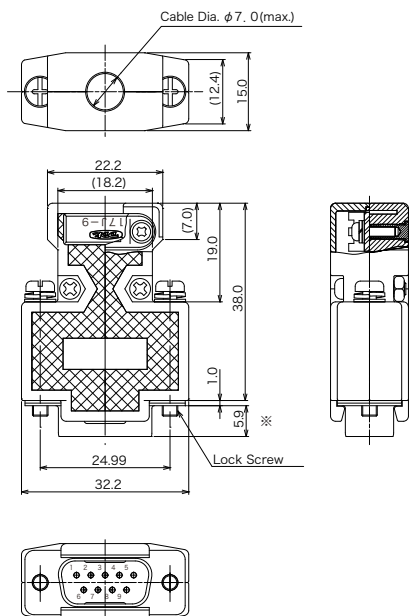


15 contact

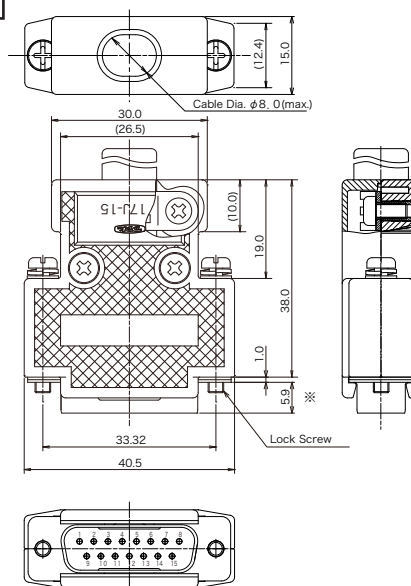

25 contact

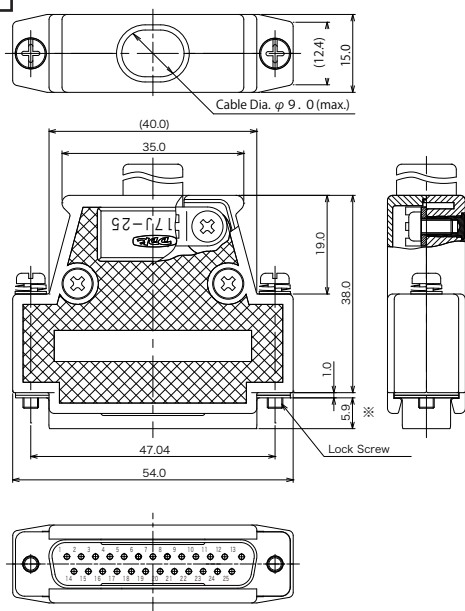

37 contact

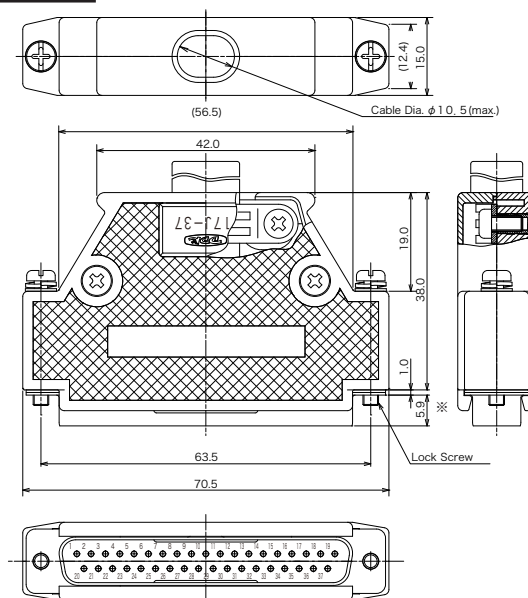

※ Dimension is including the connector.

▶ Panel Mount Deviation

Deviation of Panel Mount

Mounting Style	Front Mount	Front Mount	Rear Mount
Stud Jack Socket			
17L-002 □ Type 1 	Assembled with Stud, Pan-head Screw • Socket 17JE-13 □□ 0-0 □ (D2 □)-CG • Pin 17JE-23 □□ 0-0 □ (D2 □)-CG		
17L-003 □ 1 Type 2 		Jack socket and hex nut(M3) are attached. • Socket 17JE-13 □□ 0-0 □ (D3 □)A • Pin 17JE-23 □□ 0-0 □ (D3 □)	
17L-003 □ 3 Type 3 Panel Thickness Max1.3			Jack socket and hex nut(M3) are attached. • Socket 17JE-13 □□ 0-0 □ (D4 □)A • Pin 17JE-23 □□ 0-0 □ (D4 □)

□ : Thread Size


A : M2.6×0.45

B : M3×0.5


C : # 4-40UNC

not available

● Panel Mounting Configuration

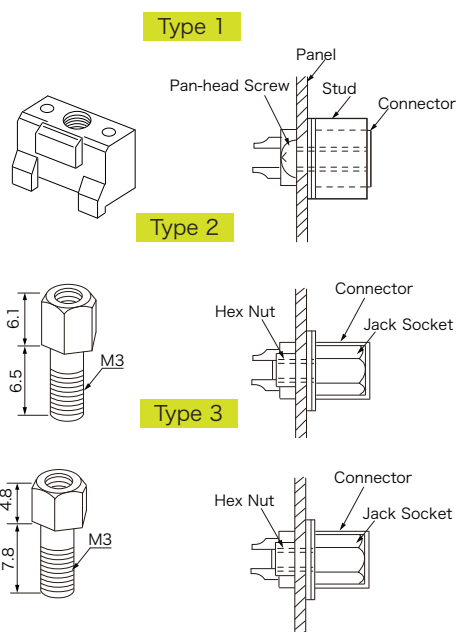

● Panel Cut-out Dimensions

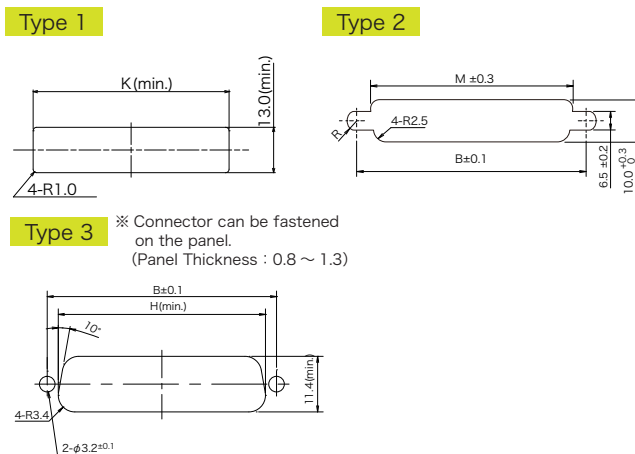

Number of Contact	B	H	M	K
9	24.99	20.5	22.2	34.09
15	33.32	28.8	30.5	42.42
25	47.04	42.5	44.3	56.14
37	63.50	59.1	60.7	72.60

▶ DUST COVER

17-25PN

Number of
Contact
09
15
25
37




Color of Cover
Omit : Red for Socket
Blue for Pin
N : Natural (Translucent)
B : Black

Cover Style
S: Socket (Receptacle)
P: Pin (Plug)






Shape / Size

Pin Connector

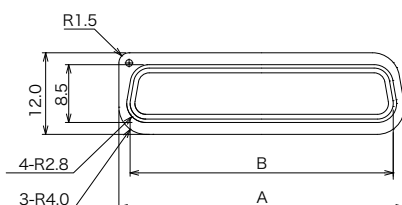












Part Number	A	B
17-09P □	19.8	16.65
17-15P □	28.1	25.0
17-25P □	42.0	38.7
17-37P □	58.3	55.15

Socket Connector

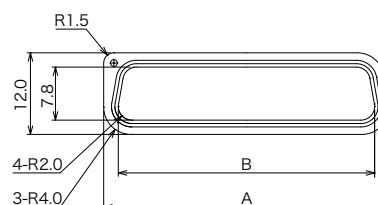

Part Number	A	B
17-09S □	19.8	15.7
17-15S □	28.1	24.0
17-25S □	42.0	37.7
17-37S □	58.3	54.1

▶ Deviation List

Hood Lock Screw	Straight Hood for 9, 15, 25, 37 contact 	Right Angle Hood for 25 contact 	Hood Lock Screw	Straight Hood for Slim Cable 9,15, 25, 37 contact 															
17J-001 □  24	Hood P/N: 17JE-25H-1A-CF 25 contact Thread Size: A Deviation: (D8 □) (※) • Socket 17JE-13 □ □ 0-02(D8 □)A-CG • Pin 17JE-23 □ □ 0-02(D8 □)-CG		17J-001 □  24	Hood P/N: 17JE- □ □ H2- □ □ -CF Deviation: (D8 □) (※) • Socket 17JE-33 □ □ 0-02(D8 □)A-CG • Pin 17JE-43 □ □ 0-02(D8 □)-CG															
17J-002 □  6.5 24	Hood P/N: 17JE- □ □ H-1 □ 2-CF Deviation: (D8 □ 2) (※) • Socket 17JE-13 □ □ 0-02(D8 □ 2)A-CG • Pin 17JE-23 □ □ 0-02(D8 □ 2)-CG		17J-002 □  6.5 24	Hood P/N: 17JE- □ □ H2- □ □ 2-CF Deviation: (D8 □ 2) (※) • Socket 17JE-33 □ □ 0-02(D8 □ 2)A-CG • Pin 17JE-43 □ □ 0-02(D8 □ 2)-CG															
17J-005 □ -CF  10 42.9	Hood P/N: 17JE- □ □ H-1 □ 4-CF Deviation: (D8 □ 6) (※) • Socket 17JE-13 □ □ 0-02(D8 □ 6)A-CG • Pin 17JE-23 □ □ 0-02(D8 □ 6)-CG		17J-005 □ -CF  10 42.9	17JE- □ □ H2- □ □ 4-CF Deviation: (D8 □ 6) (※) • Socket 17JE-33 □ □ 0-02(D8 □ 6)A-CG • Pin 17JE-23 □ □ 0-02(D8 □ 6)-CG															
17J-008 □ -CF  6.5 20		Hood P/N: 17JE-25LH-1 □ -CF Deviation: (D18 □) (※) • Socket 17JE-13 □ □ 0-02(D18 □)A-CG • Pin 17JE-23 □ □ 0-02(D18 □)-CG	Applicable Cable Size <table><tr><th>Size</th><th>Standard Cable</th><th>Slim Cable</th></tr><tr><td>9</td><td>φ 7.0 (max.)</td><td>φ 5.1 (max.)</td></tr><tr><td>15</td><td>φ 8.0 (max.)</td><td>φ 5.7 (max.)</td></tr><tr><td>25</td><td>φ 9.0 (max.)</td><td>φ 6.6 (max.)</td></tr><tr><td>37</td><td>φ 10.5 (max.)</td><td>φ 7.4 (max.)</td></tr></table>		Size	Standard Cable	Slim Cable	9	φ 7.0 (max.)	φ 5.1 (max.)	15	φ 8.0 (max.)	φ 5.7 (max.)	25	φ 9.0 (max.)	φ 6.6 (max.)	37	φ 10.5 (max.)	φ 7.4 (max.)
Size	Standard Cable	Slim Cable																	
9	φ 7.0 (max.)	φ 5.1 (max.)																	
15	φ 8.0 (max.)	φ 5.7 (max.)																	
25	φ 9.0 (max.)	φ 6.6 (max.)																	
37	φ 10.5 (max.)	φ 7.4 (max.)																	
17J-014 □ -CF  6.5 19		Hood P/N: 17JE-25LH-1 □ 1-CF Deviation: (D18 □ 1) (※) • Socket 17JE-13 □ □ 0-02(D18 □ 1)A-CG • Pin 17JE-23 □ □ 0-02(D18 □ 1)-CG																	

Thread Size

A : M2.6×0.45

B : M3×0.5

C : # 4-40UNC

 not available

(※) Connector with Hood Kit

© Specifications and/or dimensions in this catalogue are subject to change without notice.
Your catalogue checking the latest specifications with our drawings would be highly appreciated.